

ภาคผนวก ค
ระบบการจัดการสิ่งแวดล้อม






PAN ORIENT ENERGY (SIAM) LTD.

ENVIRONMENTAL MANAGEMENT SYSTEM

JUNE 2021

	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

FOREWORD

Pan Orient Energy (Siam) Ltd. ("The Company") recognises that effective health, safety and environmental management contributes significantly to its long-term business success.

This document sets out The Company's social and environmental management system. It emphasises the systematic approach in the way we manage our business activities and our belief that our performance can always be improved over time. The integration of social responsibility and environmental protection into our day-to-day activities is the key to successful management.

The application and success of this system requires the participation and commitment of management, employees and contractors at all levels.

This policy and management system has the Board's full support but we require your commitment through a personal understanding of this document and full participation in the effective implementation of the system.

It is imperative that everyone involved in the business of The Company familiarise themselves with their roles and responsibilities in this document. Only by total commitment by everyone can we ensure the best possible protection of our personnel, contractors, the public, our assets and the environment.

Signed


Jeffrey Howard Chisholm

General Manager

Date: June 18th, 2021

Area of Application

The policies and associated Environmental Management System (EMS) apply to the activities of Pan Orient Energy (Siam) Ltd. in Thailand.


	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Document Issue Record

Position	Location	Copy No.	Issue Date
Paper Copies			
Chief Executive Officer & General Manager	Bangkok	01	
Operations Manager	Bangkok	02	
Financial & Accounting Manager	Bangkok	03	
EIA & Government Liaison Coordinator	Bangkok	04	
Field Operation Engineer	Kam Phaeng Saen	05	
Production Supervisor	Kam Phaeng Saen	06	
HSE Officer	Kam Phaeng Saen	07	
Production Foreman	Kam Phaeng Saen	08	

REVISION STATUS

Rev	Date	Description	Originator	Approved
0	30 July 2006	First Working Version	Various	General Manager
1	17 Feb 2010	Second Working Version	Sal Pirera	General Manager
2	20 April 2012	Third Working Version	Pharada Meengoen	General Manager
3	31 January 2013	Fourth Working Version	Prakaipruak Boonkerd	General Manager
4	29 August 2014	Fifth Working Version	Prakaipruak Boonkerd	General Manager
5	10 July 2015	Sixth Working Version	Prakaipruak Boonkerd	General Manager
6	27 May 2016	Seventh Working Version	Prakaipruak Boonkerd	General Manager
7	8 February 2017	Eighth Working Version	Prakaipruak Boonkerd	General Manager
8	7 February 2019	Ninth Working Version	Prakaipruak Boonkerd	General Manager
9	13 September 2019	Tenth Working Version	Prakaipruak Boonkerd	General Manager
10	18 June 2021	Eleventh Working Version	Prakaipruak Boonkerd	General Manager

	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Environmental Management System

Pan Orient Energy (Siam) Ltd.

Contents

SECTION 1:	2
1. LISTING OF CONCERNED PERSONNEL IN ENVIRONMENT MANAGEMENT SYSTEM	2
SECTION 2:	4
2. PAN ORIENT ENERGY HEALTH, SAFETY AND ENVIRONMENTAL POLICY & OBJECTIVES	4
SECTION 3:	5
3. OIL SPILL CONTINGENCY PLAN (OSCP)	5
SECTION 4:	11
4. ENVIRONMENTAL MANAGEMENT SYSTEM	11
4.1 IDENTIFYING POTENTIAL ENVIRONMENTAL IMPACTS AND RISKS	11
4.2 MANAGING AND MITIGATING THE POTENTIAL IMPACTS	11
4.3 ENVIRONMENTAL MONITORING AND MITIGATION COMPLIANCE AUDITING	11
4.3.1 Monitoring	11
4.4 REPORTING AND DOCUMENTATION	13
4.4.1 Daily Production Report	14
4.4.2 Daily Drilling Report	14
4.4.3 Other Reports related to Environmental Issues	14
4.5 ENVIRONMENTAL MANAGEMENT FOR POTENTIAL IMPACTS:	14
4.5.1 Management of Pollution from Noise and Vibration - Exploration	14
4.5.2 Management of effects from drilling	15
4.5.3 Management of the effects of production processing	16
4.5.4 Management of other wastes	19
4.5.5 Management of effects from a well blow out	21
4.5.6 Management of hazardous gas	22
4.5.7 Management of the storing and transportation of hazardous materials	22
4.5.8 Management of pollution from accidental petroleum leakages	23
4.5.9 Management of pollution from voice, light and odours	23
4.5.10 Management of the abandoning of a wellsite	24

Pan Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Executive Summary

It is the policy of The Company to conduct its activities in such a way as to take foremost account of the health and safety of employees and all other persons that come into contact with its activities. The Company will endeavour to give dutiful consideration to the protection of the environment, and to pursue a policy of continual improvement of all health, safety, social and environment issues.

The company also strives to maximize public understanding of the proposed projects and activities through information and exchange between the project proponent and the communities in the vicinity of its operations that might be affected directly or indirectly by the proposed project activities.

The Company's Environmental Management System is designed around its operating experience in the L53/48 concession, basing it on known hazards, existing controls and building on the existing principals and guidelines. It enables the Company's management to obtain assurance that hazards and effects are identified and controlled to an agreed standard.

The Company's Environmental Management System Manual is divided into six sections, described briefly below:

Section 1:

Identifies the Company's personnel who are directly involved in the Social and Environmental Management System particularly highlighting senior staff members and those involved in operational or onsite supervisory roles.

Section 2:

The Company's HSE Policy Statement is presented in Section 2.

Section 3:

Sets out the Company's Oil Spill Contingency Plan (OSCP). This is designed in such a way that in the event of an oil spill, either on location or off-site, a clean-up process can be quickly and efficiently initiated and the appropriate authorities notified. The OSCP includes listings of priorities, the level of response required related to the severity of the spill and provides a list of emergency contact numbers. Oil spill clean-up techniques and oil spill equipment available both on and off-site are provided in the appropriate appendices.

Section 4:

The Company's environmental management plan is presented in this section. The management plan is based on the outcome of the environmental impact assessments performed by certified independent third party consultants. Methods of mitigating the risks are subsequently employed so that their potential impact can be prevented or reduced.

The establishment of baseline monitoring stations and the systematic monitoring of environmental parameters, at each phase of the operations, are performed to assess the ongoing environmental conditions which measure any changes from the original environmental conditions. Follow up procedures including internal and third party audits are also performed to access the performance and effectiveness of the mitigation measures.

Corrective or remedial actions are performed in the event of non-compliance issues or if parameters are found to be in excess of environmental quality standards due to the Company's activities.

1

Pan Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

SECTION 1:

1. Listing of Concerned Personnel in Environment Management System

The protection of the environment and the impact of the Company's operations have upon the environment represents a fundamental concern for all personnel employed by the Company.

The key to the successful management of environmental concerns, however, lies with those in management and supervisory positions, who are also directly involved with the production and drilling operations at L53/48 concessions. Such staff members have a direct impact on the environmental decision making process and may use their expertise and supervisory roles to convey the Company's environmental policy and environmental management procedures to other on-site employees, contractual staff as well as those involved in off-site activities such as transportation.

Company staff with a pivotal role in the environmental management process are shown in highlighted boxes on the Organization Chart attached.

2

Pan Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

SECTION 2:

2. Pan Orient Energy Health, Safety and Environmental Policy & Objectives

The Company is committed to protecting the safety of everybody involved with our activities, the people who come into contact with our operations and the physical and natural environments in which we work. We aspire to high standards of practice through a process of continuous improvement and the adoption of international codes and standards where practicable.

To meet this commitment we will implement management systems in our operations that accord with the requirements of our health, safety and environmental standards and strive to:

- Ensure that our operations comply with applicable health, safety and environmental laws and regulations.
- Implement controls to protect all personnel involved in our activities, to prevent pollution and protect biodiversity.
- Provide health, safety and environmental training to our employees and actively promote awareness of health, safety and environmental issues.
- Ensure that contractors are aware of our policies and standards and where necessary, work with our contractors to raise their standards to meet them.
- Foster a culture where accidents, incidents and near misses are reported and investigated and the lessons learned are shared throughout the organization.
- Monitor our performance and conduct regular audits to ensure our controls are effective and that our health, safety and environmental aspirations are being achieved.
- Set objectives and targets for improving health, safety and environmental performance and monitor.
- Ensure that a high priority is placed on emergency preparedness.
- Consult with and respond to the concerns of other stakeholders on our health, safety and environmental performance.

Responsibility for compliance with Pan Orient's HSE policy and standards lies with the Directors, Managers and the Staff.


Successful HSE performance requires commitment from all our employees and it is a requirement that every employee and contractor acts responsibly in preventing, injury to themselves and others, or damage to equipment and the environment.

Signed Date: June 18th, 2021

JH

Jeffrey Howard Chisholm
General Manager - Pan Orient Energy (Siam) Ltd.

4

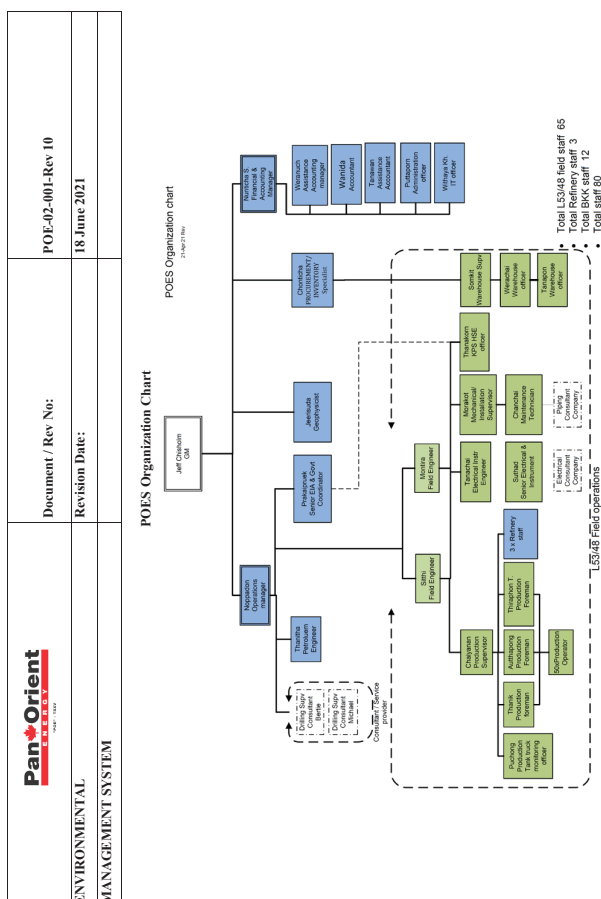

3

PanOrient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Section 3:

3. Oil Spill Contingency Plan (OSCP)

The Company as Operator has a financial responsibility and legal requirement to clean-up any pollution arising from its operations. The Company is committed, however, to operate at all times in such a manner as to minimize the risk of oil spills, blowouts or chemical leakage. In the unlikely event that such an incident occurs, the following OSCP provides guidance on the appropriate actions that will be undertaken.

During petroleum exploration, testing and production there are risks for minor and major oil spills. Due to the high viscosity and pour point, the crude oil is not very mobile and can be easily contained and removed with shovels. However, other spills such as fuels and motor oils are also considered.

The Company has developed an oil spill contingency plan covering all drilling, testing and loading operations. The plan identifies three levels of response and the Emergency Organization and actions required to successfully coordinate the Company's clean-up to the response.

Priorities

1. The following priorities need to be observed:
2. The prevention of emergencies;
3. The safety and saving of life;
4. Protection of the environment; and
5. Salvage of equipment and installations

Levels of Response and Procedures

There are four levels of response relating to accidental discharges:

Oil Spill Classification:

- Housekeeping Oil Spill <1 to <3 bbls, that can be dealt with using onsite equipment deployed by local staff;
- Level 1 (Minor Oil Spill) >3 to <50 bbls, that can be readily be cleaned-up by field personnel using locally available equipment;
- Level 2 (Significant Oil Spill) >50 bbls to <100 bbls, that requires additional manpower and supplemental resources or third party companies;
- Level 3 (Major Oil Spill) >100 bbls, that overwhelms the response capability of operator, requiring mobilization of personnel and resources of the central executive bodies and international specialized responders.

Housekeeping Spills:

This refers to on-site spills less than 3 bbls, which are contained and can readily be cleaned-up by field personnel using equipment maintained on site.

5

PanOrient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Housekeeping Response Procedures:

In case of oil spill less than 3 bbls can be responded with on site by production operator immediately by using prepared tools and equipment in wellsite.

Level 1:

Minor spills from 3 bbls to 50 bbls that do not affect normal operations and can readily be cleaned-up by field personnel using locally available equipment.

Level 1 Response Procedures

Emergency Organisation

Operations Co-ordinator: Pan Orient on-site Production Supervisor

Job Responsibilities of Operations Co-ordinator

1. Ensure safety of all personnel
2. Ensure that the discharge is cleaned-up properly and that the sites containment facilities have not been breached.
3. Fill out an Incident Report Form. The completed form should be sent to the Production Supervisor, Field Operation Engineer and Operations Manager respectively.

Level 2:

- Significant spills from 50 bbls to 100 bbls when the discharge can still be contained but requires additional manpower and supplemental resources or third party companies to clean up the spill. An example of this would be a ruptured tank.

Level 2 Response Procedures

Emergency Organisation

Operations Co-ordinator: Pan Orient on-site Production Supervisor, Field Operation Engineer & HSE officer

General Manager/Operations Manager: Bangkok Office

1. Ensure safety of all personnel
2. Shut down all ignition sources to minimize the risk of fire.
3. If there is a possibility of fire, then notify the Fire Brigade.
4. Isolate or stop the source of spillage.
5. Inform the General Manager that a Level 2 Response situation exists, state:
 - The nature of the spill
 - If the spillage is continuing and at what rate
 - If the spill is on fire
 - What volume has been spilt
 - Any other information
6. Ensure that the containment system is not damaged.

6

PanOrient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

7. Decide whether the oil spill contractor is required on-site (in which case it becomes a Level 3 Response).
8. Deploy clean-up equipment to deal with the discharge.
9. Restore normal operations promptly.
10. Fill out an Accident/Incident Report Form. The completed form should be sent to the Operations Manager – Pan Orient Energy (Siam) Ltd. at the Bangkok office within 24 hours.

Job Responsibilities of Field Operation Engineer

1. Inform the Operations Manager POES, and other relevant employees about the situation.
2. If necessary inform the local Water Authority.
3. Act as a focal point for information passing to and from the site.

Level 3:

A major spill of over 100 bbls when the discharge overwhelms the response capability of Pan Orient., requiring mobilization of personnel and resources of central executive bodies and international specialized responders need to be called in to assist in the containment and clean-up.

Level 3 Response Procedures

When the discharge exceeds the capabilities of the immediate on-site personnel, can not be contained and requires an oil spill contractor to be called in to assist with the containment and clean-up.

An example of such an incident that would require a Level 3 Response would be a blowout or a serious road tanker accident.

Emergency Organisation

Operations Co-ordinator: Pan Orient on-site Production Supervisor, Field Operation Engineer & HSE officer
Operations Manager: Bangkok Office (Emergency Response Team Leader)

Job Responsibilities of Operations Co-ordinator

Initial Response

1. Ensure safety of all personnel
2. Shut down all ignition sources including non-certified and non-intrinsically safe equipment, e.g. Cameras, tape recorders, radios, torches etc, until it is certain that there is no risk of fire or explosion.
3. Attempt to isolate/control source of spill.
4. Contact Emergency Services
5. Inform the General Manager that a Level 3 Response is required and provide the following information:
 - location of the spill (e.g. access road, diesel tank).
 - the kind of incident (e.g. tanker spill, blowout).
 - when the incident occurred.
 - the type of oil/substance involved.
 - the volume spilt (best estimate)

7

PanOrient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

- if it is continuing to spill and what the rate of spillage is.
 - is the oil/substance is on fire.
 - any other relevant information
6. Try to contain spillage within as small an area as possible, away from points of ignition.
 7. Deploy containment equipment.

Follow-up Action

1. Continue to ensure safety of all personnel
2. If source of spill not under control, continue efforts to isolate/control it.
3. Liaise with clean-up contractor, Pan Orient personnel on-site and local authorities.
4. Keep the General Manager informed of the situation.
5. Restore normal operations promptly.
6. Fill out an Accident/Incident Report Form (See Appendix II). The completed form should be sent to the Operations Manager – Pan Orient Energy (Siam) Ltd. at the Bangkok office within 24 hours.

Job Responsibilities of the Operations Manager (Emergency Response Team Leader)

Initial Response

1. Mobilise clean-up contractor and pass on relevant information.
2. Liaise with the Pan Orient Energy on-site Production Foreman and Operations Manager and give technical advice as necessary.
3. Provide a communications channel for passing information to and from site.

Follow-up Action

1. Inform the General Manager of Pan Orient Energy (Siam) Ltd. and other relevant employees about the situation
2. Inform the Director General Department of Mineral Fuels that a Level 3 Incident has occurred.
3. If necessary inform the local Water Authority.
4. Co-ordinate press releases with the Pan Orient Corporation.
5. Liaise with the Intergovernmental Affairs Advisor as appropriate.
6. Liaise with the Logistics Co-ordinator and Logistics Support Advisor.
7. Act as a focal point for information passing to and from the site.

Public Relations in the event of a Level 3 Incident

A press statement may be arranged between the Operations Manager (Thailand) and the General Manager of Pan Orient Energy (Siam) Ltd. in Bangkok, Thailand.

Emergency Services Contact Numbers and Call-out Procedures

The Production Foreman from the site should contact the Emergency Services.

8

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Police

In the event of a major discharge, the Police provide control of traffic to and from the incident area. Where a number of services are involved and no suitable communications centre is available, the police can provide a control and co-ordination post to facilitate clearance operations.

Kam Phaeng Saen: 034 351-219
Song Pi Nong : 035-531-019

Fire Brigade

The Fire Brigade should attend all incidents where a risk of fire or ignition is present. If a fire occurs, the Senior Fire Service Officer assumes control of the incident until the fire is extinguished.

TAO Thung Luk Nok : 091-880-9791
TAO Hua Pho : 035-531-031

Hospital

The Hospital Service should be called as necessary.

Kam Phaeng Saen Hospital : 034-281-686
Somdej 17 Hospital : 035-531-077

Clean-up Contractors

Pan Orient Energy (Siam) Ltd. has made arrangements with government licenced hazardous waste transporters and disposal companies to provide oil spill containment and clean-up and disposal services in the event of a Level 3 incident.

Call-out Procedure

In the event of a Level 3 incident, clean-up contractors should be called and told what level of response is required (e.g. standby, full call-out).

Government Departments

In the event of a Level 3 incident, the General Manager should notify:

Department of Mineral Fuels (DMF)

Mrs. Premrutai Vinaiphat

Director General
555/2 Energy Complex B, 21th Floor
Viphavadi-Rangsit Road,
Chatuchak, Bangkok 10900
Ph: (662) 794 3001 Fax: (662) 794 3058

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Local Authority Contact Numbers

The Emergency Controller should notify the following agencies in the event of any offsite spills Level 1, 2 or 3 incidents, if appropriate:

1.53/48 Concession Area

District Offices

Muang Nakhon Pathom – 034-258-411
Kam Phaeng Saen – 034-351-086, 034-281-102
Song Pi Nong – 035-531-001

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Section 4

4. Environmental Management System

The Environmental Management System is divided in to five main categories as follows:

1. Identifying potential environmental impact and risks;
2. Managing and mitigating the potential impacts;
3. Environmental Monitoring and Mitigation Compliance Auditing;
4. Reporting and Documentation;
5. Environmental Management for Potential Impacts;

4.1 Identifying Potential Environmental Impacts and Risks

An environmental impact assessment (EIA), encompassing risk assessment and social impacts, is performed by a third party consultant for each exploration and production project. In addition, community attitude surveys are performed twice a year and a health impact assessment is performed and updated on a yearly basis.

4.2 Managing and mitigating the potential impacts

The potential impacts identified in the EIA studies can be prevented or reduced by employing the mitigation measures recommended in the EIA. Mitigation measures have been

4.3 Environmental Monitoring and Mitigation Compliance Auditing

The regular internal and third party auditing schedule ensures the environmental management plan stated in the EIA is implemented. This includes the monitoring of environmental components and the measures required to

The auditing system consists of the following:

4.3.1 Monitoring

The monitoring measures stated in the EIA are comprised of:

- Environmental Monitoring;
- Social Attitude Monitoring;

Environmental monitoring measures the key characteristics of operations that can have a significant impact on the environment. It provides the means of measuring performance against established requirements (objectives, targets, and performance criteria).

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Baseline surveys are conducted to provide information on the chemical and biological environment relevant to the field before start-up of production or drilling operations. Subsequent, ongoing monitoring provides data on waste-stream emissions in order to ensure an ongoing assessment of operating standards and data to measure any recordable changes from the original environmental conditions.

Monitoring determines:

- The types and quantities of substances entering the environment
- Where the substances go
- The effect of substances on the biota
- Environmental change over time

The following is monitored during exploratory drilling:

- Weather
- Drilling waste volumes and type

During production, the following is monitored:

- Quantities of water disposed
- Volumes of other waste generated and disposed

The following surveys are undertaken and reported on prior to the start-up of any SWIA operation that requires the construction of a new site. The surveys continue during the operation and also for a given specific time-period after the decommissioning of any particular site.

4.3.1.1 Groundwater Quality Monitoring

Although surface casing is set at around 80 to 100m to protect surface aquifers, groundwater quality is monitored to determine whether locally used aquifers have been contaminated by drilling or production activities. As a potassium sulphate drilling fluid is used, SO₄ monitoring can act as a useful tracer to determine seepage of any drilling fluid into aquifers.

Sampling is undertaken as follows:

Monitoring Stations:

Exploration Phase: Nearest available groundwater wells up and down flow from the proposed wellsite location. Also onsite monitoring wells up-flow and down-flow from the wellhead

Production Phase: Onsite monitoring wells up-flow and down-flow from the wellhead.

Frequency and Duration

Drilling Phase:

- During the EIA study prior to a site preparation (for areas with now previous baseline data);
- Within 15 days after any drilling activity ceases;

Production Phase:

- After site construction;
- Within 15 days after production drilling;
- Annually thereafter.

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

In addition, groundwater samples are taken in the event of a level 2 spill at onsite monitoring wells (in the event of an onsite spill) and at groundwater wells within 50 to 100m of any offsite level 2 spills.

Parameters

Samples are analysed for the following parameters:

- Temperature
- Salinity parameters: pH, conductivity, suspended solids, total dissolved solids, chloride, sulphate, potassium and calcium.
- Total Petroleum Hydrocarbon (TPH).
- HMs: As, Cd, Total Cr, Pb, Hg, Se, Ni, Ba, Zn, Fe, Cu and Mn

4.3.1.2 Surface Water Quality

Water quality is sampled at the same location as follows:

Frequency

- Within 15 days after drilling
- Annually thereafter during production

Parameters

Samples are analysed for the following parameters:

- Temperature
- Salinity parameters: pH, conductivity, suspended solids, total dissolved solids and chloride.
- Total Petroleum Hydrocarbon (TPH) and BTEX.
- HMs: As, Cd, Total Cr, Pb, Hg, Se, Ni, Ba, Zn, Fe, Cu and Mn.
- Dissolved Oxygen
- BOD
- Coliform Bacteria

4.3.1.3 Soil Quality Monitoring

Soil quality is sampled at two locations outside the boundary of any new site in preparation, 1 upstream of the groundwater gradient, the other downstream.

Frequency

- Prior to site preparation (laterite soil)
- Within 15 days after drilling
- Annually thereafter during production

Parameters

Samples are analysed for the following parameters:

- Salinity parameters: pH, salinity, conductivity and chloride.
- Total Petroleum Hydrocarbon (TPH) and BTEX.
- HMs: As, Cadmium and Cadmium compound, Hexavalent Chromium, Pb, Hg, Ni, Se, Ba, Cu, Zn, Fe, Mn and Manganese and Manganese compound.

4.4 Reporting and Documentation

The following reports are generated on a daily basis and cover the day-to-day operations at all concessions.

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

4.4.1 Daily Production Report

A Daily Production Report includes the amount crude oil produced over the last 24 hours and its properties and the amount of BS&W. Also recorded are any incidents, accidents, unsafe acts or environmental issues that have occurred at the production sites.

4.4.2 Daily Drilling Report

For well control purposes it is standard practice to monitor the time breakdown of activities at the rig site. The current depth of the well, geological prognosis, weather, mud volumes, mud weight and circulation rate are recorded. Also included are any mud volumes and the amount and nature of cuttings that have been produced into the waste pit.

4.4.3 Other Reports related to Environmental Issues

The following reports are produced by POES at the conclusion of drilling a well or in the event of an incident:

End of Well Report

Daily data is supplemented by end of well reports (after the well has been drilled and flow tested), which contain information on the composition and properties of the hydrocarbon (volumes of gas, condensate, oil and water; chemical content; oil gravity; gas gravity etc.).

Accident/Incident Report

Should any accident or incident occur during the day-to-day operational activities then the on-site company representative files an accident/incident report to the Bangkok office. Such a report may record an environmental incident, its causes and its immediate impact on the environment. The report should also include any clean-up measures that have been undertaken and their effectiveness in reducing or cancelling the impact of the incident.

4.5 Environmental Management for Potential Impacts;

4.5.1 Management of Pollution from Noise and Vibration - Exploration

Sources of Impact

During drilling significant noise and vibration is emitted from the drilling rig, the drilling rig engine and generators. The noise is characterized as a continuous monotone, low pitch emission. Other sources of noise and vibration emissions include medium pitch noise and vibration emissions from the diesel powered generators on the rig site and variable pitch noise and vibration emissions from the rig engine as it is engaged to power the draw-works and rotary table.

Evaluation of Impact

The General low pitch of the drilling noise is such that it is difficult to detect during normal daytime activity only a small distance from the drilling site. The 24 hour nature of drilling, means that during quiet night time hours there is more potential for the local community to hear the drilling noise at levels above that of the normal ambient background noise.

The distance to the nearest village and the nature of the sound of drilling activity indicates that the environmental impact is likely to be minimal even in the quiet hours of darkness. Similarly vibrations from drilling activities, emanating from the rig engines, drill bit and the

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

drill string will be only detectable within close proximity (less than 500m) to the drilling rig. It is expected that the environmental impact of vibrations on the nearest communities will be minimal.

Management Controls

In the event of drilling activity being unacceptably close to a rural settlement as far as noise and vibration levels are concerned, then POES will erect temporary sound barriers between the drilling rig and the settlement so that the effect from noise and vibration from the rig is reduced to more acceptable levels.

4.5.2 Management of effects from drilling

Cuttings and Drilling Fluids – Water-based Muds

Sources and Evaluation of Impact

Leakage or overflow of cuttings and waste drilling fluids has the potential to contaminate surface waters, soils and ground water, with subsequent effects on agricultural crops and aquatic flora and fauna.

The cuttings and fluids contain potassium chloride and possibly residual hydrocarbons. The entry of saline and hydrocarbon contaminated fluids into the ground water may affect the growth of agricultural crops and be potentially toxic to terrestrial and aquatic flora and fauna. Cuttings and fluids may also contain heavy metals, which may contaminate soils and affect the growth of agricultural crops.

The relatively low volumes of cuttings produced during the 1000m +/- wells drilled by POES are unlikely to cause major local environmental impacts, particularly as storage capacity is well in excess of the volumes expected. Salinity levels are not predicted to be high, and the short duration of the drilling activity will not allow for the excessive evaporation levels required to concentrate and produce highly saline liquids.

Examination of the local geology indicates that high levels of potentially polluting heavy metals are not expected. The greatest quantities of component chemicals in the drilling fluids mud are normally PHPA polymer and potassium chloride. Reference to chemical safety data sheets for these constituents shows that both these chemicals are of low or zero toxicity.

Management Controls

POES plans to use potassium sulphate PHPA water based mud (WBM) for exploration appraisal and development wells. Water based muds have been shown to be non-toxic and have negligible impact on the environment. However, to ensure that minimal amounts of mud will be discharged to the waste pit, the cuttings are separated from the mud via a solids control system-vibrating shale shakers and a centrifuge system. The mud is not disposed of, but is stored in drums or tanks for reuse in future drilling campaigns.

POES permanently disposes of cuttings and associated fluids into a specially compacted and Bitumat Polyflex waste pit on-site. The waste pit is constructed to a height one meter above the site, which is above the wet weather groundwater level.

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

This will ensure that contaminants will not be able to leach into the groundwater or soils.

Exhaust and GHG Emissions

Sources and Evaluation of Impact

The air emissions will be the products of combustion from the diesel engines, carbon dioxide (CO₂), carbon monoxide (CO), nitrogen dioxide (NO₂), and sulphur dioxide (SO₂). Emissions will only continue during the short 2-week drilling program.

Exhaust fumes emissions will disperse quickly into the clear rural air and cause no discernable air pollution.

4.5.3 Management of the effects of production processing

Facilities Installation

Sources of Impact

The activities involved in establishing a site for production include the digging of trenches for the installation of electricity and water lines to the site. It also involves setting up buildings on site, and the establishment of the oil/gas heater and separation equipment vessels, pipe work and storage tanks.

The installation phase of any production facilities project will be marked by a short phase of transport activity where the processing and supporting infrastructure will be trucked to the site. Production chemicals will also be brought in to the site by truck. The transportation activity will usually have a relatively short duration of 1 to 2 days. The number of truck movements is about 5 to 6 per day.

Evaluation of Impact

There is expected to be some mild dust emissions due to the truck movements on the rural roadways leading to the site. For the majority of the journey of trucks will be on sealed roads, but often a compacted, laterite rig road lies between the highway and the site (up to 1 km). The potential for dust emissions is estimated as moderate, and may result in a short-term reduction in air quality, although the reduction in air quality is likely to be localized and of short duration.

The transport activity is also likely to cause a certain amount of localised noise of short duration. The noise levels will not be more than that associated with the movement of large trucks. The noise levels are expected to be similar to the agricultural-related which operate in the area.

The establishment of the production site has the potential to affect the local aesthetics. The effects are considered moderate, as the current production facilities do not dominate the local landscape, even if slightly visible from the main highway. The nearest village is 2km away from current production facility sites.

Management Controls

Pan+Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Vehicle movements would normally be restricted to daylight hours and should not disturb villagers during the hours of darkness, the time of lowest ambient noise. The number of vehicle movements will also be kept to the safe minimum; this will have the effect of:

1. reducing the exposure time of the drivers to traffic
2. reducing the amount of dust, noise and exhaust emissions
3. reducing the number of transport loads through settlements

Petroleum Extraction

Sources of Impact

The physical extraction of hydrocarbons and associated fluids from the reservoir could have a number of impacts. There is a possibility of very slight noise from the continuous operation of beam pumps and moderate noise from at surface jet pump delivery pumps.

Soil quality could possibly be environmentally impacted, through contamination of the area around the well bore by oil.

Evaluation of Impact

Noise emissions from beam pumps, although long-term, are low and are not expected to rise above background ambient levels, even during the hours of darkness. The nearest community is too far away from any current production sites for noise to become a nuisance. The impact from noise can best be described as moderate to minimal. Jet pump delivery pumps will possibly require sound proofing in the longer term depending on the noise profile.

Soil around a well bore may well become contaminated with oil. This oil may contaminate the soil on the laterite pad, and wash off during storm events to the liquid storage waste pit. The contamination of the laterite pad is of minimal significance as the soil can be removed and treated offsite. The compacted nature and design of the pad will not allow oil to permeate to groundwater. Oil will wash to the waste pit during rainfall events, and be captured. Overflow from the waste pit, however, may allow hydrocarbon-contaminated waters onto adjacent agricultural land if not cleaned up regularly.

Management Control

POES ensures that any crude oil leaked or spilled via the extraction process on to the laterite pad is immediately cleaned. Should a beam pump need to be located close to a settlement such that the noise from the pump rises above the ambient noise of the settlement, then POES will provide a shield between the pump and the settlement.

Produced Sand Disposal

Sources of Impact

Sands will be produced during the production phase of any project. The sand is brought up with the crude oil. Burning it in a small high temperature incinerator treats the sand. Waste incinerator gases will be released to atmosphere and the resultant incinerator ash will be land filled on site.

17

Pan+Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Evaluation of Impact

The use of an incinerator leads to the release of combustion product gaseous emissions to atmosphere. Carbon monoxide, carbon dioxide, nitrogen dioxide and sulphur dioxide will be released in small quantities when sand is being burnt.

The relatively small volume of sand produced implies that the volumes of waste gasses produced will also be too small to have and major impact local air quality.

Separation Processes

Sources of Impact

The separation process involves the transfer of well fluids via pipes to the heater-treater, where produced gas is used to heat and separate the oil from water. The crude oil is then piped to heated storage tanks and separated produced water is disposed to the produced water tank.

Evaluation of Impact

The operation of pumps and other machinery will emit combustion gases resulting in localized air quality reduction, and will also generate localized noise. Air emissions are likely to be small and will disperse quickly in the atmosphere. There may be some small process emissions during the operational phase but these will be small and will also not adversely impact the local air quality.

If there is a leak or spill during the separation process, then there is the potential for contamination of the laterite pad. Wash during storm events may carry the oil into the waste pit or into neighboring agricultural areas. This may cause some impacts on aquatic and terrestrial flora and fauna. Small leaks are likely to cause only moderate impacts on soil and surface water quality. Air emissions, and the potential for spills, are predicted to have only moderate potential environmental impacts.

Management Control

An Oil Spill Contingency Plan is in place (see Section 3). Oil spill equipment is available both onsite and available locally (Appendix III and IV) should a leak or spill occur during the separation process.

Product Storage and Transfer

Sources of Impact

The transfer of crude oil from the storage tanks to the transport vehicles may lead to the minor spillage of product.

Evaluation of Impact

If there is a leak or spill during these operations, then there is the potential for contamination on the laterite pad. Wash through during storm events may carry the oil into the waste pit or into neighboring agricultural areas. This may cause some impacts on aquatic and terrestrial flora and fauna. Small leaks are likely to cause only moderate impacts on soil and surface water quality.

18

Pan+Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Management Control

An Oil Spill Contingency Plan is in place (see Section 3) and Oil spill equipment (Appendix III & IV) is available onsite should a leak or spill occur during the separation process.

All bunding should be checked for coherency and capacity to contain at least the volume of fluids in storage.

4.5.4 Management of other wastes

Waste Gas Flaring and Venting

Sources of Impact

The flaring of waste gas as a result of the production separation processes has the potential to negatively impact the local air quality. Crude oil is heated and the liquid fractions separated from the gaseous phase. Much of the gas produced, however, is recycled to heat the separation equipment, but a small proportion of the gas is flared. The emissions to air will be carbon dioxide, carbon monoxide, nitrogen dioxide and sulphur dioxide, along with negligible amounts of methane and ethane.

Evaluation of Impact

The local air quality is good, although periodic wide-scale agricultural burning occurs. The use of flaring does, however, almost entirely eliminate the need to vent off volatile hydrocarbon gases which are more likely to have an effect on workers or community health and safety. The health and safety impacts of the comparatively small-scale flaring occurring at the SW1A concession are considered negligible.

The main impacts surround the emission of greenhouse gases such as carbon dioxide and gases of concern such as oxides of sulphur and nitrogen. The amount of gas flared is minuscule in comparison with other oil and gas, and industrial applications and flare height is usually less than one meter. This taken together with limited other air pollution sources suggests that local dispersion and replenishment rates should easily exceed the emission rates from the site. Also of significance is the large buffer zone between SW1A exploration and production sites and local villages. This zone allows for sufficient dispersion so that odour or poor air effects are not likely to be encountered by the local population.

Also of note are the chemical characteristics of the production gas. The gas is comprised of light fraction hydrocarbons, which will be completely combusted on flaring. This will result in the very small levels of particulate matter, which will help to eliminate soot and dust fall out. For this reason ground based effects are considered likely minimal, and the removal of hydrocarbon smokes reduces the potential for negative visual impacts.

Fugitive emissions from a plant of this small scale are considered to be too small to produce significant impacts.

Air pollution impacts from production gas flaring are moderate to minor, with no ground-based or visual impacts.

19

Pan+Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Management Control

A daily record is kept of the height and quality of burning of the flares.

Produced Water Treatment and Disposal

Sources of Impact

Water is separated from the crude oil by an oil/water separator and the heat separation processes. After treatment the produced water still contains some residual hydrocarbons, metals and other contaminants from the geological formation and the production process.

Evaluation of Impact

Storage of produced waters in produced water tank. Spillage could cause the tank to overflow and as a result the produced water may be potentially polluting, and cause detrimental effects to soil, surface and groundwater if discharged. Saline and alkaline discharges to soil may affect rice crops and other sensitive terrestrial flora in the area. Hydrocarbons may affect crops, flora and some terrestrial species. Spillage and overflow are considered to be a moderate impact risk. The produced water was injected to a sealed sub-surface geological structure, thus reducing the risk of surrounding land and water contamination.

Management Control

The concrete bund around produced water tank has been designed so that it can store the produced water in case of spillage. The quality of produced water in the tank is monitored on a yearly basis.

On-site Sewage Systems

Sources of Impact

Sewage is produced from the toilet facilities in place on-site. The waste domestic sewage is treated in septic tanks. The septic tank system has a herringbone drainage system with a sand filter at its base. This septic tank effluent soaks away to the surrounding soil where it receives natural biological treatment.

Evaluation of Impact

The potential impacts are related to a degradation of soil, surface and ground water quality. The main issues are biological contamination and an increase in water nutrient levels. As the groundwater and surface waters at the site are not used for drinking purposes, no impacts are expected from the natural drainage of septic tank effluent. The toilet facilities are only used for a short period of time during drilling operations (up to four weeks), or used only sporadically during the production phase.

Management Control

Septic tank levels are regularly monitored by POES. Local contractors are employed to empty full tanks.

20

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

4.5.5 Management of effects from a well blow out

POES employs a number of measures in order to prevent a petroleum blow-out. As well as using standard Well Control Procedures and staff trained in well control procedures, POES employs:

- Seismic surveys and archive well database to accurately determine potential risk
- A mud system
- A Blow-out Preventer Stack (BOP) with shear rams
- A qualified Drilling Supervisor

These measures are described in more detail below.

Seismic surveys and archive well database

The thorough interpretation of the available 3D seismic survey over the L53/48 concession, combined with data gathered from previous wells drilled in the area ensures that a detailed database exists of the geology and formation pressures likely to be encountered by drilling. This enables the design of the mud program, where mud-weights will be maintained higher than the predicted formation pressures. Interpretation of the seismic surveys may also indicate if an area selected for drilling is prone to shallow gas pockets.

The Mud System

If sufficient pressure were not maintained on porous and permeable formations while drilling, the pressured fluid contained within the reservoir units (hydrocarbon or water combinations) would enter the well bore and flow to surface. The normal method of maintaining control pressure is to provide a full column of mud in the well bore in order to exert sufficient excess pressure at the formation face. This overbalances the natural pressure in the formation and holds formation fluids in place.

Loss of overbalancing pressure from a column of drilling mud can occur in one of two ways:

- The bit can penetrate an unexpectedly high-pressure, porous and permeable formation, the fluids from which can lift the mud column. Should higher than anticipated pressures be encountered in the formation being drilled, extra weight is added to the mud to counter that pressure.
- The bit can penetrate a low-pressure "thief" zone, which carries the mud away into the formation. Loss of circulation occurs as annular mud stops returning to the surface. Reduced column pressure allows higher pressure hydrocarbon fluids from other zones into the well bore and up the hole, lifting the remaining mud out. Should mud volume be lost to a thief zone, circulating additives including LCM pills (Loss Circulating Material) to the mud are required in an attempt to seal the zone.

The Blowout Preventer Stack

Should the mud system fail to maintain sufficient over-pressure to contain the flow of hydrocarbons into the well, then the blowout preventer (BOP) stack affords a further line of defense. The BOP stack includes three separate sets of valves, each of which can seal off the

21

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Environmental Impacts

Due to the small volumes of chemicals stored and handled on site, and their relatively non-toxic nature, the environmental impact of a leak, or spillage is considered moderate.

Management Controls

Mitigation measures include storing chemicals on a concrete pad with drains to a separate cement waste pit, to collect any spills or leaks during storage. To ensure safe handling, the chemical material safety data sheets (MSDS) will be kept on site at all times. A full listing of the MSDS is given in Appendix V.

Spills and leaks can be minimised by good housekeeping practices, such as routine maintenance on equipment, proper storage and handling, routine checks of stored chemicals and the use of drip trays or bunding.

Transportation of Hazardous Materials

Safety and spills are linked in that a properly trained driver should have a lower incidence of accidents and therefore spills.

Driver training and the choice of haulage contractor is the most important factor in minimizing potential risk. The contractor used will be obliged by the terms of the contract to have equipment of high integrity and a formal driver-training program. The contractor will have an oil spill contingency plan, notification procedures and first aid spill equipment on each truck.

Explosives

The explosives will not be stored on-site at any time. They will be stored in a military magazine under supervision in Petchabun. They will be brought on-site immediately prior to use, and handled by a specialist contractor.

4.5.8 Management of pollution from accidental petroleum leakages

POES's Oil Spill Contingency Plan (OSCP) for all Concession Blocks is incorporated within Section 3 of this Manual. The OSCP is consistent with the requirements of the National Oil Spill Response Plan for Thailand. The OSCP covers POES's exploration and production drilling activities, indicates how to cope with emergencies, details the actions to be taken in the event of more serious and widespread occurrences and lists the clean-up equipment.

4.5.9 Management of pollution from voice, light and odours

Voice

Pollution to the adjacent environment by the voices of employees is not considered a major issue at the current POES concession locations. Usually the noise emanating from machinery such as generators, production equipment and the drilling rig will far exceed and be more noticeable than those of the workers on-site. There are also no nearby settlements that will be close enough to the POES sites to be disturbed by the voices of the personnel working on-site.

While off-site, POES employees are expected to behave in such a manner as to not disturb the local community.

23

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

well independently of the others. Once closed, the BOP valves are designed to withstand all subsequent hole pressures.

If a well control incident, such as a blowout, occurred and control could not be regained through use of the BOP stack and mud, then well blowout specialists would be mobilised to implement special well-kill procedures.

Such an incident would inevitably lead to drilling fluids and possibly crude oil being lost to the environment. If such an incident occurred then the Oil Spill Contingency Plan (Section 3) will be immediately activated.

4.5.6 Management of hazardous gas

Hazardous gases such as H₂S have been encountered within the some wellsites. Hence there is need for hazardous gas detection equipment on the rig, or the special training of the on-site crew in the H₂S survival techniques.

4.5.7 Management of the storing and transportation of hazardous materials

Storage and Handling of Hazardous Materials

Sources of Impact

Chemicals such as fuels, paints, grease, oil, detergents, waxes and emulsions are stored on-site. During storage there is a potential for chemicals to leak, contaminating soil, surface and groundwater. During handling the potential exists for minor spills and personnel contact with chemicals, causing occupational health hazards (if inhaled, ingested or contacted by the skin).

Evaluation of Impact

Chemical spills, depending on their size, have the potential to cause contamination of soils, surface and groundwater. Secondary effects include mortality and sub-lethal effects (ecological, physiological and behavioural) among a wide range of organisms in the receiving environment. Contact with chemicals can also lead to occupational health and safety impacts. Volatile chemicals may evaporate and cause a health hazard and a reduction in the local air quality.

The chemicals being used during drilling and production operations, however, are for the most part inert.

Drilling Mud Constituents

Drilling mud constituents such as barite, calcium carbonate, potassium chloride and various polymers are relatively non-toxic, particularly from a human health perspective.

Fuel

Fuels such as diesel, and hydrocarbon breakdown products can be toxic, particularly in the water environment. It is planned that diesel will be stored in purpose made enclosed tanks and will not be in contact with the atmosphere.

22

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Light

Sources of Impact

The most powerful source of light during the hours of darkness emanates from the drilling rig, and drilling rig mast. These lights can be clearly seen from the highway by passing motorists. The remoteness of the drilling locations from nearby settlements, however, means that the lights of the drilling rig is usually obscured by trees and hedges and do not interfere with the normal ambient/domestic lighting of the villages.

Only a limited amount of light emanates from the production stations, such as perimeter and security lighting, which is comparable to similar light industrial complexes. Light emanating from the production flares is also visible from passing vehicles on the highway during hours of darkness. The size of the flare is comparable to that of a small bonfire.

Evaluation of Impact

The light sources of the drilling rig and production stations and flare are not considered to be above those of similar small industrial complexes, or contribute significantly or adversely to the illumination of the area. The nearest settlements are located at a distance too far from the light sources to be noticeable. Due to the relative remoteness of the area, the increase in light levels provided by the WB1 production facilities may indeed act as a marker for passing motorists and somewhat help to illuminate the otherwise unlit road.

Odours

Sources of Impact

Petroleum type odours from both the drilling and production facilities are noticeable when on-site. The odour is not strong and dissipates until it is unnoticeable only a short distance from the sites.

Management Controls

Chemicals and diesel fuel are kept in sealed containers that help to limit any dispersion of odours in to the surrounding atmosphere.

4.5.10 Management of the abandoning of a wellsite

Well abandonments, either after logging or at the end of a production life-cycle, will involve placing cement plugs to seal all potential aquifers within the well bore and the conductor will be cut off below ground level. The well will also be sealed at the surface and covered in soil.

The waste pit will be abandoned as follows: liquids will be drained out of the waste pit and either re-injected into designated injector wells. A cement cap will then be placed over the top to seal the entire pit. Finally, a layer of soil will be placed over the top.

Sources of Impact

The activities involved in decommissioning a site include: the removal of production equipment, the removal of concrete pads and the chemical storage containers. It may also involve the sealing and plugging of the well.

24

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

The abandonment phase will have some transportation activity, although the duration should be only a few days. The transportation will be light and will be in the form truck movements.

Evaluation of Impact

There is expected to be some mild dust emissions due to truck movements on the rural roadways leading to the sites. The majority of the journey of trucks, however, will be on sealed roads.

The potential for dust emissions is estimated as minimal, and is unlikely to cause any reduction in air quality.

The transport activity is also likely to cause a certain amount of noise. Again the noise will be localized and of very short duration. The noise levels will not be more than that associated with the movement of a large truck. The noise levels are expected to be similar to the agricultural vehicles and trucks, which operate in the area. Vehicle movements are also planned to be restricted to daylight hours and should not disturb villagers during the hours of darkness, the time of lowest ambient noise.

Noise Impacts will be of short duration and levels are unlikely to be above the daytime ambient noise created by local agricultural and truck activity.

The digging up of trenches to remove infrastructure and the removal of the concrete pad may produce small quantities of dust into the atmosphere. Dust emissions are likely to be small and confined to the immediate vicinity of the digging activity, although the movement of digging machinery may move loose earth onto roadways spreading the potential for dust.

The effects of dust emissions are likely moderate, due to the short-term nature of the activity, and will be localized.

The machinery involved in the digging and pipe and cable laying may produce some noise. Again the noise levels are not expected to exceed the noise generated by local agricultural activity, and will be of short duration. The activity will also be limited to daylight areas, which will minimize the nuisance caused by the noise emissions.

Noise Impact will be of short duration and levels are unlikely to be above the daytime ambient noise created by local agricultural and truck activity.

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Appendix 1: Oil Spill Equipment Held On-site

The oil spill contingency equipment held locally is of a basic nature, but should prove adequate for most purposes:

1. Shovels,.
2. Open top oil drums for the storage of contaminated soil or recovered soil. Some on-site and readily available locally.
3. Sand bags (or grain/rice bags as a good substitute). Quantity held on-site.
4. Sand for absorption of spills. Small quantity held onsite for minor spills but large quantities (20 ton loads) available from various local building merchants.
5. Heavy plant ie. Excavators, Tractors, Trucks, available locally.
6. Labour: Site personnel available but additional local personnel can be hired direct.
7. Broom
8. Gloves and apron

Pan-Orient ENERGY	Document / Rev No:	POE-02-001-Rev 10
ENVIRONMENTAL	Revision Date:	18 June 2021
MANAGEMENT SYSTEM		

Appendix 2: Oil Spill Equipment Held Elsewhere

1. Small vacuum tankers are available for lease in Kam Phaeng Sean and Songpinong Districts.
2. Flat bed trucks are available for lease from Kam Phaeng Sean village.