

ภาคผนวก ช

เอกสารสอบเทียบเครื่องมือที่ใช้ในการวิเคราะห์



CERTIFICATE OF CALIBRATION

Certificate No.:

CO-1908005/22

Page 1 of total 4 pages

Customer
WATER ANALYSIS CENTER CO., LTD.
30/5 Soi Viphavadee 60, Viphavadee Rangsit Road,
Kwaeng Taladbangkhen, Khet Laksi, Bangkok 10210

| | | | |
|--------------|---|-----------------------------|----------------|
| Equipment | pH Meter | Ambient Temperature: | (20 ± 2) °C |
| Manufacturer | METTLER TOLEDO | Relative Humidity: | (50 ± 10) % |
| Serial No. | B327527211 | Atmospheric Pressure: | - |
| Description | | Jayhawks Laboratory (CL&GL) | |
| | Range : 0 - 14 pH, Resolution : 0.01 pH | Received Date | 19 August 2022 |
| | | Calibration Date | 19 August 2022 |
| | | Date of Issue | 22 August 2022 |

| | | |
|--------------------------|-----------------------------|-------------|
| Environmental Conditions | Ambient Temperature: | (20 ± 2) °C |
| | Relative Humidity: | (50 ± 10) % |
| | Atmospheric Pressure: | - |
| Calibration Location | Jayhawks Laboratory (CL&GL) | |
| Received Date | 19 August 2022 | |
| Calibration Date | 19 August 2022 | |
| Date of Issue | 22 August 2022 | |

Checked by

Approved by

Measurement Results:

1. Function Simulated pH Meter

| Standard Applied (mV) | Nominal Value (pH) | UUC Reading | | Uncertainty (± mV) |
|--------------------------|-----------------------|-------------|--------|-----------------------|
| | | pH | mV | |
| 177.48 | 4.00 | 4.01 | 177.4 | 0.060 |
| 0.00 | 7.00 | 7.00 | 0.0 | 0.060 |
| -177.48 | 10.00 | 10.01 | -177.4 | 0.060 |

UUC : Unit Under Calibration

Note : Adjust Curve to simulate pH (4,7,10)

This calibration certificate shall not be reproduced other than in full except with the prior written approval of the Thai Heart Calibration Co., Ltd.

FE-169

REV 02/02/24/21

REV 02/02/24/21

REV 02/02/24/21



Page 2 of total 4 pages

Reference Method:
- The calibration method used was CP-178 based on an in-house method.

- This certificate can be traceable to the national standards, which is realized the shown measurement units according to the International System of Units (SI Units).

Reference Standard:

| Type | pH Value | Lot No. | Due Date | Traceability |
|----------------------|----------|---------|---------------|--------------|
| pH Standard Solution | 4.01 | 081020 | Jan. 22, 2023 | NIMT |
| | 7.01 | 020221 | Jan. 18, 2023 | |
| | 10.00 | 091020 | Feb. 7, 2023 | |

Remark: This certificate is traceable to the International System of Units (SI Unit) through:
- NIMT, National Institute of Metrology (Thailand).
- THC, Thai Heart Calibration Co., Ltd.

Calibrated by Kittipong

REV 02/02/24/21



Certificate No.: C0-190805/22

Page 3 of total 4 pages

Measurement Results (Cont.):

2. Calibration of pH Electrode (Serial No.: 332279)

| | | Measured Value | | Uncertainty (\pm mV) |
|------------------------------|-------|----------------|-------------|----------------------------|
| pH Standard Solution (pH) | (pH) | (mV) | (\pm pH) | |
| 4.01 | 4.01 | 185.9 | 0.013 | |
| 7.01 | 7.01 | 9.3 | 0.013 | |
| 10.00 | 10.01 | -164.9 | 0.013 | |

Note : Adjust Curve to Buffer Solution pH (4,7,10)
Temperature stability of micro bath : $25 \pm 0.2^\circ\text{C}$

The above reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor $k = 2.00$, providing a level of confidence approximately 95%.

Certificate No.: C0-190805/22

Page 4 of total 4 pages

Reference Method:

- The calibration method used was CP-096 based on an in-house method.
- The temperature scale used was an ITS-90.
- This certificate can be traceable to the national standards, which is realized the shown measurement units according to the International System of Units (SI Units).

Reference Standard Instruments:

| Type | Model | Serial No. | Cert. No. | Due Date | Traceability |
|---------------------------------|-----------|------------|--------------|---------------|--------------|
| Thermometer Readout | 1529-R | B7C853 | 10-101100/21 | Nov. 10, 2022 | THC |
| Platinum Resistance Thermometer | 5626 | 4854 | C0A30047 | Oct. 22, 2023 | FLUKE |
| Liquid Bath | XORTS-40A | XO111019 | 10-030600/21 | Jun. 3, 2023 | THC |

Remark: This certificate is traceable to the International System of Unit (SI Unit) through:

- THC, Thai Heart Calibration Co., Ltd.
- FLUKE, Fluke Corporation, U.S.A.

Measurement Results:

(X) Without Adjustment

Sensor Type : RTD (PT100)

| Dimension of probe : Diameter 4 mm. | Immersion Depth (mm.) | Standard Reading ($^\circ\text{C}$) | UUC Reading ($^\circ\text{C}$) | Correction ($^\circ\text{C}$) | Uncertainty (\pm $^\circ\text{C}$) |
|-------------------------------------|-----------------------|---------------------------------------|----------------------------------|---------------------------------|--|
| | 120 | 22.00 | 22.0 | 0.00 | 0.060 |
| | 120 | 25.00 | 25.0 | 0.00 | 0.060 |
| | 120 | 28.00 | 28.0 | 0.00 | 0.060 |

UUC : Unit Under Calibration

The above reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor $k = 2.00$, providing a level of confidence approximately 95%.

- End of Certificate -

Calibrated by

FE-169

Calibrated by

FE-169



THAI HEART CALIBRATION CO., LTD.
1271 Mon S. Pimuk Soi, Samut Prakan 10280
ID. #73942162/35/34935/02/2575/8496/Fax. #0275745407
Calibration Services



THAI HEART CALIBRATION CO., LTD.
112/1 2680/5, Phanet Soi, Muang, Samut Prakan 10280
Tel. 02-2390-2162, 02-2390-2433, 02-2399-8496 Fax. 02-2397-8807
Calibration Services



ANAB
ACCREDITED
CALIBRATION LABORATORY
AC-2695



ILAC-MRA
ACCREDITED
CALIBRATION LABORATORY
AC-2695

CERTIFICATE OF CALIBRATION

Certificate No.:

C0-2007006/22

Page 1 of total 2 pages

Customer

WATER ANALYSIS CENTER CO., LTD.
30/5 Soi Viphavadee 60, Viphavadee Rangsit Road,
Kwaeng Taladbangkhen, Khet Laksi, Bangkok 10210

| | | | |
|--------------|--------------------|--------|----------|
| Equipment | Conductivity Meter | Model | CON 2700 |
| Manufacturer | EUTECH | ID No. | WWI 0136 |
| Serial No. | 2657889 | | - |
| Description | | | |

| | | |
|--------------------------|-----------------------------|-------------|
| Environmental Conditions | Ambient Temperature: | (20 ± 2) °C |
| | Relative Humidity: | (50 ± 10) % |
| | Atmospheric Pressure: | - |
| Calibration Location | Jayhawks Laboratory (CL&GL) | |
| Received Date | 20 July 2022 | |
| Calibration Date | 20 July 2022 | |
| Date of Issue | 21 July 2022 | |

Checked by

[Redacted]

Approved by



Certificate No.:

C0-2007006/22

Page 2 of total 2 pages

Reference Method:

- The calibration method used was CP-177 based on an in-house method.
- This certificate can be traceable to the national standards, which is realized the shown measurement units according to the International System of Units (SI Units).

Reference Standard :

| Material | Batch Value | Lot Number | Due Date | Traceability |
|--------------------------------|-------------|------------|---------------|--------------|
| Conductivity Standard Solution | 151.1 µS/cm | S211008031 | Jan. 18, 2023 | SCP Science |
| | 1.421 mS/cm | S220112015 | May 16, 2023 | |

Remark: This certificate is traceable to the International System of Unit (SI Unit) through:
- SCP Science.

Measurement Results:

| Conductivity Standard Solution | Measured Value | Correction | Uncertainty (±) |
|--------------------------------|----------------|--------------|-------------------|
| 151.1 µS/cm | 150.9 µS/cm | 0.2 µS/cm | 1.5 µS/cm |
| 1.421 mS/cm | 1.423 mS/cm | -0.002 mS/cm | 0.0052 mS/cm |

Note : Adjustment points: 151.1 µS/cm 1.421 mS/cm

The above reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor $k = 2.00$, providing a level of confidence approximately 95%.

- End of Certificate -

SV 201003/2023

Cert. No. WAC-065
Page 1 of 2

CERTIFICATE OF CALIBRATION

Instrument : DO Meter
Model : DO-31P
Serial No. : 780065
Manufacturer : TOA-DKK

Measuring Range : 0.00 ~ 20.00 mg/l

Customer : Water Analysis Center Co.,Ltd.
1/94 Moo.5 T.Kanham, A.U-Thai
Ayutthaya 13210 Thailand

Date Of Received : 05 / 01 / 2023
Date Of Calibration : 05 / 01 / 2023

Ambient Condition : Temperature 25 °C
Humidity 50 % RH

Calibrated By :

Date Of Issue : 09 / 01 / 2023

This Certificate may not be reproduced other than in full, except with
the prior written approval of the head of the industrial instruments
calibration center.

Cert. No. WAC-065
Page 2 of 2

Instrument : DO Meter

Model : DO-31P

Serial No. : 780065

Calibrate Procedure

- This instrument was calibrated by comparison with standard solution (PH/ORP)
- This instrument was calibrated by comparison with scattering plate value (Turbidity)
- This instrument was calibrated by comparison with conductivity (Conductivity)
- This instrument was calibrated by comparison with Sodium sulfite anhydrous (DO)

Condition of this result of calibration

- 1). Reference Standard Solution

| Standard | Lot No | Batch. | Cert. No. | Due Date |
|----------------------|--------------|-----------|-----------|-------------|
| Sodium Sulfite Power | 1.06657-0500 | K54224057 | - | 30 Sep 2023 |

2). Traceability This certification is traceable to

- Merck KGaA 64271 Darmstadt
- DKK Corporation

Result Of Calibration

| Standard Solution | | Before Adjust | | After Adjust | |
|-------------------|------|---------------|--------|--------------|-------|
| (mg/l) at 24.1°C | | Indicator | Error | Indicator | Error |
| Zero | 0.00 | 0.05 | + 0.05 | 0.00 | - |
| Span | 8.25 | 7.13 | - 1.12 | 8.25 | - |

DO Electrode No. OE270AA(5) S/N 111F0029

Calibrated By :

Master Calibration Co.,Ltd.

547 Soi Ratchadananit, Kwaeng Samsemnok, Khet Huaykwang, Bangkok 10310

Tel : (02) 274 2978-9, (02) 2742987-8 Fax : (02) 274 2518, (02) 274 2989

Website : www.mastercalibration.com E-mail : calibrate@mastercalibration.com

MASTER CALIBRATION CO.,LTD.

Certificate of Calibration



TEMPERATURE
CONTROLLER ENCLOSURES

Certificate No.: MC 2207678

Customer : Water Analysis Center Co., Ltd.

1/94 Moo 5, T.Kanthan, A.U-Thai, Ayutthaya 13210.

Page 1 of 3



Reference Job No. : 22-1601 Received Date : 12 July 2022

Description : Refrigerator

Manufacturer : SANDENINTERCOOL Model : SEC-1500SBD

Serial No. : SEC1500201A-0708-00304 ID. No. : WWL0038

Marking : Additionally for the purpose of identification by this laboratory a label marked with this certificate number (MC.2207678) has been attached to the case.

Method : In-House calibration procedure MWI-T-033 this method is reference to TLAS G-20 "Temperature Controlled Enclosures".

Location of Calibration : Water Analysis Center Co., Ltd. ; Laboratory.

Environmental Conditions : Ambient Temperature : (25.8 to 27.5) °C

Relative Humidity : (48.8 to 52.2) %


Date of Calibration : 12 July 2022 Date of Issue : 19 July 2022

This instrument was calibration according to TLAS G-20 by comparison with calibrated thermocouple type T under no load condition. The Thermocouples were placed on nine points and located one thermocouple in each of the eight corners of the chamber and was away from the each wall of 5 cm to 10 cm. And placed the ninth thermocouple within 2.5 cm of the geometric center of the chamber.

Temperature Uniformity - the maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady state conditions. The reference sensor should preferably be located at the geometric center of the chamber.

Temperature Stability - one-half of the greatest maximum difference of measured temperatures at any one sensor.

Overall Variation - The Difference of the maximum and minimum measured temperatures throughout observation.

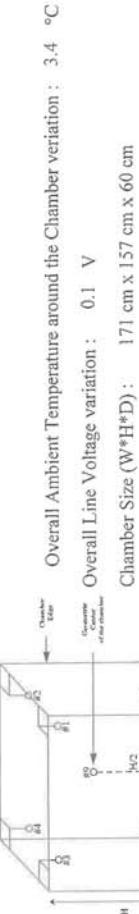

Checked by : [REDACTED]

Approved by : [REDACTED]

The uncertainties are for a confidence probability of approximately 95%

This certificate is issued in accordance with the conditions of accreditation granted by the National Standardization Council of Thailand-Office of the National Standardization Council that has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of Master Calibration Co.,Ltd.

[MCF-Q-077; Rev.6 ; Date : 22/04/2021]

Page 2 of 3

The Reference Standard :
Description : Data Acquisition/Switch Unit
With Thermocouple Type " T " ID. No.2/1 to 2/9
NSC/TIS/TS 17025
CALIBRATION 01/03

Certificate No.: MC 2207678

Certificate No. : MC 2114432 Serial No. : MY44096104 Due date : 20 December 2022

This certificate is traceable to the international system of units maintained at:

- Master Calibration Co., Ltd.

1. Calibration Procedure:

Checked by :

[MCF-Q-077; Rev.6 ; Date : 22/04/2021]

Certificate No.: MC 2207678

Page 3 of 3

2. Result of calibration :

Temperature Measurement Accuracy Test

| Measured Temperature (°C) at Spread Locations | | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|-----|---------------|
| Indicating Temperature (°C) | #1 | #2 | #3 | #4 | #5 | #6 | #7 | #8 | Ref. #9 (±°C) |
| 2.5 | 3.5 | 3.6 | 3.7 | 3.5 | 3.6 | 3.4 | 3.4 | 3.3 | 3.4 |
| | | | | | | | | | 1.1 |

Chamber Characterization Result

| Controller Temperature (°C) | Indicating Temperature (°C) | Temperature Stability (±°C) | Temperature Uniformity (°C) | Overall Variation (°C) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------|
| 2.0 | 2.5 | 1.5 | 0.6 | 3.1 |

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

This report will certify of the calibrated equipment only.

End of Certificate

Customer : Water Analysis Center Co., Ltd.
1/94 Moo 5, T.Kantham, A.U-Thai, Ayutthaya 13210.

TEMPERATURE
CONTROLLER ENCLOSURES

NSC-TSI-TIS 77025
CALIBRATION 0183
Page 1 of 3


Certificate of Calibration

NSC-TSI-TIS 77025

CALIBRATION 0183

Page 1 of 3



MCAL
MASTER CALIBRATION CO.,LTD.

547 Soi Ratchadaniwat, Kwaeng Samsemonk, Khet Huaykwang, Bangkok 10310
Tel. : (02) 274 2978-9, (02) 2742987-8 Fax : (02) 274 2518, (02) 274 2989
Website : www.mastercalibration.com E-mail : calibrate@mastercalibration.com

The uncertainties are for a confidence probability of approximately 95%.

This certificate is issued in accordance with the conditions of accreditation granted by the National Standardization Council of Thailand-Office of the National Standardization Council that has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of Master Calibration Co.,Ltd.

Approved by :


Checked by :




Checked by :

Certificate No.: MC 2203933

Page 2 of 3

Certificate No.: MC 2203933

Page 3 of 3

The Reference Standard :

| Description | Certificate No. | Serial No. | Due date |
|--|-----------------|------------|---------------|
| Data Acquisition/Switch Unit With Thermocouple Type "T" ID. No.30/1 to 30/9 | MC 2106035 | 93000641 | 8 August 2022 |

This certificate is traceable to the international system of units maintained at:

- Master Calibration Co., Ltd.

1. Calibration Procedure:

This Instrument was calibration according to TLAS G-20 by comparison with calibrated thermocouple type T under no load condition. The Thermocouples were placed on nine points and located one thermocouple in each of the eight corners of the chamber and was away from the each wall of 5 cm to 10 cm. And placed the ninth thermocouple within 2.5 cm of the geometric center of the chamber.

Temperature Uniformity - the maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady state conditions. The reference sensor should preferably be located at the geometric center of the chamber.

Temperature Stability - one-half of the greatest maximum difference of measured temperatures at any one sensor.

Overall Variation - The Difference of the maximum and minimum measured temperatures throughout observation.

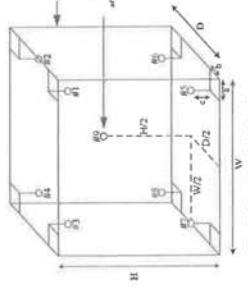


Figure 1 : Sensor Installation Location

Overall Ambient Temperature around the Chamber variation : 1.1 °C
Overall Line Voltage variation : 0.2 V
Chamber Size (W*H*D) : 65 cm x 80 cm x 50 cm

Checked by : XXXXXXXXXX

Checked by : XXXXXXXXXX



Certificate of Calibration

NSC-TSI-15-17025

Calibration date:

Equipment: Balance Certificate No.: C01221685
Model: BL210S Issued Date: 08 June 2022
Serial No. (or ID.): 15808131 (WWL 0022)
Manufacturer: Sartorius Job No.: KSPR2206906
Condition: In condition

Customer:

Water Analysis Center Co., Ltd.
1/94 Moo 5, Rojana Industrial Park, Rojana Road,
Tambol Kanham, Amphur U-Thai, Ayutthaya 13210 Thailand

Environment Condition: Temperature 27 °C ± 0.5 °C
Humidity 42 %RH ± 4.7 %RH

Calibration Place: Water Analysis Center Co., Ltd. (วิสาหกิจชุมชน)
1/94 Moo 5, Rojana Industrial Park, Rojana Road,
Tambol Kanham, Amphur U-Thai, Ayutthaya 13210 Thailand

Calibration By: Mr. Preecha Phooarsai

Calibration Date: 08 June 2022

The Method used: In-house method, SPCC-WI-47, based on UKAS Lab 14

This certificate is traceable to the SI Units maintained by National Institute of Metrology
(NIMT), Thailand through SPC RT Co., Ltd. Certificate No. C02220794

SPC RT Co., Ltd.
บริษัท เอสพีซี รีท จำกัด


This certificate is issued to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national standard laboratories.

The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor ($k=2$) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM). These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of SPC RT Co., Ltd.

Calibration Results:

Without Adjustment

Eccentric Error: Weight to be 1/3 or 1/2 of Maximum capacity, taken from the center of the pan as a zero reference.

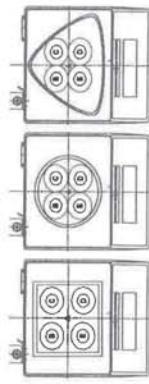

Repeatability: Determination of the standard deviation of weighing balance., Readability 0.0001 (g)

| Nominal Test Value (g) | Reference Points (g) | | | | |
|------------------------|----------------------|--------|---------|---------|---------|
| | A | B | C | D | E |
| - | 0.0001 | 0.0001 | -0.0002 | -0.0002 | -0.0002 |
| 200 | 0.0004 | 0.0004 | 0.0004 | 0.0004 | 0.0004 |

| Nominal Value (g) | Conventional Mass | | | | | Displayed Value (g) | Error of Indication (g) | Uncertainty (g) | k |
|-------------------|-------------------|-----------|--------|---------|--------|---------------------|-------------------------|-----------------|------|
| | A | B | C | D | E | | | | |
| 1 | 0.99998 | 1.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000097 | 2.02 | 2.02 |
| 2 | 1.99999 | 2.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000098 | 2.02 | 2.02 |
| 5 | 5.00000 | 5.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000099 | 2.02 | 2.02 |
| 10 | 10.00002 | 10.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000010 | 2.02 | 2.02 |
| 20 | 19.99995 | 20.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000011 | 2.01 | 2.01 |
| 50 | 50.00002 | 50.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000012 | 2.01 | 2.01 |
| 70 | 69.99997 | 70.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000015 | 2.00 | 2.00 |
| 100 | 100.00007 | 100.0001 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000017 | 2.00 | 2.00 |
| 120 | 120.00002 | 120.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.000020 | 2.00 | 2.00 |
| 150 | 150.00009 | 150.00002 | 0.0001 | 0.00023 | 0.0004 | 0.0004 | 0.000023 | 2.00 | 2.00 |
| 200 | 199.99993 | 200.0003 | 0.0003 | 0.0004 | 0.0004 | 0.0004 | 0.000029 | 2.00 | 2.00 |

The End of Certificate