

Certificate of Calibration

Certificate No. : 65-420108-1

Page : 1 of 2

Submitted by : Pacific Laboratory Co.,Ltd.

14/5358 Moo 14, T. Bang Bua Thong, A. Bang Bua Thong, Nonthaburi 11110 Thailand

Equipment : pH Meter with electrode

pH meter

Manufacturer : Eutech

Model : pH 700

Range : N/A pH

Resolution : 0.01 pH

Serial No. : 2841305

ID No. : LAB-PH-002

Electrode

Model : N/A

Serial No. : 3093341

Environment : On site calibration was carried out at the Laboratory Pacific Laboratory Co.,Ltd.

Ambient Temperature : (25.2 to 25.8)° C

Relative Humidity : (50 to 55) %

Date of Received : 17 December 2022

Date of Calibration : 17 December 2022

Date of Issue : 19 December 2022

Calibrated by : Bunjerd Masri

Calibration Method : In-house method CAL-M4201 direct measurement by using standard voltage calibrator and using certified reference material (CRM)

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Multiproduct Calibrator

| ID No. | Cert. No. | Due Date | Traceability |
|--------|---------------|-------------|---|
| 400005 | SG-E-00473/64 | 27 Aug 2023 | National Institute of Metrology Thailand (NIMT) |

2. Standard Buffer Solution

| pH | Cert. No. | Lot No. | Exp. Date | Traceability |
|--------|-----------|---------|-------------|---|
| 4.008 | 61235182 | 857394 | 11 Dec 2024 | CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025 |
| 6.986 | 61267169 | 857395 | 11 Dec 2023 | CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025 |
| 10.010 | 61260481 | 857396 | 11 Dec 2023 | CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025 |

Approved by

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-420108-1

Page : 2 of 2

Result of Calibration :

UUC Condition As-Received : Good

Function : Electrical measurement

pH meter

Performing standard curve by Multiproduct Calibrator at pH (4,7,10)

| Adjustment Curve at nominal pH | Applied Voltage (mV) | Nominal Value (pH) | UUC Reading | | Correction (mV) | Uncertainty (± mV) |
|-----------------------------------|---------------------------|-------------------------|-------------|--------|----------------------|-------------------------|
| | | | (pH) | (mV) | | |
| 4, 7, 10 | 177.4800 | 4 | 4.00 | 177.5 | 0.0 | 0.12 |
| | 0.0000 | 7 | 7.00 | 0.0 | 0.0 | 0.086 |
| | -177.4800 | 10 | 10.00 | -177.5 | 0.0 | 0.12 |

Function : pH meter with electrode

Performing a three - buffer standard curve using buffer nominal pH (4,7,10)

| Adjustment Curve at nominal pH | Standard Buffer (pH) | UUC Reading (pH) | Correction (pH) | Uncertainty (± pH) |
|-----------------------------------|---------------------------|-----------------------|----------------------|-------------------------|
| 4, 7, 10 | 4.008 | 4.01 | 0.00 | 0.0097 |
| | 6.986 | 7.00 | -0.01 | 0.011 |
| | 10.010 | 10.01 | 0.00 | 0.014 |

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$,
providing a level of confidence of approximately 95%

- 000 -



Certificate of Calibration

Certificate No. : 65-400648-1

Page : 1 of 2

Submitted by : Pacific Laboratory Co., Ltd
14/5358 Moo 14, T. Bang Bua Thong, A. Bang Bua Thong, Nonthaburi 11110 Thailand

Equipment : Digital Thermometer with Thermistor probe
Temperature Indicator

Manufacturer : Eutech Model : pH 700
Range : N/A °C Resolution : 0.1 °C
Serial No. : 2841305 ID No. : LAB-PH-002

Thermistor probe
Model : N/A Sheath Material : Stainless
Diameter : 3 mm. Length : 115 mm.
Serial No. : PHSTEMB01P 049 ID No. : LAB-PH-002

Environment : On site calibration was carried out at the Laboratory, Pacific Laboratory Co., Ltd

Ambient Temperature : (25.2 to 25.8) °C
Relative Humidity : (50 to 55) %
Line Voltage : (220.0 to 222.0) VAC

Date of Received : 17 December 2022

Date of Calibration : 17 December 2022

Date of Issue : 19 December 2022

Calibrated by : Bunjerd Masri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4003 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

| ID No. | Cert. No. | Due Date | Traceability |
|--------|------------|-------------|---|
| 400002 | TT-0074-22 | 20 Jun 2024 | National Institute of Metrology Thailand (NIMT) |

2. Standard Digital Thermometer

| ID No. | Cert. No. | Due Date | Traceability |
|--------|-----------|-------------|---|
| 400033 | 22E569 | 22 Feb 2024 | National Institute of Metrology Thailand (NIMT) |

Approved by

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-400648-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

| Immersion Depth (mm.) | Standard Reading (°C) | UUC Reading (°C) | Correction (°C) | Uncertainty (± °C) |
|----------------------------|----------------------------|-----------------------|----------------------|-------------------------|
| 115 | 25.003 | 24.9 | 0.1 | 0.19 |

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

- () -





CERTIFICATE No : 22M8888
REFERENCE No : 66223-2

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : DIGITAL BALANCE
MANUFACTURER : SHIMADZU
MODEL : AF225WD
SERIAL No : D316301828
ID No : LAB-BL-003
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : PACIFIC LABORATORY CO., LTD.
14/5358 MOO. 14 TAMBOL BANGBUA THONG
AMPHOE BANG NUA THONG, NONTHABURI
11110

CALIBRATED BY : ATSAWIN Y.

CALIBRATION DATE : 01-Aug-22

APPROVED BY : 

ISSUED DATE : 02-Aug-22

RECEIVED DATE : 01-Aug-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.



CERTIFICATE No : 22M8888

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : DIGITAL BALANCE MODEL : AF225WD
MANUFACTURER : SHIMADZU S/N : D316301828
ID No : LAB-BL-003 RECEIVED DATE : 01-Aug-22
AIR PRESSURE : 1005mbar \pm 1mbar CALIBRATION DATE : 01-Aug-22
AMBIENT TEMPERATURE : 25° C \pm 1° C RELATIVE HUMIDITY : 56 %RH \pm 10 % RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED BY ACCORDING TO UKAS LAB 14 EDITION 6:2019 BY USING KNOWN WEIGHT STANDARD WEIGHT. THE BALANCE WAS ADJUSTED USING WEIGHT OF QUALITY CALIBRATION TO ADJUST. THE BALANCE HAS NO ZERO TRACKING FUNCTION. REPEATABILITY WAS MEASURED BY USING 10 REPEATED MEASUREMENTS. LINEARITY WAS MEASURED COVERING 10 POINTS, EVENLY SPREAD OVER THE RANGE. THE INSTRUMENT WAS SET ZERO BEFORE PERFORMING THE LINEARITY TEST. OFF-CENTER LOADING WAS MEASURED BY USING STANDARD WEIGHTS PLACED ON THE PAN AND MOVED TO VARIOUS POSITIONS ON THE PAN.

2. REFERENCE STANDARD INSTRUMENTS :-

| INSTRUMENT | MODEL | SERIAL No | CERTIFICATE No | DUE DATE |
|------------------------|-------|-----------|----------------|-----------|
| 1) STANDARD WEIGHT SET | E2 | QK-I-151 | C02210415 | 09-Feb-23 |
| 2) STANDARD WEIGHT | E2 | 15843 | C02210419 | 10-Feb-23 |
| 3) STANDARD WEIGHT | E2 | QK-I-349 | M2103235S | 26-Mar-23 |

3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.

4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.

5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-

- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH CENTRAL BUREAU OF WEIGHTS&MEASURES

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

1. ZERO SETTING FUNCTION : NORMAL


2. TARE FUNCTION : NORMAL

3. REPEATABILITY OF READING AT 200 g WAS 0.000045 g

4. DEPARTURE FROM NOMINAL VALUE/ LINEARITY

| NOMINAL VALUE (g) | BALANCE READING (g) | CORRECTION (g) | UNCERTAINTY (\pm g) |
|-------------------|---------------------|----------------|------------------------|
| 0.000 | 0.0000 | 0.0000 | 0.000075 |
| 0.001 | 0.0010 | 0.0000 | 0.000075 |
| 0.010 | 0.0100 | 0.0000 | 0.000075 |
| 0.050 | 0.0500 | 0.0000 | 0.000076 |
| 0.100 | 0.1000 | 0.0000 | 0.000075 |
| 1.000 | 1.0000 | 0.0000 | 0.000077 |
| 2.000 | 2.0000 | 0.0000 | 0.000077 |
| 5.000 | 5.0000 | 0.0000 | 0.000079 |
| 20.000 | 20.0000 | 0.0000 | 0.000086 |
| 50.000 | 50.0000 | 0.0000 | 0.00011 |
| 100.000 | 100.0001 | -0.0001 | 0.00019 |
| 150.000 | 150.0001 | -0.0001 | 0.00026 |
| 200.000 | 200.0000 | 0.0000 | 0.00032 |

5. OFF CENTER LOADING ERROR



| POINT | READING (g) |
|--------------------|-------------|
| 1 | 100.0000 |
| 2 | 100.0000 |
| 3 | 100.0000 |
| 4 | 100.0000 |
| 5 | 100.0000 |
| OFF-CENTER LOADING | 0.0000 |

NOTE: THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA. THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY COVERAGE FACTOR $k=2$, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

**QUALITY CALIBRATION CO.,LTD.**

235 Petchkasem 63/2 Road, Laksong, Bangkae, Bangkok 10160

Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

www.qcalibration.com



CERTIFICATE No : 22T8890

REFERENCE No : 66223-4

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR

MANUFACTURER : AQUA LYTIC

MODEL : TC135S

SERIAL No : 0614/000033


ID No : LAB-IB-001

CONDITION AS RECEIVED : USED ITEM

SUBMITTED BY : PACIFIC LABORATORY CO., LTD.
14/5358 MOO. 14 TAMBOL BANGBUA THONG
AMPHOE BANG NUA THONG, NONTABURI 11110

CALIBRATED BY : CHAICHARN CH.

CALIBRATION DATE : 01-Aug-22

APPROVED BY : 

ISSUED DATE : 02-Aug-22

RECEIVED DATE : 01-Aug-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



CERTIFICATE No : 22T8890

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : AQUA LYTIC
MODEL : TC135S
ID No : LAB-IB-001
RECEIVED DATE : 01-Aug-22
AMBIENT TEMPERATURE : 26 °C ± 1 °C

S/N : 0614/000033
CALIBRATION DATE : 01-Aug-22
RELATIVE HUMIDITY : 53 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION


1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLAS G-20 BY COMPARISON WITH CALIBRATED THERMOCOUPLE TYPE K UNDER NO LOAD CONDITION. THE THERMOCOUPLES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOCOUPLE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOCOUPLE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2. REFERENCE STANDARD INSTRUMENTS :-

| <u>INSTRUMENT</u> | <u>MODEL</u> | <u>SERIAL No</u> | <u>CERTIFICATE No</u> | <u>DUE DATE</u> |
|-------------------------------|--------------|------------------|-----------------------|-----------------|
| 1) DATA LOGGER WITH TC TYPE K | HYDRA 2635A | 8009008 | 22T7512 | 05-Jul-23 |

3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

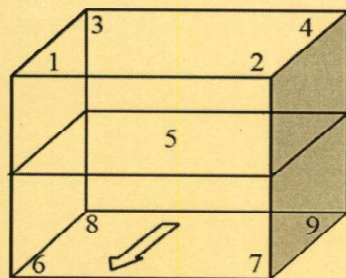

FRONT

GENERAL INFORMATION

| |
|---|
| Overall Ambient Temperature around the Chamber (°C) variation : 7 |
| Overall Line Voltage (V) variation : 10 |
| Instrument Condition : Normal |

CHAMBER PERFORMANCE

| Controller Temperature (°C) | Indicating Temperature (°C) | Temperature Stability (±°C) | Temperature Uniformity (°C) | Overall Variation (°C) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------|
| 20.0 | 20.0 | 0.63 | 0.48 | 1.43 |

TEMPERATURE MEASUREMENT ACCURACY TEST

| Controller Temp (°C) | Indicating Temp (°C) | Measured Temperature (°C) at Spread Locations | | | | | | | | | Uncertainty (±°C) |
|----------------------|----------------------|---|-------|-------|-------|--------|-------|-------|-------|-------|-------------------|
| | | #1 | #2 | #3 | #4 | Ref. 5 | #6 | #7 | #8 | #9 | |
| 20.0 | 20.0 | 20.07 | 20.08 | 20.07 | 20.07 | 20.11 | 20.07 | 20.01 | 19.96 | 19.83 | 0.91 |

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2: LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k =2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

**QUALITY CALIBRATION CO.,LTD.**

235 Petchkasem 63/2 Road, Laksong, Bangkai, Bangkok 10160

Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

www.qcalibration.com



CERTIFICATE No : 22T8896

REFERENCE No : 66224-2

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : WATER BATH

MANUFACTURER : MEMMERT

MODEL : WNB22

SERIAL No : L514.0184

ID No : LAB-WB-001

CONDITION AS RECEIVED : USED ITEM

SUBMITTED BY : PACIFIC LABORATORY CO., LTD.
14/5358 MOO. 14 TAMBOL BANGBUA THONG
AMPHOE BANG NUA THONG, NONTABURI 11110

CALIBRATED BY : CHAICHARN CH.

CALIBRATION DATE : 01-Aug-22

APPROVED BY :

ISSUED DATE :

02-Aug-22

RECEIVED DATE :

01-Aug-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.



CERTIFICATE No : 22T8896

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : WATER BATH
MANUFACTURER : MEMMERT
ID NUMBER : LAB-WB-001
RECEIVED DATE : 01-Aug-22
AMBIENT TEMPERATURE : 29 °C ± 1 °C

MODEL : WNB22
SERIAL NUMBER : L514.0184
CALIBRATION DATE : 01-Aug-22
RELATIVE HUMIDITY : 53 %RH ± 10 % RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO ASTM E715-80 (REAPPROVED 2001) BY COMPARISON WITH CALIBRATED RTD. THE PROBES WERE PLACED ON FIVE POINTS AND LOCATED ONE PROBE IN EACH OF THE FOUR CORNERS OF THE BATH AND PLACED THE FIFTH RTD WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE WATER VOLUME (REFERENCE LOCATION) UNDER NO LOAD CONDITION.

2. REFERENCE STANDARD INSTRUMENTS :-

INSTRUMENT

MODEL

SERIAL No

CERTIFICATE No

DUE DATE

1) DATA LOGGER WITH RTD

2625A

6603614

22T7514

05-Jul-23


3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.

4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.

5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-

- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

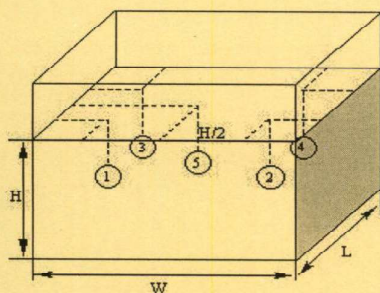

PROBE INSTALLATION
POSITION IN THE BATH

GENERAL INFORMATION

Overall Variation of Ambient Temperature around the Bath (°C) : 1.5

Overall Variation of Line Voltage (V) : 11

Instrument Condition : Normal

BATH PERFORMANCE

| Controller Temperature (°C) | Indicating Temperature (°C) | Temperature Stability (±°C) | Temperature Uniformity (°C) | Overall Variation (°C) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------|
| 85.0 | 85.0 | 0.16 | 0.12 | 0.33 |
| 95.0 | 95.0 | 0.17 | 0.09 | 0.35 |

TEMPERATURE MEASUREMENT ACCURACY TEST

| Controller Temp (°C) | Indicating Temp (°C) | Measured Temperature (°C) at Spread Locations | | | | | Uncertainty (± °C) |
|----------------------|----------------------|---|-------|-------|-------|--------|--------------------|
| | | #1 | #2 | #3 | #4 | Ref. 5 | |
| 85.0 | 85.0 | 84.71 | 84.72 | 84.66 | 84.70 | 84.77 | 0.23 |
| 95.0 | 95.0 | 94.71 | 94.71 | 94.72 | 94.66 | 94.75 | 0.24 |

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE BATH.

NOTE 2 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR $k=2$, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

**QUALITY CALIBRATION CO.,LTD.**

235 Petchkasem 63/2 Road, Laksong, Bangkae, Bangkok 10160

Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

www.qcalibration.com



CERTIFICATE No : 22T8889

REFERENCE No : 66223-3

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : HOT AIR OVEN

MANUFACTURER : MEMMERT

MODEL : UN55

SERIAL No : B214.1879


ID No : LAB-OV-001

CONDITION AS RECEIVED : USED ITEM

SUBMITTED BY : PACIFIC LABORATORY CO., LTD.
14/5358 MOO. 14 TAMBOL BANGBUA THONG
AMPHOE BANG NUA THONG, NONTHABURI 11110

CALIBRATED BY : CHAICHARN CH.

CALIBRATION DATE : 01-Aug-22

APPROVED BY : 

ISSUED DATE : 02-Aug-22

RECEIVED DATE : 01-Aug-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



CERTIFICATE No : 22T8889

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UN55
ID No : LAB-OV-001
RECEIVED DATE : 01-Aug-22
AMBIENT TEMPERATURE : 26 °C ± 1 °C

S/N : B214.1879
CALIBRATION DATE : 01-Aug-22
RELATIVE HUMIDITY : 53 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION


1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLAS G-20 BY COMPARISON WITH CALIBRATED THERMOCOUPLE TYPE K UNDER NO LOAD CONDITION. THE THERMOCOUPLES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOCOUPLE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOCOUPLE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2. REFERENCE STANDARD INSTRUMENTS :-

| INSTRUMENT | MODEL | SERIAL No | CERTIFICATE No | DUE DATE |
|-------------------------------|-------------|-----------|----------------|-----------|
| 1) DATA LOGGER WITH TC TYPE K | HYDRA 2635A | 7903007 | 22T7512 | 05-Jul-23 |

3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

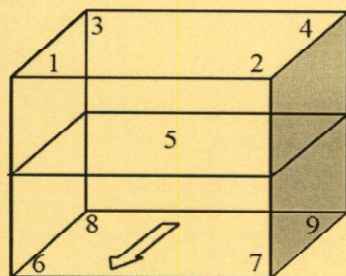

FRONT

GENERAL INFORMATION

| |
|---|
| Overall Ambient Temperature around the Chamber (°C) variation : 0 |
| Overall Line Voltage (V) variation : 10 |
| Instrument Condition : Normal |
| Chamber Size (W*L*H): 40*33*40 cm |

CHAMBER PERFORMANCE

| Controller Temperature (°C) | Indicating Temperature (°C) | Temperature Stability (±°C) | Temperature Uniformity (°C) | Overall Variation (°C) |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------|
| 104.0 | 104.0 | 0.41 | 1.27 | 1.41 |
| 180.0 | 180.0 | 0.67 | 2.27 | 2.44 |

TEMPERATURE MEASUREMENT ACCURACY TEST

| Controller Temp (°C) | Indicating Temp (°C) | Measured Temperature (°C) at Spread Locations | | | | | | | | | Uncertainty (±°C) |
|----------------------|----------------------|---|--------|--------|--------|--------|--------|--------|--------|--------|-------------------|
| | | #1 | #2 | #3 | #4 | Ref. 5 | #6 | #7 | #8 | #9 | |
| 104.0 | 104.0 | 104.09 | 103.96 | 103.60 | 103.84 | 103.93 | 103.57 | 103.64 | 103.15 | 103.76 | 0.83 |
| 180.0 | 180.0 | 179.96 | 179.74 | 179.20 | 179.71 | 180.02 | 179.24 | 179.40 | 178.55 | 179.70 | 1.2 |

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR $k=2$, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT