

ง-2

น้ำทิ้ง

List of Instrument/Equipment Certification for Quality Analysis.

No.	Instrument/Equipment	Parameter	Manufacturer	Model / Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration*	Remark
Laboratory Instrument/Equipments Water Quality Analysis.									
1	pH Meter	pH Temperature	Mettler-Toledo	Seven Compact S220	National Food Institute, Ministry of Industry, Thailand	2203527-001	5 Jul 22	4 Jul 23	-
2	Analytical Balance (Readability 0.01 mg)	Suspended Solids Total Dissolved Solids	Mettler-Toledo	XSR205DU / C009071872	Technology Promotion Association (Thailand-Japan)	22MM210	26 Apr 22	25 Apr 23	-
3	Analytical Balance (Readability 0.01 mg)		Mettler-Toledo	AB204-S/ 1128312528	Technology Promotion Association (Thailand-Japan)	23MM331	7 Apr 23	5 Apr 24	-
4	Hot Air Oven		Memmert	UF55 / B216.1666	Technology Promotion Association (Thailand-Japan)	21TM1409	19 Oct 22	18 Oct 23	-
5	Incubator	Total Coliform Bacteria Fecal Coliform Bacteria	Binder	BD 53 E2/ 13-07343	Technology Promotion Association (Thailand-Japan)	23TM192	15 Feb 23	14 Feb 24	-
6	Incubator		Memmert	INB 400 / E411.1325	Technology Promotion Association (Thailand-Japan)	22TM1063	11 Jul 22	10 Jul 23	-
7	Water Bath		Memmert	WB 14 / I401.0569	Technology Promotion Association (Thailand-Japan)	22TM1065	11 Jul 22	10 Jul 23	-
8	Water Bath		Memmert	WNB 14 / L407.0756	Technology Promotion Association (Thailand-Japan)	22TM1066	11 Jul 22	10 Jul 23	-
9	Analytical Balance		Ohaus	PX623 / C236754745	DKSH Technology Limited	C01223732	9 Dec 22	8 Dec 23	-
10	Auto Clave		ALP	CL-40L / 807298	Technology Promotion Association (Thailand-Japan)	22TM1121	11 Jul 22	10 Jul 23	-
11	Analytical Balance (Repeatability 0.1 mg)	Fat Oil & Grease	Mettler-Toledo	XPE205 / B748058497	Mettler-Toledo	TH2058-097-040722-ACC-	23 Sep 22	22 Sep 23	-

List of Instrument/Equipment Certification for Quality Analysis.

No.	Instrument/Equipment	Parameter	Manufacturer	Model / Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration*	Remark
Laboratory Instrument/Equipments Water Quality Analysis.									
12	BOD Incubator	BOD	Arco	UC4-1320 / (UAE:WAO.018/2551)	Technology Promotion Association (Thailand-Japan)	22TM305	7 Apr 22	6 Apr 23	-
13	BOD Incubator		Arco	UC4-1320/ 13URC45013201	Technology Promotion Association (Thailand-Japan)	23TM249	15 Feb 23	14 Feb 24	-
14	Digestor Unit	TKN	FOSS TECATOR	2520/ 91794469	National Food Institute, Ministry of Industry, Thailand	2202361-001-01	6 Apr 22	5 Apr 23	-
15	Digestor Unit		FOSS TECATOR	2520/ 91794469	National Food Institute, Ministry of Industry, Thailand	2302413-001	28 Mar 23	26 Mar 24	-
16	Distillation Unit (Kjeldahl Method)		FOSS TECATOR	KT8100 / 91889052	FOSS South East Asia	6623	25 Jul 22	24 Jul 23	-

Due Date of Calibration* : Based on the annual calibration plan. At least 1 time per year.



Equipment : Electronic Balance
Condition As-Received : Used Item
Reference : 2204-0542OC-1

Cert.No.: 22MM210
Page: 2 of 3

Procedure used :-

Calibration were conducted using in-house calibration procedure CP-OB01 according to direct measurement method against standard weight.

Condition of this result of calibration

1. Reference standard instruments:-

- | Instruments | Model | Serial No. | ID No. | Test report No. | Due date |
|-----------------------------|-------|------------|---------|-----------------|------------|
| 1) Standard Weight Set (E2) | 15884 | - | 70RC138 | MM-0009-21 | 3 Feb 2023 |
2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This result of calibration was made on requested at the point specified by customer.

4. This certificate is not certified for any commercial transaction.

5. This certification is traceable to the International System of Unit.

Result of calibration () Without Adjustment (*) After Adjustment by Internal Calibration

Range capacity : 0 g to 81 g Resolution 0.00001 g
81 g to 220 g Resolution 0.0001 g

Before Adjustment :

Applied Weight (g)	Balance Reading (g)	Correction (g)	Measurement Uncertainty (± mg)	Coverage Factor (k)
80	80.00004	-0.00004	0.15	2.00
200	199.9999	+0.0001	0.35	2.00

After Adjustment :

1. Determination of the standard deviation of weighing machine (n = 10)

Applied Weight (g)	Standard Deviation of Reading (g)
80	0.000008
200	0.00005



Equipment : Electronic Balance
Condition As-Received : Used Item
Reference : 2204-0542OC-1

Cert.No.: 22MM210
Page: 3 of 3

Result of calibration

2. Effect of off center loading

A mass of 100 g was placed to various position on the pan.
The weighing machine reading error obtained is given in the table

Position 1 (g)	Position 2 (g)	Position 3 (g)	Position 4 (g)	Position 5 (g)	Maximum difference between off-center and central loading (g)
-0.0002	-0.0001	0.0000	-0.0002	-0.0002	0.0002

3. Departure from nominal value

Applied Weight (g)	Balance Reading (g)	Correction (g)	Measurement Uncertainty (± mg)	Coverage Factor (k)
Unload	0.00000	0.00000	0.016	2.13
0.05	0.05001	-0.00001	0.016	2.13
0.1	0.10001	-0.00001	0.017	2.11
1	1.00002	-0.00002	0.019	2.05
5	5.00003	-0.00003	0.026	2.00
20	20.00008	-0.00008	0.049	2.00
50	50.00010	-0.00010	0.080	2.00
80	80.00014	-0.00014	0.15	2.00
100	100.0001	-0.0001	0.21	2.00
150	150.0001	-0.0001	0.29	2.00
200	200.0001	-0.0001	0.35	2.00

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-o-o-

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES & EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLIANG, SUANLIANG BANGKOK 10250
TEL: 0-2317-5000-29 FAX: 0-2719-9484



Cert.No.: 23MM331
Page.: 1 of 3

Certificate of Calibration

Equipment : Electronic Balance
Manufacturer : Mettler Toledo
Model : AB204-S
Serial No. : 1128312528
ID No. : UAE_AIR.019/2550

Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260

Location : Balance Room 2

Received order : 07 April 2023
Calibration Date : 07 April 2023
Ambient Temperature : 15 °C to 40 °C
Relative Humidity : 30 % to 90 %

Calibrated by : Suwit Injai

Approved by :  Approved Signatory

() Ponthippa Tamayakul
() Malee Bulkrusa

Issue Date : 10 April 2023

The Uncertainties are for a confidence probability of approximately 95 %

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม



Equipment : Electronic Balance
Condition As-Received : Used Item
Reference : 2304-00150C-1

Cert.No.: 23MM331
Page: 2 of 3

Procedure used :-

Calibration were conducted using in-house calibration procedure CP-OB01 according to direct measurement method against standard weight.

Condition of this result of calibration

1. Reference standard instruments:-

- 1) Standard Weight Set (E2) Model 15884 Serial No. 24053 ID No. 70RC007 Test report No. MM-0010-22 Due date 20 Jan 2024
2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This result of calibration was made on requested at the point specified by customer.
4. This certificate is not certified for any commercial transaction.
5. This certification is traceable to the International System of Unit.

Result of calibration () Without Adjustment (*) After Adjustment by Internal Calibration

Range capacity : 0 g to 220 g Resolution 0.0001 g

Before Adjustment :

Applied Weight (g)	Balance Reading (g)	Correction (g)	Measurement Uncertainty (\pm mg)	Coverage Factor (k)
100	99.9999	+0.0001	0.19	2.03
200	200.0001	-0.0001	0.29	2.00

After Adjustment :

1. Determination of the standard deviation of weighing machine (n = 10)

Applied Weight (g)	Standard Deviation of Reading (g)
100	0.00007
200	0.00007

เอกสารไม่ควบคุม



Equipment : Electronic Balance
Condition As-Received : Used Item
Reference : 2304-0015OC-1

Result of calibration

2. Effect of off center loading

A mass of 100 g was placed at various position on the pan.
The weighing machine reading error obtained is given in the table

Position 1	Position 2	Position 3	Position 4	Position 5
(g)	(g)	(g)	(g)	(g)
-0.0001	-0.0002	+0.0004	-0.0001	-0.0006


3. Departure from nominal value

Applied Weight		Balance		Measurement		Coverage	
(g)	(g)	Reading	Correction	Uncertainty	(\pm mg)	Factor	(k)
Unload		0.0000	0.0000	0.15		2.13	
0.1		0.0999	+0.0001	0.15		2.13	
1		0.9999	+0.0001	0.15		2.13	
5		4.9999	+0.0001	0.15		2.13	
10		9.9999	+0.0001	0.15		2.11	
20		20.0000	0.0000	0.15		2.11	
50		50.0000	0.0000	0.16		2.06	
70		69.9999	+0.0001	0.18		2.04	
100		99.9999	+0.0001	0.19		2.03	
150		150.0003	-0.0003	0.29		2.00	
200		200.0005	-0.0005	0.29		2.00	

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-o-o-

Cert.No.: 23MM331
Page: 3 of 3



Maximum difference between
off-center and central loading
(g)
0.0005

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES & EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-27 FAX. 0-2719-9484



Cert. No.: 22TM1490
Page: 1 of 3

Certificate of Calibration

Equipment : Hot Air Oven
Manufacturer : Memmert
Model : UF 55
Serial No. : B216.1666
ID No. : UAE.WAO.027/2559
Submitted by : United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : Lab Floor 2
Received Order : 19 October 2022
Calibration Date : 19 October 2022
Ambient Temperature : $(26 \pm 10) ^\circ\text{C}$
Relative Humidity : $(50 \pm 30) \%$

Calibrated by : Preecha Hlanhib

Approved by : 
Approved Signatory

() Pongthippa Tameyakul
() Malee Bulkrusa
(✓) Suwit Imjai

Issue Date : 31 October 2022

The Uncertainties are for a confidence probability of approximately 95 %

This certificate may not be reproduced other than in full, except with the prior written
Approval of the Head of Corporate Services & Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม

A 0046800



Equipment : Hot Air Oven
Condition As-Received : Used Item
Reference : 2210-0575OC-1
Cert. No.: 22TM1490
Page : 2 of 3

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD) and Thermocouple Type T.

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument **Model** **Serial No.** **Cert. No.** **Due Date**
1) Data Acquisition 34970A MY41021843 22LM4 10 Jan 2023


2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certificate is traceable to the International System of Unit.

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Close



Probe Installation Details :

a =	5.0	cm
b =	5.0	cm
c =	5.0	cm

Dimension of Chamber :

D =	0.33	m
W =	0.40	m
H =	0.40	m
Capacity =	0.053	m ³

Ref. Std. ID No. : @	
Calibration Point	
Position :	(104) °C (140, 180) °C
1	18-04RTD-01 21-04TC-01
2	18-04RTD-02 21-04TC-02
3	18-04RTD-03 21-04TC-03
4	18-04RTD-04 21-04TC-04
5	18-04RTD-05 21-04TC-05
6	18-04RTD-06 21-04TC-06
7	18-04RTD-07 21-04TC-07
8	18-04RTD-08 21-04TC-08
9 (ref.)	18-04RTD-09 21-04TC-09

Environment during calibration	
Temp. (°C)	Beginning Finished
REL.Humid. (%)	29 30
AC Supply (Volt)	47 40
	221 220



Equipment : Hot Air Oven
Condition As-Received : Used Item
Reference : 2210-0575OC-1
Cert. No.: 22TM1490
Page : 3 of 3
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Uncertainty (± °C)	Coverage Factor k
104.0	104.0	104.0	0.061	1.3	1.7	0.42	2
140.0	140.0	140.0	0.14	2.3	2.4	1.1	2
180.0	180.0	180.0	0.21	3.5	3.6	1.3	2

Measured Temperature (°C)								
Position								
1	2	3	4	5	6	7	8	9 (ref.)
104.0	103.076	103.777	104.124	104.667	104.426	104.012	103.928	104.370
140.0	138.199	139.189	139.808	139.550	140.266	139.622	139.293	140.369
180.0	177.930	179.267	178.643	179.753	181.011	180.093	179.496	181.278

Average* : The average of 30 values in each position.

Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor
Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation
UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม

๑ 1133252

เอกสารไม่ควบคุม

๑ 1133251



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 14, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert. No.: 23TM192
Page : 1 of 3

Certificate of Calibration

Equipment : Incubator
Manufacturer : Binder
Model : BD 53 E2
Serial No. : 13-07343
ID No. : UAE.MIC.005/2558

Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangkok 10260
Location : Microbiology Laboratory

Received Order : 15 February 2023
Calibration Date : 15 February 2023
Ambient Temperature : $(26 \pm 10) ^\circ\text{C}$
Relative Humidity : $(50 \pm 30) \%$

Calibrated by : Suwit Imjai

Approved by :

() Ponthippa Tameyakul
() Malee Butkruea

Issue Date : 24 February 2023

The Uncertainties are for a confidence probability of approximately 95%.

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3: Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2302-0295OC-1
Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument :-

Instrument **Model** **Serial No.** **Cert. No.** **Due Date**
1) Data Acquisition 34972A MY59003411 22LM185 26 Nov 2023

2. This certificate is valid only to the item calibrated on date and place of calibration.


3. This certification is traceable to the International System of Unit.

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Close

Environment during calibration		
	Beginning	Finished
Temp. (°C)	22	23
REL Humid. (%)	65	61
AC Supply (Volt)	231	231



Probe Installation Details :

a = 5.0 cm
b = 5.0 cm
c = 5.0 cm
D = 0.33 m
W = 0.40 m
H = 0.40 m
Capacity = 0.053 m³

Position :	Ref. Std. ID No.:
1	20RTD-2/1
2	20RTD-2/2
3	20RTD-2/3
4	20RTD-2/4
5	20RTD-2/5
6	20RTD-2/6
7	20RTD-2/7
8	20RTD-2/8
9 (ref.)	20RTD-2/9

Cert. No.: 23TM192
Page : 2 of 3

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2302-02850C-1
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Cert. No.: 23TM192
Page : 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Uncertainty (± °C)	Coverage Factor K
35.0	35.4	35.4	0.037	0.56	0.86	0.30	2
Measured Temperature (°C)							
Position							
1	2	3	4	5	6	7	8
35.0	35.256	35.308	35.118	35.453	34.700	34.798	34.657
							9 (ref.)
							34.938

Average* : The average of 30 values in each position.

Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.
Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.
UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
334/4 PATTANAKARN ROAD SOI 18, SUANLIANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-37 FAX. 0-2719-9484



MSC-761-7657025
CALIBRATION 0008

Cert. No.: 22TM1063
Page.: 1 of 3

Certificate of Calibration

Equipment : Incubator

Manufacturer : Memmert

Model : INB 400

Serial No. : E411.1325

ID No. : UAE MIC.003/2555

Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260

Location : Microbiology Laboratory

Received Order : 11 July 2022

Calibration Date : 11 July 2022

Ambient Temperature : (26 ± 10) °C

Relative Humidity : (50 ± 30) %

Calibrated by : Man Pattanapongpaliboon

Approved by :

() Ponthippa Tameyakul
() Malee Butkruea
() Suwit Injai

Approved signature

Issue Date : 18 July 2022

The Uncertainties are for a confidence probability of approximately 95 %

This certificate may not be reproduced other than in full, except with the prior written

Approval of the head of Corporate Services 3: Equipment Calibration and Testing Services

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received :
Reference :
Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-
Instrument Model Serial No. Cert. No. Due Date
1) Data Acquisition 34072A MV67013823 22LM24 26 Feb 2023

2. This certificate is valid only to the item calibrated on date and place of calibration.


3. This certification is traceable to the International System of Unit.

Result of Calibration :-

Function of UUC* :-

Fresh air setting : Close

Environment during calibration		
	Beginning	Finished
Temp. (°C)	25	25
REL Humid. (%)	56	62
AC Supply (Volt)	219	223



Probe Installation Details :

a = 5.0 cm
b = 5.0 cm
c = 5.0 cm
D = 0.40 m
W = 0.33 m
H = 0.40 m
Capacity = 0.053 m³

Position :	Ref. Std. ID No.:
1	21-17RTD-01
2	21-17RTD-02
3	17RTD-03
4	17RTD-04
5	17RTD-05
6	17RTD-06
7	17RTD-07
8	17RTD-08
9 (ref.)	17RTD-09

เอกสารไม่คว



Equipment : Incubator
Condition As-Received :
Reference :
Result of Calibration :-
Function of UUC* :-
Fresh air setting : Close

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Uncertainty (± °C)	Coverage Factor k
36.0	35.5	35.5	0.10	0.63	0.88	0.30	2
Measured Temperature (°C)							
Position							
1	2	3	4	5	6	7	8
35.895	35.803	35.846	35.766	36.272	35.561	36.212	35.519
36.0							9 (ref.)
							35.697

Average* : The average of 30 values in each position.

Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor

Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation

UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่คว



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLIANG, SUANLIANG BANGKOK 10250
TEL. 0-2717-3088-27 FAX. 0-2719-9484



Cert. No.: 22TM1065
Page.: 1 of 3

Certificate of Calibration

Equipment : Water Bath

Manufacturer : Memmert

Model : WB 14

Serial No. : 1401.0569

ID No. : UAE.MIC.004/2544

Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260

Location : Microbiology Laboratory

Received Order : 11 July 2022

Calibration Date : 11 - 12 July 2022

Ambient Temperature : (26 ± 10) °C

Relative Humidity : (50 ± 30) %

Calibrated by : Man Pattanapongpalboon

Approved by :

() Ponthippa Tameyakul
(/) Malee Butkruea
() Suwit Imjai

Approved Signatory

Issue Date :

18 July 2022

The Uncertainties are for a confidence probability of approximately 95 %

This certificate may not be reproduced other than in full, except with the prior written

Approval of the Head of Corporate Services 3 : Equipment Calibration and Testing

เอกสารไม่ควบคุม



Equipment : Water Bath

Condition As-Received : Used Item

Reference : 2207-02450C-5

Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-OT04 according to direct measurement method with Data Acquisition which connected with Industrial Platinum Resistance Thermometer (IPT) .

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard Instrument :-

Instrument Model Serial No. Cert. No. Due Date

1) Data Acquisition 34972A MY57013823 22LM24 26 Feb 2023


2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certification is traceable to the International System of Unit.

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Beginning of Calibration Finished of Calibration	Environmental		AC Voltage Supply (Volt)
	(°C)	(%R.H.)	
	25	59	223
	25	63	224



Front

Position :	Ref. Std. S/N :
1	4804539-005
2	4804539-007
3	4804539-008
4	4804539-009
5(ref.)	4804539-010

Cert. No.: 22TM1065
Page.: 2 of 3

เอกสารไม่ควบคุม



Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2207-0245OC-5
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source

Cert. No.: 22TM1065
Page.: 3 of 3

Calibration point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Average* Standard Reading (°C)				
			1	2	3	4	5 (ref.)
41.5	41.2	41.2	41.475	41.459	41.427	41.485	41.493
Calibration point (°C)	Uniformity (°C)	Stability (± °C)	Uncertainty (± °C)	Coverage Factor k			
41.5	0.097	0.065	0.15	2			

Average* : The average of 30 values in each position.
Uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Stability : One-half of the greatest maximum difference of measured temperature at any one probe.
UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity.

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 16, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0 2717-3000-27 FAX. 0 2719-9484

Cert. No.: 22TM1066
Page.: 1 of 3

Certificate of Calibration

Equipment : Water Bath
Manufacturer : Memmert
Model : WNB 14
Serial No. : L407.0756
ID No. : UAE MIC.024/2550
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : Microbiology Laboratory
Received Order : 11 July 2022
Calibration Date : 11 July 2022
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %
Calibrated by : Man Pattanasongpalboon

Approved by :
() Ponthippa Tameyakul
() Malee Butkruea
() Suwit Imjai

Approved Signatory

Issue Date : 18 July 2022

The Uncertainties are for a confidence probability of approximately 95 %

This certificate may not be reproduced other than in full, except with the prior written

Approval of the head of Corporate Services 3: Equipment Calibration and Testing

เอกสารไม่ควบคุม



Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2207-0245OC-6
Procedure Used :-

Calibration was conducted using in-house calibration procedure CP-OT04 according to direct measurement method with Data Acquisition which connected with Industrial Platinum Resistance Thermometer (IPRT).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument Model Serial No. Cert. No. Due Date
1) Data Acquisition 34972A MY57013823 22LM24 26 Feb 2023

2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certification is traceable to the International System of Unit.

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

	Environmental		AC Voltage Supply
	(°C)	(%R.H.)	(Volt)
Beginning of Calibration	25	59	223
Finished of Calibration	25	63	224



Front

Position :	Ref. Std. S/N.:
1	4804539-006
2	4804539-007
3	4804539-008
4	4804539-009
5(ref.)	4804539-010

เอกสารไม่ควบคุม



Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2207-0245OC-6
Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Calibration point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Average* Standard Reading (°C)				
			1	2	3	4	5 (ref.)
44.5	45.0	45.0	44.559	44.526	44.456	44.528	44.537

Calibration point (°C)	Uniformity (°C)	Stability (± °C)	Uncertainty (± °C)	Coverage Factor k
44.5	0.12	0.032	0.15	2

Average* : The average of 30 values in each position.

Uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Stability : One-half of the greatest maximum difference of measured temperature at any one probe.

UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity.

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor **k**, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม



Certificate of Calibration



Equipment: Balance
Model: PX623
Serial No. (or ID.): C236754745
Manufacturer: Ohaus
Condition: New

Certificate No.: C01223732
Issued Date: 09 December 2022
Job No.: KSPR2215576
Page: 1 of 2

Customer: United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udomsuk 41, Sukhumvit Road, Bangchak Sub-District,
Phrakhanong District, Bangkok, THAILAND 10260

Environment Condition: Temperature 26 °C ± 0.5 °C
Humidity 53 %RH ± 3.9 %RH

Calibration Place: United Analyst and Engineering Consultant Co., Ltd. (301 Microbiology Room)
3 Soi Udomsuk 41, Sukhumvit Road, Bangchak Sub-District,
Phrakhanong District, Bangkok, THAILAND 10260

Calibration By: Mr. Adisal Maknoi
Calibration Date: 09 December 2022
The Method used: In-house method, CAL-WI-47, based on UKAS Lab 14
Traceability: This certificate is traceable to the SI Units maintained by National Institute of Metrology (NIMT), Thailand through DKSH Technology Co., Ltd. Certificate No. C02221765



(Mr. Adisal Maknoi)
Person in charge



(Mr. Rungrod Jenkitrakulchai)
Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

บริษัท เทคโนโลยี จำกัด
DKSH Technology Limited
2333 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2839 7000 Email: info.calibration@dksh.com Website: www.dksh.com/certificate-thailand

เอกสารไม่ควบคุม

Delivering Growth - In Asia and Beyond.

CAL-FM-C01-14: 12 Sep 2022



Certificate No.: C01223732

Page: 2 of 2

Calibration Results:

Without Adjustment

Eccentric Error: Weight to be 1/3 or 1/2 of Maximum capacity, taken from the center of the pan as a zero reference.

	Nominal Test Value					(g)
	A	B	C	D	E	
	-	0.000	0.000	0.000	0.000	0.000

Repeatability: Determination of the standard deviation of weighing balance., Readability

0.001 (g)

Nominal test value (g)	Standard Deviation
50	0.0004
500	0.0005

Error of Indication from nominal or conventional mass value., Readability

0.001 (g)

Nominal Value (g)	Conventional Mass (g)	Displayed Value (g)	Error of Indication (g)	Uncertainty (g)	k
1	1.0000	1.000	0.000	0.0010	2.03
5	5.0001	5.000	0.000	0.0010	2.03
10	10.0001	10.000	0.000	0.0010	2.03
20	20.0001	20.000	0.000	0.0010	2.03
50	50.0001	50.000	0.000	0.0010	2.03
100	100.0001	100.000	0.000	0.0011	2.03
200	200.0004	200.000	0.000	0.0011	2.02
300	300.0005	300.000	-0.001	0.0013	2.01
400	400.0008	400.001	0.000	0.0014	2.01
500	500.0003	500.000	0.000	0.0017	2.00
600	600.0004	600.000	0.000	0.0019	2.00

The End of Certificate

บริษัท เทคโนโลยี จำกัด
DKSH Technology Limited
2333 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2839 7000 Email: info.calibration@dksh.com Website: www.dksh.com/certificate-thailand

เอกสารไม่ควบคุม

Delivering Growth - In Asia and Beyond.

CAL-FM-C01-14: 12 Sep 2022



Refer to Certificate No.: C01223732

Page: 1 of 2

Statements of conformity:

This conformity certificate documents the validity of the following statements of conformity based on the measurement results of corresponding calibration certificate:

The error of indication determined during calibration are under given measurement and environmental conditions and considering the expanded measurement uncertainty (coverage probability 95%) within the specification. The given measurement uncertainty already includes other all effects by according to the standard method, UKAS Lab14. Therefore, those parameters have not been assessed separately.

Tolerance and Decision rules:

Assessment of the conformity of the measurement device are done based on direct comparison of the relevant measurement results with the tolerances and decision rule are prescribed by the customer.

Decision rule : ☐ Choice A Binary Statement for Simple Acceptance Rule ($w = 0$), Specific Risk $< 50\%$ PFA

☒ Choice B Non-binary statement with guard band ($w = 1$ U), Pass or Fail Specific Risk $< 2.5\%$ PFA and Condition Pass or Condition Fail Specific Risk $< 50\%$ PFA

☐ Choice C Customer defined, Customers may define arbitrary multiple of r to have applied as guard band ($w = r$ U).
: PFA – Probability of False Accept

(Mr. Rungrat Jenkitrakulchai)
Authorized signatory

บริษัท ดีเคเอสเอช (ประเทศไทย) จำกัด
DKSH Technology Limited
2533 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
Phone +66 2839 7000 Email: info.calibration@dksh.com Website: www.dksh.com/th/calibration

เอกสารไม่ควบคุม

Delivering Growth – In Asia and Beyond.

CAL-FM-C01-14: 12 Sep 2022



Refer to Certificate No.: C01223732

Page: 2 of 2

Statements of conformity:

Without Adjustment

Readability; 0.001 g

Nominal Value g	Error of Indication g	Guard band (w) g	Tolerance (\pm) g	Conformity
1	0.000	0.0010	0.002	Pass
5	0.000	0.0010	0.010	Pass
10	0.000	0.0010	0.020	Pass
20	0.000	0.0010	0.040	Pass
50	0.000	0.0010	0.100	Pass
100	0.000	0.0011	0.200	Pass
200	0.000	0.0011	0.400	Pass
300	-0.001	0.0013	0.600	Pass
400	0.000	0.0014	0.800	Pass
500	0.000	0.0017	1.000	Pass
600	0.000	0.0019	1.200	Pass

The validity of the statements of conformity cannot be guaranteed for different places of use, environmental conditions or improper use.

The End of Statements of conformity


บริษัท ดีเคเอสเอช (ประเทศไทย) จำกัด
DKSH Technology Limited
2533 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
Phone +66 2839 7000 Email: info.calibration@dksh.com Website: www.dksh.com/th/calibration

เอกสารไม่ควบคุม

Delivering Growth – In Asia and Beyond.

CAL-FM-C01-14: 12 Sep 2022

Without Adjustment
Job No. XSPR2219576
Readability: 0.001g

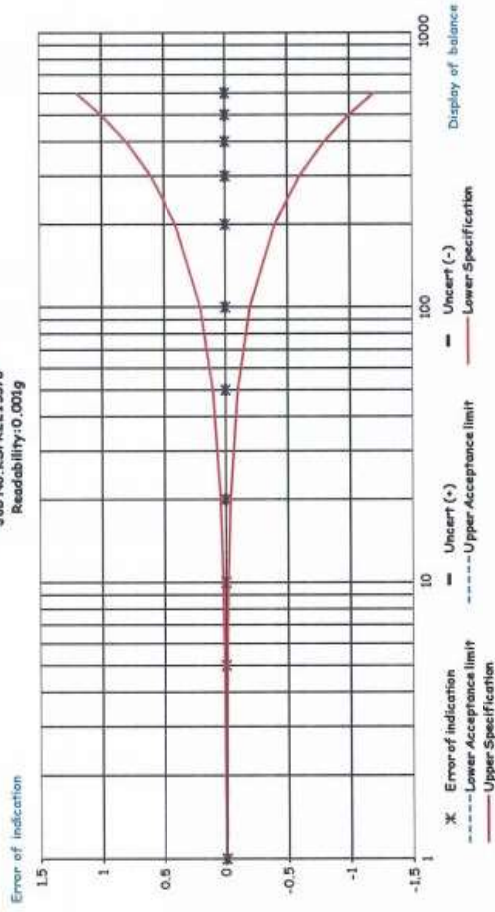

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES & EQUIPMENT CALIBRATION AND TESTING SERVICES
5344 PATTANAKARN ROAD SOI 18, SUANLIANG, SUANLIANG BANGKOK 10250
TEL: 0-2717-3000-37 FAX: 0-2719-9884



Cert. No.: 22TM1121
Page.: 1 of 3

Certificate of Calibration

Equipment : Autoclave
Manufacturer : ALP
Model : CL-40L
Serial No. : 807298
ID No. : UAE.MIC.019/2560

Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Sol Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : 301 Room

Received Order : 11 July 2022
Calibration Date : 11 July 2022
Ambient Temperature : $(26 \pm 10) ^\circ\text{C}$
Relative Humidity : $(50 \pm 30) \%$

Calibrated by : Preecha Hlahib

Approved by : 
Approved Signatory

() Ponthippa Tameyakul
() Malee Bulkruea
() Suwit Imjai

Issue Date : 18 July 2022

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written

Approval of the head of Corporate Services 3 Equipment Calibration and Testing Services

เอกสารไม่ควบคุม



Equipment : Autoclave
Condition As-Received : Used Item
Reference : 2207-0245OC-7
Cert. No.: 22TM1121
Page.: 2 of 3

Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-QT03 according to direct measurement method with Data Acquisition which connected with Thermocouple Type T


The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-
Instrument Model Serial No. Cert. No. Due Date
1) Data Acquisition 34970A MY44000450 22LM46 20 Mar 2023
 2. This certificate is valid only to the item calibrated on date and place of calibration.
 3. This certification is traceable to the International System of Unit.
 4. This result of calibration covers laboratory autoclaves for the sterilization of goods and material which could be infected with organisms categorized as Hazard Group 1, 2 and 3**
- (** = Categorization of pathogens according to hazard and categories of containment, second edition, 1990)
It does not cover autoclaves for use with material infect with organisms in Hazard Group 4, for which complete containment and sterilization of infected condensate is considered to be essential.
This result of calibration does not apply to sterilizers or disinfectors used for medical, dental, pharmaceutical or veterinary purposes which are directly concerned with patient care, or those used for fabrics subjected to sterilization which are required to be dry at the end of cycle.

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source



Environmental	
(°C)	(%R.H.) (Volt)
Beginning of Calibration	29 49 220
Finished of Calibration	32 48 220

Position	Description	Ref. Std. ID No.:
1 =	Center of chamber	22-14TC-01
2 =	Temperature sensor	22-14TC-02
3 =	Exhaust port	22-14TC-03

เอกสารไม่ควม



Equipment : Autoclave
Condition As-Received : Used Item
Reference : 2207-0245OC-7
Cert. No.: 22TM1121
Page.: 3 of 3

Result of Calibration :- (*) Without Adjustment

Operating parameter Set : Temperature = 115 °C
Sterilization period = 15 minute

UUC* Setting (°C)	UUC* Reading (°C)	Position	Average* Standard Reading (°C)	Stability (± °C)	Pressure Reading (MPa)	Uncertainty (± °C)	Coverage Factor k
116	116	1	116.523	0.14	0.08	0.90	2
		2	116.566				
		3	116.440				

Operating parameter Set : Temperature = 121 °C
Sterilization period = 30 minute

UUC* Setting (°C)	UUC* Reading (°C)	Position	Average* Standard Reading (°C)	Stability (± °C)	Pressure Reading (MPa)	Uncertainty (± °C)	Coverage Factor k
122	122	1	122.503	0.19	0.12	0.91	2
		2	122.637				
		3	122.558				

Average* : The average of 30 values in each position.

Stability : One-half of the greatest maximum difference of measured temperature at any one probe.

UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.


-o0o-

เอกสารไม่ควม

Error of Indication

As Found	Reference Value	Indication	Error of Indication	Expanded Uncertainty	k
1	0.00000 g	0.00000 g	0.00000 g	0.023 mg	2
2	9.99997 g	9.99997 g	0.00000 g	0.063 mg	2
3	29.99998 g	29.99999 g	0.00001 g	0.14 mg	2
4*	49.99998 g	50.00000 g	0.00002 g	0.12 mg	2
5*	89.99999 g	70.00000 g	0.00001 g	0.20 mg	2
6	90.00002 g	90.00002 g	0.00000 g	0.27 mg	2
7*	100.00002 g	100.00005 g	0.00003 g	0.29 mg	2
8*	120.00003 g	120.00005 g	0.00002 g	0.31 mg	2
9*	150.00001 g	150.00002 g	0.00001 g	0.31 mg	2
10	170.00001 g	170.00007 g	0.00006 g	0.38 mg	2
11	200.00002 g	200.00000 g	-0.00002 g	0.35 mg	2

*The calculated uncertainty was replaced by the CMC (Calibration and Measurement Capabilities) value because the calculated uncertainty was smaller than the CMC value.

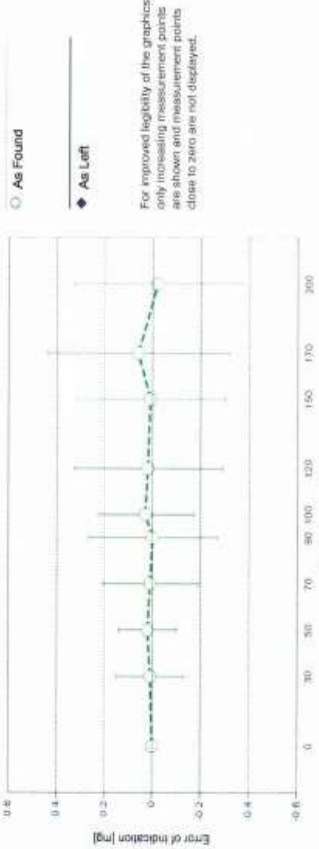

The uncertainty stated is the expanded uncertainty at calibration obtained by multiplying the standard combined uncertainty by the coverage factor k – which can be larger than 2 according to EURAMET cg-18. The value of the measurand lies within the assigned range of values with a probability of approximately 95%.

The user is responsible for maintaining environmental conditions and the settings of the weighing instrument when it was calibrated.

Test Equipment

All weights used for metrological testing are traceable to national or international standards. The weights were calibrated and certified by an accredited calibration laboratory.

Weight Set 1: OIML E2

Weight Set No.:	WS03	Date of Issue:	21-Sep-2021
Certificate Number:	175498	Calibration Due Date:	14-Mar-2023

Weight Set 2: OIML E2

Weight Set No.:	WS6B	Date of Issue:	21-Oct-2021
Certificate Number:	C142784709	Calibration Due Date:	17-Apr-2023

Weight Set 3: OIML E2

Weight Set No.:	WS70	Date of Issue:	21-Oct-2021
Certificate Number:	C142784702	Calibration Due Date:	19-Mar-2023

Thermo Hygrometer

Equipment No.:	IN281	Date of Issue:	23-May-2022
Certificate Number:	22+1057	Calibration Due Date:	15-May-2023

Remarks

FACT adjustment functionality activated

Equipment condition: Good

Next calibration according to customer's procedure

Calibration data not decide by calibration laboratory.

End of Accredited Section

The information below and any attachments to this calibration certificate are not part of the accredited calibration.

Measurement Uncertainty of the Weighing Instrument in Use

Stated is the expanded uncertainty with $k=2$ in use. The formula shall be used for the estimation of the uncertainty under consideration of the errors of indication. The value R represents the net load indication in the unit of measure of the device.

Temperature coefficient for the evaluation of the measurement uncertainty in use

1.0 · 10⁻⁶ / K

Temperature range on site for the evaluation of the measurement uncertainty in use

3 K


Linearization of Uncertainty Equation

1	Range		Max	As Found	As Left
	d				
1	0.00001 g	220 g		$U_1 = 0.024 \text{ mg} + 0.00508 \text{ mg/g} \cdot R$	N/A

To optimize the stability of the linearization, besides of the zero load only increasing measurement points with a test load of 5% of the measurement range or larger are taken for the calculation of the linear equation.

Absolute and Relative Measurement Uncertainty in Use for Various Net Indications (Examples)

Net Indication		As Found		As Left	
0.00220 g		0.024 mg	1.1%	N/A	N/A
0.02200 g		0.024 mg	0.11%	N/A	N/A
0.22000 g		0.025 mg	0.011%	N/A	N/A
2.20000 g		0.035 mg	0.0016%	N/A	N/A
220.00000 g		1.1 mg	0.00052%	N/A	N/A

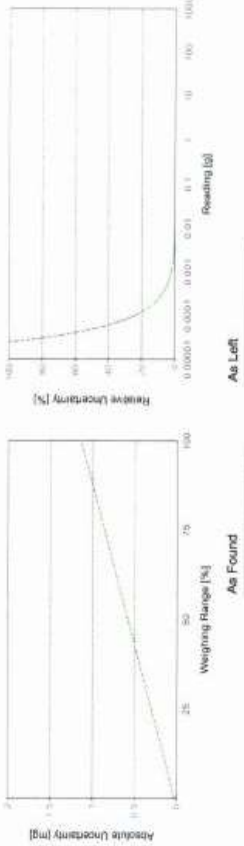

GWP®
Certificate



As Found



As Left



The weighing device meets the given process requirements.

The weighing device meets the given process requirements.

Tests Performed:

☒ As Found

☐ As Left

☒ No adjustments/modifications made. As Left results correspond to As Found.


Process Requirements

Weighing Tolerance: 0.5%

Smallest Net Weight: 10.00000 g

Safety Factor: 2

Safe Weighing Range

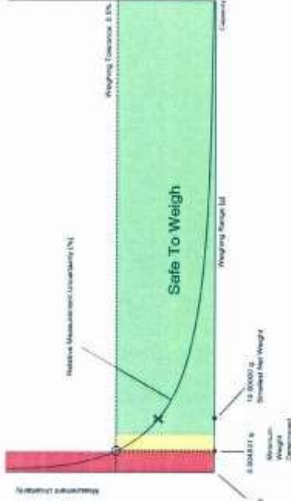

While the values in the graph reflect the actual calibration results, the measurement uncertainty curves are merely a visual representation. This graph reflects As Left taking, unless only As Found was performed.

Minimum Weight

As Found Minimum Weight Table

Tolerance	Minimum weights for different weighing tolerances and safety factors				
	Safety Factor				
	1	2	3	5	10
0.1%	0.024253 g	0.048754 g	0.073509 g	0.123795 g	0.254223 g
0.2%	0.012095 g	0.024253 g	0.036472 g	0.061100 g	0.123795 g
0.5%	0.004831 g	0.009671 g	0.014522 g	0.024253 g	0.048754 g
1%	0.002414 g	0.004831 g	0.007250 g	0.012095 g	0.024253 g
2%	0.001207 g	0.002414 g	0.003622 g	0.006040 g	0.012095 g
5%	0.000483 g	0.000965 g	0.001448 g	0.002414 g	0.004831 g

✓ Pass: The determined minimum weight meets the requirement for the smallest net weight.

As Left Minimum Weight Table

Tolerance	Minimum weights for different weighing tolerances and safety factors				
	Safety Factor				
	1	2	3	5	10
0.1%	0.024253 g	0.048754 g	0.073509 g	0.123795 g	0.254223 g
0.2%	0.012095 g	0.024253 g	0.036472 g	0.061100 g	0.123795 g
0.5%	0.004831 g	0.009671 g	0.014522 g	0.024253 g	0.048754 g
1%	0.002414 g	0.004831 g	0.007250 g	0.012095 g	0.024253 g
2%	0.001207 g	0.002414 g	0.003622 g	0.006040 g	0.012095 g
5%	0.000483 g	0.000965 g	0.001448 g	0.002414 g	0.004831 g

✓ Pass: The determined minimum weight meets the requirement for the smallest net weight.

At these net minimum weight values, the measurement uncertainty of the weighing device is equal to or less than 1/1 (no safety factor), 1/2, 1/3, 1/5, or 1/10 of the required tolerance. The values are calculated with $k = 2$ and based on the linear formula of the measurement uncertainty of the weighing device in use.

The safety factor for As Found is always 1. This implies no safety factor. As Found testing looks at the behavior of the instrument from the past until test occurred. For the past, it is necessary to know that the tolerance was met, but not the safety factor. The safety factor is a proactive measure to apply for future measurements.

Notes on minimum weight values in above table:

1. If "N/A" is shown above, no appropriate value could be calculated.
2. METTLER TOLEDO is not responsible for the definition of the process requirements.

Measurement Results

Results Summary

	Repeatability			Eccentricity	Error of Indication
	As Found	As Left			
✓ = Passed			✓	✓	✓
✗ = Failed					
⚠ = Safety Factor not met					

Repeatability

Test Load: 100 g

Tolerance	Control Limit	As Found		As Left	
		Std. Deviation	Result	Std. Deviation	Result
0.1%	0.005000 g		✓		✓
0.2%	0.010000 g		✓		✓
0.5%	0.025000 g	0.000011 g	✓	0.000011 g	✓
1%	0.050000 g		✓		✓
2%	0.100000 g		✓		✓
5%	0.250000 g		✓		✓

The weighing tolerance is met if the standard deviation is less than or equal to the corresponding control limit.

Eccentricity

Test Load: 100 g

Tolerance	Control Limit	As Found		As Left	
		Deviation	Result	Deviation	Result
0.1%	0.05000 g		✓		✓
0.2%	0.10000 g		✓		✓
0.5%	0.25000 g	0.00005 g	✓	0.00005 g	✓
1%	0.50000 g		✓		✓
2%	1.00000 g		✓		✓
5%	2.50000 g		✓		✓

The weighing tolerance is met if the deviation is less than or equal to the corresponding control limit.

Error of Indication

As Found

Control limits for various weighing tolerances									
Reference Value	Error	0.1%	0.2%	0.5%	1%	2%	5%		
0.00000 g	0.00000 g	N/A	N/A	N/A	N/A	N/A	N/A		
20.99998 g	0.00001 g	0.01500 g	0.03000 g	0.07500 g	0.15000 g	0.30000 g	0.75000 g		
40.99996 g	0.00002 g	0.02500 g	0.05000 g	0.12500 g	0.25000 g	0.50000 g	1.25000 g		
60.99994 g	0.00001 g	0.03500 g	0.07000 g	0.17500 g	0.35000 g	0.70000 g	1.75000 g		
80.00002 g	0.00000 g	0.04500 g	0.09000 g	0.22500 g	0.45000 g	0.90000 g	2.25000 g		
100.00002 g	0.00003 g	0.05000 g	0.10000 g	0.25000 g	0.50000 g	1.00000 g	2.50000 g		
120.00003 g	0.00002 g	0.06000 g	0.12000 g	0.30000 g	0.60000 g	1.20000 g	3.00000 g		
150.00001 g	0.00001 g	0.07500 g	0.15000 g	0.37500 g	0.75000 g	1.50000 g	3.75000 g		
170.00001 g	0.00006 g	0.08500 g	0.17000 g	0.42500 g	0.85000 g	1.70000 g	4.25000 g		
200.00002 g	-0.00002 g	0.10000 g	0.20000 g	0.50000 g	1.00000 g	2.00000 g	5.00000 g		
Result		✓	✓	✓	✓	✓	✓		✓

As Left

Control limits for various weighing tolerances									
Reference Value	Error	0.1%	0.2%	0.5%	1%	2%	5%		
0.00000 g	0.00000 g	N/A	N/A	N/A	N/A	N/A	N/A		
20.99998 g	0.00001 g	0.01500 g	0.03000 g	0.07500 g	0.15000 g	0.30000 g	0.75000 g		
40.99996 g	0.00002 g	0.02500 g	0.05000 g	0.12500 g	0.25000 g	0.50000 g	1.25000 g		
60.99994 g	0.00001 g	0.03500 g	0.07000 g	0.17500 g	0.35000 g	0.70000 g	1.75000 g		
80.00002 g	0.00000 g	0.04500 g	0.09000 g	0.22500 g	0.45000 g	0.90000 g	2.25000 g		
100.00002 g	0.00003 g	0.05000 g	0.10000 g	0.25000 g	0.50000 g	1.00000 g	2.50000 g		
120.00003 g	0.00002 g	0.06000 g	0.12000 g	0.30000 g	0.60000 g	1.20000 g	3.00000 g		
150.00001 g	0.00001 g	0.07500 g	0.15000 g	0.37500 g	0.75000 g	1.50000 g	3.75000 g		
170.00001 g	0.00006 g	0.08500 g	0.17000 g	0.42500 g	0.85000 g	1.70000 g	4.25000 g		
200.00002 g	-0.00002 g	0.10000 g	0.20000 g	0.50000 g	1.00000 g	2.00000 g	5.00000 g		
Result		✓	✓	✓	✓	✓	✓		✓

The weighing tolerance is met if the error (of indication) for each test point is less than or equal to the corresponding control limit for that particular weighing tolerance. Results at or close to the zero point cannot be assessed.



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
53/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10240
TEL: 0-2373-3000-27 FAX: 0-2719-9484

Cert. No.: 22TM305
Page.: 1 of 3

Certificate of Calibration

Equipment : BOD Incubator
Manufacturer : ARCO
Model : UR-1320

Serial No. :
ID No. : UAE.WAO.018/2551

Submitted by : United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260

Location : Lab Floor 2

Received Order : 7 April 2022

Calibration Date : 7 April 2022

Ambient Temperature : (26 ± 10) °C

Relative Humidity : (50 ± 30) %

Calibrated by : Man Pattanapongpaiboon

Approved by :
() Pornthippa Tameyakul
() Malee Bukruea
() Suwit Imjai

Issue Date : 18 April 2022

The Uncertainties are for a confidence probability of approximately 95%.

This certificate may not be reproduced other than in full, except with the prior written
Approval of the Issuer of Corporate Services 3 : Equipment Calibration and Testing Services.



Equipment : BOD Incubator
Condition As-Received : Used Item
Reference : 2204-00150C-2

Cert. No.: 22TM305
Page.: 2 of 3

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).

The temperature scale used was based on ITS-90.

Condition of this result of calibration


1. Reference standard Instrument:-
Instrument Model Serial No. Cert. No. Due Date
1) Data Acquisition 34970A MY41021843 22LM4 10 Jan 2023
2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.

Result of Calibration :-

(*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Not Available



Probe Installation Details :

Dimension of Chamber :
a = 10 cm
b = 10 cm
c = 10 cm
D = 0.62 m
W = 1.2 m
H = 1.2 m
Capacity = 0.89 m³

Environment during calibration		
	Beginning	Finished
Temp (°C)	27	27
REL Humid. (%)	56	59
AC Supply (Volt)	222	221

Position :	Ref. Std. ID No.:
1	18-04RTD-01
2	18-04RTD-02
3	18-04RTD-03
4	18-04RTD-04
5	18-04RTD-05
6	18-04RTD-06
7	18-04RTD-07
8	18-04RTD-08
9 (ref.)	18-04RTD-09



Equipment : BOD Incubator
Condition As-Received : Used Item
Reference : 2204-00150C-2
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Not Available

Cert. No.: 22TM305
Page.: 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Uncertainty (± °C)	Coverage Factor <i>k</i>		
20.0	20.0	20.0	0.50	0.44	1.1	0.64	2		
Measured Temperature (°C)									
Calibration Point (°C)	Position								
	1	2	3	4	5	6	7	8	9 (ref.)
20.0	20.080	20.056	19.866	19.826	19.855	19.656	19.819	19.979	19.899

Average* : The average of 30 values in each position.

Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor

Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.

UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม

๑ 1104314

เอกสารไม่ควบคุม

๑ 1104313



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
334/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert. No.: 23TM249
Page : 1 of 3

Certificate of Calibration

Equipment : BOD Incubator
Manufacturer : Arco
Model : UC4-1320
Serial No. : 13URC4S013201
ID No. : UAE.WAO.015/2561

Submitted by : United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udornsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260

Location : Lab Floor 2
Received Order : 15 February 2023
Calibration Date : 15 February 2023
Ambient Temperature : $(26 \pm 10) ^\circ\text{C}$
Relative Humidity : $(50 \pm 30) \%$

Calibrated by : Preecha Hiahlib
Approved by : [REDACTED] Approved Signatory

() Ponthippa Tameyakul
(☒) Malee Buksuea
() Suwit Imjai

Issue Date : 24 February 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3: Equipment Calibration and Testing Services.



Cert. No.: 23TM249

BOD Incubator

Arco

Model: UC4-1320

S/N: -

ID. No.: UAE.WAO.015/2561

✓ MTC 2023 Mar 10, 2023

0817

2 Apr 143



Equipment : BOD Incubator
Condition As-Received : Used Item
Reference : 2302-02970C-1
Cert. No.: 231M249
Page : 2 of 3

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).
The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Model	Serial No.	Cert. No.	Due Date
1) Data Acquisition	34972A	MY57013711	22LM93	02 Jul 2023

2. This certificate is valid only to the item calibrated on date and place of calibration.


3. This certification is traceable to the International System of Unit.

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Not Available

Environment during calibration		
	Beginning	Finished
Temp. (°C)	29	31
REL-Humid. (%)	63	67
AC Supply (Volt)	220	220



Probe Installation Details :

a = 10 cm
b = 10 cm
c = 10 cm
D = 0.62 m
W = 1.2 m
H = 1.2 m
Capacity = 0.89 m³

Dimension of Chamber :

Position :	Ref. Std. ID No.:
1	22-18RTD-2/1
2	18RTD-2/2
3	18RTD-2/3
4	18RTD-2/4
5	18RTD-2/5
6	18RTD-2/6
7	18RTD-2/7
8	18RTD-2/8
9 (ref.)	18RTD-2/9



Equipment : BOD Incubator
Condition As-Received : Used Item
Reference : 2302-0297OC-1
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Not Available

Cert. No.: 23TM249
Page : 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Uncertainty (± °C)	Coverage Factor <i>k</i>
20.0	20.0	19.3	0.32	0.57	1.0	0.60	2
Measured Temperature (°C)							
Position							
1	2	3	4	5	6	7	8
20.086	19.916	20.386	19.976	19.973	19.838	19.837	19.821
							9 (ref.)
							19.949

Average* : The average of 30 values in each position.
Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.
Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

Verification Certificate

Certificate No.: 2202361-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road,
Bangchack, Prakhong, Bangkok 10260

Page 1 of 4

Equipment: HEATING BLOCK DIGESTION

Manufacturer: FOSS

Model: 2520

Serial No.: 91794469

ID No.: UAE.WAS.011/2560

Order No.: 2202361

Operation No.: 2202361-001

Date of Receipt: 4 April 2022

Date of Calibration: 4-6 April 2022

Calibrated by Mr.Nuttapol Niyomchat
SpecialistApproved by
(Mr. Manoprasit Ruangsri)Date of Issue: 11 April 2022
Manager, Division of Calibration Laboratory
Responsible for the Technical Management Team

The uncertainties are for a confidence probability of approximately 95 %.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-CS-009 Revision: 00 Date: 14-12-61

เอกสารไม่ควบคุม

Verification Report

Certificate No.: 2202361-001-01
Equipment: HEATING BLOCK DIGESTION
Model: 2520
Serial No.: 91794469
Resolution: 1 °C
ID No.: UAE.WAS.011/2560
Manufacturer: FOSS
Date of Calibration: 4-6 April 2022

Page 2 of 4

Location: Laboratory Room, NATIONAL FOOD INSTITUTE
Environment Condition:
Ambient Temperature (25 ± 3) °C
Relative Humidity (55 ± 15) %
Line Voltage (220 ± 10) Volt

Condition of this results of Calibration:

1. This instrument was calibrated by insert standard thermocouples type R into its heating block digestion and compared to temperature obtained from reference standards thermometer at calibrated point.
 - The temperature scale used was based on ITS - 90 .
 - All data show below were final values and the initial data may be obtained upon request.
2. Reference Standard Instrument :

Instrument	Model	Serial No.	Certificate No.	Due Date	Through
Digital Thermometer with Thermocouple	34970A/34901A Type R	MY44045576 / MY41194462 TC2101-103 / CH2101-103	TC21/0041	24-Apr-2022	N.M. Technical Center Laboratory

3. This certificate is traceable to international system of units (SI Units).

4. This certificate was certified only for the instrument we calibrated.

5. This result of calibration was found accurate as shown on date and place of calibration only.

6. Condition of Calibrated item : Good

UUC* Description

Time of Record - Hour 30 Minute At 380 °C

7. Result of Calibration : ☒ Without adjustment ☐ After adjustment

F-CS-012 Revision: 00 Date: 14-12-61

เอกสารไม่ควบคุม

Verification Report

Certificate No.: 2202361-001-01
Equipment: HEATING BLOCK DIGESTION
Model: 2520 Serial No.: 91794469
Resolution: 1 °C ID No.: UAE.WAS.011/2560
Manufacturer: FOSS
Date of Calibration: 4-6 April 2022
Calibration point: 380 °C
Calibration result: Continued

Page 3 of 4

Reporting of Temperature

Block No.	UUC* Setting (°C)	UUC* Reading (°C)	Stability (±°C)	Standard Thermometer (°C)	Uncertainty (±°C)
1	380	380	0.13	376.48	1.5
2	380	380	0.12	376.58	1.5
3	380	380	0.12	376.51	1.5
4	380	380	0.14	376.70	1.6
5	380	380	0.18	376.81	1.6
6	380	380	0.12	377.23	1.6
7	380	380	0.12	377.37	1.5
8	380	380	0.13	376.68	1.5
9	380	380	0.14	376.72	1.5
10	380	380	0.18	378.97	1.6
11	380	380	0.25	378.79	1.6
12	380	380	0.11	377.14	1.6
13	380	380	0.19	379.65	1.6
14	380	380	0.16	379.61	1.6
15	380	380	0.16	378.66	1.6
16	380	380	0.15	379.18	1.6
17	380	380	0.23	377.39	1.6
18	380	380	0.11	377.71	1.6
19	380	380	0.22	376.64	1.6
20	380	380	0.16	376.56	1.6

Note: - UUC* = Unit Under Calibration

- Immersion depth of standard thermometer in tube level high of sand is equal heater plate of UUC.
- Stability = One-half of the greatest maximum difference of measured temperatures at one sensors, for at least half an hour after reaching steady state.

FCS-012 Revision: 00 Date: 14-12-61


เอกสารไม่ควบคุม

Verification Report

Certificate No.: 2202361-001-01
Equipment: HEATING BLOCK DIGESTION
Model: 2520 Serial No.: 91794469
Resolution: 1 °C ID No.: UAE.WAS.011/2560
Manufacturer: FOSS
Date of Calibration: 4-6 April 2022
Calibration point: 380 °C
Calibration result: Continued

Page 4 of 4

Figure 1. Location of Reference Standard and Block Diagram of Digestion Unit
TOP VIEW

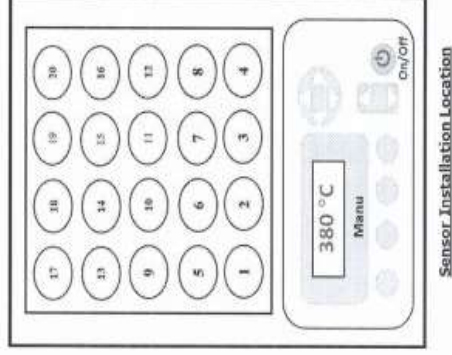

Note:

- UUC* = Unit Under Calibration
- Immersion depth of standard thermometer in tube level high of sand is equal heater plate of UUC.
- Stability = One-half of the greatest maximum difference of measured temperatures at one sensors, for at least half an hour after reaching steady state.

The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor $k=2$, providing a level of confidence of approximately 95 %.

----- End -----

FCS-012 Revision: 00 Date: 14-12-61

เอกสารไม่ควบคุม



องค์การรับรองมาตรฐานผลิตภัณฑ์อุตสาหกรรม
Foundation for Industrial Development National Food Institute
Food Industrial Laboratory Service Center

Verification Certificate

Certificate No.: 2302413-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road,
Bangchack, Prakhnong, Bangkok 10260

Page 1 of 4

Equipment: HEATING BLOCK DIGESTION
Manufacturer: FOSS
Model: 2520
Serial No.: 91794469
ID No.: UAE.WAS.011/2560
Order No.: 2302413
Operation No.: 2302413-001
Date of Receipt: 28 March 2023
Date of Calibration: 30-31 March 2023

Calibrated by Mr.Nuttapol Niyomchat
Specialist
Approved by [Redacted]
(Mr.Pieraphat Tuanjit)
Manager, Division of Calibration Laboratory
Responsible for the Technical Management Team
Date of Issue: 10 April 2023

The uncertainties are for a confidence probability of approximately 95 %.
This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-C5-009 Revision: 01 Date: 20-04-65



เอกสารไม่ควบคุม

23008 อาคารรับรองมาตรฐานผลิตภัณฑ์อุตสาหกรรม (องค์การรับรองมาตรฐานผลิตภัณฑ์อุตสาหกรรม)
23008 โซน 35, ถนนอุทิศ 41, สุขุมวิท, กรุงเทพมหานคร 10713, Thailand
Tel: +66(0) 2422 8888 Fax: +66(0) 2422 8545



องค์การรับรองมาตรฐานผลิตภัณฑ์อุตสาหกรรม
Foundation for Industrial Development National Food Institute
Food Industrial Laboratory Service Center

Verification Report

Certificate No.: 2302413-001-01
Equipment: HEATING BLOCK DIGESTION
Model: 2520
Serial No.: 91794469
Resolution: 1 °C
ID No.: UAE.WAS.011/2560
Manufacturer: FOSS
Date of Calibration: 30-31 March 2023

Page 2 of 4

Location: Laboratory Room, NATIONAL FOOD INSTITUTE
Environment Condition: Ambient Temperature (25 ± 3) °C
Relative Humidity (55 ± 15) %
Line Voltage (220 ± 10) Volt

Condition of this results of Calibration:

1. This instrument was calibrated by insert standard thermocouples type R into its heating block digestion and compared to temperature obtained from reference standards thermometer at calibrated point.
 - The temperature scale used was based on ITS - 90 .
 - All data show below were final values and the initial data may be obtained upon request.
2. Reference Standard Instrument :

Instrument	Model	Serial No.	Certificate No.	Due Date	Through
Digital Thermometer with Thermocouple	34970A	MY4045576 / MY41384453	TC22/0044	5-May-2023	N.F.I. Technical Center Laboratory
	Type R	TCR101-103 / CHA101-103			

3. This certificate is traceable to international system of units (SI Units).
4. This certificate was certified only for the instrument we calibrated.
5. This result of calibration was found accurate as shown on date and place of calibration only.
6. Condition of Calibrated Item : Good

UUC* Description

Time of Record - Hour 30 Minute At 380 °C

7. Result of Calibration : ☒ Without adjustment ☐ After adjustment

F-C5-009 Revision: 01 Date: 20-04-65



เอกสารไม่ควบคุม

23008 อาคารรับรองมาตรฐานผลิตภัณฑ์อุตสาหกรรม (องค์การรับรองมาตรฐานผลิตภัณฑ์อุตสาหกรรม)
23008 โซน 35, ถนนอุทิศ 41, สุขุมวิท, กรุงเทพมหานคร 10713, Thailand
Tel: +66(0) 2422 8888 Fax: +66(0) 2422 8545

Verification Report

Certificate No.: 2302413-001-01
Equipment: HEATING BLOCK DIGESTION
 Model: 2520 Serial No.: 91794469
 Resolution: 1 °C ID No.: UAE.WAS.011/2560
 Manufacturer: FOSS

Date of Calibration: 30-31 March 2023
Calibration point: 380 °C
Calibration result:

Page 3 of 4

Reporting of Temperature

Block No.	UUC* Setting (°C)	UUC* Reading (°C)	Stability (± °C)	Standard Thermometer (°C)	Uncertainty (± °C)
1	380	380	0.96	377.74	2.1
2	380	380	0.40	377.28	2.1
3	380	380	1.18	377.82	2.1
4	380	380	0.44	377.19	1.6
5	380	380	0.11	377.30	1.6
6	380	380	0.14	377.90	1.6
7	380	380	1.17	373.85	2.1
8	380	380	0.33	376.96	2.1
9	380	380	0.14	374.18	2.1
10	380	380	0.96	378.56	2.0
11	380	380	1.04	378.34	2.0
12	380	380	0.35	378.06	2.0
13	380	380	0.48	377.05	1.6
14	380	380	0.38	379.19	1.6
15	380	380	0.50	377.48	1.6
16	380	380	0.48	378.33	1.7
17	380	380	0.71	377.60	1.7
18	380	380	0.35	376.77	1.7
19	380	380	0.84	377.06	1.8
20	380	380	0.41	378.58	1.8

Note:

- UUC* = Unit Under Calibration
- Immersion depth of standard thermometer in tube level high of sand is equal heater plate of UUC.
- Stability = One-half of the greatest maximum difference of measured temperatures at one sensors, for at least half an hour after reaching steady state.

FCS-009 Revision: 01 Date: 20-04-65



เอกสารไม่ควบคุม
 nfi.com

องค์การสนับสนุนและพัฒนาอุตสาหกรรม
 การอุตสาหกรรมอาหาร
 Foundation for Industrial Development National Food Institute
 national food institute
 ministry of industry
 2008 Sol 35, Aum Amarn Road, Bang Yai Subdistrict, Bang Phai District, Bangkok 10710 Thailand
 Tel: +66(0) 2422 8568 Fax: +66(0) 2422 8545


Verification Report

Certificate No.: 2302413-001-01
Equipment: HEATING BLOCK DIGESTION
 Model: 2520 Serial No.: 91794469
 Resolution: 1 °C ID No.: UAE.WAS.011/2560
 Manufacturer: FOSS

Date of Calibration: 30-31 March 2023
Calibration point: 380 °C
Calibration result:

Page 4 of 4

Figure 1. Location of Reference Standard and Block Diagram of Digestion Unit

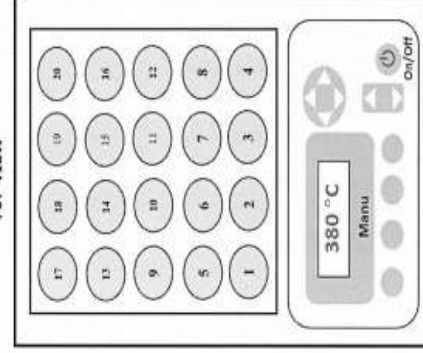

Sensor Installation Location

Note:

- UUC* = Unit Under Calibration
- Immersion depth of standard thermometer in tube level high of sand is equal heater plate of UUC.
- Stability = One-half of the greatest maximum difference of measured temperatures at one sensors, for at least half an hour after reaching steady state.

The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor providing a level of confidence of approximately 95 %.

***** End *****

FCS-009 Revision: 01 Date: 20-04-65



เอกสารไม่ควบคุม
 nfi.com

องค์การสนับสนุนและพัฒนาอุตสาหกรรม
 การอุตสาหกรรมอาหาร
 Foundation for Industrial Development National Food Institute
 national food institute
 ministry of industry
 2008 Sol 35, Aum Amarn Road, Bang Yai Subdistrict, Bang Phai District, Bangkok 10710 Thailand
 Tel: +66(0) 2422 8568 Fax: +66(0) 2422 8545

FOSS

Customer Service Report

FOSS South East Asia
3388 Srinrat Building, 25th - 26th Floor, Unit No. 3388/90,
Rama IV Road, Klongton , Klongtoey, Bangkok, Thailand 10110

Report No: 6623

Date: 25/12/25
Customer: United Analyst and Engineering
Instrument: KT9100

Hours Start 9.00 Finish 9.30
Travel To Customer 9.00-12.00 3 hr
Labour 12.00-16.00 4 hrs
Travel From Customer 16.00 1 hr

Job Type				
Application	Special	Standard		
Normal	Courtesy Visit	Installation	X	Training
Distributor	PMA Onboarding	Quote		In House
Internal	Warranty	Repair		PM
Digital Service	Sales Support	Remote		Other

PO/Quote Number: 31988052
PMA Type: 31988052
Contract No: 31988052

Details of Work / Test		Condition / Status
Unpack and assemble the instrument		OK
Connect the instrument to the computer		OK
Check the instrument settings		OK
Test the instrument performance		OK
Pack the instrument and return it to the customer		OK

Part No:	Batch	Description	Qty

I confirm this report is accurate and complete

Signed FOSS: [Signature]
Name: [Name]

Signed Customer: [Signature]
Name: [Name]

Would you be willing to participate in a brief survey in order to tell us how we performed? []

เอกสารไม่ควบคุม

FOSS

Customer Service Report

FOSS South East Asia
3388 Srinrat Building, 25th - 26th Floor, Unit No. 3388/90,
Rama IV Road, Klongton , Klongtoey, Bangkok, Thailand 10110

Report No: 6534

Date: 25/12/25
Customer: United Analyst and Engineering
Instrument: KT9100

Hours Start 9.00 Finish 9.30
Travel To Customer 9.00-12.00 3 hr
Labour 12.00-16.00 4 hrs
Travel From Customer 16.00 1 hr

Job Type				
Application	Special	Standard		
Normal	Courtesy Visit	Installation		Training
Distributor	PMA Onboarding	Quote		In House
Internal	Warranty	Repair		PM
Digital Service	Sales Support	Remote		Other

PO/Quote Number: 31988052
PMA Type: 31988052
Contract No: 31988052

Details of Work / Test		Condition / Status
Unpack and assemble the instrument		OK
Connect the instrument to the computer		OK
Check the instrument settings		OK
Test the instrument performance		OK
Pack the instrument and return it to the customer		OK

Part No:	Batch	Description	Qty

I confirm this report is accurate and complete

Signed FOSS: [Signature]
Name: [Name]

Signed Customer: [Signature]
Name: [Name]

Would you be willing to participate in a brief survey in order to tell us how we performed? []

เอกสารไม่ควบคุม

Kjeltec™ 8100 Distillation Unit

This IQ applies to Kjeltec™ 8100 Distillation Unit manufactured by FOSS Analytical. The installation is performed by FOSS trained service personnel.

1 Intended Use

Kjeltec 8100 is intended for laboratory use analyzing parameters as specified in FOSS Analytical AB's Application Notes.

2 Purpose

This Installation Qualification is designed to assure that:

- The Kjeltec instrument is received complete, with all required parts in good condition.
- The location of the instrument is environmentally and ergonomically suitable
- The instrument is assembled and configured correctly
- Suitable electricity and water are supplied to the instrument, see table 2 for requirements.

3 Identification

Description	Serial Number
Kjeltec 8100 Distillation Unit	๑1๕ ๙๑๐๕2

Dedicated Analytical Solutions

FOSS Analytical A/S
69 Slangerupgade
DK-3400 Hillerød
Denmark

Tel +45 7010 3370
Fax +45 7010 3371
E-mail support@foss.dk
Web www.foss.dk

FOSS Analytical AB
Box 70
SE-263 21 Högarna
Sweden

Tel +46 42 361500
Fax +46 42 340349
E-mail support@foss.dk
Web www.foss.dk

4 Control of Received Equipment

4.1 Verify that the correct instrument type and accessory kit items are received and in proper condition

The packing list (shipped with the instrument) specifies all the items. The installer will verify that all items are received as shipped on the packing list. For each item listed, verify that the acceptance criteria are met. If so, write "Y" in the right column of the table immediately following.

Packing List Item	Acceptance Criteria	Pass/Y/(N)
Kjeltec 8100 Distillation Unit	No visible damage, received in undamaged FOSS Analytical's standard shipping container.	Y
Accessory kit, according to packing list	Included. No visible damage, received in undamaged FOSS Analytical's standard shipping container	Y
Handling device for digestion tube	Included. No visible damage.	Y
Tanks with level sensors for Waste, Alkali and Water	Included. No visible damage.	Y
Receiver flask	Included. No visible damage.	Y
One digestion tube 250ml One digestion tube 100 ml	Included. No visible damage.	Y
Tube adapter	Included. No visible damage.	Y
User manual	Kjeltec 8100 Distillation Unit	Y
Owners guide	Kjeltec 8100 Distillation Unit	Y
Quick guide	Kjeltec 8100 Distillation Unit	Y
Spare parts manual	Kjeltec 8100 Distillation Unit	Y
Application notes	AN 300 Included AN 303 Included	Y

5 Installation


5.1 The equipment must be installed in a suitable location with power, water and draining available

Verify that the instrument installation site meets the acceptance criteria given in the table below. If so, write "Y" in the right column of the table immediately following.

Location Requirements	Acceptance Criteria	Pass (Y/N)
Adequate space for instrument	Dimensions 48x58x69 cm	Y
AC supply available for instrument	200-240 V 50/60Hz	Y
Current	10 A	Y
Cold water supply available	2 L/min at 30°C	Y
Drain	For cooling water and waste (depending on local waste disposal legislation)	Y
Ambient temperature	Max. 40°C	Y
Ambient humidity	Max. 80% relative	Y
Internal fuses	T10A AH	Y

5.2 The instrument must be assembled correctly

Verify that all tubes are correct connected. If so, write "Y" in the right column of the table immediately following.

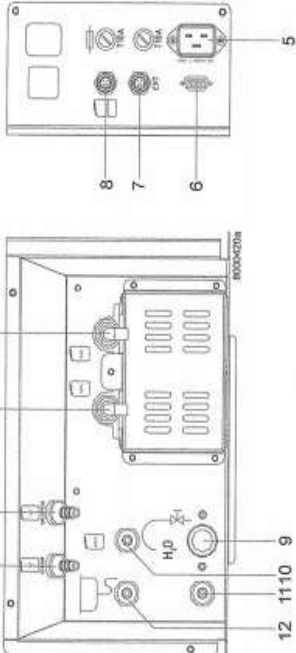Instrument Tubing Connections		Acceptance Criteria	Pass (Y/N)
		Visual verification by installer	Y
<ol style="list-style-type: none">1. Deionised water in (steam generator)2. Deionised water in (dilution water)3. *) Receiver solution in4. Alkali in5. Power6. Not used7. External titration module8. Level sensors9. Cooling water in (tap water)10. Waste water out (tube drain vessel)11. Drain12. Cooling water out (tap water) <p>*) Only on Kjeltac 8200</p>			

5.3 The instrument should be assembled and powered up

Connect the distilling unit to the power supply. Perform the start up procedure and check that the expected response is obtained. If so, write "Y" in the right column of the table immediately following.

Action	Expected Response	Pass (Y/N)
Switch on the power	The instruments start up and the self test will run. The sample counter shows the number of analysed samples since first power and the Software Version shows the version of the instruments software.	Y
	After start-up, Program 1 is loaded and the Analyse menu is displayed.	Y
Turn on the cold water tap	No visible reaction	Y
Press the "Manual" view	The Manual menu is opened	Y
Open the door with the handle, place the test tube and receiver flask in position. Close the door.		Y
Select Dilution and press Start	Water is added to the tube	Y
Select Alkali and press Start	Alkali is added to the tube	Y
Select Steam and press start	After heating up, steam is entering the tube	Y
Select Drain and press Start	The tube is drained	Y

6 Summary of Deviations/Comments

Deviations from above requirements are specified below and any corrective actions are noted.

Deviation	Action	Comment

7 IQ Documentation

Upon successful completion and recording of all instructions above, sign and date this sheet below. If required by customer, leave one signed copy with instrument.

If customer's internal procedures require further reporting or witnessing of results, execute those procedures as required.

Installed By:

Company:

Customer Name:

Company:

Date completed:

Foss SEA

United Analyst and Engineering

United Analyst and Engineering

July 25, 2022

Kjeltec™ 8100 Distillation Unit

This OQ applies to Kjeltec 8100 Distillation Unit manufactured by FOSS Analytical. The operation qualification is performed by FOSS trained service personnel.

1 Intended Use

Kjeltec 8100 is intended for laboratory use analyzing parameters as specified in FOSS Analytical Application Notes.

2 Purpose

This procedure is designed to test the function of the instrument according to factory test specifications:

- Alkali volume
- Distillation Accuracy
- Distillation Repeatability

3 Identification

Description	Serial Number
Kjeltec 8100 Distillation Unit, 200-240 V 50/60 Hz	๗18๙๐52

Dedicated Analytical Solutions

FOSS Analytical A/S
69 Svingerupgade
DK-3400 Hillerød
Denmark
Tel +45 7010 3370
Fax +45 7010 3371
E-mail support@foss.dk
Web www.foss.dk

Customer Support, 6003 7246 / Rev. 1

FOSS Analytical AB
Box 70
SE-263 21 Höganäs
Sweden
Tel +46 42 361000
Fax +46 42 340349
E-mail support@foss.dk
Web www.foss.dk

1(7)

เอกสารไม่ควบคุม

4 Performance

4.1 Verify the dispensed volumes of reagents

Note! To verify the dispensed volumes of reagents a triple test should be done to be statistic correct. Then calculate a mean value.

1. Choose "Manual" in the menu. (When starting up the instrument Program 1 is loaded)
2. Open the safety door by pressing **Open** and place a tube in the instrument. Close the safety door.

Water

1. Press **Dilution** and then press **Start**. 80 ml of water will be filled into the tube.
2. Measure the collected water in a graduated measuring glass and note the result in table 1 below.
3. Check acceptance criteria in the table and make the judgment if passed or not.

Note! If the water volume needs to be calibrated, go to 4.8.5 Dilution Pump Calibration in the User Manual.

Alkali

1. Press **Alkali** and then press **Start**. 50 ml of alkali will be filled into the tube.
2. Measure the collected alkali in a graduated measuring glass and note the result in table 1 below.
3. Check acceptance criteria in the table and make the judgment if passed or not.

Table 1 Volume control

Test	Result	Expected result	Passed (Y/N)
Water volume	$\frac{80}{\text{ml}}$ $\frac{80}{\text{ml}}$ $\frac{80}{\text{ml}}$ Mean $\frac{80}{\text{ml}}$	76- 84 ml	Y
Alkali volume	$\frac{50}{\text{ml}}$ $\frac{50}{\text{ml}}$ $\frac{50}{\text{ml}}$ Mean $\frac{50}{\text{ml}}$	47- 54 ml	Y

Customer Support, 6003 7246 / Rev. 1

เอกสารไม่ควบคุม

4.2 Verify the distillation procedure, accuracy and precision

The distillation principle is to convert ammonium (NH_4^+) into ammonia (NH_3) by using an alkali (NaOH) and thereafter steam distil it into a receiver flask containing boric acid and titrate with standard acid solution using colorimetric end-point detection. Ammonium sulphate, a substance with known ammonia content, can be used to check the accuracy of the distillation. The recovery is calculated from obtained result.

The way to perform this test will be described in the following.

Chemical Check

Use ammonium sulphate ($\text{NH}_4)_2\text{SO}_4$, purity > 99.5 % *)

Mol. weight = 132.14 g/mol, Nitrogen content in ammonium sulphate (99.5 %) = 21.09% *)

Analysis conditions according to AN 300

Water	80 ml
Alkali	50 ml NaOH (40%w/w)
Receiver solution	30 ml boric acid (4%)
Distillation time	5 minutes
SAFE	5 seconds
Titrant	0.2N HCl

For reagent preparation see Appendix A

1. Start the instrument and run two blanks without chemicals according to above analysis conditions, distil into a receiver flask containing boric acid. Titrate with a standard acid solution using colorimetric end-point detection. If the blanks are less than 0.2 ml continue with the recovery tests:
2. Weigh 0.15 g ammonium sulphate into a tube. Prepare 6 samples (tubes).
3. Run the six samples according to above analysis conditions. Titrate with a standard acid solution using colorimetric end-point detection.
4. Calculate the recovery according to below equations. Expected results of recovery should be 100%±1%.

Recovery test	Result	Expected result	Passed (Y/N)
Blank value (water blank)	1. 0.09 ml 2. 0.19 ml	0.05-0.20 ml	Y
Recovery	1. 100.78 % 2. 101.38 % 3. 100.65 % 4. 99.81 % 5. 99.92 % 6. 100.81 %		
Accuracy	Mean Value: 100.0%	99-101%	Y
Precision	SD: 0.552	SD <1%	Y

*) Note! Please also note that the below calculations must be adjusted if other purity levels of ammonium salts are used. A certificate for the chemical supplier should be available

Purity	Nitrogen content
99.5%	21.09%
99.6%	21.12%
99.7%	21.14%
99.8%	21.16%
99.9%	21.18%

$$\% \text{ Nitrogen} = \frac{(ml_{\text{sample}} - ml_{\text{blank}}) \times N \times 14,007 \times 100}{mg_{\text{sample}}} \quad \begin{matrix} 0.1095 \\ 21.72 \end{matrix}$$

N = Normality of titrant to 4 places of decimal.

$$\% \text{ Recovery} = \frac{\% \text{ Nitrogen}}{21.09} \times 100$$

mg sample 23.56

1 2 3 4 5 6

5 Summary of Deviations/Comments

Deviations from above requirements are specified below and any corrective actions are noted.

Deviation	Action	Comment

6 OQ Documentation

Upon successful completion of tests above, sign and date this sheet below. If required by customer, leave one signed copy with instrument.

If customer's internal procedures require further reporting or witnessing of results, execute those procedures as required.

Performed By: _____

Company: _____

Customer Name: _____

Company: _____

Date completed: _____

7 Appendix A

7.1 Preparation of Reagents

7.1.1 Alkali

To convert ammonium into ammonia an excess of sodium hydroxide is necessary.

Use 400 g NaOH per litre of solution. Commercially available in concentrations up to 50 %. Do not use concentrations above 40 % as this will lead to crystal formation impairing the function of the pumps. If you can only buy concentrations > 40 %, dilute it before use.

7.1.2 Titrant acid, determination of concentration

To be able to achieve accurate nitrogen / protein results, one must be quite sure that the HCl (hydrochloric acid) concentration is what it is supposed to be. A titration against a predetermined solution of sodium carbonate as described below is thus necessary. Incorrect HCl concentration can otherwise cause substantial errors.

- **Standard substance**

Weigh approx. 10 g of anhydrous sodium carbonate (Na_2CO_3). Use a mortar to make a fine powder. Dry it for 1 h at 265 °C or 2 h at 200 °C. After cooling in a desiccator, transfer the sodium carbonate to a beaker with a tight lid. Store it in a desiccator.

- **Indicator solutions**

Dissolve 0.1 g methyl red in 100 ml methanol. Dissolve 0.1 g bromocresol green in 100 ml methanol.

- **Procedure**

Weigh approx. 0.4 g of the standard substance, using an analytical balance, note the weight (W_1). Transfer the sodium carbonate to a receiver flask and add 40 ml of H_2O (distilled or deionized). Add 8 drops from each of the indicator solutions. Titrate to pink. Note the amount in ml used (A_1). Boil this solution for a few minutes. The solution will turn green. Cool rapidly to room temperature under running water. Continue the titration until the next pink colour change occurs. Note also this volume

(A_2). Boil the solution for a few minutes. Cool rapidly to room temperature under running water. Continue the titration until the next pink colour occurs. Note also this volume (A_3).

Note! Temperature changes will influence the volume and the concentration of the titrant solution. The working temperature of the titrant should approximate that of its temperature during standardization. If temperature corrections are necessary, sufficient accuracy may be obtained by use of a correction table. (AOAC 942.25)

7.2 Calculation

$$\text{Molarity (M)} = \frac{18.870 \times W_1}{(A_1 + A_2 + A_3)}$$

Note! Concentration must be accurate to four digits, i.e. 0.2000 M.

Note! The colour change of this official procedure (AOAC 936.15) may be difficult to see, therefore a pH meter or a mixed indicator (e.g. 0.1 g Methyl red and 0.1 g Bromocresol green in 100 ml methanol) will make it much easier to perform.

7.3 Receiver Solution

Boric acid 4 % with bromocresol green / methyl red indicator solution

In order to obtain accurate results the receiver solution is adjusted so that a small (0.05-0.20 ml) positive blank is obtained when running a blank sample. The 4 % boric acid receiver solution is prepared by dissolving 400 g of boric acid in about 5-6 l very hot deionized water. Mix and add more hot deionized water to a volume of about 9 l. Cool the solution to room temperature and add 100 ml of bromocresol green solution (100 mg in 100 ml methanol) and 70 ml of methyl red solution (100 mg in 100 ml of methanol). Dilute to 10 l with deionized water and mix carefully.

Note! The addition of alkali is to achieve a positive blank value. This should, however, be kept between 0.05 - 0.20 ml titrant, to obtain good repeatability when testing blanks.

Adjustment of the boric acid is made by the following procedure:

1. Transfer 25 ml boric acid solution to a receiver flask and add 100 ml of distilled water. If the solution in the flask is still red, titrate with 0.1 M sodium hydroxide solution until a neutral grey colour is obtained. Calculate the amount of sodium hydroxide solution necessary to adjust the boric acid solution in the 10 l flask with the formula: ml 1.0 M alkali = ml titrant x 40
2. Add the calculated amount of 1.0 M alkali solution to the boric acid solution. Mix.
3. To check proceed as follows using 25 ml of the boric acid solution. Run a blank. If the value of this blank is high (0.5 ml of 0.2 M HCl) the boric acid is incorrectly adjusted. This might create irregular blanks. For correction add HCl directly into the boric acid tank, mix it carefully and repeat until a reading of 0.05 - 0.20 ml HCl is obtained. If a positive blank is not achieved, add further small quantities of 1 M NaOH and repeat the check until a satisfactory value is achieved.

FOSS

Performance Qualification

Kjeltec™ 8100 Distillation Unit Tecator™ 2508/2520 Digestor

1 Scope

This PQ applies to the Digestion system 2508/2520 (including exhaust and scrubber unit) and Kjeltec 8100 Distillation Unit manufactured by FOSS Analytical. The user of the instrument performs the PQ.

2 Intended Use

The Digestion system (including exhaust and scrubber) and Kjeltec 8100 Distillation Unit are intended for laboratory use analyzing parameters as specified in FOSS Application Notes.

3 Purpose

The guidelines are intended to assist the user in successfully developing Performance Qualifications for the specific application(s) to which the instrument is applied.

The Performance Qualification (PQ) includes the process of demonstrating that the Digestion system 2508/2520 (including exhaust and scrubber unit) and the Kjeltec 8100 Distillation unit consistently perform according to a specification appropriate for its routine use. Main activities in the PQ phase are:

- Preventive maintenance
- On-going verification tests

This document suggests routines to fulfill the requirements for an acceptable PQ but the final procedure should be adapted to local routines for similar equipment.

4 Definition of Test Procedures

4.1 Preventive Maintenance

Maintenance of the Kjeltec 8100 should be performed according to the instructions in manual, see User Manual Kjeltec 8100/8200 Distillation Unit, chapter 5, Maintenance. A yearly service is recommended (service agreement).

Maintenance of the Digestion block (including exhaust and scrubber) should be performed according to instruction in the user manual, see User Manual Tecator Digestor, chapter 5, Maintenance.

Dedicated Analytical Solutions

FOSS Analytical AUS
69 Slangerupgade
DK-3400 Hillerød
Denmark
Tel +45 7010 3370
Fax +45 7010 3371
E-mail support@foss.dk
Web www.foss.dk

FOSS Analytical AB
Box 70
SE-203 21 Högansås
Sweden
Tel +46 42 361500
Fax +46 42 340340
E-mail support@foss.dk
Web www.foss.dk

4.2 Ongoing Qualification Tests

Block Temperature

The temperature for the digestion is limited by the boiling point for the sulphuric acid, this can be increased by adding a salt (K_2SO_4) to the digestion mixture. It's important that the optimal ratio between acid and salt is kept; please follow recommendation in AN 300 or suggested procedures for a specific kind of sample material.

The block temperature itself can be controlled external by inserting a temperature probe in the intended hole in the aluminium block (front row of holes).

Use the reagents and method procedure specified in AN 300. Use only reagents of recognized analytical grade, unless otherwise specified and distilled or demineralised water or water of equivalent purity.

Suggested standard material for internal quality control:

Ammonium sulphate $[(NH_4)_2SO_4]$, min. 99.5 % (mass fraction), with certified purity.

Note: The above chemical is usually readily available with a certificate specifying the purity.

Alternatively ammonium iron(II) sulphate, $(NH_4)_2 Fe (SO_4)_2 \times 6 H_2O$, with certified purity may be used.

Tryptophan ($C_{11}H_{12}N_2O_2$), minimum assay 99 % (mass fraction). Nitrogen content 137.2 g/kg. Do not dry in an oven before use.

Acetanilide (C_8H_9NO), minimum assay 99 % (mass fraction). Nitrogen content 103.6 g/kg. Do not dry in an oven before use.

Sucrose, ($C_{12}H_{22}O_{11}$), with a nitrogen content of not more than 0.002 % (mass fraction). Do not dry in an oven before use.

Blank Tests

Carry out a blank test following the currently used procedure for digestion, distillation and titration taking 2 ml of water and about 0.7 g of sucrose instead of the test portion. Keep a record of blank values. If blank values change, identify the cause.

Note: The amount of titrant used in the blank test should always be greater than 0.0 ml. Blanks within the same laboratory should be consistent across time.

4.3 Recovery Tests

Regularly run recovery studies to check the accuracy of procedure and equipment:

- Nitrogen loss.** - Use 0.12 g ammonium sulphate and 0.67 g sucrose per flask weighted to the nearest 0.1 mg. Add all other reagents as stated in the method currently used (Kjeltabs, H_2SO_4 , etc). Digest and distil under same conditions as for sample. Recoveries shall be >99 %.
- Digestion efficiency.** - Use a test portion of minimum 0.15 g of tryptophan or acetanilide and 0.67 g sucrose per flask weighted to the nearest 0.1 mg. Determine the nitrogen content according to the current procedure in use. The recoveries of tryptophan shall be >98.5 %; the recoveries of acetanilide shall be >99.5 %.
- Distillation and titration efficiency.** - Distil 0.10 – 0.15 g ± 0.0001 g ammonium sulphate, omitting the digestion step. The recoveries should be >99.5 %.

Note: Results less than 98.5 % or more than 101.0 % in either of the recovery tests indicate failures in the procedure and/or inaccurate concentration of the standard volumetric hydrochloric acid solution (should be adjusted to four decimals accuracy according to procedure in AN 300)

Customer Support, 6003 7363 / Rev. 2

2(11)

เอกสารไม่ควบคุม

External Quality Control Program

It is recommended to participate in an external quality control program, such a proficiency program or ring test, with equivalent sample material as analysed within the laboratory.

Calculation and Expression of Results

$$w_N = \frac{14.007(V_s - V_0)N \times 100\%}{m}$$

Where:

w_N is the nitrogen content of the sample, expressed as a percentage by mass.

V_s is the numerical value of the volume of the hydrochloric acid standard volumetric solution used in the sample test, in milliliters, expressed to the nearest 0.05 ml.

V_0 is the numerical value of the volume of the hydrochloric acid standard volumetric solution used in the blank test, in milliliters, expressed to the nearest 0.05 ml.

N is the numerical value of the exact normality of the hydrochloric acid standard volumetric solution, expressed to four decimal places.

m is the numerical value of the mass of the test portion, in milligrams, expressed to the nearest 1 mg for sample weights >1 g or to the nearest 0.1 mg for sample weights <1 g.

5 Maintenance

5.1 Maintenance Kjeltec™ 8100

See instructions in User Manual - Kjeltec 8100/8200, chapter 5 Maintenance.

5.2 Maintenance Tecator™ Digestor

See instructions in User Manual - Tecator Digestor, chapter 5 Maintenance.

6 The Maintenance Record Charts

This record charts are provided to assist you in keeping your system in good working order. Please make copies and use them regularly as they can often help us to help you in the unlikely event a system malfunction.

Customer Support, 6003 7363 / Rev. 2

3(11)

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม

[illegible]

¹⁶Applicable for FOSS sales and service companies.

[illegible]

Applicable for FOSS sales and service companies.

6.2 FossCare™ Customer Log

6.2.1 Daily Maintenance

Date	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
Steam Cleaning															
Cleaning of Drip Tray, Tube Support and Safety Door															
Cleaning of Tube Adapter															
Cleaning from Spillage															
Check of Sample Racks															
Signature															
Number of analyses															

เอกสารนี้มีความคุ้มครอง

6.2.2 Weekly Maintenance

Date	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
Check of Safety Functions															
Check of Reagent Tanks															
Check of Digestion Tubes															
Signature															
Number of analyses															

เอกสารนี้มีความคุ้มครอง

6.2.3 Every 1-3 Months Maintenance

Date	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
Cleaning of Alkali Pump																
Cleaning of Splash Head																
Cleaning of Receiver Solution Dispensing System																
Check of Tube Adapter																
Signature																
Number of analyses																

เอกสารนี้มีความคุ้มครอง

6.2.4 Additional Maintenance

Date	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
Cleaning of Steam Generator																
Signature																
Number of analyses																

เอกสารนี้มีความคุ้มครอง

เอกสารไม่ควบคุม

[illegible]

เอกสารไม่ควบคุม

[illegible]

ภาคผนวก จ

หนังสือขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์



ที่ ๒๓ ๐๓๑๐(๑)/ ๖ ๐ ๒ ๘

กรมโรงงานอุตสาหกรรม
ถนนพหลโยธินที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๑๐๐

๒๒ มีนาคม ๒๕๖๖

เรื่อง เปลี่ยนแปลงบุคลากรและสารมลพิษที่วิเคราะห์

เรียน กรรมการผู้จัดการ บริษัท ปูนีเคต แอนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และชนิดสารมลพิษที่ยกปฏิบัติการวิเคราะห์เอกชน
ฉบับที่ ๒๐ มกราคม ๒๕๖๖

สิ่งที่ส่งมาด้วย เอกสารแนบท้ายหนังสือเปลี่ยนแปลงบุคลากรและสารมลพิษที่วิเคราะห์

บริษัท ปูนีเคต แอนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด จำนวน ๒ ฉบับ

ตามที่หนังสือที่อ้างถึง บริษัท ปูนีเคต แอนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด
ต้องปฏิบัติตามวิธีวิเคราะห์เอกชน เลขทะเบียน ๖-๑๔๕๕ สถานที่ตั้งเลขที่ ๓ ซอยสุขุมวิท ๔๓ ถนนสุขุมวิท
แขวงบางจาก เขตพระโขนง กรุงเทพมหานคร ขอเปลี่ยนแปลงบุคลากรและสารมลพิษที่วิเคราะห์ที่
ความละเอียดแล้ว นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว มีความเห็นดังนี้

๑. ให้ยกเลิกเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๒ ราย

๑) นายวิทย์ สุวรรณภาพ ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๒) นายพิพัฒน์ ตันมณฑล ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๕๙๗

๒. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๑ ราย

๑) นางสาวอรุณา ประสานศรี ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๒) นายพศุต เนิมเนียม ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๓) นายศุภกร สวรรค์ ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๔) นายศุภพล ศิลาโนภี ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๕) นายโชคชัย พุ่มไธวัล ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๖) นายณวัชร กอสินบำรุง ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๗) นายธีรวัฒน์ ธรรมสุวรรณ ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๘) นายณัฏฐพงศ์ ขงขุนทด ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๙) นางสาวณิฏฐา พงษ์กรกิจ ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๑๐) นางสาวณิพัทธ์ พงษ์บุญมี ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๑๑) นางสาวพรธิศา ขจรนันทิพทะ ทะเบียนเลขที่ ๖-๑๔๕๕-๖-๐๐๑๖๖

๓. ให้เพิ่มรอบตรวจสอบสารมลพิษที่วิเคราะห์ตามข้อ ๒.๑๐๐๕



ดำเนินการโดย

๒๒

อนึ่ง หนังสือฉบับนี้จะมีผลใช้บังคับเมื่อพ้นกำหนดสิบวันนับแต่วันขึ้นทะเบียนข้อปฏิบัติการวิเคราะห์เอกชน
ที่ ๒๓ ๐๓๑๐(๑)/๒๕๖๖ ลงวันที่ ๕ กุมภาพันธ์ ๒๕๖๕ คือในวันที่ ๒ กุมภาพันธ์ ๒๕๖๕ ทั้งนี้ สามารถยื่นคำขอ
ผ่านระบบอิเล็กทรอนิกส์ได้ทั้งหน้าเว็บไซต์กรมโรงงานอุตสาหกรรม ตาม QR Code ที่แนบมาด้วย

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

(นายประจักษ์ สว่างทนต์)
ผู้อำนวยการอาวุโสและโฆษกโฆษณ
ปฏิบัติการกรมโรงงานอุตสาหกรรม



ยื่นคำขอผ่านระบบอิเล็กทรอนิกส์

กลุ่มวิจัยและพัฒนายวสารพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบและประเมินผลและประเมินห้องปฏิบัติการ

โทร. ๐ ๒๖๓๐ ๖๓๖๖ ต่อ ๒๒๐๓-๕ โทรสาร ๐ ๒๖๓๐ ๖๓๖๖ ต่อ ๒๒๐๓๕

ไปรษณีย์อิเล็กทรอนิกส์ sarabang@dlw.mail.go.th



ดำเนินการโดย



"อุตสาหกรรมก้าวไกล ประเทศไทยก้าวไกล" ร่วมกับพันธมิตร อุตสาหกรรมสีเขียว



เอกสารแนบท้ายหนังสือเปลี่ยนแปลงบุคลากรและสารมลพิษที่วิเคราะห์

บริษัท ปูนีเคต แอนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด เลขทะเบียน ๖-๑๔๕๕

ที่ ๒๓ ๐๓๑๐(๑)/ ๖ ๐ ๒ ๘

ลงวันที่ ๒๒ มีนาคม ๒๕๖๖

ขอขยายสารมลพิษที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๑๖ รายการ

ยื่น จำนวน ๑๖ รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Benzene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
2	Carbon tetrachloride	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
3	1,2-Dichloroethane	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
4	1,1-Dichloroethylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
5	cis-1,2-Dichloroethylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
6	trans-1,2-Dichloroethylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
7	Ethylbenzene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
8	Methylene chloride	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
9	Styrene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
10	Tetrachloroethylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
11	Toluene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
12	Trichloroethylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
13	m-Xylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
14	p-Xylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
15	p-Xylene	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)
16	Xylene (Total)	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method (1,2)

เอกสารอ้างอิง...

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบและประเมินผลและประเมินห้องปฏิบัติการ กลุ่มวิจัยและพัฒนายวสารพิษโรงงาน กรมโรงงานอุตสาหกรรม โทร. ๐ ๒๖๓๐ ๖๓๖๖ ต่อ ๒๒๐๓-๕



ดำเนินการโดย



กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๑๖๐

๒๕ ตุลาคม ๒๕๖๕

เรื่อง เปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์

เรียน กรรมการผู้จัดการ บริษัท ยูนิค แชนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด

อ้างถึง คำขอรับทะเบียน/เปลี่ยนแปลงบุคลากร และขอใบแสดงผลของห้องปฏิบัติการวิเคราะห์ภายนอก
ลงวันที่ ๑๘ ตุลาคม ๒๕๖๕

ตามหนังสือที่อ้างถึง บริษัท ยูนิค แชนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด
ห้องปฏิบัติการวิเคราะห์ภายนอก เลขทะเบียน ๖-๑๑๕๕ สถานะที่ ๓ ขออยู่ครบ ๕๑ ถนนสุขุมวิท แขวงบางจาก
เขตพระโขนง กรุงเทพมหานคร ขอเปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์ ความละเอียดดังนี้

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว มีความเห็นดังนี้

๓. ให้ยกเลิกเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๔ ราย

- | | |
|------------------------------------|-----------------------------|
| ๑) นายสุธรรมา แก้วชัยนอก | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๐๒ |
| ๒) นายกนกพงศ์ บุญพวง | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๓) นายอุทิศพล พงศ์ถาวร | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๔) นางสาวปัญญาลักษณ์ ธนกิจกาญจนนกร | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๒. ให้เพิ่มผู้ควบคุมห้องปฏิบัติการวิเคราะห์ จำนวน ๒ ราย

- | | |
|--------------------------|-----------------------------|
| ๑) นายกนกพงศ์ บุญพวง | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นายสุธรรมา แก้วชัยนอก | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๓. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๖ ราย

- | | |
|-----------------------------|-----------------------------|
| ๑) นายชินวัฒน์ หอยสิทธิ์ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นายประพันธ์ แก้วภาค | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๓) นายศักดิ์สิทธิ์ มูลิเกตุ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๔) นายคุณานนท์ ฤทธาภรณ์ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๕) นายชาญณรงค์ ยี่ลือ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๖) นางสาวจิตตนา ศรีวรรณ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๗) นกฤดี โปธิ์เงิน | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๘) นายเจษฎา ชัยศรี | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๙) นายรัชต์ เชนสุรินทร์ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๑๐) นายสุวิทย์ ชุมเชื้อ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๑๑) นายสุวิทย์ ชุมเชื้อ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๑๒) นายชัย บัวส | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

UAE
UAE ANALYST AND CONSULTANT
CONSULTANT COMPANY LIMITED
สำนักงานผู้ตรวจ

อนึ่ง หนังสือฉบับนี้...

- ๒ -

อนึ่ง หนังสือฉบับนี้จะมีผลใช้บังคับเมื่อได้รับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์ภายนอก
ที่ อก ๐๓๑๐(๑)/๒๕๖๕ ลงวันที่ ๕ กุมภาพันธ์ ๒๕๖๕ คือในวันที่ ๒ กุมภาพันธ์ ๒๕๖๕ ทั้งนี้ สามารถยื่นคำขอ
ผ่านระบบอิเล็กทรอนิกส์ได้ที่หน้าเว็บไซต์กรมโรงงานอุตสาหกรรม ตาม QR Code ที่แนบมาด้วย

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

(นางประสม คำวงษ์)

ผู้อำนวยการกองวิจัยและเตือนภัยมลพิษและทะเบียนห้องปฏิบัติการ
ปฏิจิการกรมโรงงานอุตสาหกรรม

ยื่นคำขอผ่านระบบอิเล็กทรอนิกส์

กองวิจัยและเตือนภัยมลพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๕๓๖ ๖๓๓๒ ต่อ ๒๑๐๓-๕

โทรสาร ๐ ๒๕๓๖ ๖๓๓๒ ต่อ ๒๑๑๕

ไปรษณีย์อิเล็กทรอนิกส์ saraban@dlw.mail.go.th

UAE
UAE ANALYST AND CONSULTANT
CONSULTANT COMPANY LIMITED
สำนักงานผู้ตรวจ



"อุตสาหกรรมก้าวไกล ประเทศไทยก้าวหน้า ร่วมกันพัฒนา อุตสาหกรรมสีเขียว"



กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๑๖๐

๐๑ กันยายน ๒๕๖๕

เรื่อง เปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์

เรียน กรรมการผู้จัดการ บริษัท ยูนิค แชนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด

อ้างถึง คำขอรับทะเบียน/เปลี่ยนแปลงบุคลากร และขอใบแสดงผลของห้องปฏิบัติการวิเคราะห์ภายนอก
ลงวันที่ ๒๒ สิงหาคม ๒๕๖๕

ตามหนังสือที่อ้างถึง บริษัท ยูนิค แชนนาลิสต์ แอนด์ เอ็นจิเนียริ่ง คอนซัลแตนท์ จำกัด
ห้องปฏิบัติการวิเคราะห์ภายนอก เลขทะเบียน ๖-๑๑๕๕ สถานะที่ ๓ ขออยู่ครบ ๕๑ ถนนสุขุมวิท แขวงบางจาก
เขตพระโขนง กรุงเทพมหานคร ขอเปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์ ความละเอียดดังนี้

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว มีความเห็นดังนี้

๑. ให้ยกเลิกเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๔ ราย

- | | |
|------------------------------|-----------------------------|
| ๑) นายวิศา ไชยภูมิกุล | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นายปิยะฉัตร ศรีใจ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๓) นายธีรเมธ สุทธิ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๔) นางสาวศิริวรรณ ขอนพา | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๕) นายศักดิ์สิทธิ์ เกตุสิงห์ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๒. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๑ ราย

- | | |
|--------------------------|-----------------------------|
| ๑) นางสาวมาลา หาญในเมือง | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นางสาวกมลวรรณ สิงมา | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๓. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๑ ราย

- | | |
|--------------------------|-----------------------------|
| ๑) นายไพโรจน์ วงศ์คำ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นายประทีปชัย เมื่อนาม | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๔. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๑ ราย

- | | |
|--------------------------|-----------------------------|
| ๑) นางสาวศุภมาส คำจิต | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นางสาวนภาพร ชื่นนาคัน | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๕. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๑ ราย

- | | |
|-----------------------|-----------------------------|
| ๑) นางสาวเบญญา มณีนุช | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นายอมรพล อมรลักษณ์ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๖. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๑ ราย

- | | |
|--------------------------|-----------------------------|
| ๑) นางสาวศิริเพชร ทองขาว | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
| ๒) นางสาวนภาพร ศุภชาติ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |

๗. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๑ ราย

- | | |
|------------------------|-----------------------------|
| ๑) นางสาววิมลวรรณ คำคำ | ทะเบียนเลขที่ ๖-๑๑๕๕-๖-๐๐๒๕ |
|------------------------|-----------------------------|

UAE
UAE ANALYST AND CONSULTANT
CONSULTANT COMPANY LIMITED
สำนักงานผู้ตรวจ

อนึ่ง หนังสือฉบับนี้...

- ๒ -

อนึ่ง หนังสือฉบับนี้จะมีผลใช้บังคับเมื่อได้รับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์ภายนอก
ที่ อก ๐๓๑๐(๑)/๒๕๖๕ ลงวันที่ ๕ กุมภาพันธ์ ๒๕๖๕ คือในวันที่ ๒ กุมภาพันธ์ ๒๕๖๕ ทั้งนี้ สามารถยื่นคำขอ
ผ่านระบบอิเล็กทรอนิกส์ได้ที่หน้าเว็บไซต์กรมโรงงานอุตสาหกรรม ตาม QR Code ที่แนบมาด้วย

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

(นางจินดา เสนอคำ)

ผู้อำนวยการกองวิจัยและเตือนภัยมลพิษและทะเบียนห้องปฏิบัติการ
ปฏิจิการกรมโรงงานอุตสาหกรรม

ยื่นคำขอผ่านระบบอิเล็กทรอนิกส์

กองวิจัยและเตือนภัยมลพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๕๓๖ ๖๓๓๒ ต่อ ๒๑๐๓-๕

โทรสาร ๐ ๒๕๓๖ ๖๓๓๒ ต่อ ๒๑๑๕

ไปรษณีย์อิเล็กทรอนิกส์ saraban@dlw.mail.go.th

UAE
UAE ANALYST AND CONSULTANT
CONSULTANT COMPANY LIMITED
สำนักงานผู้ตรวจ



"อุตสาหกรรมก้าวไกล ประเทศไทยก้าวหน้า ร่วมกันพัฒนา อุตสาหกรรมสีเขียว"



ทะเบียนเลขที่ 7-๑๕๕-๙-๐๐๑๖
ทะเบียนเลขที่ 7-๑๕๕-๙-๐๐๑๗
ทะเบียนเลขที่ 7-๑๕๕-๙-๐๐๑๘
ทะเบียนเลขที่ 7-๑๕๕-๙-๐๐๑๙
ทะเบียนเลขที่ 7-๑๕๕-๙-๐๐๒๐



LEAD ANALYST AND ENGINEERING
DESIGN PART COMPANY LIMITED

จำแนกถูกต้อง

ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๐๒ ราย

- ๑) นางสุพิศนธ์ หิรัญสิทธิ์
- ๒) นางสาวธรรมมา แก้ววิชานฤกุล
- ๓) นายพิชญ์ชัย เจริญคุณ
- ๔) นางสาวไอลักษณ์ แก้วโสม
- ๕) นายสมชาย ธรรมรัตน์
- ๖) นางสาวนันทกานันท์ ทองแก้ว
- ๗) นางสาวกิตติมา สมพงษ์
- ๘) นายธรรพล เทพทอง
- ๙) นางสาวพรวิมล พุทธิชัย
- ๑๐) นางสาวพรนิจนีย์ สาธุบุญเรือน
- ๑๑) นางอุบลพรรณ นามะทิพย์
- ๑๒) นางสาวอาภาภรณ์ อ่อนคุณ
- ๑๓) นายกิตติศักดิ์ หงษ์จำรัส
- ๑๔) นางสาวนันทพรพรหม บุญคง
- ๑๕) นางสาวพรพิมล น่วมทอง
- ๑๖) นายวิชัญ สุวรรณเวช
- ๑๗) นายอภิรักษ์ พัวศิริ
- ๑๘) นายณวัฒน์ นามะทิพย์
- ๑๙) นายทพพร นามะทิพย์
- ๒๐) นางสาวกัญจนาธิ โยธา
- ๒๑) นางสาวนภาพร สุทธิ
- ๒๒) นางสาวพรรณนิภา อภิสิทธิ์ปาก
- ๒๓) นายศุภกิจ ธรรมบุญเกียรติ
- ๒๔) นางสาวสุภาวดี ธิยานะที
- ๒๕) นายพนธ์พล เทพะพงษ์
- ๒๖) นายชัชวาลย์ หันนุกุล
- ๒๗) นางสาวพิชญ์ชัช ชาติพิศล
- ๒๘) นางสาวนภาพร เสือคำจันทร์
- ๒๙) นายกนกพงศ์ บุญพร
- ๓๐) นางสาวสุพิศนา เจริญชัยสมบัติ
- ๓๑) นายพชรพงศ์ จอสี
- ๓๒) นายพิชิตพงษ์ ปิณฑุผลดิษฐ์
- ๓๓) นายปรีชา ไชยมีสุกุล
- ๓๔) นายพิชากร ก้อนทอง
- ๓๕) นายปิยะธิดา เกื้อทอง

[illegible]

๓๒) นานาเบสิกัน...

[illegible][illegible]

100% ANALYST APPROVED
 CHINA TAIYI COMPANY LIMITED

อ.พนม

[illegible][illegible]

เอกสารแนบท้ายหนังสือรับข้อหาและใบเตือนการปฏิบัติราชการของ

บริษัท ยูนิเทค แอแนบลิติก แอนด์ เอ็นจิเนียริ่ง คอนซัลแทนท์ จำกัด เลขทะเบียน ๖-๑๔๕
ที่ ๑๓ ๐๓๑๐(๒) ๑๘๘๕๕ ลงวันที่ ๑๔ กุมภาพันธ์ ๒๕๖๕

ขอข่าอสารณคดีที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๑๓๗ รายการ

น้ำเสีย จำนวน ๕๖ รายการ

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
1	Aldrin	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
2	Arsenic	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ⁽¹⁾ 2) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
3	Barium	Digestion, Inductively Coupled Plasma Method ⁽¹⁾
4	α -BHC	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
5	β -BHC	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
6	δ -BHC	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
7	γ -BHC	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
8	Biochemical Oxygen Demand	1) 5-Day BOD Test, Azide Modification Method ⁽¹⁾ 2) 5-Day BOD Test, Membrane Electrode Method ⁽¹⁾
9	Cadmium	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
10	Chemical Oxygen Demand	1) Closed Reflux, Titrimetric Method ⁽¹⁾ 2) Closed Reflux, Colorimetric Method ⁽¹⁾ 3) Open Reflux, Titrimetric Method ⁽¹⁾
11	Chlordane	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
12	Chromium	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
13	Color	ADMI Weighted-Ordinate Spectrophotometric Method ⁽¹⁾
14	Copper	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
15	Cyanide	1) Distillation, Colorimetric Method ⁽¹⁾ 2) Flow Injection Analysis Method ⁽¹⁾

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
16	o,p'-DDT	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
17	4,4'-DDO	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
18	4,4'-DDE	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
19	4,4'-DDT	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
20	Dieldrin	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
21	Endosulfan I	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
22	Endosulfan II	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
23	Endosulfan sulfate	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
24	Endrin	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
25	Endrin aldehyde	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
26	Formaldehyde	Distillation, Colorimetric Method ⁽¹⁾
27	Free Chlorine	1) Iodometric Method ⁽¹⁾ 2) DPD Ferrous Titrimetric Method ⁽¹⁾
28	Heptachlor	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
29	Heptachlor Epoxide	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
30	Hexavalent Chromium	1) Colorimetric Method ⁽¹⁾ 2) Extraction, Direct Air-Acetylene Flame Method ⁽¹⁾
31	Lead	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
32	Manganese	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
33	Mercury	Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ⁽¹⁾
34	Methoxychlor	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
35	Nickel	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽¹⁾

16 o,p'-DDT...

36 Oil & Grease...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
36	Oil & Grease	1) Liquid-Liquid, Partition-Gravimetric Method ⁽¹⁾ 2) Soxhlet Extraction Method ⁽¹⁾
37	pH	Electrometric Method ⁽¹⁾
38	Phenols	1) Distillation, Chloroform Extraction Method ⁽¹⁾ 2) Distillation, Direct Photometric Method ⁽¹⁾
39	Selenium	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ⁽¹⁾ 2) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
40	Sulfide	1) Iodometric Method ⁽¹⁾ 2) Methylene Blue Method ⁽¹⁾
41	Temperature	Laboratory and Field Methods ⁽¹⁾
42	Total Dissolved Solids	Dried at 180 °C ⁽¹⁾
43	Total Kjeldahl Nitrogen	Semi-Micro-Kjeldahl Method ⁽¹⁾
44	Total Suspended Solids	Dried at 103-105 °C ⁽¹⁾
45	Trivalent Chromium	1) Digestion, Direct Air-Acetylene Flame Method; Colorimetric Method; Calculation ⁽¹⁾ 2) Digestion, Inductively Coupled Plasma Method; Colorimetric Method; Calculation ⁽¹⁾
46	Zinc	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽¹⁾

น้ำดื่ม จำนวน 126 รายการ

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
1	Acenaphthene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
2	Acetone	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
3	Aldrin	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
4	Anthracene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
5	Antimony	Digestion, Inductively Coupled Plasma Method ⁽¹⁾
6	Arsenic	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ⁽¹⁾ 2) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
7	Atrazine	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
8	Barium	1) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 2) Digestion, Inductively Coupled Plasma Method ⁽¹⁾
9	Benz(a)anthracene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
10	Benzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
11	Benzo(b)fluoranthene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
12	Benzo(k)fluoranthene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
13	Benzoic acid	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
14	Benzo(a)pyrene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾

4 Anthracene...

15 Benzo(g,h,i)perylene...

ลำดับ	สารเคมี	วิธีวิเคราะห์
15	Benzo(g,h,i)perylene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
16	Beryllium	Digestion, Inductively Coupled Plasma Method ⁽¹⁾
17	Bis(2-chloroethyl)ether	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
18	Bis(2-ethylhexyl)phthalate	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
19	Bromodichloromethane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
20	Bromoform	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
21	Butanol	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
22	Butyl benzyl phthalate	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
23	Cadmium	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽²⁾
24	Carbazole	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
25	Carbon disulfide	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
26	Carbon tetrachloride	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
27	Chlordane	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
28	p-Chloroaniline	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
29	Chlorobenzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾

30 Chlorodibromomethane...

ลำดับ	สารเคมี	วิธีวิเคราะห์
30	Chlorodibromomethane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
31	Chloroform	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
32	2-Chlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
33	Chromium	1) Digestion, Direct Air-Acetylene Flame Method ⁽¹⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽¹⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽²⁾
34	Chromium (III)	1) Digestion, Direct Air-Acetylene Flame Method; Colorimetric Method; Calculation ⁽¹⁾ 2) Digestion, Inductively Coupled Plasma Method; Colorimetric Method; Calculation ⁽¹⁾
35	Chromium (VI)	1) Colorimetric Method ⁽¹⁾ 2) Extraction, Air-Acetylene Flame Method ⁽¹⁾
36	Chrysene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
37	Cyanide	Distillation, Colorimetric Method ⁽¹⁾
38	2,4-D	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾
39	DOD	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
40	DDE	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
41	DDT	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾

42 Dibenz(a,h)anthracene...

ลำดับ	สารเคมี	วิธีวิเคราะห์
42	Dibenz(a,h)anthracene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
43	Di-n-butyl phthalate	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
44	1,2-Dichlorobenzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
45	1,3-Dichlorobenzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
46	1,4-Dichlorobenzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
47	3,3'-Dichlorobenzidine	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
48	1,1-Dichloroethane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
49	1,2-Dichloroethane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
50	1,1-Dichloroethylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
51	cis-1,2-Dichloroethylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
52	trans-1,2-Dichloroethylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
53	2,4-Dichlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
54	1,2-Dichloropropane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
55	1,3-Dichloropropane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
56	1,3-Dichloropropene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
57	Dieldrin	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾

58 Diethyl phthalate...

ลำดับ	สารเคมี	วิธีวิเคราะห์
58	Diethyl phthalate	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
59	2,4-Dimethylphenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
60	2,4-Dinitrophenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
61	2,4-Dinitrotoluene	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
62	2,6-Dinitrotoluene	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
63	Di-n-Octyl phthalate	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
64	Endosulfan	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
65	Endrin	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
66	Ethylbenzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽¹⁾
67	Fluoranthene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
68	Fluorene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾
69	Heptachlor	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽¹⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽²⁾

70 Heptachlor epoxide...

ลำดับ	สารเคมี	วิธีวิเคราะห์
70	Heptachlor epoxide	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
71	Hexachlorobenzene	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
72	Hexachloro-1,3-butadiene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
73	n-Hexane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
74	α-HCH	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
75	β-HCH	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
76	γ-HCH	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
77	Hexachlorocyclopentadiene	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
78	Hexachloroethane	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
79	Indeno(1,2,3-cd)pyrene	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
80	Isophorone	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
81	Lead	1) Digestion, Direct Air-Acetylene Flame Method ⁽⁶⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽⁶⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽⁶⁾

82 Manganese...

ลำดับ	สารเคมี	วิธีวิเคราะห์
82	Manganese	1) Digestion, Direct Air-Acetylene Flame Method ⁽⁶⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽⁶⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽⁶⁾
83	Mercury	Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ⁽⁶⁾
84	Methanol	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
85	Methoxychlor	Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾
86	Methyl bromide	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
87	Methylene chloride	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
88	2-Methylphenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
89	2-Methylnaphthalene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
90	Methyl tert-butyl ether	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
91	Naphthalene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
92	Nickel	1) Digestion, Direct Air-Acetylene Flame Method ⁽⁶⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽⁶⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽⁶⁾
93	Nitrobenzene	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
94	N-Nitrosodiphenylamine	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
95	N-Nitrosodi-n-propylamine	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾

96 Polychlorinated Biphenyls...

ลำดับ	สารเคมี	วิธีวิเคราะห์
96	Polychlorinated Biphenyls - PCB 1016 - PCB 1221 - PCB 1232 - PCB 1242 - PCB 1248 - PCB 1254 - PCB 1260	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
97	Pentachlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
98	pH	Electrometric Method ⁽⁶⁾
99	Phenanthrene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
100	Phenol	1) Distillation, Chloroform Extraction Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
101	Pyrene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
102	Selenium	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ⁽⁶⁾ 2) Digestion, Inductively Coupled Plasma Method ⁽⁶⁾
103	Silver	Digestion, Inductively Coupled Plasma Method ⁽⁶⁾
104	Styrene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
105	1,1,2,2-Tetrachloroethane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
106	Tetrachloroethylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
107	Toluene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾

108 Toxaphene...

ลำดับ	สารเคมี	วิธีวิเคราะห์
108	Toxaphene	1) Liquid-Liquid Extraction, Gas Chromatographic Method ⁽⁶⁾ 2) Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
109	TPH (C ₈ - C ₉)	1) Purge and Trap, Gas Chromatographic Method ^(1,2,3) 2) Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(1,2,3)
110	TPH (C ₁₀ - C ₁₆)	Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(2,3)
111	TPH (C ₁₀ - C ₂₀)	Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(2,3)
112	1,2,4-Trichlorobenzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
113	1,1,1-Trichloroethane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
114	1,1,2-Trichloroethane	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
115	Trichloroethylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
116	2,4,5-Trichlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
117	2,4,6-Trichlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
118	1,3,5-Trimethylbenzene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
119	Vanadium	Digestion, Inductively Coupled Plasma Method ⁽⁶⁾
120	Vinyl acetate	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
121	Vinyl chloride	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
122	m-Xylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾
123	o-Xylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁶⁾

124 p-Xylene...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
124	p-Xylene	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁴⁾
125	Xylene (Total)	Purge and Trap Gas Chromatographic/Mass Spectrometric Method ⁽⁴⁾
126	Zinc	1) Digestion, Direct Air-Acetylene Flame Method ⁽⁴⁾ 2) Digestion, Electrothermal Atomic Absorption Spectrometric Method ⁽⁴⁾ 3) Digestion, Inductively Coupled Plasma Method ⁽⁶⁾

สารมลพิษ (ต่อเนื่อง) จำนวน 25 รายการ

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
1	Antimony	Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
2	Arsenic	1) Isokinetic Sampling, Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
3	Cadmium	1) Isokinetic Sampling, Digestion, Direct Air-Acetylene Flame Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
4	Carbon Monoxide	Instrumental Analyzer Method ⁽¹⁾
5	Chlorine	Isokinetic Sampling, Ion Chromatographic Method ⁽⁴⁾
6	Chromium	1) Isokinetic Sampling, Digestion, Direct Air-Acetylene Flame Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
7	Cobalt	Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
8	Copper	1) Isokinetic Sampling, Digestion, Direct Air-Acetylene Flame Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
9	Cresol	Absorption Sampling, Gas Chromatographic Method ⁽⁴⁾

10 Dioxins/Furans...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
10	Dioxins/Furans	Isokinetic Sampling ⁽⁴⁾
11	Hydrogen Chloride	Isokinetic Sampling, Ion Chromatographic Method ⁽⁴⁾
12	Hydrogen Fluoride	Isokinetic Sampling, Ion Chromatographic Method ⁽⁴⁾
13	Hydrogen Sulfide	Absorption Sampling, Iodometric Method ⁽⁴⁾
14	Lead	1) Isokinetic Sampling, Digestion, Direct Air-Acetylene Flame Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
15	Manganese	1) Isokinetic Sampling, Digestion, Direct Air-Acetylene Flame Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
16	Mercury	Isokinetic Sampling, Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ⁽⁴⁾
17	Nickel	1) Isokinetic Sampling, Digestion, Direct Air-Acetylene Flame Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
18	Opacity	Ringelmann's Method ⁽¹⁾
19	Oxides of Nitrogen	1) Absorption Sampling, Phenoldisulfonic acid Method ⁽⁴⁾ 2) Instrumental Analyzer Method ⁽⁴⁾
20	Selenium	1) Isokinetic Sampling, Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ⁽⁴⁾ 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
21	Sulfur Dioxide	1) Absorption Sampling, Barium-Thorin Titrimetric Method ⁽⁴⁾ 2) Instrumental Analyzer Method ⁽⁴⁾
22	Sulfuric Acid	Isokinetic Sampling, Barium-Thorin Titrimetric Method ⁽⁴⁾
23	Total Suspended Particulate	Isokinetic Sampling, Gravimetric Method ⁽⁴⁾
24	Vanadium	Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method ⁽⁴⁾
25	Xylene	1) Isokinetic Sampling, Gas Chromatographic Method ⁽⁴⁾ 2) Absorption Sampling, Gas Chromatographic Method ⁽⁴⁾

11 Sulfur Dioxide...

สารมลพิษ (ต่อเนื่อง) จำนวน 35 รายการ

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
1	Aldrin	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(2,3,7) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(2,3,7)
2	Antimony	Digestion, Inductively Coupled Plasma Method ^(1,13)
3	Arsenic	1) Waste Extraction, Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^(2,4,11) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,4,13) 3) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^(7,13) 4) Digestion, Inductively Coupled Plasma Method ^(7,13)
4	Barium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,4,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,13)
5	Beryllium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,4,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,13)
6	Cadmium	1) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^(2,4,14) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,4,13) 3) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 4) Digestion, Inductively Coupled Plasma Method ^(7,13)
7	Chlordane	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(2,3,7) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(2,3,7)
8	Chromium	1) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^(2,4,14) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,4,13) 3) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 4) Digestion, Inductively Coupled Plasma Method ^(7,13)

3) Digestion...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
9	Chromium (III)	3) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 4) Digestion, Inductively Coupled Plasma Method ^(7,13) 1) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method; Waste Extraction, Colorimetric Method; Calculation ^(2,4,13,14) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method; Waste Extraction, Colorimetric Method; Calculation ^(2,4,13,14)
10	Chromium (VI)	3) Digestion, Flame Atomic Absorption Spectrometric Method; Alkaline Digestion, Colorimetric Method; Calculation ^(7,8,13,14) 4) Digestion, Inductively Coupled Plasma Method; Alkaline Digestion, Colorimetric Method; Calculation ^(7,8,13,14)
11	Cobalt	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,4,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,13)
12	Copper	1) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^(2,4,14) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,4,13) 3) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 4) Digestion, Inductively Coupled Plasma Method ^(7,13)
13	2,4-D	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(2,3,7) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(2,3,7)
14	DDO	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(2,3,7) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(2,3,7)

15 DDE...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
15	DDE	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
16	DDT	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
17	Dieldrin	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
18	Endrin	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
19	Heptachlor	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
20	Lead	1) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^(2,6,11) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 3) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 4) Digestion, Inductively Coupled Plasma Method ^(7,15)
21	Lindane	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
22	Mercury	1) Waste Extraction, Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ^(2,17) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13)

CONSULTANT COMPANY LIMITED

3) Digestion...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
		3) Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ^(2,18) 4) Digestion, Inductively Coupled Plasma Method ^(7,19) 5) Thermal Decomposition Amalgamation and Atomic Absorption Spectrometric Method ^(7,9)
23	Methoxychlor	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
24	Molybdenum	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,15)
25	Nickel	1) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^(2,6,14) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 3) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 4) Digestion, Inductively Coupled Plasma Method ^(7,15)
26	Polychlorinated Biphenyls - Aroclor 1016 - Aroclor 1221 - Aroclor 1232 - Aroclor 1242 - Aroclor 1248 - Aroclor 1254 - Aroclor 1260 - 2-Chlorobiphenyl - 2,3-Dichlorobiphenyl - 2,2',5-Trichlorobiphenyl - 2,4',5-Trichlorobiphenyl - 2,2',3,5'-Tetrachlorobiphenyl - 2,2',5,5'-Tetrachlorobiphenyl - 2,3,4,4'-Tetrachlorobiphenyl - 2,2',3,4,5'-Pentachlorobiphenyl	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)

UAE
UNIVERSITY ANALYST AND ENGINEERING
CONSULTANT COMPANY LIMITED

ดำเนินการทดสอบ

- 2,2',4,5,5'...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
	- 2,2',4,5,5'-Pentachlorobiphenyl - 2,3,3',4',6-Pentachlorobiphenyl - 2,2',3,4,4',5'-Hexachlorobiphenyl - 2,2',3,4,5,5'-Hexachlorobiphenyl - 2,2',3,5,5',6'-Hexachlorobiphenyl - 2,2',4,4',5,5'-Hexachlorobiphenyl - 2,2',3,3',4,4',5'-Heptachlorobiphenyl - 2,2',3,3',4,4',5,5'-Heptachlorobiphenyl - 2,2',3,4,4',5,5',6'-Heptachlorobiphenyl - 2,2',3,4,4',5,5',6'-Heptachlorobiphenyl - 2,2',3,3',4,4',5,5',6'-Nonachlorobiphenyl Pentachlorophenol	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ^(2,9,26) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,26)
28	pH	Electrometric Method ^(7,30)
29	Selenium	1) Waste Extraction, Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^(2,6,28) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 3) Digestion, Inductively Coupled Plasma Method ^(7,15) 4) Digestion, Inductively Coupled Plasma Method ^(7,15)

CONSULTANT COMPANY LIMITED

30 Silver...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
30	Silver	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,15)
31	Thallium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,15)
32	Toxaphene	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method ^(3,9,22) 2) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22)
33	Trichloroethylene	1) Waste Extraction, Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(2,10,23) 2) Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,23)
34	Vanadium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,15)
35	Zinc	1) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^(2,6,14) 2) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^(2,6,13) 3) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 4) Digestion, Inductively Coupled Plasma Method ^(7,15)

สิ้น จำนวน 125 รายการ

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
1	Acenaphthene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,24) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
2	Acetone	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,24)

UAE
UNIVERSITY ANALYST AND ENGINEERING
CONSULTANT COMPANY LIMITED

ดำเนินการทดสอบ

3 Aldrin...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
3	Aldrin	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
4	Anthracene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
5	Antimony	Digestion, Inductively Coupled Plasma Method ^(7,13)
6	Arsenic	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^(7,13) 2) Digestion, Inductively Coupled Plasma Method ^(7,13)
7	Atrazine	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
8	Barium	Digestion, Inductively Coupled Plasma Method ^(7,13)
9	Benz(a)anthracene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
10	Benzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
11	Benzobifluoranthene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
12	Benzok(k)fluoranthene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
13	Benzoic acid	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
14	Benzo(a)pyrene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)

15 Benzo(g,h,i)perylene...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
15	Benzo(g,h,i)perylene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
16	Beryllium	Digestion, Inductively Coupled Plasma Method ^(7,13)
17	Bis(2-chloroethyl)ether	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
18	Bis(2-ethylhexyl)phthalate	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
19	Bromodichloromethane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
20	Bromofom	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
21	Butanol	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
22	Butyl benzyl phthalate	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
23	Cadmium	1) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 2) Digestion, Inductively Coupled Plasma Method ^(7,13)
24	Carbazole	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
25	Carbon disulfide	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
26	Carbon tetrachloride	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
27	Chlordane	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
28	p-Chloroaniline	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
29	Chlorobenzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
30	Chlorodibromomethane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)

31 Chloroform...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
31	Chloroform	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
32	2-Chlorophenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
33	Chromium	1) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 2) Digestion, Inductively Coupled Plasma Method ^(7,13)
34	Chromium (III)	1) Digestion, Flame Atomic Absorption Spectrometric Method; Alkaline Digestion, Colorimetric Method; Calculation ^(7,13,14) 2) Digestion, Inductively Coupled Plasma Method; Alkaline Digestion, Colorimetric Method; Calculation ^(7,13,14)
35	Chromium (VI)	Alkaline Digestion, Colorimetric Method ^(7,14)
36	Chrysene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
37	Cyanide	Extraction, Distillation, Colorimetric Method ^(7,29,30)
38	2,4-D	Ultrasonic Extraction, Gas Chromatographic Method ^(7,13)
39	DDD	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
40	DDE	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
41	DDT	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
42	Dibenz(a,h)anthracene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)

43 Di-n-butyl phthalate...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
43	Di-n-butyl phthalate	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
44	1,2-Dichlorobenzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
45	1,3-Dichlorobenzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
46	1,4-Dichlorobenzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
47	3,3'-Dichlorobenzidine	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
48	1,1-Dichloroethane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
49	1,2-Dichloroethane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
50	1,1-Dichloroethylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
51	cis-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
52	trans-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
53	2,4-Dichlorophenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
54	1,2-Dichloropropene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
55	1,3-Dichloropropane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
56	1,3-Dichloropropene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
57	Dieldrin	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,20) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
58	Diethyl phthalate	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)
59	2,4-Dimethylphenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,20)

60 2,4-Dinitrophenol...

ลำดับ	สารเคมี	วิธีวิเคราะห์
60	2,4-Dinitrophenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
61	2,4-Dinitrotoluene	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
62	2,6-Dinitrotoluene	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
63	Di-n-Octyl phthalate	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
64	Endosulfan	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
65	Endrin	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
66	Ethylbenzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
67	Fluoranthene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,24) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
68	Fluorene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,24) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
69	Heptachlor	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
70	Heptachlor epoxide	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)

UAE
UNITED ANALYST AND CONSULTING
CONSULTANT COMPANY LIMITED

71 Hexachlorobenzene

ลำดับ	สารเคมี	วิธีวิเคราะห์
71	Hexachlorobenzene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
72	Hexachloro-1,3-butadiene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
73	n-Hexane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
74	α-HCH	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
75	β-HCH	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
76	γ-HCH	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
77	Hexachlorocyclopentadiene	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
78	Hexachloroethane	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
79	Indeno[1,2,3-cd]pyrene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,24) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
80	Isophorone	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
81	Lead	1) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 2) Digestion, Inductively Coupled Plasma Method ^(7,15)
82	Manganese	1) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,14) 2) Digestion, Inductively Coupled Plasma Method ^(7,15)

UAE
UNITED ANALYST AND CONSULTING
CONSULTANT COMPANY LIMITED

83 Mercury...

ลำดับ	สารเคมี	วิธีวิเคราะห์
83	Mercury	1) Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ^(7,16) 2) Digestion, Inductively Coupled Plasma Method ^(7,17) 3) Thermal Decomposition Amalgamation and Atomic Absorption Spectrometric Method ^(7,18)
84	Methanol	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
85	Methoxychlor	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,22) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
86	Methyl bromide	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
87	Methylene chloride	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
88	2-Methylphenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
89	2-Methylnaphthalene	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
90	Methyl tert-butyl ether	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
91	Naphthalene	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,24) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
92	Nickel	1) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,16) 2) Digestion, Inductively Coupled Plasma Method ^(7,15)
93	Nitrobenzene	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
94	N-Nitrosodiphenylamine	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)
95	N-Nitrosodi-n-propylamine	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24)

UAE
UNITED ANALYST AND CONSULTING
CONSULTANT COMPANY LIMITED

96 Polychlorinated Biphenyls

ลำดับ	สารเคมี	วิธีวิเคราะห์
96	Polychlorinated Biphenyls - Aroclor 1016 - Aroclor 1221 - Aroclor 1232 - Aroclor 1242 - Aroclor 1248 - Aroclor 1254 - Aroclor 1260 Polychlorinated Biphenyls - 2-Chlorobiphenyl - 2,3-Dichlorobiphenyl - 2,2',5-Trichlorobiphenyl - 2,4',5-Trichlorobiphenyl - 2,2',3,5'-Tetrachlorobiphenyl - 2,2',5,5'-Tetrachlorobiphenyl - 2,3',4,4'-Tetrachlorobiphenyl - 2,2',3,4,5'-Pentachlorobiphenyl - 2,2',4,5,5'-Pentachlorobiphenyl - 2,3,3',4,6'-Pentachlorobiphenyl - 2,2',3,4,4',5'-Hexachlorobiphenyl - 2,2',3,4,5,5'-Hexachlorobiphenyl - 2,2',3,5,5',6'-Hexachlorobiphenyl - 2,2',4,4',5,5'-Hexachlorobiphenyl - 2,2',3,3',4,4',5'-Heptachlorobiphenyl - 2,2',3,4,4',5,5'-Heptachlorobiphenyl - 2,2',3,4,4',5',6'-Heptachlorobiphenyl	1) Ultrasonic Extraction, Gas Chromatographic Method ^(10,24) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(10,24) Ultrasonic Extraction, Gas Chromatographic Method ^(10,24)

UAE
UNITED ANALYST AND CONSULTING
CONSULTANT COMPANY LIMITED

- 2,2',3,4,4',5,5',6'-

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
97	- 2,2',3,4,5,5',6-Heptachlorobiphenyl - 2,2',3,3',4,4',5,5',6-Nonachlorobiphenyl Pentachlorophenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26)
98	Phenanthrene	1) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26)
99	Phenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26)
100	Pyrene	1) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26) 2) Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26)
101	Selenium	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^(7,28) 2) Digestion, Inductively Coupled Plasma Method ^(7,18)
102	Silver	Digestion, Inductively Coupled Plasma Method ^(7,18)
103	Styrene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
104	1,1,2,2-Tetrachloroethane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
105	Tetrachloroethylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
106	Toluene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
107	Toxaphene	Ultrasonic Extraction, Gas Chromatographic Method ^(16,26)
108	TPH (C ₁₀ -C ₂₀)	1) Purge and Trap, Gas Chromatographic Method ^(12,25) 2) Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
109	TPH (C ₁₀ -C ₂₀)	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
110	TPH (C ₁₀ -C ₂₀)	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
111	1,2,4-Trichlorobenzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)

112 1,1,1-Trichloroethane...

ลำดับ	สารมลพิษ	วิธีวิเคราะห์
112	1,1,1-Trichloroethane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
113	1,1,2-Trichloroethane	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
114	Trichloroethylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
115	2,4,5-Trichlorophenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26)
116	2,4,6-Trichlorophenol	Ultrasonic Extraction, Gas Chromatographic/Mass Spectrometric Method ^(12,26)
117	1,3,5-Trimethylbenzene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
118	Vanadium	Digestion, Inductively Coupled Plasma Method ^(7,18)
119	Vinyl acetate	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
120	Vinyl chloride	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
121	m-Xylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
122	o-Xylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
123	p-Xylene	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
124	Xylene (Total)	Purge and Trap, Gas Chromatographic/Mass Spectrometric Method ^(12,25)
125	Zinc	1) Digestion, Flame Atomic Absorption Spectrometric Method ^(7,18) 2) Digestion, Inductively Coupled Plasma Method ^(7,18)

เอกสารอ้างอิง

- กระทรวงอุตสาหกรรม. ประกาศกระทรวงอุตสาหกรรม, พ.ศ. 2549 เรื่อง กำหนดค่าปริมาณสารเคมีที่เขียนในเอกสารที่รับมาจากผู้ประกอบการที่ผลิตหรือนำเข้าสารเคมีอันตราย. 4 ธันวาคม 2549, ตอนที่ 123 ของก.พ. (123) ราชกิจจานุเบกษา.
- กระทรวงอุตสาหกรรม. ประกาศกระทรวงอุตสาหกรรม, พ.ศ. 2549 เรื่อง กำหนดค่าปริมาณสารเคมีที่เขียนในเอกสารที่รับมาจากผู้ประกอบการที่ผลิตหรือนำเข้าสารเคมีอันตราย. 25 มกราคม 2549, ตอนที่ 123 ของก.พ. (123) ราชกิจจานุเบกษา.

3. สมาคมวิศวกรรม...

- สมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย. คู่มือวิเคราะห์น้ำเสีย. พิมพ์ครั้งที่ 4. กรุงเทพมหานคร: การพิมพ์, 2547.
- APHA, AWWA, WEF. Standard Methods for the Examination of Water and Wastewater. 23rd ed. Washington, DC: APHA, 2017.
- United States Environmental Protection Agency. Standards of Performance for New Stationary Sources. 40 CFR 60. Appendix A, 2019.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. SW-846, 1997.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Acid Digestion of Sediments, Sludges, and Soils. SW-846 Method 3050B, 1996.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Alkaline Digestion for Hexavalent Chromium. SW-846 Method 3060A, 1996.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Separatory Funnel Liquid-Liquid Extraction. SW-846 Method 3510C, 1996.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Ultrasonic Extraction. SW-846 Method 3550C, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Purge and Trap for Aqueous Samples. SW-846 Method 5030C, 2003.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Closed System Purge and Trap and Extraction for Volatile Organics in Soil and Waste Sample. SW-846 Method 5035A, 2000.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Inductively Coupled Plasma-Optical Emission Spectrometry. SW-846 Method 6010D, 2014.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Flame Atomic Absorption Spectrophotometry. SW-846 Method 7000B, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Arsenic (Atomic Absorption). Gaseous Hydride Method 7061A, 1996.

- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Chromium, Hexavalent (Colorimetric). SW-846 Method 7196A, 1992.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Mercury in Liquid Waste (Manual Cold Vapor Technique). SW-846 Method 7470A, 1994.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Mercury in Solid or Semisolid Waste (Manual Cold-Vapor Technique). SW-846 Method 7471B, 1998.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Mercury in Solids and Solutions by Thermal Decomposition, Amalgamation, and Atomic Absorption Spectrophotometry. SW-846 Method 7473, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Selenium (Atomic Absorption, Borohydride Reduction). SW-846 Method 7742, 1994.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Nonhalogenated Organics Using GC/FID. SW-846 Method 8015D, 2003.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Organochlorine Pesticides by Gas Chromatography. SW-846 Method 8081B, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Polychlorinated Biphenyls (PCBs) by Gas Chromatography. SW-846 Method 8082A, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Polynuclear Aromatic Hydrocarbons. SW-846 Method 8100, 1980.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Volatile Organic Compounds by Gas Chromatography/Mass Spectrometry. SW-846 Method 8260D, 2011E.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Semivolatile Organic Compounds by Gas Chromatography/Mass Spectrometry. SW-846 Method 8270E, 2011E.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Chlorinated Hydrocarbons by GC/MS. Pentafluorobenzoylation Derivatization. SW-846 Method 8311A, 2011E.

28. United States Environmental Protection Agency, Test Methods for Evaluation Solid Waste Physical/Chemical Methods, **Total and Amenable Cyanide : Distillation**, SW-846 Method 9010C, 2004.

29. United States Environmental Protection Agency, Test Methods for Evaluation Solid Waste Physical/Chemical Methods, **Cyanide Extraction Procedure for Solids and Oils**, SW-846 Method 9013A, 2014.

30. United States Environmental Protection Agency, Test Methods for Evaluation Solid Waste Physical/Chemical Methods, **Cyanide in Waters and Extracts using Titrimetric and Manual Spectrophotometric Procedures**, SW-846 Method 9014, 2014.

31. United States Environmental Protection Agency, Test Methods for Evaluation Solid Waste Physical/Chemical Methods, **pH Electrometric Measurement**, SW-846 Method 9040C, 2004.

32. United States Environmental Protection Agency, Test Methods for Evaluation Solid Waste Physical/Chemical Methods, **Soil and Waste pH**, SW-846 Method 9045D, 2004.



ดำเนินการโดย