

ภาคผนวก จ

สำเนาเอกสารรับรองเครื่องมือการตรวจวัด

Certificate of Calibration

Certificate No. : 65-400499-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
188/46 Wisutesukhakorn 25, Pracha-Ud Rd., Thungkru Bangkok 10140 Thailand

Equipment : Air Chamber (Refrigerator)
Manufacturer : Biobase
Range : N/A °C
Serial No. : YC025025190108
Model : BXC-V250M (II)
Resolution : 0.1 °C
ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (30.0 to 31.0) °C
Relative Humidity : (45 to 50) %
Line Voltage : (229.0 to 232.0) V

Date of Received : 21 September 2022

Date of Calibration : 21 September 2022

Date of Issue : 23 September 2022

Calibrated by : Permpoon Chanpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with Thermocouple probe

ID No. 400029 & 400032 Cert. No. 65-400274-1 Due Date 25 Nov 2022
Traceability National Institute of Metrology Thailand (NIMT)

Approved by

(Bunjerd Masri)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration


Certificate No. : 65-400499-1 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)

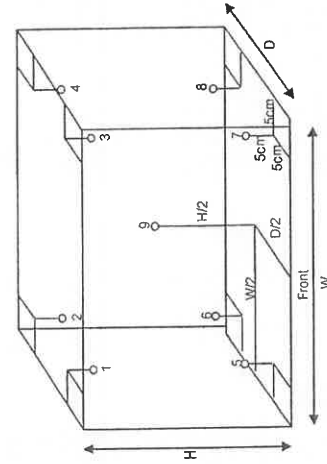

Inside of Chamber
W = 0.50 m
D = 0.40 m
H = 1.20 m
Capacity = 0.24 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
4.0	2.0	2.0	3.9	4.8	5.2	5.0	5.2	4.7	5.2	4.1	5.1	0.75

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured		Overall Variation (°C)
			Uniformity (°C)	Stability (°C)	
4.0	2.0	2.0	1.6	0.3	1.9

Remark The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Page : 1 of 2

Certificate No. : 65-400499-2

Submitted by : M.Green Group Co., Ltd.

188/46 Wisatesukhakon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment : Air Chamber (Oven)

Manufacturer : Memmert

Model : UF110

Range : N/A °C Resolution : 0.1 °C

Serial No. : B419.1092 ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (30.0 to 31.0) °C

Relative Humidity : (45 to 50) %

Line Voltage : (229.0 to 232.0) V

Date of Received : 21 September 2022

Date of Calibration : 21 September 2022

Date of Issue : 23 September 2022

Calibrated by : Pernpon Champu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with Thermocouple probe

ID No. Cert. No. Due Date

400029 & 400030 65-400272-1 24 Nov 2022

Traceability

National Institute of Metrology Thailand (NIMT)

Approved by

(Bunjerd Masri)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration


Certificate No. : 65-400499-2

Result of Calibration : Without Adjustment

UDC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)



Inside of Chamber

W = 0.56 m

D = 0.40 m

H = 0.48 m

Capacity = 0.11 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
104.0	104.0	104.0	103.8	103.4	104.6	104.0	104.1	103.8	104.2	103.4	104.1	0.71
180.0	180.0	180.0	179.5	179.1	181.4	179.9	180.3	179.5	181.0	179.0	180.3	0.96

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured		Overall Variation (°C)
			Uniformity (°C)	Stability (°C)	
104.0	104.0	104.0	0.8	0.2	1.4
180.0	180.0	180.0	1.4	0.3	2.7

Remark: The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- o o -





Certificate of Calibration

Certificate No. : 65-400499-3

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatsukhakkhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Water Bath

Manufacturer : Memmert

Model : WNB29

Range : N/A °C

Resolution :0.1 °C

Serial No. : L619.0037

ID No. : N/A

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (30.0 to 31.0) °C

Relative Humidity : (45 to 50) %

Line Voltage : (229.0 to 232.0) V

Date of Received : 21 September 2022

Date of Calibration : 21 September 2022

Date of Issue : 23 September 2022

Calibrated by : Permporn Chanpu

Calibration Method : This instrument was calibrated by In-house method CAL-M4006 based on ASTM E715-80

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD probe

ID No. Cert. No. Due Date Traceability

400029 & 400031 65-400273-1 23 Nov 2022 National Institute of Metrology Thailand (NIMT)

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.

Certificate of Calibration


Certificate No. : 65-400499-3

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

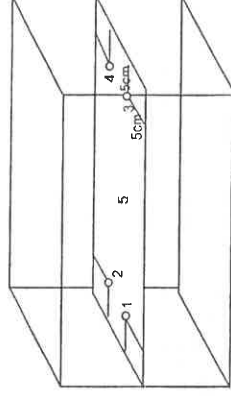

Front

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.					Uncertainty (± °C)	Measured Uniformity (°C)	Measured Stability (°C)
			1	2	3	4	5			
85.0	85.0	85.0	84.65	84.57	84.77	84.70	84.74	0.19	0.25	0.06

Remark The uncertainty is not combine uniformity of the water bath

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- o O o -

Approved by
(Bunjerd Mastri)
Supervisor



Certificate of Calibration

Certificate No. : 65-410112-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatsuknakon 25, Pracha-Uthid Rd.,

Thungkru, Bangkok 10140 Thailand

Equipment :

Digital Thermo-Hygrometer

Manufacturer : Digicon

Model : TH-02A

Range Temperature : 0 °C to 50 °C Resolution : 0.1 °C

Range Humidity : 20 %R.H. to 99 %R.H. Resolution : 1 %R.H.

Serial No. : 1819A0771796 ID No. : N/A

Environment :

Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Date of Received : 21 September 2022

Date of Calibration : 22 September to 24 September 2022

Date of Issue : 24 September 2022

Calibrated by : Chortip Samchusri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4013 by compared with standard probe sensor humidity/temperature into humidity/temperature chamber.

Reference Standard Instruments : This certification is traceable to the International System of Units

Digital Indicator with Standard Probe Temp&Hum

ID No. Cert.No. Due Date

Traceability

400034 & 400035

SG-H-00713/65

07 Jan 2023

Success Gateway Co., Ltd., Accredited by TISI Calibration No.0268

Approved by

(Bunjerd Masi)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-410112-1

Page : 2 of 2

UUC Condition As-Received : Good

Result of Calibration : Without Adjustment

Function : Temperature measurement

Reference Humidity @ 50 %R.H.

Standard Temperature (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
20.04	19.8	0.2	0.46
24.99	24.7	0.3	0.46
30.03	29.7	0.3	0.46

Result of Calibration : Without Adjustment

Function : Humidity measurement

Reference Temperature @ 25 °C

Standard Humidity (%R.H.)	UUC Reading (%R.H.)	Correction (%R.H.)	Uncertainty (± %R.H.)
40.00	39	1	2.2
60.01	58	2	2.3

Remarks

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2 , providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 65-200300-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisetstakrakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Electronic Balance

Manufacturer : SHIMADZU

Model : AP225WD

Serial No. : D316300690

Capacity : 220 g

Resolution : 0.00001g/102g, 0.0001g/220g

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.1 to 26.3) °C

Relative Humidity : (62.1 to 64.5) %

Air Pressure : 1007.0 mbar

Date of Received :

21 September 2022

Date of Calibration :

21 September 2022

Date of Issue :

24 September 2022

Calibrated by :

Akaradath Thippichai

Calibration Method :

In-house method CAL-M2001 based on UKAS Publication ref : LAB 14

Edition 5, July 2015

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.

Cert.No.
C02213103Due Date
18 Nov 2022

Traceability

National Institute of Metrology (Thailand), (NIMTT)

Approved by

(Surachai Promthong)
Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 65-200300-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Departure of indication from nominal value

Nominal Value (g)	Correction (g)	Uncertainty \pm (g)
0.001	0.00001	0.000012
0.01	0.00000	0.000014
0.1	0.00001	0.000018
1	0.00000	0.000026
10	0.00000	0.000053
20	-0.00001	0.000071
50	0.00001	0.00011
100	-0.00008	0.00020
150	-0.0001	0.00038
200	-0.0001	0.00038

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.15$, providing a level of confidence of approximately 95%

Eccentric error

Load test : 50 g

A B C D E

0.00001 0.00006 0.00004 -0.00006 0.00000 g



Repeatability

Load test : 200 g

Sidev. : 0.000053 g

-0.00 -



CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhaphrasuen 3 Rd., Bangpood, Pakkred, Nonthaburi 11120
Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.comNSC-TSI-TSI 7025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 65-400503-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd.,
Thungkru, Bangkok 10140 Thailand

Equipment :

Liquid in Glass Thermometer

Manufacturer : N/A

Model : N/A

Range : 0 °C to 100 °C

Resolution : 1 °C

Serial No. : N/A

Immersion : Total

ID No. : 94-49747

Environment :

Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Line Voltage : (220 ± 22) VAC

Date of Received :

21 September 2022

Date of Calibration :

23 September to 26 September 2022

Date of Issue :

26 September 2022

Calibrated by :

Chortip Samchusti

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4001 based on ASTM E77-07 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No.	Cert. No.	Due Date	Traceability
400001	TT-0016-22	07 Feb 2024	National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No.	Cert. No.	Due Date	Traceability
400003	21E1850	14 Jun 2023	National Institute of Metrology Thailand (NIMT)
400004	21E1850	14 Jun 2023	National Institute of Metrology Thailand (NIMT)

Approved by

(Bunjerd Masri)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.

CAL-F0031-03



CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhaphrasuen 3 Rd., Bangpood, Pakkred, Nonthaburi 11120
Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.com

Certificate of Calibration

Certificate No. : 65-400503-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Ice point check : UUC* reading 0 °C Standard reading 0.0327 °C

Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
39.7131	40	-0.3	0.31

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-



CAL-F0031-03



Certificate of Calibration

Certificate No. : 65-420076-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisutesukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

pH Meter with electrode

pH meter

Manufacturer : Eutech

Model : pH 700

Range : N/A pH

Resolution : 0.01 pH

Serial No. : 2884323

ID No. : N/A

Electrode

Model : N/A

Serial No. : 40417

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.4 to 26.0) °C

Relative Humidity : (56 to 60) %

Date of Received : 21 September 2022

Date of Calibration : 21 September 2022

Date of Issue : 24 September 2022

Calibrated by : Bunjerd Masri

Calibration Method : In-house method CAL-M4201 direct measurement by using standard voltage calibrator and using certified reference material (CRM)

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Multiproduct Calibrator

ID No.	Cert. No.	Due Date	Traceability
400005	SG-E-00473/64	27 Aug 2023	National Institute of Metrology Thailand (NIMT)

2. Standard Buffer Solution

pH	Cert. No.	Lot No.	Exp. Date	Traceability
4.008	61235182	795894	14 Feb 2024	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
6.985	61243095	809356	21 Apr 2023	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
10.008	61244986	795895	25 Feb 2023	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025

Approved by

(Bunjerd Masri)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 65-420076-1

Page : 2 of 2

Result of Calibration :

UUC Condition As-Received : Good

Function : Electrical measurement

pH meter

Performing standard curve by Multiproduct Calibrator at pH (4,7,10)

Adjustment Curve at nominal pH	Applied Voltage (mV)	Nominal Value (pH)	UUC Reading		Correction (mV)	Uncertainty (± mV)
			(pH)	(mV)		
4, 7, 10	177.4800	4	4.00	177.5	0.0	0.12
	0.0000	7	7.00	0.1	-0.1	0.086
	-177.4800	10	10.00	-177.4	-0.1	0.12

Function : pH meter with electrode

Performing a three - buffer standard curve using buffer nominal pH (4,7,10)

Adjustment Curve at nominal pH	Standard Buffer (pH)	UUC Reading (pH)	Correction (pH)	Uncertainty (± pH)
4, 7, 10	4.008	4.01	0.00	0.010
	6.985	7.00	-0.01	0.011
	10.008	10.01	0.00	0.014

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- o O o -





Certificate of Calibration

Certificate No. : 65-400500-1 Page : 1 of 2

Submitted by : M Green Group Co.,Ltd.
188/46 Wisatsukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment : Digital Thermometer with Thermistor probe

Temperature Indicator

Manufacturer : Eutech Model : pH 700
Range : N/A °C Resolution : 0.1 °C
Serial No. : 2884323 ID No. : N/A

Thermistor probe

Model : N/A Sheath Material : Stainless
Diameter : 3.2 mm. Length : 100 mm.
Serial No. : PHSTEMB01P ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co.,Ltd.

Ambient Temperature : (25.4 to 26.0) °C
Relative Humidity : (56 to 60) %
Line Voltage : (224.0 to 225.2) VAC

Date of Received : 21 September 2022

Date of Calibration : 21 September 2022

Date of Issue : 24 September 2022

Calibrated by : Bunjerd Masri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4003 by compared with PRT in the dry-well calibrator at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert. No. Due Date Traceability

400002 TT-0074-22 20 Jun 2024

National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert. No. Due Date Traceability

400033 22E569 22 Feb 2024

National Institute of Metrology Thailand (NIMT)

Approved by :
(Bunjerd Masri)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.

Certificate of Calibration

Certificate No. : 65-400500-1 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Immersion Depth (mm.)	Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
100	25.004	24.9	0.1	0.19

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 65-300541-1

Page : 1 of 2

Submitted by :

M Green Group Co.,Ltd.

188/46 Wisatesuknakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Volumetric Flask

Manufacturer : GLASSCO

Class : A

Capacity : 100 ml

ID No. : VF100/01/19

Environment :

Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Air Pressure : 1007.5 mbar.

Date of Received : 21 September 2022

Date of Calibration : 26 September 2022

Date of Issue : 26 September 2022

Calibrated by :

Areerat Sornbun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert. No.

Due Date

Traceability

241005

65-200172-4

02 Dec 2022

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-300541-1

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
100	100.081

Uncertainty of measurement with in ± 0.018 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-

Certificate of Calibration

Certificate No. : 65-300541-2

Submitted by : M Green Group Co.,Ltd.

188/46 Wisatsuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Page : 1 of 2

Equipment : Volumetric Flask
Manufacturer : GLASSCO Class : A
Capacity : 250 ml
ID No. : VF250/01/19

Environment : Ambient Temperature : (23 ± 2) °C
Relative Humidity : (50 ± 15) %
Air Pressure : 1007.4 mbar.

Date of Received : 21 September 2022
Date of Calibration : 26 September 2022
Date of Issue : 26 September 2022
Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.	Cert.No.	Due Date	Traceability
241002	65-200172-1	02 Dec 2022	National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-300541-2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Page : 2 of 2

Nominal Volume (ml)	Measuring Volume (ml)
250	250.11

Uncertainty of measurement with in \pm 0.049 ml
This result of calibration was found accurate as shown on date and place of calibration only.
This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 65-300541-3

Page : 1 of 2

Submitted by :

M Green Group Co.,Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Volumetric Flask

Manufacturer : GLASSCO

Class : A

Capacity : 1000 ml

ID No. : VF1000/01/19

Environment :

Ambient Temperature : (23 ± 2) °CRelative Humidity : (50 ± 15) %

Air Pressure : 1007.4 mbar.

Date of Received : 21 September 2022

Date of Calibration : 26 September 2022

Date of Issue : 26 September 2022

Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID.No. Cert.No.

Due Date

Traceability

241002 65-200172-1

02 Dec 2022

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Towadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-300541-3

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
1000	1000.47

Uncertainty of measurement with in \pm 0.14 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-



Certificate of Calibration

Certificate No. : 65-300541-4

Page : 1 of 2

Submitted by : M Green Group Co.,Ltd.

188/46 Wisatueknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Cylinder
Manufacturer : GLASSCO Class : A
Capacity : 250 ml Graduation : 2 ml
ID No. : CY250/01/19

Environment : Ambient Temperature : (23 ± 2) °C
Relative Humidity : (50 ± 15) %
Air Pressure : 1007.4 mbar.

Date of Received : 21 September 2022
Date of Calibration : 26 September 2022
Date of Issue : 26 September 2022
Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units
Electronic Balance

ID No.	Cert.No.	Due Date	Traceability
241002	65-200172-1	02 Dec 2022	National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-300541-4

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
150	151.08
250	251.34

Uncertainty of measurement with in \pm 0.087 ml
This result of calibration was found accurate as shown on date and place of calibration only.
This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 65-300541-5

Page : 1 of 2

Submitted by :

M Green Group Co.,Ltd.

188/46 Wisatsuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Measuring Pipette

Manufacturer : GLASSCO

Class : A

Capacity : 10 ml Graduation : 0.1 ml

ID No. : MP10/01/19

Environment :

Ambient Temperature : (23 ± 2) °CRelative Humidity : (50 ± 15) %

Air Pressure : 1002.7 mbar.

Date of Received :

21 September 2022

Date of Calibration : 26 September 2022

Date of Issue : 26 September 2022

Calibrated by :

Areerat Sornbun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert.No.

Due Date

Traceability

241005

65-200172-4

02 Dec 2022

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 65-300541-5

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 12.14 sec.

Nominal Volume (ml)	Measuring Volume (ml)
2	1.9942
5	4.9827
10	9.9888

Uncertainty of measurement with in \pm 0.0039 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-

CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhprachasan 3 Rd., Bangpood, Pakked, Nonthaburi 11120
Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : cal@caltech.co.th, cal@yaho.com, cal@caltech.co.th@hotmail.com



NSC-TISI-TIS 17025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 65-300541-6

Page : 1 of 2

Submitted by : M Green Group Co.,Ltd.

188/46 Wisatsuknakhon 25, Pracha-Uthid Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Measuring Pipette

Manufacturer : GLASSCO Class : A

Capacity : 25 ml Graduation : 0.1 ml

ID No. : MP25/01/19

Environment : Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Air Pressure : 1002.7 mbar.

Date of Received : 21 September 2022

Date of Calibration : 26 September 2022

Date of Issue : 26 September 2022

Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. Cert. No. Due Date Traceability

241005 65-200172-4 02 Dec 2022

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.

CAL-F0031-03



CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhprachasan 3 Rd., Bangpood, Pakked, Nonthaburi 11120
Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : cal@caltech.co.th, cal@yaho.com, cal@caltech.co.th@hotmail.com

Certificate of Calibration

Certificate No. : 65-300541-6

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 12.14 sec.

Nominal Volume (ml)	Measuring Volume (ml)
5	5.0254
15	15.0847
25	25.0413

Uncertainty of measurement with in \pm 0.0067 ml.

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-

CAL-F0031-03





Certificate of Calibration

Certificate No. : 65-210457-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisakunakhon25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Weight
 Manufacturer : N/A Material : Stainless Steel
 Weight size : 1 g

ID No. : 63-210391-1

Assumed density of weight : 7950 kg / m³Assumed Air density : 1.2 kg / m³

Environment : Ambient Temperature : (20 ± 2) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1001.1 mbar

Date of Received : 21 September 2022

Date of Calibration : 28 September 2022

Date of Issue : 28 September 2022

Calibrated by : Wuttichai Swaphong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.	Cert. No.	Due Date	Traceability
E221-E2210	MM-0042-22	21 Mar 2025	National Institute of Metrology (Thailand), (NIMT)

Approved by

(Surachai Promthong)
 Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 65-210457-1 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	1 g	none	1 g -0.016 mg	± 0.023 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 65-210457-2 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
188/46 Wisasuknakhon25, Pracha-Utd Rd., Thungku, Bangkok 10140 Thailand

Equipment : Weight
Manufacturer : N/A Material : Stainless Steel
Weight size : 100 g

ID No. : 63-210391-2
Assumed density of weight : 7950 kg / m³
Assumed Air density : 1.2 kg / m³

Environment : Ambient Temperature : (20 ± 2) °C
Relative Humidity : (50 ± 10) %
Air Pressure : 1001.8 mbar

Date of Received : 21 September 2022
Date of Calibration : 28 September 2022
Date of Issue : 28 September 2022
Calibrated by : Wutichai Swapthong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights
ID No. Cert. No. Due Date Traceability
E221-E2210 MM-0042-22 21 Mar 2025 National Institute of Metrology (Thailand), (NIMT)

Approved by :
(Sirachai Promthong)
Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 65-210457-2 Page : 2 of 2

Result of Calibration : Without Adjustment
UUC Condition As-Received : Good

No.	Nominal Value	Id. Mark	Conventional mass Value	Measuring Uncertainty
1	100 g	none	100 g -0.17 mg	± 0.11 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o-o-





Certificate of Calibration

Certificate No. : 65-210457-3 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisakunakhon25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Weight

Manufacturer : N/A

Material : Stainless Steel

Weight size : 200 g

ID No. : 63-210391-3

Assumed density of weight : 7950 kg / m³Assumed Air density : 1.2 kg / m³

Environment : Ambient Temperature : (20 ± 2) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1001.8 mbar

Date of Received : 21 September 2022

Date of Calibration : 28 September 2022

Date of Issue : 28 September 2022

Calibrated by : Wuttichai Swatphong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.	Cert. No.	Due Date	Traceability
E221-E2210	MM-0042-22	21 Mar 2025	National Institute of Metrology (Thailand), (NIMT)

Approved by

(Surachai Promthong)
Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 65-210457-3 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	200 g	none	200 g +0.09 mg	± 0.17 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-





S K SALES AND SERVICE CO.,LTD.
194/56, 194/57 Thakham Rd, Sornae Dam
Bang Khun Thian Bangkok 10150
Tel : 02-417-2144 Fax : 02-417-2155



NPA-TS-17025
CALIBRATION (281)

Certificate of Calibration

Reference No. : 3484/2209-049
Customer : M GREEN GROUP CO.,LTD
Equipment : 188/46 Pracha-Uitd Rd., Thungkru,
Manufacturer : Bangkok 10140 Thailand
Model : Incubator
Serial No. : BIOBASE
ID No. : BIOBASE
Received Date : KYP1502202003
Calibrated Date : 14 September 2022
Issued Date : 14 September 2022
Environment : 16 September 2022

Certificate No. : S2209-3148
Page 1 of 2

	Minimum Value	Maximum Value
Ambient Temperature (°C)	25.1	25.8
Relative Humidity (% RH)	54	55
AC Line Voltage (VAC)	223	225

Place Of Calibration : Temperature Calibration Room
Calibrated by : Mr. Teerasak Chalvaporn

Calibration Method

In-house method : SK-WI-23 base on Thai Laboratory Accreditation Scheme Publication Reference G-20

Condition of this result of calibration

1. Reference standard instrument

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Data acquisition/Switch unit	34972A	MY44021731	L2205-1241	27 Nov 22
2) Multiplexer Module	34901A	MY41085938	L2205-1241	27 Nov 22

2. This result of calibration was found accurate as shown on date and place of calibration only

3. This certificate can be traceable to International System of Unit :

- Through Thailand Institute of Scientific And Technological Research (TISTR)

Approved by :

☒ Mr. Suphachai Saksri ☐ Mr. Phayak Tootit ☐ Miss Tantaporn Peitong

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence level of approximately 95 %

This certificate may not be reproduced other than in full except with the prior written approval of the S K Sales And Service Company Limited.

Certificate No. : S2209-3148

Page 2 of 2

Table1 General Information

Working Area (W*L*H)	45 *42 *84 cm
Fresh Air	OFF

Table2 Chamber Performance


Setting Temperature (°C)	Average Indicating Temperature (°C)	Measured Stability (± °C)	Measured Uniformity (°C)	Overall Variation (°C)
20.0	20.0	0.96	0.55	1.92

Table3 Temperature Distribution

Setting Temperature (°C)	Average Standard Reading (°C)									Uncertainty (± °C)
	No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	
20.0	19.78	19.72	19.94	19.70	19.80	19.63	19.79	19.66	19.82	1.3

Resolution : 0.1 (°C)

* Probe No. 9 is Reference Probe



- Notes :
1. The temperature stability is the one-half of greatest maximum difference of measured temperatures at any one probe.
 2. The temperature uniformity is the maximum difference of measured temperatures between of any probes and the measured temperature at the reference location which are observed at same time
 3. Overall variation is the difference of maximum and minimum measured temperatures throughout observation time.
 4. The reported uncertainty of measurement were excluded Uniformity and Stability

** End of Calibration Report **




TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES & EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-27 FAX 0-2719-9484



Cert.No.: 22CG4888
Page.: 1 of 2

Certificate of Calibration

Equipment : Burette
Capacity : 10 mL
Serial No. : -
ID. No. : 2212-0344-1
Manufacturer : Glassco
Made in : -
Submitted by : M GREEN GROUP CO., LTD.
188/46 Precha-Utd Rd., Thungkru
Bangkok 10140 Thailand
Ambient Temperature : (20 ± 2.5) °C
Relative Humidity : (50 ± 10) %
Barometric Pressure : 759 mmHg
Calibration Procedure : ASTM E 542 - 01
Calibrated by : Panward Pramklam
Approved by : 
Approved Signatory
() Ponthippa Tameyakul
() Malee Bulkruea
() Ponpan Palpin
() Srisuda Khamtha
Issue Date : 16 December 2022

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0048588



Equipment : Burette
Received Date : 13 December 2022
Condition As-Received : New Item
Calibration Date : 15 December 2022
Reference : 2212-0344WN-1
Cert.No.: 22CG4888
Page.: 2 of 2

Condition of this result of calibration

1. Reference Standard Instruments :

Instruments	Model	Serial No.	ID. No.	Certificate No.	Traceability	Due date
1) Balance	MS204TS	C226356983	140RC010	TH2068-012	METTLER	29 Sep 2023
2) Thermo-Hygraph	THDX-CE	00016540	140EC001	22H1243	NIST,NIMT	09 June 2023
3) Thermometer	-	1594592	140EC010	221181	NIMT	10 Feb 2023

This certification is traceable to SI Unit

2. The certificate is valid only to the item calibrated on date and place of calibration.
3. True value is converted to true volume at the standard temperature of 20 °C

Calibration result :

Nominal capacity (mL)	Reading (mL)	Uncertainty (± mL)	k Factor
10	9.9867	0.0038	2.00

Remark mL = cm³

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

a 1140298



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLIANG, SUANLIANG BANGKOK 10250
TEL. 0-2717-900-27 FAX. 0-2719-9434



NSC-TB-15170.25
CALIBRATION 0008

Cert.No.: 22CG4889
Page.: 1 of 2

Certificate of Calibration

Equipment : Burette
Capacity : 25 mL
Serial No. :
ID. No. : 2212-0344-2
Manufacturer : Glasco
Made in :
Submitted by : M GREEN GROUP CO., LTD.
188/46 Precha-Ud Rd., Thungkru
Bangkok 10140 Thailand
Ambient Temperature : (20 ± 2.5) °C
Relative Humidity : (50 ± 10) %
Barometric Pressure : 759 mmHg
Calibration Procedure : ASTM E 542 - 01
Calibrated by : Panward Pramklam

Approved by :
Approved Signatory

() Ponthippa Tameyakul
() Malee Butkruea
() Ponpan Paipim
() Srisuda Khamtha

Issue Date : 16 December 2022

The Uncertainties are for a confidence probability of approximately 95 %

This certificate may not be reproduced other than in full, except with the prior written

Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0048587



Equipment : Burette
Received Date : 13 December 2022
Condition As-Received : New Item
Calibration Date : 15 December 2022
Reference : 2212-0344WN-2

Cert.No.: 22CG4889
Page.: 2 of 2

Condition of this result of calibration

1. Reference Standard Instruments :

Instruments	Model	Serial No.	ID. No.	Certificate No.	Traceability	Due date
1) Balance	MS204TS	C226356983	140RC010	TH2068-012	METTLER	29 Sep 2023
2) Thermo-Hygrograph	THDX-CE	00016540	140EC001	22H1243	NIST, NIMT	09 June 2023
3) Thermometer	-	1594592	140EC010	221181	NIMT	10 Feb 2023

This certification is traceable to SI Unit

2. The certificate is valid only to the item calibrated on date and place of calibration.

3. True value is converted to true volume at the standard temperature of 20 °C

Calibration result :

Nominal capacity (mL)	Reading (mL)	Uncertainty (± mL)	k Factor
25	24.9589	0.0065	2.00

Remark mL = cm³

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-o0o-

a 1140299



QUALITY CALIBRATION CO., LTD.

235 Petchkasem 63/2 Road, Latsoong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4384
www.qcalibration.com



CERTIFICATE No : 23TI1387
REFERENCE No : 68174-5

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 110
SERIAL No : D415.0802
ID No : BQL-190
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30/32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



QUALITY CALIBRATION CO., LTD.

235 Petchkasem 63/2 Road, Latsoong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4384

CERTIFICATE No : 23TI1387

PAGE : 2 OF 2

Calibration Report


EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 110
ID No : BQL-190
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
RELATIVE HUMIDITY : 50 %RH ± 10 %RH
SN : D415.0802
CALIBRATION DATE : 13-Feb-23

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLA5 G-20 BY COMPARISON WITH CALIBRATED RTD PH100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2. REFERENCE STANDARD INSTRUMENTS :-

INSTRUMENT : DATA LOGGER WITH RTD
MODEL : HYDRA 2635A
SERIAL No : 6633300
CERTIFICATE No : 2277509
DUE DATE : 10-Jul-23
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO., LTD.
RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 5
Overall Line Voltage (V) variation : 8
Instrument Condition : Normal
Chamber Size (W*H) : 56*40*48 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
37.0	37.0	37.0	36.93	0.07	0.16	0.26
44.0	44.0	44.0	44.17	0.07	0.22	0.27

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Indicating Temp (°C)		Measured Temperature (°C) at Spread Locations									Uncertainty (±°C)
		#1	#2	#3	#4	#5	#6	#7	#8	#9	
37.0	37.0	36.97	36.95	36.94	36.96	36.92	36.91	36.90	36.84	36.84	0.25
44.0	44.0	44.21	44.23	44.09	44.23	44.13	44.21	44.15	44.07	44.07	0.36

NOTE 1: THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2: LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3: THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA. THE REPORTED UNCERTAINTY OF MEASUREMENT, WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.
END OF CALIBRATION REPORT

F-G010 REV : 02



QUALITY CALIBRATION CO.,LTD.

235 Petchkasem 63/2 Road, Lakong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 23T1386
REFERENCE No : 58174-4

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D518.0082
No : EQL-205
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-C010 REV : 02



QUALITY CALIBRATION CO.,LTD.

235 Petchkasem 63/2 Road, Lakong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

CERTIFICATE No : 23T1386

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-205
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
SN : D518.0082
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 %RH


CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2-REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER WITH RTD HYDRA 2655A 6635300
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 2

Overall Line Voltage (V) variation : 9

Instrument Condition : Normal

Chamber Size (W*H*H): 56*40*72 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
35.0	35.0	35.0	34.99	0.02	0.14	0.20
36.0	36.0	36.0	36.00	0.03	0.14	0.22
41.5	41.5	41.5	41.46	0.05	0.10	0.19

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
	#1	#2	#3	#4	#5	#6	#7	#8	#9	
35.0	34.91	34.94	34.93	34.93	34.98	35.03	35.08	35.01	35.08	0.25
36.0	35.93	35.95	35.95	35.94	36.00	36.05	36.10	36.01	36.10	0.25
41.5	41.46	41.47	41.41	41.47	41.50	41.47	41.45	41.43	41.49	0.36

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2: LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%
END OF CALIBRATION REPORT

FIGURE 102



QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksoeng, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

CERTIFICATE No: 23T1385
REFERENCE No: 68174-3

PAGE: 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D518.0240
No : EQL-218
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEDAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY : 
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksoeng, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

CERTIFICATE No: 23T1385

PAGE: 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-218
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
S/N : D518.0240
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 %RH


CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TIAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER FNO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

REFERENCE STANDARD INSTRUMENTS :-

- INSTRUMENT : MODEL : SERIAL No : CERTIFICATE No : DUE DATE :
1) DATA LOGGER WITH RTD : HYDRA 2635A : 6635300 : 2217509 : 10-Jul-23
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION:- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 2

Overall Line Voltage (V) variation : 12

Instrument Condition : Normal

Chamber Size (W*H*D): 56*40*72 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
35.0	35.0	35.0	35.00	0.05	0.15	0.26
36.0	36.0	36.0	36.00	0.04	0.16	0.26

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
	#1	#2	#3	#4	#5	#6	#7	#8	#9	
35.0	34.94	34.98	34.93	34.97	35.10	34.94	35.04	35.05	35.05	0.25
36.0	35.0	35.94	35.92	35.96	36.07	36.11	35.95	36.05	36.05	0.25

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED 'UNCERTAINTY' OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k =2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

F-G010 REV:02



CERTIFICATE No : 23T1384
REFERENCE No : 681742

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D519.0140
ID No : EQL-231

CONDITION AS RECEIVED : USED ITEM

SUBMITTED BY : TEST TECH CO., LTD.
3032 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23



CERTIFICATE No : 23T1384


PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-231
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
SERIAL No : D519.0140
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.
2. REFERENCE STANDARD INSTRUMENTS :-
 - 1) DATA LOGGER WITH RTD HYDRA 2635A
 3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
 4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
 5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
 - NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO., LTD.
- RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION
Overall Ambient Temperature around the Chamber (°C) variation : 2
Overall Line Voltage (V) variation : 8
Instrument Condition : Normal
Chamber Size (W*L*H) : 56*40*72 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation
35.0	35.0	35.0	35.03	0.08	0.17	0.32
37.0	37.0	37.0	37.02	0.08	0.22	0.32
41.5	41.5	41.5	41.54	0.04	0.13	0.20

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)		Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)	
#1	#2	#3	#4	Ref. 5	#6	#7	#8	#9				
35.0	34.92	35.02	34.99	35.01	35.03	35.06	35.09	35.10			0.25	
37.0	37.0	36.99	36.95	37.00	37.02	37.09	37.07	37.11			0.25	
41.5	41.52	41.51	41.47	41.49	41.54	41.62	41.58	41.56			0.36	

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA. THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.
END OF CALIBRATION REPORT



QUALITY CALIBRATION CO., LTD.

235 Peichasem 63/2 Road, Laksoeng, Bangkok 10160

Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

www.qcalibration.com



CERTIFICATE No: 23TI1391
REFERENCE No: 68175-1

PAGE: 1 OF 2

Certificate of Calibration

EQUIPMENT : AUTOCLAVE
MANUFACTURER : HIRAYAMA
MODEL : HVE-50
SERIAL No : 30612085166
No : EQL-155
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD.,
SAMAEDAM, BANGKHUNTHIAN, BANGKOK
10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
PONGSAK J.
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



QUALITY CALIBRATION CO., LTD.

235 Peichasem 63/2 Road, Laksoeng, Bangkok 10160

Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

www.qcalibration.com

CERTIFICATE No: 23TI1391

PAGE: 2 OF 2

Calibration Report

EQUIPMENT : AUTOCLAVE
MANUFACTURER : HIRAYAMA
ID NUMBER : EQL-155
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 30°C ± 1°C
MODEL : HVE-50
SERIAL NUMBER : 30612085166
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50%RH ± 10% RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED BASED ON BS 2646 : Part 5 : 1993 BY COMPARISON WITH CALIBRATED THERMOCOUPLE TYPE K UNDER NO LOAD CONDITION. THE THERMOCOUPLES WERE PLACED ON FIVE LOCATIONS AS SHOWN IN THE PICTURE. TWO PROBES WERE PLACES NEAR TOP AND BOTTOM WALL AND EACH PROBE WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE THIRD PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE INSTRUMENT CHAMBER. PROBE NUMBER 4 WAS ATTACHED TO THE LOAD TEMPERATURE PROBE, IF FITTED, WITHIN 20 mm OF ITS TIP. PROBE NUMBER 5 WAS PLACED IN THE CHAMBER DRAIN OR VENT WITHIN 100 mm OF ITS CONNECTION TO THE CHAMBER.

2. REFERENCE STANDARD INSTRUMENTS :

1) DATA LOGGER
INSTRUMENT : VALPROBE S350, DV35, DN94 23T0885
MODEL : S350, DV35, DN94 23T0885
2) THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
3. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
4. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:
5. NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO., LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber variation : 1.2 °C

Autoclave Condition : Normal

Chamber Size (Diameter*H) : 30 * 71 cm

CHAMBER PERFORMANCE

Controller	Average All Locations Temperature (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)	Pressure (MPa)	Holding time (min)	Operating Cycle time (min)
116	116.48	0.09	0.10	0.27	0.090	15	60
122	122.43	0.09	0.13	0.27	0.130	15	60

TEMPERATURE MEASUREMENT ACCURACY TEST(°C)

Cont Temp		Measured Temperature (°C) at Spread Locations					Uncertainty (± °C)
		#1	#2	#3	#4	#5	
116	116	116.45	116.50	116.53	116.45	116.45	±0.59
122	122	122.40	122.46	122.50	122.39	122.39	±0.59

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT OF TEMPERATURE MEASUREMENT ACCURACY TEST EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : THE STABILITY TERM IN THE UNCERTAINTY BUDGET WAS REPLACED BY THE STANDARD REPEATABILITY.

NOTE 3 : LOCATION 3 WAS REFERENCE LOCATION.

NOTE 4 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.
THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

P



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



NSC-TS-17023
CALIBRATION 008

Certificate of Calibration

Certificate No. : 23M259
Page : 1 of 2

Equipment : Standard Weight
Manufacturer : LS
Model : -
Serial No. : -
ID No. : EQL-121
Condition As-Received: Used Item
Received Date: 02 February 2023
Calibration Date: 07 February 2023
Reference: 2302-0080DN
Ambient Temperature: (23 ± 2) °C
Relative Humidity: (50 ± 15) %
Atmospheric Pressure: 1008.9 mbar

This certificate may not be reproduced other than in full,
except with the prior written approval of the head of
Corporate Services 3: Equipment Calibration and Testing Services.

Submitted by: TEST TECH CO.,LTD. (HEAD Office)

30, 32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkokhuthian, Bangkok 10150

Procedure used: Calibration were conducted using in-house calibration procedure CP-M01 according to comparison method
against standard weights on the basis of weighings at an average air density of 1.2 kg/m³ and a temperature
of 23.4 °C material density of weight is 8000 kg/m³.

Condition of this result of calibration

1.Reference standards Instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Standard weight Set (E2)	YCS31-712-00	50202965	MM-0109-22	11 Jul 2024

2.This certificate is not certified for any commercial transaction.

3.The certificate is valid only to the item calibrated on date and place of calibration.

4.This Certification is traceable to the International System of Unit maintained at:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by : Chaowalit Ritirak
Issue Date : 08 February 2023

Approved Signatory :

[] Phaiinee Prabpalpat
[x] Sura Suwamasri
[] Chaowalit Ritirak



Cert No.: 23M259
Page: 2 of 2

Result of calibration Without adjustment

Nominal Value	Conventional mass	Uncertainty of Measurement (±)	Maximum Permissible error (±)
50 g	50.00015 g	0.10 mg	0.30 mg

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-000-



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 14, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



CALIBRATION 0098

Certificate of Calibration

Certificate No. : 23M260

Page : 1 of 2

Equipment : Standard Weight
Manufacturer :
Model :
Serial No. :
ID No. : EQL-258
Condition As-Received: Used Item
Received Date: 02 February 2023
Calibration Date: 07 February 2023
Reference: 2302-0080DN
Ambient Temperature: (23 ± 2) °C
Relative Humidity: (50 ± 15) %
Atmospheric Pressure: 1012 mbar

Submitted by: TEST TECH CO.,LTD. (HEAD Office)
30, 32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkhunthian, Bangkok 10150

Procedure used: Calibration were conducted using In-house calibration procedure CP-M01 according to comparison method against standard weights on the basis of weighings at an average air density of 1.2 kg/m³ and a temperature of 23.6 °C material density of weight is 8000 kg/m³.

Condition of this result of calibration

1. Reference standards Instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Standard weight Set (E2)	YCS31-712-00	50202965	MM-0108-22	11 Jul 2024

2. This certificate is not certified for any commercial transaction.

3. The certificate is valid only to the item calibrated on date and place of calibration.

4. This Certification is traceable to the International System of Unit maintained at:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by : Chaowalit Ritthirak
Issue Date : 08 February 2023

Approved Signatory :

[] Phalinee Prabpaipal
[x] Sure Suwannasri
[] Chaowalit Ritthirak



Cert No. : 23M260

Page: 2 of 2

Result of calibration Without adjustment

Nominal Value	Conventional mass	Uncertainty of Measurement (±)	Maximum Permissible error (±)
2 kg	2.0000034 kg	3.0 mg	10 mg

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-o-o-

B 0307756

a 1146232



QUALITY CALIBRATION CO., LTD.
235 Petchkasem 63/2 Road, Laksoeng, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 22T7648
REFERENCE No : 65843-2

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : WATER BATH
MANUFACTURER : MEMMERT
MODEL : WPE 45
SERIAL No : L711.0024
ID No : EQL-147
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEDAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 14-Jul-22

APPROVED BY :
ISSUED DATE : 15-Jul-22
RECEIVED DATE : 14-Jul-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-C010 REV : 02



QUALITY CALIBRATION CO., LTD.
235 Petchkasem 63/2 Road, Laksoeng, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

CERTIFICATE No : 22T7648

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : WATER BATH
MANUFACTURER : MEMMERT
ID NUMBER : EQL-147
RECEIVED DATE : 14-Jul-22
AMBIENT TEMPERATURE : 24 °C ± 1 °C
MODEL : WPE 45
SERIAL NUMBER : L711.0024
CALIBRATION DATE : 14-Jul-22
RELATIVE HUMIDITY : 50 %RH ± 10 % RH


CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO ASTM E715-80 (REAPPROVED 2001) BY COMPARISON WITH CALIBRATED RTD. THE PROBES WERE PLACED ON FIVE POINTS AND LOCATED ONE PROBE IN EACH OF THE FOUR CORNERS OF THE BATH AND PLACED THE FIFTH RTD WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE WATER VOLUME (REFERENCE LOCATION) UNDER NO LOAD CONDITION.

2. REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER WITH RTD
INSTRUMENT MODEL 2625A
SERIAL No 6603614
CERTIFICATE No 22T7514
DUE DATE 05-Jul-23
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO., LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Variation of Ambient Temperature around the Bath (°C) : 0.9
Overall Variation of Line Voltage (V) : 3
Instrument Condition : Normal
Bath Inner Size (W*L*H) : 60*42*24 cm

PROBE INSTALLATION POSITION IN THE BATH

BATH PERFORMANCE

Calibration Point	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
41.5	41.5	41.5	41.54	0.05	0.03	0.12
44.5	44.5	44.5	44.50	0.07	0.02	0.15

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations				Uncertainty (± °C)
		#1	#2	#3	#4	
41.5	41.5	41.54	41.55	41.52	41.55	0.14
44.5	44.5	44.48	44.51	44.50	44.51	0.15

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE BATH.

NOTE 2 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT QC LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

F-C010 REV 02



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T. Banpa, A. Kaengkhoh, Saraburi 18110, Thailand.

Saraburi Tel : +66 3627 3096 Fax : +66 3627 3100

Bangkok Tel : +668 9205 6851, +669 8247 2360

Website : www.scieco.co.th E-Mail : calibrate@scg.com



Certificate No. T230022

Page 1 of 4

Certificate of Calibration

Equipment : Chamber (Cooling Room)

Manufacturer : -

Model : -

Serial No. : -

Customer Code : EQL-167

ID No. : T1447A1

Customer : Test Tech Co.,Ltd

30, 32 Rama II Soi 63, Rama II Rd., Samaedam,

Bangkhunthian Bangkok 10150

Customer Location : LABORATORY FLOOR 3

Date of Receipt : 13 January 2023

Calibrated By : Suiiar Nakrakred (Site Calibration Manager)

Approved By : [Redacted] / Boonchai Suriyawong (Site Calibration Manager)

Date of Issue : 24 JAN 2023

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrological Center.

FM-L14118/31-08-64



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T. Banpa, A. Kaengkhoh, Saraburi 18110, Thailand.



Certificate No. T230022

Page 2 of 4

Calibration Report

Equipment : Chamber (Cooling Room)

Date of Calibration : 18 January 2023

Environment : Temperature : 25.0-27.2 °C

Line Voltage : 221.9-227.3 V

Relative Humidity : 55 - 65 %RH

Condition of this results of calibration :

1. This equipment was calibrated by insert nine standard thermocouples type T into its chamber, the other one standard thermocouples type T use for ambient temperature measurement. The calibration was done in according to WI-720 (based on ASTM E145-94 (Reapproved 2001) and AS2853-1986).

All data show below were final values and the initial data from customer request. The temperature scale used was based on ITS - 90.

2. Reference Standard Instrument :

Instrument	Model	Instrument No.	Certificate No.	Due Date
TC	TYPE T	TN141-TN150	T222123	5 October 2023
TC	TYPE T	TN151-TN160	T222123	5 October 2023
DATA LOGGER	34970A	T150	T222123	5 October 2023

3. This certificate is traceable to :

National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244)

4. Condition of calibrated item : good

Equipment Description :

Time Constant : 2 Hour 8 Minute At 3 °C

Fresh Air Damper : ☐ Open ☐ Min ☐ Medium ☐ Max

☐ Close ☒ Not Available

5. Adjustment :

() without adjustment (X) after adjustment

Approved By



FM-L15117/15-05-63



Metrological Center
SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.




NSG-TSLTS 17025
CALIBRATION 0244

Certificate No. T230022

Page 3 of 4

Calibration Report

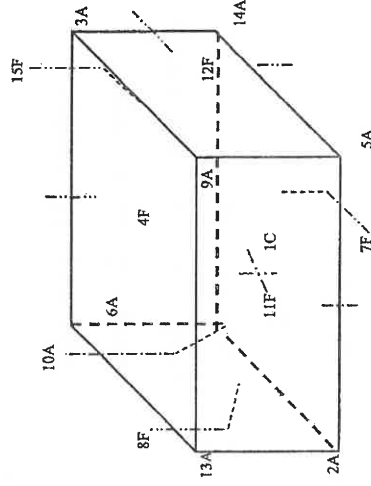

C = Centre, F = Centre of Face, A = Corner, E = Centre of Edge

1C	=	TN141
2A	=	TN142
3A	=	TN143
4F	=	TN144
5A	=	TN145
6A	=	TN146
7F	=	TN147
8F	=	TN148
9A	=	TN149
10A	=	TN150

11F	=	TN151
12F	=	TN152
13A	=	TN153
14A	=	TN154
15F	=	TN155

Approved By _____

FM-LJ5117/15-05-63



Metrological Center
SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.



NSG-TSLTS 17025
CALIBRATION 0244

Certificate No. T230022

Page 4 of 4

Calibration Report

Measurement Results:

Average Standard Reading at each position (°C)										
Calibration Point	TN141	TN142	TN143	TN144	TN145	TN146	TN147	TN148	TN149	TN150
3	2.93	2.77	2.79	2.26	3.04	3.39	2.91	3.05	3.54	2.95
	TN151	TN152	TN153	TN154	TN155					
	3.32	3.28	3.00	2.96	2.90					

Chamber (Cooling Room)			Temperature Distribution				
Setting (°C)	Reading (°C)		Average (°C)	Stability (± °C)	Uniformity (°C)	Uncertainty (± °C)	Coverage Factor k
	Min, Max	Average					
3.0	2.9, 3.1	3.0	3.01	0.47	1.04	0.98	2.00

* The quoted uncertainty exclude "uniformity"

The calibration result apply only the above calibrated item.

The result of test was found accurate as shown on date and place of test only.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k which for a t-distribution, providing a level of confidence of approximately 95 %.

Approved By _____

FM-LJ5117/15-05-63



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.

Saraburi Tel : +66 3627 3096 Fax : +66 3627 3100

Bangkok Tel : +668 9205 6851 , +669 8247 2360

Website : www.scieco.co.th E-Mail : calibrate@scg.com



NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate No. T230121

Page 1 of 4

Certificate of Calibration

Equipment : Chamber (Cooling Room)
Manufacturer : -
Model : -
Serial No. : -
Customer Code : EQL-181
ID No. : T0399A5
Customer : Test Tech Co.,Ltd
30, 32 Rama II Soi 63, Rama II Rd., Samaedam,
Bangkhunthian Bangkok 10150
Customer Location : LABORATORY FLOOR 4
Date of Receipt : 26 January 2023
Calibrated By : Sujjar Nakrakred (Site Calibration Manager)
Approved By : [Redacted] / Boonchai Suriyawong (Site Calibration Manager)
Date of Issue : 01 FEB 2023

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrological Center.

FM-L14118/31-08-64



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.

NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate No. T230121

Page 2 of 4

Calibration Report

Equipment : Chamber (Cooling Room)
Date of Calibration : 30 January 2023
Environment : Temperature : 25.0-27.2 °C
Line Voltage : 221.9-227.3 V
Relative Humidity : 55 - 65 %RH

Condition of this results of calibration :

1. This equipment was calibrated by insert nine standard thermocouples type T into its chamber , the other one standard thermocouples type T use for ambient temperature measurement . The calibration was done in according to WI-T20 (based on ASTM E145-94 (Reapproved 2001) and AS2853-1986) .

All data show below were final values and the initial data from customer request . The temperature scale used was based on ITS - 90 .

2. Reference Standard Instrument :

Instrument	Model	Instrument No.	Certificate No.	Due Date
TC	TYPE T	TN141-TN150	T222123	5 October 2023
TC	TYPE T	TN151-TN160	T222123	5 October 2023
DATA LOGGER	34970A	T150	T222123	5 October 2023

3. This certificate is traceable to :

National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244.)

4. Condition of calibrated item : good

Equipment Description :

Time Constant : 1 Hour 30 Minute At 3 °C
Fresh Air Damper : ☐ Open ☐ Min ☐ Medium ☐ Max
☐ Close ☒ Not Available

5. Adjustment : () without adjustment (X) after adjustment

Approved By : [Redacted]

FM-L15117/15-05-63



Metrological Center
SCI ECO Services Company Limited
33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.




NSC-TIS-TIS 17025
CALIBRATION 0244

Certificate No. T230121

Page 3 of 4

Calibration Report

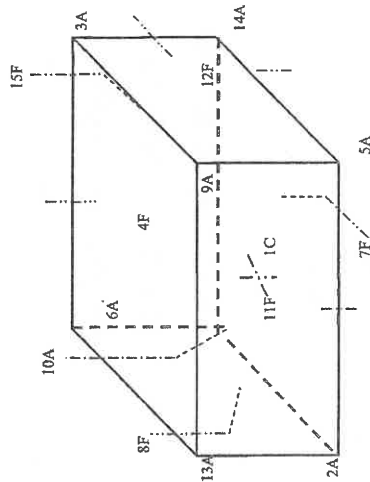

C = Centre, F = Centre of Face, A = Corner, E = Centre of Edge

1C	=	TN141
2A	=	TN142
3A	=	TN143
4F	=	TN144
5A	=	TN145
6A	=	TN146
7F	=	TN147
8F	=	TN148
9A	=	TN149
10A	=	TN150

11F	=	TN151
12F	=	TN152
13A	=	TN153
14A	=	TN154
15F	=	TN155

Certificate No. T230121

Page 4 of 4

Calibration Report

Measurement Results:

Average Standard Reading at each position (°C)											
Calibration Point	TN141	TN142	TN143	TN144	TN145	TN146	TN147	TN148	TN149	TN150	
	3	2.84	2.89	3.01	3.07	3.13	3.19	3.04	2.99	3.15	2.94
		TN151	TN152	TN153	TN154	TN155					
	2.99	2.99	3.14	2.85	2.88						

Chamber (Cooling Room)			Temperature Distribution					Coverage Factor <i>k</i>
Set point (°C)	Reading (°C)		Average (°C)	Stability (± °C)	Uniformity (°C)	Uncertainty (± °C)		
	Min ,Max	Average						
3.0	2.8 , 3.1	3.0	3.01	0.48	0.93	0.99	2.00	

The quoted uncertainty exclude "uniformity"
The calibration result apply only the above calibrated item.
The result of test was found accurate as shown on date and place of test only.
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k which for a t-distribution, providing a level of confidence of approximately 95 %.

Approved By



Approved By





TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
53/44 PATTANAKARN ROAD SOI 18, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



NIST-78B-175723
CALIBRATION 0008

Certificate of Calibration

Certificate No. : 22H2197
Page : 1 of 2

Equipment: Dial Thermo-Hygrometer
Manufacturer: Barigo
Model: -
Serial No.: -
ID No.: EQL-064
Condition As-Received: Used Item
Received Date: 17 October 2022
Calibration Date: 25 October 2022
Reference: 2210-0461DN
Ambient Temperature: (25 ± 3) °C
Relative Humidity: (50 ± 20) %

This certificate may not be reproduced other than in full,
except with the prior written approval of the head of
Corporate Services 3: Equipment Calibration and Testing Services.

Submitted by: TEST TECH CO.,LTD. (HEAD OFFICE)

30, 32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkhunthian, Bangkok 10150

Procedure used: Calibration were conducted using in-house calibration procedure CP-H02 according to comparison
with standard chilled mirror sensor for humidity measurement function and comparison with standard
temperature probe for temperature measurement function into humidity / temperature chamber.

Condition of this result of calibration

1. Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Chilled-Mirror Hygrometer	Dew Master	41282	19848	03 Nov 2022
2) Handheld Thermometer With Sensor	1523	3240076	221248	02 Mar 2023

2. The certificate is valid only to the item calibrated on date and place of calibration.

3. This Certification is traceable to the International System of Unit maintained at:-

-National Institute of Standards and Technology (NIST) , The United States of America

-National Institute of Metrology Thailand (NIMT)

Calibrated by: Surasit Phansudnoi
Issue Date: 01 November 2022

Approved Signatory:

[✓] Chakrit Waewanjua
[] Ponthippa Tameyakul
[] Viporn Tantayawuthi



Cert. No.: 22H2197
Page: 2 of 2

Result of Calibration:-				
Function:	Reference Temperature (°C)	Humidity Standard Humidity (%R.H.)	Without Adjustment UUC* Reading (%R.H.)	Uncertainty of Measurement (±%R.H.)
	25.0	30.1	29.0	1.5
	25.0	40.1	39.0	1.5
	25.0	50.1	50.0	1.7
	25.0	60.0	61.0	1.7
	25.0	75.2	76.5	1.7

Result of Calibration:-				
Function:	Temperature Standard Temperature (°C)	Without Adjustment UUC* Reading (°C)	Error (°C)	Uncertainty of Measurement (±°C)
	15.013	15.0	-0.013	0.72
	20.023	20.0	-0.023	0.72
	25.019	25.0	-0.019	0.72
	30.009	30.0	-0.009	0.72

UUC* : Unit Under Calibration

The reported uncertainty of measurement was base on standard uncertainty multiplied
by coverage factor k = 2.00, providing confidence level approximately 95%.

-000-

a 1133179



QUALITY CALIBRATION CO., LTD.
235 Petchkasem 63/2 Road, Lakseang, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 22M9915
REFERENCE No : 66549-2

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : DIGITAL BALANCE
MANUFACTURER : SARTORIUS
MODEL : BP210S
SERIAL No : S0736477
ID No : EQL-008
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
3032 RAMA II SOI 63, KAMA II RD.,
SAMAEDAM, BANGKHUNTHIAN, BANGKOK
10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 15-Sep-22
APPROVED BY :
ISSUED DATE : 21-Sep-22
RECEIVED DATE : 15-Sep-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV 02



QUALITY CALIBRATION CO., LTD.
235 Petchkasem 63/2 Road, Lakseang, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

CERTIFICATE No : 22M9915

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : DIGITAL BALANCE
MANUFACTURER : SARTORIUS
MODEL : BP210S
ID No : EQL-008
AIR PRESSURE : 1011mmHg ± 1mmHg
AMBIENT TEMPERATURE : 21°C ± 1°C
CONDITION OF THIS RESULTS OF CALIBRATION :
1. THIS INSTRUMENT WAS CALIBRATED BY ACCORDING TO UKAS LAB 14 EDITION 6:2019 BY USING KNOWN WEIGHT
STANDARD WEIGHT. THE BALANCE WAS ADJUSTED USING INTERNAL WEIGHT TO ADJUST. THE BALANCE HAS NO
ZERO TRACKING FUNCTION. REPEATABILITY WAS MEASURED BY USING 10 REPEATED MEASUREMENTS. LINEARITY
WAS MEASURED COVERING 10 POINTS. EVENLY SPREAD OVER THE RANGE. THE INSTRUMENT WAS SET ZERO BEFORE
PERFORMING THE LINEARITY TEST. OFF-CENTER LOADING WAS MEASURED BY USING STANDARD WEIGHTS PLACED
ON THE PAN AND MOVED TO VARIOUS POSITIONS ON THE PAN. THE INTERNAL WEIGHT WAS CHECKED BY USING
2. REFERENCE STANDARD INSTRUMENTS :-


INSTRUMENT MODEL SERIAL No CERTIFICATE No DUE DATE
1) STANDARD WEIGHT SET E2 QK-1451 02210415 09-Feb-23
2) STANDARD WEIGHT E2 15843 02210419 10-Feb-23
3) STANDARD WEIGHT E2 QK-1349 M21032358 26-Mar-23
4. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH CENTRAL BUREAU OF WEIGHTS&MEASURES

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

1. ZERO SETTING FUNCTION : NORMAL
2. TARE FUNCTION : NORMAL
3. REPEATABILITY OF READING AT 200 g WAS 0.000063 g
4. DEPARTURE FROM NOMINAL VALUE / LINEARITY

NOMINAL VALUE (g)	BALANCE READING (g)	CORRECTION (g)	UNCERTAINTY (±g)
0.00	0.0000	0.0000	0.000090
0.10	0.1000	0.0000	0.000090
0.20	0.2000	0.0000	0.000090
0.50	0.5000	0.0000	0.000091
1.00	1.0000	0.0000	0.000091
2.00	2.0000	0.0000	0.000092
5.00	5.0000	0.0000	0.000093
10.00	10.0000	0.0000	0.000095
20.00	19.9999	0.0001	0.00010
50.00	49.9998	0.0002	0.00012
100.00	99.9998	0.0002	0.00019
200.00	199.9993	0.0007	0.00032

5. OFF CENTER LOADING ERROR



POINT	READING (g)
1	99.9997
2	99.9996
3	99.9995
4	99.9997
5	99.9998
OFF-CENTER LOADING	0.0002

6. INTERNAL WEIGHT ERROR : 0.0006666666666666376 g
NOTE: THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT PRODUCTION AREA
THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A
COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%
END OF CALIBRATION REPORT

F-G010 REV 02



CERTIFICATE No : 22T9917
REFERENCE No : 66549-4

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : HOT AIR OVEN.
MANUFACTURER : MEMMERT
MODEL : UFE 500
SERIAL No : G508.0791
ID No : EQL-128
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : CHAICHARN CH.
CALIBRATION DATE : 15-Sep-22

APPROVED BY :
ISSUED DATE : 21-Sep-22
RECEIVED DATE : 15-Sep-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



CERTIFICATE No : 22T9917

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UFE 500
ID No : EQL-128
RECEIVED DATE : 15-Sep-22
AMBIENT TEMPERATURE : 25°C ± 1°C
SN : G508.0791
CALIBRATION DATE : 15-Sep-22
RELATIVE HUMIDITY : 51%RH ± 10%RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO CLASS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 4 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.


2. REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER WITH RTD : HYDRA 2635A
MODEL : 6635300
SERIAL No : 22T7509
CERTIFICATE No : 22T7509
DUE DATE : 10-JUL-23
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDES LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT :-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO., LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 1 °
Overall Line Voltage (V) variation : 3
Instrument Condition : Normal
Chamber Size (W*H*F) : 56*40*48 cm



CHAMBER PERFORMANCE

Calibrates Point (°C)	Average All Position Temp. (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
104.0	104.32	0.15	0.62	1.02
180.0	180.09	0.29	1.23	1.86

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
		#1	#2	#3	#4	#5	#6	#7	#8	#9	
104.0	104.0	104.23	103.89	104.54	104.02	104.33	104.63	104.42	104.48	104.39	0.38
180.0	180.0	180.16	179.13	180.46	179.35	179.79	180.66	180.36	180.29	180.61	1.1

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA. THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2 PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

F-G010 REV : 02



QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 22T9918
REFERENCE No : 66549-5

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UFE 500
SERIAL No : G512.2005
ID No : EQL-161
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : CHAICHARN CH.
CALIBRATION DATE : 15-Sep-22

APPROVED BY :
ISSUED DATE : 21-Sep-22
RECEIVED DATE : 15-Sep-22

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

CERTIFICATE No : 22T9918

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UFE 500
ID No : EQL-161
RECEIVED DATE : 15-Sep-22
AMBIENT TEMPERATURE : 25 °C ± 1 °C
CALIBRATION DATE : G512.2005
RELATIVE HUMIDITY : 51 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO ILAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.


REFERENCE STANDARD INSTRUMENTS :

- INSTRUMENT : MODEL : SERIAL No : CERTIFICATE No : DUE DATE :
1) DATA LOGGER WITH RTD : HYDRA 2635A : 7301307 : 22T7508 : 10-Jul-23
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDES LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 1
Overall Line Voltage (V) variation : 8
Instrument Condition : Normal
Chamber Size (W*L*H) : 56*40*48 cm



CHAMBER PERFORMANCE				Overall Variation (°C)	
Calibrate Point (°C)	Average All Position Temp. (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)		
104.0	103.98	0.12	0.91	1.00	
120.0	119.98	0.13	1.06	1.13	
140.0	140.09	0.13	1.35	1.39	
150.0	150.03	0.14	1.38	1.49	

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Indicating		Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)	
Temp (°C)		#1	#2	#3	#4	#5	#6	#7	#8	#9		
104.0	104.0	104.07	104.09	104.21	103.93	103.79	103.99	103.78	104.36	103.78	0.38	
120.0	120.0	120.03	120.13	120.34	119.94	119.53	119.69	119.94	119.71	120.48	0.38	
140.0	140.0	140.15	140.30	140.44	140.10	139.56	139.74	140.03	139.80	140.72	0.46	
150.0	150.0	150.04	150.25	150.54	150.35	149.46	149.55	149.83	149.60	150.67	0.46	

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.
THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%
END OF CALIBRATION REPORT

F-G010 REV : 02



Certificate of Calibration

Equipment: TURBIDIMETER
Model: 2100N
Serial No. (or ID.): 970400003415 (EQL-024)
Manufacturer: HACH
Condition: In Condition

Certificate No.: C08220157
Issued Date: 21 September 2022
Job No.: KSPR2211615
Page: 1 of 2

Customer: TEST TECH CO., LTD.
30,32 Rama II Sol 63, Rama II Rd.,
Samaedam, Bangkhuntien Bangkok 10150 Thailand

Environment Condition: Temperature 23 °C ± 2 °C
Humidity 50 %RH ± 15 %RH

Calibration Place: Environment Laboratory, DKSH Technology Limited,
1194 Soi Wachirathansathit 57, Sukhumvit 101/1 Rd.,
Bangchak, Prakhong, Bangkok 10260 Thailand

Calibration By: Mr.Wasan Nuchnabee
Calibration Date: 21 September 2022
The Method used: In house method, CAL-WI-23, base on Hach Manufacturer Method 8195
Traceability: This certificate is traceable to Primary standard Fromazin and StabCal accepted by United States Environmental Protection Agency (EPA) through Hach Company
Certificate No. A1075 , A1074 , A1091 , A1074 , A1074

(Mr. Wasan Nuchnabee)
Person in charge

(Mr. Thalemgkeat Pongngam)
Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to International or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

Unit: 0.0001 NTU
DKSH Technology Limited
2333 Mutangruiyuen Road, Mutangruiyuen 10260
Bangkok, Thailand
Phone: +66 2838 7000 Email: info.calibration@dksh.com Website: www.dksh.com/identific-tion

Delivering Growth - In Asia and Beyond.

CAL-FM-C08-08-20 Jul 2022



Certificate No.: C08220157

Page 2 of 2

Calibration Results:

Before Adjustment

Std Turbidity (NTU)	UUC Reading	Correction	Deviation	Uncertainty
0.060	0.048	0.012	0.0004	0.070
20.40	20.1	0.30	0.05	1.0
206.0	204	2.0	0.5	10
1020.0	1013	7.0	1.2	50
4065.0	3875	190.0	1.8	200

After Adjustment

Std Turbidity (NTU)	UUC Reading	Correction	Deviation	Uncertainty
0.060	0.057	0.003	0.0015	0.070
20.40	20.5	-0.10	0.04	1.0
206.0	206	0.0	0.5	10
1020.0	1018	2.0	0.5	50
4065.0	4064	1.0	0.5	200

The End of Certificate

Unit: 0.0001 NTU
DKSH Technology Limited
2333 Mutangruiyuen Road, Mutangruiyuen 10260
Bangkok, Thailand
Phone: +66 2838 7000 Email: info.calibration@dksh.com Website: www.dksh.com/identific-tion

Delivering Growth - In Asia and Beyond.

CAL-FM-C08-08-20 Jul 2022

การดูแลบำรุงรักษาเชิงป้องกัน

Preventive Maintenance



บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด
ฝ่ายบริการหลังการขาย
โทร 0 2 639 7000 E-mail: sales.th@dksh.com
ฝ่ายขายและการตลาด
โทร 0 2 639 7000 E-Mail : marketing.th@dksh.com
Website : www.dksh.co.th/technology/scientific-thailand

๗15

ใบรับรองการทวนสอบ "เครื่องกลั่นไนโตรเจน"
(Calibration Certificate of Distillation Unit VAPODEST
VAP20, VAP30s)

เงื่อนไขการให้บริการ Preventive Maintenance

บริษัทฯ จะส่งวิศวกรผู้ชำนาญ เพื่อให้บริการตามขอบข่ายของการบริการ เฉพาะ ในวันและเวลา ราชการ หากมีความประสงค์ที่จะรับบริการนอกเหนือจากวัน เวลา ราชการ (วันหยุดเสาร์ – อาทิตย์ หรือวันหยุด นักชดถุภ) บริษัทฯ จะคิดค่าบริการเพิ่มเติมตามอัตราที่กฎหมายแรงงานกำหนดไว้

ขอบข่ายการบริการ

- ตรวจสอบสภาพการทำงานของถังต่าง ๆ ของเครื่องมือ
- ทดสอบประสิทธิภาพการทำงานของถังของเครื่องมือ
- รายงานผลการตรวจสอบเครื่องมือ

หมายเหตุ

- ราคาไม่รวมค่าบริการซ่อม หรือ เปลี่ยนอะไหล่ที่ชำรุดเสียหาย หรือหมดสภาพการใช้งาน
- ในการนี้ผู้รับบริการอยู่นอกเขตพื้นที่ให้บริการ บริษัทฯ จำเป็นต้องคิดค่าใช้จ่ายเพิ่มเติม ให้แก่ ค่าเดินทาง เป็นต้น
- บริษัทฯ ขอสงวนสิทธิ์ในการเปลี่ยนแปลงราคา โดยไม่แจ้งให้ทราบล่วงหน้า

ช่องทางการติดต่อ



DKSH

DKSH Technology Limited (บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด)
เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260
เลขประจำตัวผู้เสียภาษี 010-555-001-4547 (สำนักงานใหญ่)



Call center 0 2 639 7000



DKSH Scientific



www.dksh.com/dkshscientific-thailand



marketing.th@dksh.com



@dkshscientific

Preventive Maintenance Contract

จำนวนใบการบำรุงรักษาบริการ 1 ครั้ง ต่อ ปี
 ครึ่งที่ 1 วันที่ 23_Mar_2023

รายละเอียดผู้ให้บริการ

หน่วยงาน	บริษัท เทค จำกัด
ที่อยู่	30,32 ซอยพระรามที่ 2 ซอย 63 ถนนพระรามที่ 2 แขวงสามยุค เขตบางขุนเทียน กรุงเทพมหานคร 10150
โทรศัพท์	0-2893-4211-7 แฟกซ์ 0-2893-4218

ผู้ติดต่อ

ชื่อ - นามสกุล	คุณวิภา วิเศษสังข์
ตำแหน่ง	หัวหน้าส่วน
โทรศัพท์	0-2893-4211-7 เบอร์มือถือ 0-2893-4218
E-mail	Lab_center@testtech.co.th

รายละเอียดผู้ให้บริการ


บริษัท ดีเคเอส อช จำกัด (ฝ่ายบริการลูกค้า) (สำนักงานใหญ่) เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260 โทรศัพท์ 0 2 693 7000 Email: siriporn.sy@dksh.com Line ID : siriporn3007 เจ้าหน้าที่ประสานงาน : อรุณพร อดุลยกุล โทรศัพท์ 090 678 6924, 02 301 7467	
เจ้าหน้าที่ให้บริการ	นายอัฐพร อดุลยกุล
ตำแหน่ง	Specialist, Technical Service
โทรศัพท์	0938138736 แฟกซ์ -
E-mail	Jirayudje@dksh.com

ลงนามผู้ให้บริการ	ลงนามผู้ให้บริการ
ตัวจริง (.....)	ตัวจริง (.....นายอัฐพร อดุลยกุล.....)
ตำแหน่ง	ตำแหน่ง
วันที่ / ประทับตราบริษัท	วันที่ / ประทับตราบริษัท 28/3/2023

JOB No: LSP2302591..... MODEL: Van30..... S/N: 003718.....


Part : Operational Qualification (OQ)

ตรวจสอบสภาพพร้อม
 FRONT

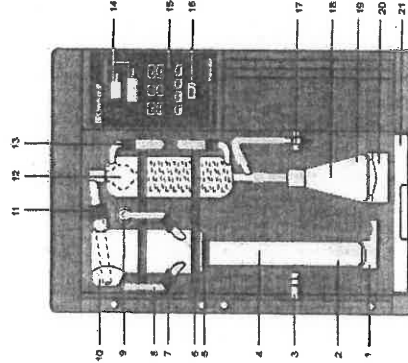

	Pass	Fail	N/A	Remark
1. Quick clamping device with wedge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2. Kjeldatherm digestion tube	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3. Holder for steam inlet tubing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4. PTFP-Inlet tubing, steam	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5. Viton-cone	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6. Clamping for glassware	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7. Screw cap GL18 with silicone seal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8. PTFP-Inlet tubing, NaOH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9. PP-Distributor with PP-threaded joint	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10. Distribution head, glass	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11. Screw cap GL32 with silicone seal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12. Distillation condenser	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13. Screw cap GL14 with plastic screw connection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14. Display	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15. Keyboard, chemical-resistant	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16. Main switch, green	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
17. Ventilation valve	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18. Distillate outlet tubing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
19. Erlenmeyer flask	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20. Platform	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21. Drip tray	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

REAR



	Pass	Fail	N/A	Remark
1. Diaphragm pump NaOH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2. Diaphragm pump H ₃ BO ₃	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	vap 40 only
3. Diaphragm pump H ₂ O for steam generator	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4. Diaphragm pump H ₂ O for sample	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
5. Peristaltic pump for suction sample	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
6. Peristaltic pump for suction receiver	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	option
7. Pinch-solenoid valve, steam	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8. Magnetic valve with pressure control	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9. Pinch-solenoid valve, shut-off	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10. Verprene-tubing 4x8 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11. Verprene-tubing 4x8 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
12. Non-return valve for diaphragm pumps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13. Tubing reduction PP 51x1 (0x3 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
14. Silicone tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	vap 40 only
15. Silicone tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	option
16. Silicone-tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
17. Verprene-tubing 8x12 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
18. Verprene tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
19. Silicone tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20. Ventilation glass	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21. Novoprene-tubing 4.8x8 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
22. Tubing reduction	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23. Silicone tubing 6x10 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
24. PP-distributor with PP-thread	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
25. SKT-valve (built in with brass fitting)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
26. Silicone tubing 8x16x80 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
27. Steam generator	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
28. PTFE-inlet tubing NaOH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
29. Silicone tubing 8x16 for cooling water inlet	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30. Silicone tubing 8x16 for cooling water outlet	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
31. Viton-tubing 6x12*50 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
32. Silicone tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	option

รายละเอียดการตรวจสอบ

ขั้นตอนการบริการ

ตรวจสอบระบบไฟฟ้า (Electrical Test)

- ตรวจสอบทางไฟฟ้าของเครื่องกับกราวด์
- กระแสไฟฟ้าที่ใช้รวม

ตรวจสอบสภาพเครื่อง (Optical Test)

- Main cable
- Electric wiring
- Pumps
- Distribution Head
- Condensor
- Steam generator
- Tubing
- Viton cone

ตรวจสอบ Function การทำงาน (The Function Test)

- ระบบทั้งเครื่องและควบคุมความดันของ Steam
- ระบบการเดินน้ำเข้า Sample Tube
- ระบบการเติม Na OH
- ระบบการ Suction ทั้ง Sample Tube และ Receiver

รายละเอียดการให้ผลการ

1. TECHNICAL DATA

Main Supply 220 volt + 10% 50 Hz with ground
Nominal current

Pass ☒ Fail ☐ N/A ☐
Remark
..... 6.3.....

1.1 COOLING WATER BATH

Temperature 15-20 °C
Cooling Water Outlet
Control Temperature

Pass ☒ Fail ☐ N/A ☐
Remark
.....

1.2 OPTICAL TEST VAP..30..

Screw cap GL14
Screw cap GL18
Screw cap GL32
Distillation Head
Condensor
Viton Cone
Ventilation Valve
Micro Switch Sample

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

2. SYSTEM COOLING-WATER INLET

Cooling Water Inlet
Cooling Water Outlet
Magnetic valve

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....

3.SYSTEM CONTROL

Key Board
Display
Program
Adding H₂O
Adding NaOH
Adding H₃PO₄
Suction Sample

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
vap 30,40 only
vap 40 only
vap 30,40 only

4.SYSTEM DISTILLATION

Boiler
Level Sensor
Nonreturn-Tubing
Solenoid Valve Shut-Off
Solenoid Valve Steam
Excess Pressure Detector
Ventilation Valve
Heater

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

5. PUMP

Pump H₂O Steam
- Non-Return Valve
Pump H₂O Sample
- Non-Return Valve
Pump NaOH
- Non-Return Valve
Pump H₃BO₃
- Non-Return Valve
Pump Suction

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

6. The Following Program Run :

Addition H₂O 0-99 sec.
Addition NaOH 0-99 sec.
Addition H₃PO₄ 0-99 sec.
Reaction Time 0-99 min.
Distillation Time 0-99 min
Steam Capacity 30%-100%
Suction Time 0-99 sec.
The instrument is in perfect technical shape

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

Remark :

.....
.....

Part : ข้อมูลสนับสนุนเทคนิค (General Technical Support)
การบำรุงรักษาทั่วไป (Basic maintenance)

Cleaning

Glass parts and suction pump should be cleaned before long periods of non-usage (i.e. holidays). This way blockages caused by crystalline deposits are avoided.

The following program should be run:

Addition H_2BO_3 :	0	s
Addition H_2O :	13	s
Addition NaOH:	0	s
Reaction time:	0	s
Distillation time:	7	min.
Steam capacity:	100	%
Suction time:	20	s

Place an empty digestion tube and an Erlenmeyer flask into position, and start the program.

In case of extreme deposits in the glassware you can clean the system by putting about 10 ml of sulphuric acid into the digestion tube.

Error Code

The micro-processor continually surveys all the functions of the distillation system. As soon as an error arises it is shown on the display and accompanied by an acoustic signal.

Error message	Measures
No tap water	Check cooling water inlet for blockages. Ensure the tap is turned on
No sample tube	Insert tube
Check chemicals	Check set of tanks
Low water Press=Enter	Check the water inlet distilled H_2O
Filling steam generator	This message disappears as soon as steam generator is filled

After the above mentioned errors are corrected, the following message is displayed.

Error message	Measures
Stop Prog.No.x Continue=Enter	Enter=continue of interrupted program Reset=Standby-mode

Other error messages

Error message	Measures
Wait for steam	Message disappears as soon as standby is reached
Add sol. > 1min Continue=Enter	Check programming Enter=continue of interrupted program Reset=Standby-mode
Program undefined	Check programming
Excess steam pressure	Switch the system off and call service
Sensor error	Switch the system off and call service