

- ฉบับปกปิดข้อมูลที่มีกฎหมายคุ้มครอง -

รายงานผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  
และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม  
ฉบับประจำเดือนมกราคม-มิถุนายน 2566

โครงการ กรีนไนน์ (GREEN NINE) อาคาร ซี

ตั้งอยู่ที่ ซอยวัดอุทัยธาราม แขวงบางกะปิ เขตห้วยขวาง กรุงเทพมหานคร



กรกฎาคม 2566

ของ นิติบุคคลอาคารชุด กรีนไนน์  
อาคาร ซี

## สารบัญ

|  | หน้า |
|--|------|
| สารบัญ   | I    |
| สารบัญรูป  | II   |
| สารบัญตาราง  | II   |
| <b>บทที่ 1 บทนำ</b>  |      |
| 1.1 ความเป็นมาของโครงการ   | 1-1  |
| 1.2 รายละเอียดของโครงการ (เฉพาะส่วนที่เกี่ยวข้องกับอาคาร ชี)   | 1-3  |
| 1.3 รายละเอียดการนำเสนอรายงานผลการปฏิบัติตามมาตรการป้องกันและ<br>แก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบ<br>สิ่งแวดล้อม | 1-6  |
| 1.4 สถานะการดำเนินโครงการ  | 1-6  |
| <b>บทที่ 2 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม</b>   |      |
| 2.1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | 2-1  |
| 2.2 สรุปผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | 2-1  |
| <b>บทที่ 3 ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม</b>  |      |
| 3.1 ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม   | 3-1  |
| 3.2 สรุปผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม   | 3-1  |
| <b>บทที่ 4 บทสรุปและข้อเสนอแนะ</b>   |      |
| 4.1 ผลการปฏิบัติตามมาตรการทั่วไป   | 4-1  |
| 4.2 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | 4-1  |
| 4.3 ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม   | 4-1  |
| <b>ภาคผนวกที่ 1 หนังสือเห็นชอบรายงานฯ และใบอนุญาตโครงการ</b>   |      |
| <b>ภาคผนวกที่ 2 เอกสารประกอบการปฏิบัติตามมาตรการฯ</b>  |      |
| <b>ภาคผนวกที่ 3 ใบรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ</b>  |      |
| <b>ภาคผนวกที่ 4 เอกสารสอบเทียบเครื่องมือการตรวจวิเคราะห์คุณภาพน้ำ</b>  |      |
| <b>ภาคผนวกที่ 5 ใบรับรอง/หนังสืออนุญาตขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน</b>  |      |

## สารบัญรูป

| รูปที่ | ชื่อรูป                                 | หน้า |
|--------|---|------|
| 1-1    | ที่ตั้งโครงการ โดยสังเขป                | 1-2  |
| 1-2    | สภาพการดำเนินโครงการ                    | 1-6  |
| 3-1    | ภาพการเก็บตัวอย่างน้ำทิ้ง               | 3-5  |
| 3-2    | กราฟแสดงผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง | 3-28 |

## สารบัญตาราง

| ตารางที่ | ชื่อตาราง  | หน้า |
|----------|--|------|
| 1-1      | สรุปรายละเอียดการนำเสนอรายงานผลการปฏิบัติตามมาตรการฯ ที่ผ่านมา                           | 1-6  |
| 2-1      | ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 | 2-2  |
| 3-1      | ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566                    | 3-2  |
| 3-2      | วิธีการเก็บตัวอย่าง วิธีการวิเคราะห์ และมาตรฐานวิธีวิเคราะห์คุณภาพน้ำทิ้ง                | 3-4  |
| 3-3      | ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง  | 3-8  |
| 3-4      | ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา   | 3-14 |

นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี  
เลขที่ 100 ถนนริมคลองบางกะปิ แขวงบางกะปิ  
เขตห้วยขวาง กรุงเทพมหานคร 10310

แบบ ตค. 1


หนังสือรับรองการจัดทำรายงานผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบ  
สิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม  
โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี

21 กรกฎาคม 2566

หนังสือรับรองฉบับนี้ ขอรับรองว่า นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี เป็นผู้จัดทำรายงานผล  
การปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบ  
ผลกระทบสิ่งแวดล้อม โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี ตั้งอยู่ที่ซอยวัดอุทัยธาราม แขวง  
บางกะปิ เขตห้วยขวาง กรุงเทพมหานคร ของนิติบุคคลอาคารชุด กรีนไนน์อาคาร ซี (เจ้าของโครงการเดิม :  
บริษัท วิทูรชนกร จำกัด) ฉบับประจำเดือน

- (✓) มกราคม – มิถุนายน 2566  
( ) กรกฎาคม – ธันวาคม 2566  
( ) อื่นๆ (ระบุ) .....

โดยมีคณะผู้จัดทำรายงาน ดังต่อไปนี้

| ผู้จัดทำรายงาน            | ลายมือชื่อ   | ตำแหน่ง                  |
|---------------------------|--|--------------------------|
| นางสาวสุพิชฌาย์ วิยะชัย   |  | ผู้จัดการอาคาร           |
| นายประจักษ์ คนเพียร       |  | หัวหน้าช่างประจำอาคาร    |
| นายเชษฐพงศ์ คุณฤทธิกุลชัย |  | วิศวกรโยธาและสิ่งแวดล้อม |

ขอแสดงความนับถือ



( นางอรนิชา รอดสวัสดิ์ )

ผู้จัดการนิติบุคคลอาคารชุด กรีนไนน์อาคาร ซี



รายงานผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  
และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม  
ฉบับประจำเดือนมกราคม-มิถุนายน 2566

|                |  |
|----------------|--|
| ชื่อโครงการ    | กรีนไนน์ (GREEN NINE) อาคาร ซี   |
| ที่ตั้งโครงการ | ซอยวัดอุทัยธาราม แขวงบางกะปิ เขตห้วยขวาง กรุงเทพมหานคร                               |
| เจ้าของโครงการ | นิติบุคคลอาคารชุด กรีนไนน์อาคาร ซี<br>(เจ้าของโครงการเดิม : บริษัท วิบุรชนากร จำกัด) |
| สถานที่ติดต่อ  | เลขที่ 100 ถนนริมคลองบางกะปิ แขวงบางกะปิ เขตห้วยขวาง<br>กรุงเทพมหานคร 10310          |
| ผู้จัดทำรายงาน | นิติบุคคลอาคารชุด กรีนไนน์อาคาร ซี   |

โครงการได้รับความเห็นชอบในรายงานการประเมินผลกระทบลี้่วงแวดล้อม  
จากคณะกรรมการผู้ชำนาญการฯ ในการประชุมครั้งที่ 26/2549 เมื่อวันที่ 20 มิถุนายน 2549  
ตามหนังสือที่ ทส 1009/5998 ลงวันที่ 13 กรกฎาคม 2549

การนำเสนอรายงานผลการปฏิบัติตามมาตรการฯ ครั้งสุดท้าย      ฉบับเดือนกรกฎาคม-ธันวาคม 2565

รายละเอียดและสถานะการดำเนินโครงการ แสดงในบทที่ 1

**การเสนอรายงานฯ**

( ) เจ้าของโครงการได้มอบอำนาจให้ ..... เป็น  
ผู้ดำเนินการเสนอรายงาน ดังหนังสือมอบอำนาจที่แนบ

(✓) เจ้าของโครงการมิได้มอบอำนาจแต่อย่างใด

# บทที่ 1 บทนำ

---

# บทนำ

## 1.1 ความเป็นมาของโครงการ

บริษัท วิทูรธนากร จำกัด ได้ว่าจ้างบริษัท เอ็นแคด คอนซัลแตนท์ จำกัด ให้เป็นผู้ศึกษาและจัดทำรายงานการประเมินผลกระทบสิ่งแวดล้อม (EIA) โครงการ GREEN NINE ตั้งอยู่ที่ซอยวัดอุทัยธาราม แขวง บางกะปิ เขตห้วยขวาง กรุงเทพมหานคร (รูป 1-1) เสนอต่อสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม (สผ.) เนื่องจากการพัฒนาโครงการเข้าข่ายต้องจัดทำรายงานฯ ตามประกาศกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม เรื่อง กำหนดประเภทและขนาดของโครงการหรือกิจการของส่วนราชการ รัฐบาลกิจ หรือเอกชน ที่ต้องจัดทำรายงานการวิเคราะห์ผลกระทบสิ่งแวดล้อม ฉบับที่ 3 (พ.ศ. 2539) เพื่อใช้ประกอบการขออนุญาตก่อสร้างอาคารจาก กองควบคุมอาคาร กรุงเทพมหานคร กำหนดโดย พระราชบัญญัติควบคุมอาคาร พ.ศ. 2522

โครงการ GREEN NINE ได้รับความเห็นชอบในรายงานฯ จากคณะกรรมการผู้ชำนาญการพิจารณา รายงานการวิเคราะห์ผลกระทบสิ่งแวดล้อมด้านโครงการที่พักอาศัย บริการชุมชนและสถานที่ตากอากาศ ในการประชุมครั้งที่ 20/2549 เมื่อวันที่ 15 พฤษภาคม 2549 (ภาคผนวก 1 เอกสาร 1-1) และมีหน้าที่ต้องปฏิบัติตามเงื่อนไขที่ได้เสนอไว้ในรายงานฯ ที่ได้รับความเห็นชอบอย่างเคร่งครัด (ภาคผนวก 1 เอกสาร 1-2)

บริษัท วิทูรธนากร จำกัด ได้จัดให้มีการก่อสร้างโครงการเป็นอาคารชุดพักอาศัย โดยโครงการก่อสร้างแล้วเสร็จและได้รับใบรับรองการก่อสร้างอาคาร คัดแปลงอาคาร หรือเคลื่อนย้ายอาคาร (แบบ อ.6) ในส่วนของอาคาร ซี จากกรุงเทพมหานคร เมื่อวันที่ 12 กรกฎาคม 2554 (ภาคผนวก 1 เอกสาร 1-3) ต่อมาได้มีการจดทะเบียนอาคารชุด (อ.ช.10) ในส่วนของอาคาร ซี ภายใต้อำนาจ “กรีนไนน์ อาคาร ซี” ทะเบียนเลขที่ 16/2554 เมื่อวันที่ 16 กันยายน 2554 (ภาคผนวก 1 เอกสาร 1-4) และจดทะเบียนนิติบุคคลอาคารชุด (อ.ช.13) ภายใต้อำนาจ “นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี” ทะเบียนเลขที่ 18/2554 เมื่อวันที่ 4 พฤศจิกายน 2554 (ภาคผนวก 1 เอกสาร 1-5) ต่อสำนักงานที่ดินกรุงเทพมหานคร สาขาห้วยขวาง

นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี ในฐานะผู้ดำเนินโครงการกรีนไนน์ (GREEN NINE) อาคาร ซี ได้มีการจัดทำรายงานผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม ฉบับประจำเดือนมกราคม-มิถุนายน 2566 เพื่อเสนอต่อหน่วยงานของรัฐซึ่งมีอำนาจตามกฎหมายให้ดำเนินโครงการหรือกิจการ ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง หลักเกณฑ์ และวิธีการจัดทำรายงานผลการปฏิบัติตามมาตรการที่กำหนดไว้ในรายงานการประเมินผลกระทบสิ่งแวดล้อมซึ่งผู้ดำเนินการ หรือผู้ขออนุญาตจะต้องจัดทำเมื่อได้รับอนุญาตให้ดำเนินโครงการหรือกิจการแล้ว พ.ศ. 2561 และที่แก้ไขเพิ่มเติม ฉบับที่ 2 พ.ศ. 2564



รูป 1-1 ที่ตั้งโครงการโดยสังเขป

## 1.2 รายละเอียดของโครงการ (เฉพาะส่วนที่เกี่ยวข้องกับอาคาร ชี)

1) ลักษณะ/ประเภทโครงการ อาคารอยู่อาศัยรวม (อาคารชุด) 1 อาคาร ความสูง 8 ชั้น จำนวน 167 ห้อง

### 2) กิจกรรมในโครงการ

#### ▪ น้ำใช้

แหล่งน้ำใช้

การประปานครหลวง สาขาสุขุมวิท

การกักเก็บน้ำ

ถังเก็บน้ำชั้นใต้ดิน 1 ถัง ปริมาตรเก็บกัก 167 ลบ.ม. และถังเก็บน้ำชั้น  
ดาดฟ้า 1 ถัง ปริมาตรเก็บกักรวม 15 ลบ.ม. (ภาคผนวก 2 เอกสาร 2-1)

#### ▪ น้ำเสียและสิ่งปฏิกูล

ระบบบำบัดน้ำเสีย

แต่ละอาคารมีการติดตั้งระบบบำบัดน้ำเสียแยกอิสระจากกัน โดยเป็น  
ระบบบำบัดแบบตะกอนเร่ง (Activated Sludge) ขนาดออกแบบรองรับ  
สูงสุด 109.12 ลบ.ม./วัน ประกอบด้วย ถังแยกตะกอน ถังปรับสภาพ  
น้ำเสีย ถังเติมอากาศ และถังตกตะกอนจุลินทรีย์ (ภาคผนวก 2 เอกสาร  
2-2)

#### ▪ ระบบระบายน้ำ

ระบบระบายน้ำเสียภายในอาคาร

เป็นระบบน้ำแบบแยกท่อส้วมและท่อน้ำเสีย โดยไหลตาม  
แนวท่อลงสู่ระบบบำบัดน้ำเสีย (ภาคผนวก 2 เอกสาร  
2-3)

ระบบระบายน้ำภายนอกอาคาร

แบ่งเป็นระบบระบายน้ำฝนและระบบระบายน้ำทิ้งที่ผ่าน  
การบำบัด แยกอิสระจากกัน โดยระบบระบายน้ำฝนจะไหล  
ไปตามแนวท่อระบายน้ำเข้าสู่บ่อหน่วงน้ำก่อนระบายออก  
สู่ระบบระบายน้ำสาธารณะ (ภาคผนวก 2 เอกสาร 2-3)

#### ▪ การจัดการมูลฝอย

ห้องพักมูลฝอยรวม

ตั้งอยู่บริเวณด้านหน้าโครงการ มีปริมาตรออกแบบในการเก็บกัก  
56 ลบ.ม. (รองรับได้นานประมาณ 3 วัน)

การรวบรวมมูลฝอย

โครงการกำหนดให้ผู้พักอาศัยรวบรวมมูลฝอยแยกประเภทใส่ถุง  
และมัดปากถุงให้มีขีด นำมาเก็บรวบรวมไว้ที่จุดพักขยะบริเวณชั้น  
ใต้ดิน เพื่อรอการเก็บขนไปกำจัดต่อไป (ภาคผนวก 2 เอกสาร 2-4)

การเก็บขนมูลฝอย

ดำเนินการโดยสำนักงานเขตห้วยขวาง ความถี่ 3 ครั้ง/สัปดาห์



▪ ระบบจราจร

|                    |   |
|--------------------|---|
| ทางเข้า-ออกโครงการ | การเดินทางเข้าสู่โครงการใช้เส้นทางหลัก คือ ถนนจตุรทิศ (ถนนเลียบใต้ทางด่วน) เข้าสู่ซอยวัดอุทัยธาราม โดยโครงการตั้งอยู่สุดซอยถนนวัดอุทัยธาราม ระยะจากปากทางเข้า-ออก ประมาณ 500 เมตร |
| ที่จอดรถยนต์       | อาคาร ซี มีพื้นที่สำหรับจอดรถยนต์ชั้นใต้ดินและที่จอดรถระดับพื้นรวม 72 คัน (ภาคผนวก 2 เอกสาร 2-5)  |
| เส้นทางเดินรถ      | ระบบการจราจรภายในโครงการ เป็นระบบเดินรถแบบทิศทางเดียวและสองทิศทาง ถนนกว้าง 6 เมตร มีลูกศรกำหนดทิศทางเดินรถที่ชัดเจน และมีแนวชะลอความเร็วรถ (ภาคผนวก 2 เอกสาร 2-5)                 |

▪ ระบบไฟฟ้า

|                     |   |
|---------------------|---|
| แหล่งรับบริการไฟฟ้า | การไฟฟ้านครหลวงเขตบางกะปิ   |
| ระบบจ่ายไฟฟ้า       | ติดตั้งหม้อแปลงไฟฟ้าแยกแต่ละอาคาร เพื่อจ่ายพลังงานไฟฟ้าให้กับอุปกรณ์ภายในอาคาร (ภาคผนวก 2 เอกสาร 2-6) |

▪ ระบบป้องกันอัคคีภัย

|                          |  |
|--------------------------|--|
| ระบบดับเพลิงประจำอาคาร   | ประกอบด้วย แหล่งน้ำสำรองดับเพลิงสำรองซึ่งเก็บไว้ในถังเก็บน้ำสำรองใต้ดิน ประมาณ 30 ลบ.ม. สามารถสำรองน้ำเพื่อการดับเพลิงได้ไม่น้อยกว่า 30 นาที ด้านหน้าอาคารมีการติดตั้งหัวรับน้ำดับเพลิงในตำแหน่งที่รถดับเพลิงสามารถเข้าถึงได้ ระบบส่งน้ำ เป็นระบบท่อเปียก โดยใช้ท่ออื่น 1 ชุด ขนาดท่อ 3 นิ้ว ไฟ ติดตั้งไว้ทุกชั้น ชั้นละ 1 ตู้ บริเวณโถงทางเดินส่วนกลางอาคาร และถังดับเพลิงเคมีแบบมือถือติดตั้งบริเวณโถงหน้าลิฟท์ของทุกชั้น (ภาคผนวก 2 เอกสาร 2-7) |
| ระบบไฟฉุกเฉิน            | มีการติดตั้งไว้ทุกชั้นบริเวณบันไดหนีไฟทั้ง 2 ฟัง และบริเวณโถงใต้อาคาร ซึ่งจะทำงานทันทีเมื่อระบบไฟฟ้าปกติหยุดทำงานหรือเกิดเหตุการณ์กระแสไฟฟ้าขัดข้อง สามารถให้แสงสว่างได้นานประมาณ 2 ชั่วโมง (ภาคผนวก 2 เอกสาร 2-7)   |
| ป้ายเรืองแสงแสดงทางหนีไฟ | มีการติดตั้งไว้บริเวณบันไดหลักและบริเวณหน้าประตูทางหนีไฟ (ภาคผนวก 2 เอกสาร 2-7)  |

|                             |   |
|-----------------------------|---|
| ระบบสัญญาณแจ้งเหตุเพลิงไหม้ | ประกอบด้วย เครื่องตรวจจับความร้อน (Heat Detector) ติดตั้งไว้ในห้องครัวและพื้นที่โถงทางเดิน ซึ่งจะมีการแจ้งสัญญาณเมื่อตรวจพบความร้อนสูงเกินกว่า 200 องศาฟาเรนไฮต์ อุปกรณ์แจ้งเหตุเพลิงไหม้ด้วยมือ (Manual Station) ติดตั้งไว้บริเวณโถงลิฟต์ชั้นใต้ดิน บริเวณหน้าบันไดหนีไฟ และบริเวณโถงบันไดหลักทุกชั้น อุปกรณ์ส่งเสียงสัญญาณแจ้งเหตุเพลิงไหม้ (Fire Alarm) เป็นอุปกรณ์ส่งสัญญาณแบบกระดิ่ง (Alarm Bell) ติดตั้งที่โถงลิฟต์ชั้นใต้ดิน บริเวณหน้าบันไดหนีไฟและบริเวณโถงบันไดหลักคู่กับอุปกรณ์แจ้งเหตุด้วยมือ (Manual Station) (ภาคผนวก 2 เอกสาร 2-7) |
| บันไดหนีไฟ                  | อาคาร ซี มีบันไดหนีไฟ 2 แห่ง ตั้งอยู่ทางปีกซ้ายและปีกขวา ของตัวอาคาร ลักษณะเป็นบันไดคอนกรีตเสริมเหล็ก ทำด้วยวัสดุไม่ติดไฟ ประดับด้วยวัสดุทนไฟ บานประตูเป็นชนิดผลักออกสู่ภายนอก (ภาคผนวก 2 เอกสาร 2-7)   |
| ระบบป้องกันอันตรายจากฟ้าผ่า | ประกอบด้วย เสาต่อฟ้า สายล่อฟ้า สายตัวนำ สายนำลงดิน และหลักสายดินที่เชื่อมโยงกันเป็นระบบ   |
| จุดรวมพล                    | อาคาร ซี กำหนดจุดรวมพลไว้ที่บริเวณด้านหน้าอาคาร (ภาคผนวก 2 เอกสาร 2-7)  |
| ▪ ทักษะสภาพและสุนทรียภาพ    |   |
| อาคาร โครงการพื้นที่สีเขียว | ได้มีการเลือกใช้กระจกและทาสีอ่อนเพื่อให้ดูสบายตา มีการปลูกต้นไม้เพื่อตกแต่งภายในพื้นที่ภายในโครงการ โดยเป็นพื้นที่สีเขียวระดับพื้นดินซึ่งมีการปลูกไม้ยืนต้น ไม้พุ่ม และพืชคลุมดิน (ภาคผนวก 2 เอกสาร 2-8)  |

### 1.3 รายละเอียดการนำเสนอรายงานผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม

นิติบุคคลอาคารชุดกรีนไนน์ อาคารซี ได้จัดให้มีการจัดทำรายงานผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม เพื่อเสนอต่อหน่วยงานของรัฐซึ่งมีอำนาจตามกฎหมาย (กรุงเทพมหานคร)

#### ตารางที่ 1-1 สรุปรายละเอียดการนำเสนอรายงานผลการปฏิบัติตามมาตรการฯ ที่ผ่านมา

| ฉบับที่ | เดือน         | วันที่ส่งรายงานฯ ต่อหน่วยงานอนุญาต | วันที่ยื่นรายงานฯ ทางอิเล็กทรอนิกส์ |
|---------|---------------|------------------------------------|-------------------------------------|
| 2/2563  | ก.ค.-ธ.ค. 63  | 25 ก.พ. 64 (ส่งหลังขอขยายเวลา)     | 15 มี.ค. 64                         |
| 1/2564  | ม.ค.-มิ.ย. 64 | 27 ก.ค. 64                         | 28 ส.ค. 64                          |
| 2/2564  | ก.ค.-ธ.ค. 64  | 28 ม.ค. 65                         | 25 มี.ค. 65                         |
| 1/2565  | ม.ค.-มิ.ย. 65 | 26 ก.ค. 65                         | 24 ก.ย. 65                          |
| 2/2565  | ก.ค.-ธ.ค. 65  | 31 ม.ค. 66                         | 1 เม.ย. 66                          |

### 1.4 สถานะการดำเนินโครงการ

ในเดือนมกราคม-มิถุนายน 2566 โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี เปิดดำเนินการเป็นอาคารชุดพักอาศัยในความดูแลของนิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี มีนางอรณิชา รอดสวัสดิ์ เป็นผู้จัดการนิติบุคคลฯ (เอกสาร 1-6 ในภาคผนวก 1) สภาพปัจจุบัน โครงการแสดงดังรูปที่ 1-2



รูปที่ 1-2 สภาพการดำเนินโครงการ

## บทที่ 2

ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม

---

## ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม

### 2.1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม

ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี ของนิคมอุตสาหกรรมชุด กรีนไนน์ อาคาร ซี ระหว่างเดือนมกราคม-มิถุนายน 2566 แสดงดังตารางที่ 2-1 และเอกสารในภาคผนวกที่ 2

### 2.2. สรุปผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม

จากการติดตามตรวจสอบผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระยะดำเนินการ โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี พบว่า ในระหว่างเดือนมกราคม-มิถุนายน 2566 นิคมอุตสาหกรรมชุด กรีนไนน์ อาคาร ซี ได้มีการดูแลโครงการให้เป็นไปตามมาตรการที่กำหนด และมีการกำหนดมาตรการ/ข้อปฏิบัติเพิ่มเติมนอกเหนือจากที่ EIA กำหนด สำหรับพนักงาน ผู้พักอาศัย และผู้มาติดต่อ เพื่อการป้องกันและเฝ้าระวังโรคติดเชื้อไวรัสโคโรนา 2019 (COVID-19) ดังเอกสาร 2-10 ในภาคผนวกที่



ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|--|--|-------------------------|---------------|
| มาตรการทั่วไป  |  |                         |               |
| 1. โครงการจะต้องยึดถือปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบคุณภาพสิ่งแวดล้อม ตามที่เสนอไว้ในรายงานการวิเคราะห์ผลกระทบสิ่งแวดล้อม โครงการ GREEN NINE ของบริษัท วิทูรธนากร จำกัด และรายละเอียดในเอกสารแนบอย่างเคร่งครัด | - นิติบุคคลอาคารชุดกรีนไนน์ อาคาร ซึ่ง ในฐานะผู้ดำเนินโครงการกรีนไนน์ (GREEN NINE) อาคาร ซึ่ง ซึ่งรับช่วงดูแลโครงการ (อาคาร ซึ่ง) ต่อจากบริษัท วิทูรธนากร จำกัด ได้รับทราบข้อกำหนด/เงื่อนไข และสนองต่อมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบคุณภาพสิ่งแวดล้อม ตามที่เสนอไว้ในรายงานการวิเคราะห์ผลกระทบสิ่งแวดล้อม เนื่องจากได้รับการวิเคราะห์ผลกระทบสิ่งแวดล้อม เนื่องจากการแจ้งการกระทำผิดและสิทธิเปรียบเทียบปรับตามพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. 2535 และที่แก้ไขเพิ่มเติมจากสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อมในเดือนธันวาคม 2563 | -                       | เอกสาร 1-5    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|--|--|-------------------------|---------------|
| 2. โครงการจะต้องบันทึกผลการติดตามตรวจสอบการดำเนินการหรือการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบคุณภาพสิ่งแวดล้อมตามที่เสนอไว้ในรายงาน และส่งผลการดำเนินการยังหน่วยงานผู้อนุญาตและสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม ตามแนวทางการเสนอรายงานผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบคุณภาพสิ่งแวดล้อม | - นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี ในฐานะผู้ดำเนินโครงการกรีนไนน์ (GREEN NINE) อาคาร ซี ได้เริ่มมีการบันทึกผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อมตามเงื่อนไข/ข้อกำหนดที่เกี่ยวข้องในเดือนธันวาคม 2563 เนื่องจากได้รับแจ้งการกระทำผิดและสิทธิเปรียบเทียบปรับตามพระราชบัญญัติสิ่งแวดล้อมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. 2535 และที่แก้ไขเพิ่มเติมจากสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม โดยได้มีการส่งผลการดำเนินงานฉบับแรกในรายงานฉบับเดือนกรกฎาคม-ธันวาคม 2563 และรายงานฉบับนี้ เป็นรายงานฉบับประจำเดือนมกราคม-มิถุนายน 2566 | -                       | -             |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|--|---|-------------------------|---------------|
| 3. หากโครงการจะเปลี่ยนแปลงรายละเอียด โครงการ รวมทั้ง มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบคุณภาพสิ่งแวดล้อมแตกต่างจากที่เสนอไว้ใน รายงาน โครงการจะต้องเสนอรายละเอียดการเปลี่ยนแปลงดังกล่าวให้หน่วยงานผู้อนุญาตและสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม เพื่อนำเสนอคณะกรรมการผู้ชำนาญการฯ พิจารณาให้ความเห็นชอบด้านสิ่งแวดล้อมก่อนดำเนินการเปลี่ยนแปลงใดๆ | - โครงการยังไม่ประสงค์เปลี่ยนแปลงรายละเอียดโครงการแต่อย่างใด  | -                       | -             |
| 4. หากได้รับการร้องเรียนจากประชาชนว่าได้รับความเดือดร้อน ราคากิจการกิจการการค้าในโครงการ หรือโครงการก่อให้เกิดความเสียหายแก่สาธารณสมบัติ เจ้าของโครงการจะต้องดำเนินการ แก้ไขปัญหาดังกล่าวโดยเร็ว และแจ้งหน่วยงาน อนุญาต สำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม และหน่วยงานที่เกี่ยวข้อง เพื่อหาแนวทางและ มาตรการ ในการแก้ไขปัญหาดังกล่าวไป   | - ในช่วงระหว่างเดือนมกราคม-มิถุนายน 2566 ไม่ปรากฏ ร้องเรียนจากประชาชนว่าได้รับความเดือดร้อน ราคากิจการกิจการการค้าในโครงการ (อาคาร ชี) แต่อย่างใด | -                       | -             |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม              | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|---|-------------------------|---------------|
| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม              |   |                         |               |
| 1. การสนองต่อมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม | - บริษัท วิทยุชนุกร จำกัด ต้องปฏิบัติตามเงื่อนไขที่ระบุในมาตรการป้องกันแก้ไขและลดผลกระทบสิ่งแวดล้อม ในรายงานการวิเคราะห์ผลกระทบสิ่งแวดล้อมในโครงการ GREEN NINE และเงื่อนไขที่เพิ่มเติมโดยสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม (สผ.) | -                       | เอกสาร 1-5    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|---|-------------------------|---------------|
| <div>2. ทรัพยากรกายภาพ</div> <div>2.1 คุณภาพอากาศ</div> <div>1. จัดให้มีพื้นที่สีเขียวภายในโครงการเพื่อเพิ่มความร่มรื่นภายในโครงการ เนื้อที่ 5,854 ตารางเมตร สำหรับผู้พักอาศัย 5,512 คน อัตราส่วนพื้นที่สีเขียว : ผู้พักอาศัยเท่ากับ 1.06 : 1 มีรายละเอียดดังนี้</div> <div>- พื้นที่สีเขียวระดับพื้นดินเนื้อที่ 4,532 ตารางเมตร ประกอบด้วยพื้นที่ปลูกไม้ยืนต้น 2,955 ตารางเมตร คิดเป็นร้อยละ 65.20 ของพื้นที่สีเขียวระดับพื้นดิน พื้นที่ปลูกได้แก่ ต้นพญาสัตบรรณ ต้นทองเหลืองต่าง และต้นอินทผลัม</div> <div>- พื้นที่ปลูกไม้ประดับบนอาคารบริเวณระเบียงชั้น 1 ของอาคารพักอาศัย A1-A7 และ B เนื้อที่ 561 ตารางเมตร และพื้นที่ปลูกบนอาคารสโมสรร 761 ตารางเมตร พื้นที่ไม้ที่เลือกปลูกได้แก่ เฟื่องฟ้า แก้ว ใผ่เลี้ยง จั๋งญี่ปุ่น พุดตะเคอง เทียนทอง และพื้นที่ปลูกหญ้าขนาดเล็ก</div> | <div>- ภายในโครงการ ได้จัดให้มีพื้นที่สีเขียวเพื่อความร่วมมือของผู้พักอาศัย โดยเป็นพื้นที่สีเขียวระดับพื้นดินซึ่งมีการปลูกไม้ยืนต้น ไม้พุ่ม และพืชคลุมดิน</div> | -                       | เอกสาร 2-8    |



ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|--|-------------------------|---------------|
| 2. อัตราการดูดซับคาร์บอนไดออกไซด์ของต้นไม้ที่ปลูกในโครงการมีค่า 830.29 mol/วัน                        | - โครงการมีการบำรุงรักษาพื้นที่สีเขียวภายในโครงการให้อยู่ในสภาพสมบูรณ์อยู่เสมอ เพื่อคงอัตราการดูดซับก๊าซคาร์บอนไดออกไซด์ของต้นไม้ภายในโครงการ    | -                       | -             |
| 2.2 คุณภาพน้ำ<br>2.2.1 น้ำใช้   | 1. รณรงค์ให้ผู้เข้าพักอาศัยและพนักงานของโครงการใช้น้ำอย่างประหยัด  | -                       | เอกสาร 2-9    |
| 2. ให้โครงการใช้เครื่องสุขภัณฑ์ประหยัดน้ำ   | - ภายในโครงการกรีนในน์ อาคาร ซี มีการรณรงค์ให้ผู้พักอาศัยและพนักงานในอาคาร ซี ใช้น้ำอย่างประหยัดผ่านช่องทางต่างๆ เช่น บอร์ดประชาสัมพันธ์ เป็นต้น | -                       | -             |
| 3. ตรวจสอบระบบส่งจ่ายน้ำประปาเป็นประจำ หากพบรอยรั่วซึมให้รีบดำเนินการแก้ไขทันที                       | - อาคาร A จัดให้มีถังเก็บน้ำใต้ดินขนาดความจุ 160 ลูกบาศก์เมตร และถังเก็บน้ำที่คาดฟ้า ความจุ 15 ลูกบาศก์เมตร                                      | -                       | -             |
| - อาคาร B จัดให้มีถังเก็บน้ำใต้ดินขนาดความจุ 100 ลูกบาศก์เมตร และถังเก็บน้ำที่คาดฟ้า 7.5 ลูกบาศก์เมตร | - อาคาร ซี มีถังเก็บน้ำใต้ดิน 1 ถึง ปริมาตรเก็บกัก 160 ลบ.ม. และถังเก็บน้ำที่คาดฟ้า 1 ถึง ปริมาตรเก็บกัก 15 ลบ.ม.                                | -                       | เอกสาร 2-1    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง  |
|---|--|-------------------------|--|
| <div>- อาคาร C จัดให้มีถังเก็บน้ำขึ้นใต้ดินขนาดความจุ 167 ลูกบาศก์เมตร และถังเก็บน้ำชั้นดาดฟ้า 15 ลูกบาศก์เมตร</div> <div>- อาคาร D จัดให้มีถังเก็บน้ำขึ้นใต้ดินขนาดความจุ 50 ลูกบาศก์เมตร</div> <div>- อาคาร E จัดให้มีถังเก็บน้ำชั้นใต้ดินขนาดความจุ 54 ลูกบาศก์เมตร และถังเก็บน้ำชั้นดาดฟ้า 5 ลูกบาศก์เมตร</div>   |  |                         |  |
| <div>2.2.2 น้ำเสีย</div> <div>1. ติดตั้งระบบบำบัดน้ำเสียแยกขยะอาคารแบบระบบตะกอนเร่งรุ่น Macro San-525, Macro San-300, Macro San-550, San 7 AE และ San 15 AE โดยติดตั้งสำหรับอาคาร (A1-A7), B, C, D และ E มีประสิทธิภาพในการบำบัด 92% ค่า BOD ไม่เกิน 20 มก./ลิตร และ SS ไม่เกิน 30 มก./ลิตร พร้อมทั้งวิเคราะห์ความสกปรกของน้ำ ได้แก่ pH, BOD<sub>5</sub>, Total Solid, Suspended Solid, Dissolved Solid, Nitrogen, Fat, Oil &amp; Grease, Total Coliform ทุก 1 เดือน สรุปเป็นรายงานเสนอสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม ทุก 6 เดือน</div> | <div>- นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซึ่งได้จัดให้มีการตรวจวิเคราะห์คุณภาพน้ำเสียก่อนเข้าระบบบำบัด (Influent) น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) และน้ำก่อนระบายออกนอกโครงการ เดือนละ 1 ครั้ง โดยในปี 2566 ได้เข้าจ้างห้องปฏิบัติการวิเคราะห์เอกชนเข้ามาดำเนินการเก็บตัวอย่างและตรวจวิเคราะห์คุณภาพน้ำในเดือนมกราคม-มิถุนายน 2566</div> | -                       | <div>เอกสาร 2-2</div> <div>ภาคผนวก 3</div> <div>ภาคผนวก 4</div> <div>ภาคผนวก 5</div> |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง                                     |
|--|---|-------------------------|---|
| 2. น้ำเสียทั้งหมดทุกกิจกรรมต้องระบายสู่ระบบบำบัดน้ำเสีย น้ำที่ผ่านการบำบัดมีคุณภาพเป็นไปตามมาตรฐานคุณภาพน้ำทิ้งจากอาคารประเภท ก. ซึ่งกำหนดให้ค่า BOD ไม่เกิน 20 มก./ลิตร และค่า SS ไม่เกิน 30 มก./ลิตร | - อาคาร ซึ่งมีการรวบรวมน้ำเสียจากกิจกรรมภายในอาคารเข้าสู่ระบบบำบัดน้ำเสียเพื่อบำบัดให้มีคุณภาพเป็นไปตามมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด  | -                       | เอกสาร 2-2<br>ภาคผนวก 3<br>ภาคผนวก 4<br>ภาคผนวก 5 |
| 3. ในกรณีเกิดการชำรุดในส่วนใดส่วนหนึ่งของระบบบำบัดน้ำเสีย จะต้องทำการซ่อมแซมหรือแก้ไขให้อยู่ในสภาพการใช้งานได้ตามปกติโดยเร็ว   | - นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซึ่งมีเจ้าหน้าที่ฝ่ายช่างทำหน้าที่ตรวจสอบและบำรุงรักษาระบบบำบัดน้ำเสียของอาคาร ซึ่งให้สภาพการทำงานเป็นปกติ  | -                       | -   |
| 4. ต้องประชาสัมพันธ์ให้ผู้พักอาศัยในโครงการทราบว่าไม่ควรทิ้งสิ่งอื่นใดที่ย่อยสลายไม่ได้ลงในโถส้วม โถปัสสาวะ และอ่างล้างมือ ที่อาจทำให้เกิดน้ำอุดตัน  | - นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซึ่งมีการรณรงค์ไม่ให้ผู้พักอาศัยและพนักงานในอาคาร ซึ่งไม่ทิ้งสิ่งที่ย่อยสลายไม่ได้ลงในโถส้วม โถปัสสาวะ และอ่างล้างมือ ที่อาจทำให้เกิดน้ำอุดตัน ผ่านช่องทางต่างๆ เช่น บอร์ดประชาสัมพันธ์ เป็นต้น | -                       | -   |
| 5. จัดให้มีเจ้าหน้าที่ฝ่ายช่างที่มีความรู้ความสามารถด้านการบำบัดน้ำเสียรับผิดชอบระบบบำบัดน้ำเสียโดยตรงอย่างน้อย 1 คน   | - นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซึ่งมีเจ้าหน้าที่ฝ่ายช่างทำหน้าที่ตรวจสอบและบำรุงรักษาระบบบำบัดน้ำเสียโดยตรงอย่างน้อย 1 คน  | -                       | -   |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง                                     |
|---|--|-------------------------|---|
| 6. โครงการจะต้องทำการติดตามตรวจสอบคุณภาพน้ำตลอดจนตรวจสอบระบบบำบัดน้ำเสียเพื่อบำรุงรักษาอุปกรณ์ที่ติดตั้ง                          | - นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซึ่ได้จัดให้มีการตรวจวิเคราะห์คุณภาพน้ำเสียก่อนเข้าระบบบำบัด (Influent) น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) และน้ำก่อนระบายออกนอกโครงการ เดือนละ 1 ครั้ง โดยในปี 2566 ได้จ้างห้องห้องปฏิบัติการวิเคราะห์เอกชนเข้ามาดำเนินการเก็บตัวอย่างและตรวจวิเคราะห์คุณภาพน้ำในเดือนมกราคม-มิถุนายน 2566 | -                       | เอกสาร 2-2<br>ภาคผนวก 3<br>ภาคผนวก 4<br>ภาคผนวก 5 |
| 7. ดำเนินการสูบน้ำตะกอนจากระบบบำบัด เพื่อคงไว้ซึ่งประสิทธิภาพในการบำบัด โดยการทำจัดตะกอนจะต้องปฏิบัติตามคำแนะนำของวิศวกรผู้ออกแบบ | - นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซึ่มีเจ้าหน้าที่ฝ่ายช่างทำหน้าที่ตรวจสอบประสิทธิภาพการทำงานของระบบบำบัดน้ำเสีย และจัดให้มีการกำจัดตะกอนภายในระยะเวลาที่กำหนด   | -                       | -   |
| 8. เลือกใช้สุขภัณฑ์ที่ประหยัดน้ำ เช่น ก๊อกน้ำมีหัวเติมฟองอากาศ โถส้วมแบบประหยัดน้ำ เพื่อช่วยลดปริมาณน้ำเสียที่เกิดขึ้นในแต่ละวัน  | - โครงการได้เลือกใช้สุขภัณฑ์ชนิดประหยัดน้ำเพื่อช่วยลดปริมาณน้ำเสียที่เกิดขึ้นในแต่ละวัน  | -                       | -   |
| 2.3 การระบายนํ้า<br>1. ให้ดำเนินการเชื่อมท่อนํ้าฝนจากอาคารทั้งหมดลงสู่บ่อบำบัดบริเวณชั้นใต้ดินของแต่ละอาคาร                       | - อาคาร ซึ่ได้มีการออกแบบและก่อสร้างระบบระบายนํ้าโดยเชื่อมท่อนํ้าฝนจากอาคารลงสู่บ่อบำบัดบริเวณชั้นใต้ดิน   | -                       | เอกสาร 2-3  |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|---|-------------------------|---------------|
| 2. ให้ติดตั้งตะแกรงดักขยะช่องระบายน้ำขนาดใหญ่ 1 เซนติเมตร ในบริเวณทางระบายน้ำก่อนไหลลงสู่บ่อบำบัดน้ำ  | -   | -                       | -             |
| 3. จัดให้มีบ่อน้ำใต้ดินบริเวณทางเข้า-ออกโครงการ ขนาดความจุ 920 ลูกบาศก์เมตร จำนวน 1 บ่อ มีมิติภายในของบ่อ กว้าง 20 เมตร ยาว 23 เมตร ลึก 3 เมตร โดยมีความลึกที่ระดับกักเก็บ 1.7 เมตร ติดตั้งเครื่องสูบน้ำควบคุมด้วยปั๊มน้ำ 2 ตัว ที่มีอัตราการสูบน้ำออกจากบ่อ 0.6 ลูกบาศก์เมตร/นาที่ และจัดให้มีบ่อตรวจสภาพน้ำทำหน้าที่ผันน้ำออกนอกโครงการ | -   | -                       | -             |
| 4. ขุดลอกท่อระบายน้ำและบ่อบำบัดน้ำทิ้งอย่างน้อยปีละ 1 ครั้ง (เดือนเมษายน ของทุกปี)  | -   | -                       | -             |
| 5. ควบคุมอัตราการระบายน้ำออกจากบ่อน้ำ ความคุมให้ประสิทธิภาพปั๊มน้ำสูบน้ำออกในอัตรา 0.6 ลูกบาศก์เมตร/นาที่   | -   | -                       | -             |
| 6. กำจัดมูลฝอยบริเวณตะแกรงดักมูลฝอยในบ่อบำบัดน้ำทุกบ่อ สัปดาห์ละ 1 ครั้ง  | -   | -                       | -             |



ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|--|--|-------------------------|---------------|
| <b>3. ทรัพยากรชีวภาพ</b> <ul style="list-style-type: none"><li>- จัดให้มีพื้นที่สีเขียวภายใน โครงการเพื่อเพิ่มความร่มรื่นภายในโครงการเนื้อที่ 5.854 ตารางเมตร สำหรับผู้พักอาศัย 5,512 คน อัตราส่วนพื้นที่สีเขียว : ผู้พักอาศัยเท่ากับ 1.06 : 1 มีรายละเอียดดังนี้<ul style="list-style-type: none"><li>- พื้นที่สีเขียวระดับพื้นดินเนื้อที่ 4,532 ตารางเมตร ประกอบด้วยพื้นที่ปลูกไม้ยืนต้น 2,955 ตารางเมตร คิดเป็นร้อยละ 65.20 ของพื้นที่สีเขียวระดับพื้นดิน พื้นไม้ที่เลือกปลูกได้แก่ ต้นพญาสัตบรรณ ต้นทองหลางต่าง และต้นอินทผลัม และปลูกพันธุ์ไม้ประดับบริเวณระเบียงพื้นที่ 1 ของพักอาศัย A1-A7, B และบนอาคารสโมสร เนื้อที่รวม 1,322 ตารางเมตร</li></ul></li></ul> | <ul style="list-style-type: none"><li>- ภายในโครงการ ได้จัดให้มีพื้นที่สีเขียวเพื่อความร่วมมือของผู้พักอาศัย โดยเป็นพื้นที่สีเขียวระดับพื้นดินซึ่งมีการปลูกไม้ยืนต้น ไม้พุ่ม และพืชคลุมดิน</li></ul> | -                       | เอกสาร 2-8    |
| <b>4. ทรัพยากรชีวภาพ</b><br><b>4.1 การคมนาคมขนส่ง</b><br>1. ติดตั้งโคมไฟให้แสงสว่างพอเพียงต่อการมองเห็น สำหรับทางเข้าออก และลานจอดรถยนต์ เพื่อความปลอดภัยในการจราจรในเวลากลางคืน   | <ul style="list-style-type: none"><li>- อาคาร ซี มีการติดตั้งไฟส่องสว่างบริเวณทางเข้า-ออก และบริเวณลานจอดรถ ตลอดจนมีการตรวจสอบและซ่อมบำรุง เพื่อความปลอดภัยในการจราจรในเวลากลางคืน</li></ul>         | -                       | เอกสาร 2-6    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|---|-------------------------|---------------|
| 2. จัดเจ้าหน้าที่รักษาความปลอดภัยให้อำนวยความสะดวกบริเวณทางเข้า-ออกหน้าโครงการตลอด 24 ชั่วโมง                                       | -   | -                       | -             |
| 3. จัดให้มีที่จอดรถภายในโครงการ 666 คัน   | -   | -                       | เอกสาร 2-5    |
| 4. จัดทำป้ายเตือนทางแยกขนาดมาตรฐานในระยะ 100 เมตร ก่อนถึงทาง และจัดให้มีกระจกโค้งบริเวณทางเข้า-ออกที่จอดรถชั้นใต้ดิน                | -   | -                       | เอกสาร 2-5    |
| 5. จัดให้มีแนวชะลอความเร็วรถ เพื่อควบคุมให้รถยนต์จำกัดความเร็วไม่เกิน 20 กิโลเมตร/ชั่วโมง   | -   | -                       | เอกสาร 2-5    |
| 6. จัดพื้นที่สีเขียว 5,854 ตารางเมตร ซึ่งช่วยดูดซับก๊าซ CO <sub>2</sub> ได้ 830.29 mol/วัน  | -   | -                       | เอกสาร 2-8    |
| 4.2 การจัดการมูลฝอย   | -   | -                       | เอกสาร 2-4    |
| 1. ขอความร่วมมือผู้พักอาศัยให้แยกประเภทขยะเปียก ขยะแห้ง และขยะอันตราย ใส่ถุงพลาสติกแยกตามประเภทขยะมัดปากถุงให้เรียบร้อยก่อนนำมาทิ้ง | -   | -                       | -             |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|--|---|-------------------------|---------------|
| 2. จัดให้มีที่พักรวมมูลฝอยสำหรับแต่ละอาคารบริเวณชั้นใต้ดิน เพื่อป้องกันการทิ้งมูลฝอยไว้ในอาคาร โดยจัดให้มีถังรองรับมูลฝอยพลาสติกแบบมีล้อและฝาปิดขนาดมาตรฐาน ความจุถึงละ 240 ลิตร (ถังสีเหลืองสำหรับมูลฝอยที่นำกลับมาใช้ใหม่ได้) ถึงสี่เหลี่ยมสำหรับมูลฝอยที่ไม่สามารถนำมาใช้ใหม่ได้ และถังสีเทาสำหรับมูลฝอยอันตราย) ซึ่งภายในถังจะมีถุงพลาสติกต้องรัดปากถุงให้แน่นปิดฝาให้สนิท นำไปไว้ที่อาคารพักรวมมูลฝอยด้านหน้าโครงการ รอกการเก็บขนไปกำจัดโดยรถเก็บขนมูลฝอยของเขตห้วยขวาง | - อาคาร ซึ่งมีพื้นที่สำหรับพักมูลฝอยรวมบริเวณชั้นใต้ดิน โดยได้จัดให้มีภาชนะสำหรับรองรับมูลฝอยแบบพลาสติก มีฝาปิด เพื่อรอกการเก็บขนไปกำจัดต่อไป                             | -                       | เอกสาร 2-4    |
| 3. จัดให้มีอาคารพักรวมมูลฝอย ขนาด 54 ตารางเมตร สูง 2.2 เมตร คิดปริมาตรเก็บกักที่ระดับ 1.2 เมตร รองรับขยะได้ 56 ลูกบาศก์เมตร สามารถเก็บกักขยะได้ 3 วัน ภายในเป็นพื้นที่คอนกรีตแบ่งพื้นที่ภายในเป็น 3 ห้อง ได้แก่ ห้องพักขยะเปียก ห้องพักขยะแห้ง และห้องพักขยะอันตราย มีท่อระบายน้ำลงระบบบำบัดน้ำเสีย และมีก๊อกน้ำใช้ในการทำความสะอาด  | - โครงการมีอาคารสำหรับพักมูลฝอยรวม ตั้งอยู่บริเวณด้านหน้าโครงการ มีปริมาตรออกแบบในการเก็บกัก 56 ลบ.ม. (รองรับได้นานประมาณ 3 วัน) ซึ่งเพียงพอต่อการกักเก็บมูลฝอยของโครงการ | -                       | -             |
| 4. ผลตอบแทนจากการคัดแยกมูลฝอยมาใช้ประโยชน์หมุนเวียน หรือการแยกมูลฝอยที่สามารถจำหน่ายได้ ให้เป็นสวัสดิการกลางของเจ้าหน้าที่โครงการเป็นแรงจูงใจในการคัดแยกขยะ  | - ผลตอบแทนจากการคัดแยกและจำหน่ายมูลฝอยรีไซเคิล โครงการได้กำหนดให้เป็นสวัสดิการกลางของเจ้าหน้าที่โครงการ   | -                       | -             |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|--|---|-------------------------|---------------|
| 4.3 การใช้ไฟฟ้าและการประหยัดพลังงาน  |   |                         |               |
| 1. วิศวกรให้ผู้พักอาศัยให้มีการใช้ไฟฟ้าอย่างประหยัด  | - นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซึ่งมีการตรวจเช็คผู้พักอาศัยและพนักงานในอาคาร ซึ่งใช้ไฟฟ้าอย่างประหยัดผ่านช่องทางต่างๆ เช่น บอร์ดประชาสัมพันธ์ เป็นต้น | -                       | เอกสาร 2-9    |
| 2. ติดตั้งอุปกรณ์ไฟฟ้าต่างๆ เช่น การเดินสายไฟฟ้า สายสัญญาณสื่อสารต่างๆ ให้เป็นไปด้วยความเรียบร้อยถูกต้องตามมาตรฐาน | - อาคาร ซึ่งมีการติดตั้งอุปกรณ์ไฟฟ้าต่างๆ ให้เป็นไปตามมาตรฐาน   | -                       | เอกสาร 2-6    |
| 3. ตรวจสอบระบบและอุปกรณ์ไฟฟ้าทั้งโครงการให้มีสภาพสมบูรณ์อย่างสม่ำเสมออย่างน้อยเดือนละ 1 ครั้ง                      | - อาคาร ซึ่งมีเจ้าหน้าที่ฝ่ายช่างทำหน้าที่ตรวจสอบและบำรุงรักษาระบบไฟฟ้าให้มีสภาพสมบูรณ์เป็นประจำทุกเดือน และมีการซ่อมบำรุง/เปลี่ยนอุปกรณ์เมื่อพบการชำรุด  | -                       | เอกสาร 2-6    |
| 4. หลอดไฟทุกชนิดที่ใช้ในโครงการ ต้องเป็นหลอดที่ประหยัดพลังงาน  | - อาคาร ซึ่งมีการใช้งานหลอดไฟชนิดประหยัดพลังงาน   | -                       | เอกสาร 2-6    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|--|-------------------------|---------------|
| <b>5. คุณค่าต่อคุณภาพชีวิต</b><br><b>5.1 สภาพเศรษฐกิจ-สังคม</b><br>1. พิจารณาการจ้างงานของคนในท้องถิ่นหรือมีที่พักในบริเวณใกล้เคียงโครงการเป็นอันดับแรก | - นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซี ได้มีการพิจารณาว่าจ้างคนในท้องถิ่นหรือมีที่พักในบริเวณใกล้เคียงโครงการเข้ามาปฏิบัติงานดูแลความเป็นระเบียบเรียบร้อยในโครงการ | -                       | -             |
| 2. การรับผู้พักอาศัยที่จะมาเช่าซื้อห้องชุดของโครงการจะต้องลงทะเบียนอย่างถูกต้อง และปฏิบัติตามกฎหมายเกี่ยวกับการเช่าซื้ออย่างถูกต้อง                     | - นิติบุคคลอาคารชุด กรีน ไนน์ อาคาร ซี ได้จัดให้มีการลงทะเบียนผู้พักอาศัยที่มาเช่าซื้อห้องชุดของโครงการให้เป็นไปตามกฎหมาย/ข้อกำหนดที่เกี่ยวข้อง                    | -                       | -             |
| <b>5.2 ความปลอดภัย และการป้องกันอัคคีภัย</b><br>1. จัดให้มีเจ้าหน้าที่รักษาความปลอดภัยตลอด 24 ชั่วโมง บริเวณทางเข้า-ออกและภายในพื้นที่โครงการ           | - โครงการมีเจ้าหน้าที่รักษาความปลอดภัยประจำตลอด 24 ชั่วโมง บริเวณทางเข้า-ออก และภายในพื้นที่โครงการ  | -                       | เอกสาร 2-9    |
| 2. จัดให้มีระบบสัญญาณเตือนภัยป้องกันบุคคลภายนอกบุกรุกพื้นที่อาคาร   | - อาคาร ซี มีการใช้ระบบสัญญาณสำหรับการเข้า-ออกโครงการ  | -                       | เอกสาร 2-9    |
| 3. ติดตั้งระบบโทรทัศน์วงจรปิด เพื่อบันทึกภาพผู้เข้าออกอาคาร   | - อาคาร ซี มีการติดตั้งระบบโทรทัศน์วงจรปิด (CCTV) เพื่อบันทึกภาพผู้เข้า-ออกอาคาร   | -                       | เอกสาร 2-9    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหา/อุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|--|--------------------------|---------------|
| 4. ส่งเจ้าหน้าที่เข้าอบรมด้านการกู้ภัยและระงับอัคคีภัย ให้มีความสามารถเข้ากู้ภัยและระงับอัคคีภัยได้อย่างมีประสิทธิภาพ   | - ในปี 2566 นิติบุคคลอาคารชุด กรีน ไนน์ อาคารฯ มีแผนจัดให้มีการอบรมด้านการกู้ภัยและระงับอัคคีภัยให้แก่เจ้าหน้าที่และผู้พักอาศัย ในช่วงครึ่งปีหลัง                    | -                        | เอกสาร 2-7    |
| 5. จัดให้มีเจ้าหน้าที่ดับเพลิงประจำโครงการ พร้อมส่งเจ้าหน้าที่เข้าอบรม ให้มีความสามารถในการระงับอัคคีภัยและปฐมพยาบาลผู้ป่วยในกรณีฉุกเฉิน                                  | - ในปี 2566 นิติบุคคลอาคารชุด กรีน ไนน์ อาคารฯ มีแผนจัดให้มีการอบรมด้านการระงับอัคคีภัยและปฐมพยาบาลผู้ป่วยในกรณีฉุกเฉินให้แก่เจ้าหน้าที่ที่โครงการ ในช่วงครึ่งปีหลัง | -                        | เอกสาร 2-7    |
| 6. จัดเตรียมสำเนาแบบแปลนอาคาร โครงการทุกชั้นไว้ที่ห้องเก็บของบริเวณชั้นที่ 1 จำนวน 1 ชุด สำหรับใช้ในกรณีมีเหตุฉุกเฉิน   | - อาคารฯ มีการสำเนาแบบแปลนอาคารจัดเก็บไว้บริเวณห้องสำนักงานนิติบุคคล สำหรับใช้ในกรณีมีเหตุฉุกเฉิน  | -                        | -             |
| 7. จัดทำแผนผังแสดงตำแหน่งของระบบป้องกันอัคคีภัยและเส้นทางหนีไฟ ตลอดจนข้อเสนอแนะในการปฏิบัติตัวเมื่อเกิดเหตุเพลิงไหม้ติดไว้ที่ประตูทางออกบันไดหนีไฟ และหน้าโถงลิฟท์ทุกชั้น | - อาคารฯ มีการติดตั้งแผนผังแสดงตำแหน่งระบบป้องกันอัคคีภัยและเส้นทางหนีไฟบริเวณหน้าลิฟต์ เพื่อให้ผู้พักอาศัยสามารถปฏิบัติตัวได้อย่างถูกต้องเมื่อเกิดเหตุเพลิงไหม้     | -                        | เอกสาร 2-7    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|--|-------------------------|---------------|
| 8. ทำการฝึกซ้อมใหญ่ด้านป้องกันและระงับอัคคีภัยของโครงการ ร่วมกับเจ้าหน้าที่ตำรวจดับเพลิง อย่างน้อยปีละ 1 ครั้ง  | - ในปี 2566 นิติบุคคลอาคารชุด กรีน โนนฯ อาคารซี มีแผนจัดให้มีการซ้อมใหญ่ด้านป้องกันและระงับอัคคีภัยของโครงการร่วมกับเจ้าหน้าที่ยที่ตำรวจดับเพลิง ในช่วงครึ่งปีหลัง | -                       | เอกสาร 2-7    |
| 9. จัดให้มีคณะทำงานด้านความปลอดภัย รับผิดชอบในการจัดให้แผนการซ้อมอพยพหนีไฟ การดับเพลิง การตรวจสอบจำนวนคน และการระวังอัคคีภัยในเบื้องต้น   | - นิติบุคคลอาคารชุด กรีน โนนฯ ได้จัดให้มีคณะทำงานด้านความปลอดภัยรับผิดชอบในการซ้อมอพยพหนีไฟ การดับเพลิง การตรวจสอบจำนวนคน และการระวังอัคคีภัยในเบื้องต้น           | -                       | -             |
| 10. จัดให้มีพื้นที่จุดรวมพลภายในโครงการทั้งหมด 7 บริเวณประกอบด้วย <ul style="list-style-type: none"><li>- บริเวณสนามหญ้าหน้าอาคาร C (พื้นที่ 266.57 ตารางเมตร) รองรับคนจากอาคาร A2 (อัตราส่วนผู้พักอาศัยต่อพื้นที่รวมพล 1 : 0.42 )</li><li>- บริเวณสนามหญ้าปีกขวาอาคาร A7 (พื้นที่ 177.99 ตารางเมตร) รองรับคนจากอาคาร A3 (อัตราส่วนผู้พักอาศัยต่อพื้นที่รวมพล 1 : 0.28)</li></ul> | - พื้นที่จุดรวมพลของผู้พักอาศัยอาคาร ซี ได้มีการกำหนดให้มีการใช้พื้นที่ร่วมกันบริเวณด้านหน้าอาคาร  | -                       | เอกสาร 2-7    |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|---|-------------------------|---------------|
| <div><div>- บริเวณสนามหญ้าปลูกชำอาคาร A7 (พื้นที่ 132.84 ตารางเมตร) รองรับคนจากอาคาร B (อัตราส่วนผู้พักอาศัยต่อพื้นที่รวมพล 1 : 0.38 )</div><div>- บริเวณสนามหญ้าปลูกชำอาคารสโมสร (พื้นที่ 203.37 ตารางเมตร) รองรับคนจากอาคาร A1, E (อัตราส่วนผู้พักอาศัยต่อพื้นที่รวมพล 1 : 0.31 )</div><div>- บริเวณสนามหญ้าปลูกชำอาคารสโมสร (พื้นที่ 246.67 ตารางเมตร) รองรับคนจากอาคาร C (อัตราส่วนผู้พักอาศัยต่อพื้นที่รวมพล 1 : 0.36)</div><div>- บริเวณสนามหญ้าปลูกชำอาคาร B (พื้นที่ 188.76 ตารางเมตร) รองรับคนจากอาคาร A4 ( อัตราส่วนผู้พักอาศัยต่อพื้นที่รวมพล 1 : 0.30)</div><div>- บริเวณสนามหญ้าด้านหลังอาคาร B (พื้นที่ 542.06 ตารางเมตร) รองรับคนจากอาคาร A5, A6, A7 (อัตราส่วนผู้พักอาศัยต่อพื้นที่รวมพล 1 : 0.28 )</div></div> |   |                         |               |



ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | รายละเอียดผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|---|---|-------------------------|---------------|
| 11. จัดเตรียมระบบป้องกันอัคคีภัยภายในอาคาร โครงการให้เป็นไปตามข้อกำหนดในกฎกระทรวง ฉบับที่ 39 (พ.ศ. 2537) กฎกระทรวง ฉบับที่ 48 (พ.ศ. 2540) และกฎกระทรวง ฉบับที่ 55 (พ.ศ. 2543) ออกตามความในพระราชบัญญัติควบคุมอาคาร พ.ศ. 2522 โดยโครงการจัดให้มีอุปกรณ์ป้องกันอัคคีภัย ประกอบด้วย อุปกรณ์แจ้งเหตุเพลิงไหม้ด้วยมือ (Niamual Station) อุปกรณ์ส่งสัญญาณแจ้งเหตุเพลิงไหม้ (Fire Alarm) เครื่องตรวจจับความร้อน (Heat Detector) ป้ายบอกชั้นและป้ายเรืองแสงแสดงทางหนีไฟ ระบบส่งสัญญาณเพลิงไหม้ตู้ดับเพลิง (FHC) และบันไดหนีไฟ | - อาคาร ซึ่ง ได้มีการออกแบบและติดตั้งอุปกรณ์ป้องกันอัคคีภัย ประกอบด้วย อุปกรณ์แจ้งเหตุเพลิงไหม้ด้วยมือ (Niamual Station) อุปกรณ์ส่งสัญญาณแจ้งเหตุเพลิงไหม้ (Fire Alarm) เครื่องตรวจจับความร้อน (Heat Detector) ป้ายบอกชั้นและป้ายเรืองแสงแสดงทางหนีไฟ ระบบส่งสัญญาณเพลิงไหม้ตู้ดับเพลิง (FHC) และบันไดหนีไฟ | -                       | เอกสาร 2-7    |
| 12. ระบบป้องกันอัคคีภัยส่วนกลาง ต้องจัดให้มีเครื่องสูบน้ำดับเพลิงชนิดหามหาม กำลังสูงสุด 70 แรงม้าจำนวน 3 เครื่อง เพื่อสูบน้ำสู่อุปกรณ์รับน้ำของอาคาร พร้อมทั้งจัดให้มีรถกระบะสำหรับเคลื่อนย้ายเครื่องสูบน้ำดับเพลิงดังกล่าว ประกอบกับจัดให้มีเจ้าหน้าที่ดับเพลิงประจำโครงการ (เจ้าหน้าที่ฝ่ายช่าง) พร้อมอุปกรณ์ดับเพลิง   | - โครงการมีการจัดเตรียมเครื่องสูบน้ำดับเพลิงเพื่อสูบน้ำสู่อุปกรณ์รับน้ำของอาคาร และอุปกรณ์ดับเพลิง สำหรับการป้องกันอัคคีภัยส่วนกลาง   | -                       | -             |

ตารางที่ 2-1 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระหว่างเดือนมกราคม-มิถุนายน 2566 (ต่อ)

| มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม   | รายละเอียดการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม  | ปัญหาอุปสรรคและการแก้ไข | เอกสารอ้างอิง |
|--|--|-------------------------|---------------|
| 5.3 ที่ดินสภาพ   |  |                         |               |
| 1. การจัดภูมิทัศน์ของโครงการเป็นไปตามที่เสนอในรายงาน   | - นิเทศอาคารชุด กรีน ไนน์ อาคาร ซี ได้ดูแลสภาพภูมิทัศน์บริเวณอาคาร ซี ให้เป็นไปตามที่มีการออกแบบและก่อสร้างไว้   | -                       | -             |
| 2. จัดให้มีพื้นที่สีเขียวภายในโครงการเพื่อเพิ่มความร่มรื่นภายในโครงการเนื้อที่ 5,854 ตารางเมตร สำหรับผู้พักอาศัย 5,512 คน อัตราส่วนพื้นที่สีเขียว : ผู้พักอาศัยเท่ากับ 1.06 : 1 มีรายละเอียดดังนี้   | - พื้นที่สีเขียวระดับพื้นดินเนื้อที่ 4,532 ตารางเมตร ประกอบด้วยพื้นที่ปลูกไม้ยืนต้น 2,955 ตารางเมตร คิดเป็นร้อยละ 65.20 ของพื้นที่สีเขียวระดับพื้นดิน พันธุ์ไม้ที่เลือกปลูกได้แก่ ต้นพญาสัตบรรณ ต้นทองหลาง ต่าง และต้นอินทผลัม | -                       | เอกสาร 2-8    |
| - พื้นที่ปลูกไม้ประดับบนอาคารบริเวณระเบียงชั้น 1 ของอาคารพักอาศัย A1-A7 และ B เนื้อที่ 561 ตารางเมตร และพื้นที่ปลูกบนอาคารสโสร 761 ตารางเมตร พันธุ์ไม้ที่เลือกปลูกได้แก่ เพื่อทำ แก้ว ไม้เลื้อย ลัง ญี่ปุ่น พุดตะแคง เทียนทอง และพื้นที่ปลูกหญ้าขนาดเล็ก |  |                         |               |

# บทที่ 3

ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม

---

## ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม

### 3.1 ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม

ผลการปฏิบัติตามมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม ระยะดำเนินการ โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี ของนิคมอุตสาหกรรมชุด กรีนไนน์ อาคาร ซี ระหว่างเดือนมกราคม-มิถุนายน 2566 แสดงดังตารางที่ 3-1

### 3.2. สรุปผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม

มาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม ในรายงานการประเมินผลกระทบสิ่งแวดล้อม ระยะดำเนินการ โครงการกรีนไนน์ (GREEN NINE) ได้กำหนดให้ติดตามตรวจสอบผลกระทบด้านคุณภาพ น้ำ และด้านความปลอดภัยและการป้องกันอัคคีภัย จากการติดตามตรวจสอบผลการปฏิบัติตามมาตรการ ติดตามตรวจสอบ ระหว่างเดือนมกราคม-มิถุนายน 2566 ไม่พบแนวโน้มผลกระทบสิ่งแวดล้อมในส่วน ของ อาคาร ซี แต่อย่างใด

ตารางที่ 3-1 ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม ระหว่างเดือนกรกฎาคม-มิถุนายน 2566

| มาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม   | ปัญหา/อุปสรรคและการแก้ไข | เอกสารอ้างอิง                       |
|--|---|--------------------------|-------------------------------------|
| 1. น้ำเสีย   |   |                          |                                     |
| - ติดตามตรวจสอบคุณภาพน้ำโดยกำหนดจุดเก็บตัวอย่างน้ำ<br>1) บ่อพักน้ำก่อนและหลังผ่านระบบบำบัดน้ำเสีย WW (A1-A7), WW (B), WW (C) และบ่อตรวจสภาพน้ำก่อนระบายออกนอกโครงการ ตรวจวิเคราะห์ดัชนีคุณภาพน้ำประกอบด้วย pH, BOD <sub>5</sub> , Total Solid, Suspended Solid, Dissolved Solid, Nitrogen, Fat, Oil & Grease, Total Coliform ความถี่ 1 เดือน/ครั้ง | - นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี ได้แจ้งให้มีการตรวจวิเคราะห์คุณภาพน้ำเสียก่อนเข้าระบบบำบัด (Influent) น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) และน้ำก่อนระบายออกนอกโครงการ (Final Discharge) เดือนละ 1 ครั้ง โดยในเดือน กรกฎาคม-มิถุนายน 2566 ผลการตรวจวิเคราะห์พบว่า มีค่าอยู่ในเกณฑ์มาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด (อาคารประเภท ข) ยกเว้น BOD, SS, TDS และ TKN ในบางเดือน ซึ่งโครงการได้นำข้อมูลผลการตรวจวิเคราะห์คุณภาพน้ำดังกล่าวมาใช้ในการปรับปรุงแก้ไขระบบบำบัดน้ำเสียต่อไป รายละเอียดแสดงในหัวข้อ 3.2.1 | -                        | ภาคผนวก 3<br>ภาคผนวก 4<br>ภาคผนวก 5 |
| 2) บ่อพักน้ำก่อนและหลังผ่านระบบบำบัดน้ำเสีย WW (D), WW (E) ตรวจวิเคราะห์ดัชนีคุณภาพ 8 สถานี เช่นเดียวกัน และให้เพิ่มการตรวจวัด Residual Chlorine ความถี่ 1 เดือน/ครั้ง   | - ไม่อยู่ในขอบเขตการดำเนินงานของโครงการกรีนไนน์ (GREEN NINE) อาคาร ซี   | -                        | -                                   |

ตารางที่ 3-1 ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม ระหว่างเดือนกรกฎาคม-ธันวาคม (ต่อ)

| มาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม   | รายละเอียดผลการปฏิบัติตามมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม  | ปัญหา/อุปสรรคและการแก้ไข | เอกสารอ้างอิง                       |
|--|--|--------------------------|-------------------------------------|
| 1. น้ำเสีย (ต่อ)   |  |                          |                                     |
| - สรุปผลการวิเคราะห์เสนอสำนักงานนโยบายและแผนทรัพยากรธรรมชาติและสิ่งแวดล้อม ทุก 6 เดือน   | - นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซึ่ ได้จัดให้มีการตรวจวิเคราะห์คุณภาพน้ำเสียก่อนเข้าระบบบำบัด (Influent) น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) และนำก่อนระบายออกนอกโครงการ (Final Discharge) เดือนละ 1 ครั้ง โดยในปี 2566 ได้ว่าจ้างห้องปฏิบัติการวิเคราะห์เอกชนเข้ามาดำเนินการเก็บตัวอย่างและตรวจวิเคราะห์คุณภาพน้ำเพื่อรายงานผลการวิเคราะห์ต่อหน่วยงานที่เกี่ยวข้อง | -                        | ภาคผนวก 3<br>ภาคผนวก 4<br>ภาคผนวก 5 |
| 2. ความปลอดภัย และการป้องกันอัคคีภัย   |  |                          |                                     |
| - จดบันทึกการฝึกซ้อมดับเพลิงสภากาพย์ปัญหาที่เกิดขึ้นตลอดจนแนวทางวิธีการแก้ไขปัญหานั้น ทักประสิทธิภาพอุปกรณ์ป้องกันอัคคีภัยทุกชนิดลงสมุดการตรวจสอบความถี่ 1 เดือน/ครั้ง | - นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซึ่ ได้จัดให้มีเจ้าหน้าที่ฝ่ายช่างทำหน้าที่ตรวจสอบประสิทธิภาพของอุปกรณ์ป้องกันอัคคีภัย ความถี่เดือนละ 1 ครั้ง โดยอุปกรณ์ป้องกันอัคคีภัยภายในอาคาร ซึ่ อยู่ในสภาพที่พร้อมใช้งาน  | -                        | เอกสาร 2-7                          |
|  | - ในปี 2566 นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซึ่ มีแผนจัดให้มีการฝึกซ้อมดับเพลิงประจำปี ในช่วงครึ่งปีหลัง  | -                        | เอกสาร 2-7                          |

### 3.2.1 ผลการติดตามตรวจสอบคุณภาพน้ำทิ้ง

#### 1) การดำเนินการ

|                                  |   |
|----------------------------------|---|
| ผู้เก็บตัวอย่าง/ผู้ตรวจวิเคราะห์ | บริษัท อีโคเทค วอเตอร์ซิสเต็มส์ จำกัด (ห้องปฏิบัติการวิเคราะห์เอกชน เลขทะเบียน ว-295)   |
| จุดเก็บตัวอย่าง                  | น้ำเสียก่อนเข้าระบบบำบัด (Influent) น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) และน้ำก่อนระบายออกนอกโครงการ (Final Discharge) เดือนละ 1 ครั้ง มีภาพการเก็บตัวอย่างแสดงดังรูปที่ 3-1                      |
| ดัชนีที่ตรวจวิเคราะห์            | pH, BOD, Suspended Solid, Total Dissolved Solid, Total Solid, TKN, Grease & Oil และ Total Coliform Bacteria (วิธีการเก็บตัวอย่าง วิธีการวิเคราะห์ และมาตรฐานวิธีการวิเคราะห์ แสดงดังตารางที่ 3-2) |
| มาตรฐานที่ใช้เปรียบเทียบ         | ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)   |

ตารางที่ 3-2 วิธีการเก็บตัวอย่าง วิธีการวิเคราะห์ และมาตรฐานวิธีวิเคราะห์คุณภาพน้ำทิ้ง

| ดัชนีที่ตรวจวัด            | วิธีการเก็บตัวอย่าง | วิธีวิเคราะห์/มาตรฐานวิธีวิเคราะห์                |
|----------------------------|---------------------|---|
| 1. pH                      | Grab Sampling       | APHA / Electrometric Method                       |
| 2. BOD                     | Grab Sampling       | APHA / 5-day BOD Test, Azide Modification Method  |
| 3. Suspended Solids        | Grab Sampling       | APHA / Total Suspended Solids Dried at 103-105 °C |
| 4. Total Dissolved Solids  | Grab Sampling       | APHA / Total Dissolved Solids Dried at 180°C      |
| 5. Total Solids            | Grab Sampling       | APHA / Total Solids Dried at 103-105 °C           |
| 6. TKN                     | Grab Sampling       | APHA / Semi-Micro Kjeldahl Nitrogen               |
| 7. Grease & Oil            | Grab Sampling       | APHA / Liquid-Liquid, Partial-Gravimetric Method  |
| 8. Total Coliform Bacteria | Grab Sampling       | APHA / Multiple Tube Fermentation Technique       |

หมายเหตุ : APHA : Standard Method for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23<sup>rd</sup> Edition 2017



น้ำเสียก่อนเข้าระบบบำบัด (Influent) หน้าอาคาร ซี



น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) หน้าอาคาร ซี



น้ำเสียก่อนเข้าระบบบำบัด (Influent)  
ข้างอาคาร ซี ฝั่งอาคาร เอ 3



น้ำทิ้งหลังผ่านระบบบำบัด (Effluent)  
ข้างอาคาร ซี ฝั่งอาคาร เอ 3

รูปที่ 3-1 ภาพการเก็บตัวอย่างน้ำทิ้ง





น้ำเสียก่อนเข้าระบบบำบัด (Influent)  
ข้างอาคาร ซี ฟังอาคาร เอ 2



น้ำทิ้งหลังผ่านระบบบำบัด (Effluent)  
ข้างอาคาร ซี ฟังอาคาร เอ 2



น้ำก่อนระบายออกนอกโครงการ (Final Discharge)

### รูปที่ 3-1 ภาพการเก็บตัวอย่างน้ำทิ้ง (ต่อ)

#### 2) ผลการตรวจวิเคราะห์

ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งในเดือนมกราคม-มิถุนายน 2566 แสดงดังตารางที่ 3-3 และรูปที่ 3-2 เมื่อนำมาเทียบกับค่ามาตรฐานตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ. 2548 เรื่อง กำหนดมาตรฐานควบคุมคุณภาพน้ำทิ้งจากอาคารบางประเภทและบางขนาด (อาคารประเภท ข) พบว่า น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) หน้าอาคาร ซี น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) ข้างอาคารซี ฟังอาคาร เอ 3 น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) ข้างอาคารซี ฟังอาคาร เอ 2 และน้ำก่อนระบายออกนอกโครงการ (Final Discharge) มีค่าอยู่ในเกณฑ์มาตรฐาน ยกเว้น BOD, SS, TDS และ TKN ในบางเดือน ซึ่งโครงการได้นำข้อมูลผลการตรวจวิเคราะห์คุณภาพน้ำดังกล่าวมาใช้ในการปรับปรุงแก้ไขระบบบำบัดน้ำเสียต่อไป

### 3) ผลการตรวจวิเคราะห์ที่ผ่านมา

ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ปี 2564-2566) ดังตารางที่ 3-4 และรูปที่ 3-2 เมื่อนำมาเทียบกับค่ามาตรฐานตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ. 2548 เรื่อง กำหนดมาตรฐานควบคุมคุณภาพน้ำทิ้งจากอาคารบางประเภทและบางขนาด (อาคารประเภท ข) พบว่าที่ผ่านมาน้ำทิ้งหลังผ่านระบบบำบัด (Effluent) หน้าอาคาร ซี น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) ข้างอาคารซี ฝั่งอาคาร เอ 3 น้ำทิ้งหลังผ่านระบบบำบัด (Effluent) ข้างอาคารซี ฝั่งอาคาร เอ 2 และน้ำก่อนระบายออกนอกโครงการ (Final Discharge) มีค่าอยู่ในเกณฑ์มาตรฐาน ยกเว้น BOD, SS, TDS และ TKN ในบางเดือน ซึ่งโครงการได้นำข้อมูลผลการตรวจวิเคราะห์คุณภาพน้ำดังกล่าวมาใช้ในการปรับปรุงแก้ไขระบบบำบัดน้ำเสียต่อไป

ตารางที่ 3-3 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 1/2566     | 25/01/66           | 25/01/66                            | 7.0     | 34.5       | 12.4                    | 383                           | 395.4               | 44.2       | <LOQ (5.0)          | >160000                              |
|            |                    | Effluent หน้าอาคาร ซี               | 7.1     | 28         | 710.2                   | 345                           | 1055.2              | 14.6       | <LOQ (5.0)          | >160000                              |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.6     | 44.5       | 269.4                   | 424                           | 693.4               | 84.6       | <LOQ (5.0)          | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8     | 5.8        | 262.8                   | 486                           | 788.8               | 14.6       | <LOQ (5.0)          | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.1     | 27         | 552.6                   | 478                           | 1030.6              | 35.8       | <LOQ (5.0)          | 54,000                               |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.6     | 14.5       | 70.8                    | 362.5                         | 565.8               | 7.8        | <LOQ (5.0)          | 54,000                               |
|            |                    | Final Discharge                     | 7.3     | 60         | 29.8                    | 433                           | 462.8               | 53.2       | <LOQ (5.0)          | 17,000                               |
| ค่ามาตรฐาน |                    |                                     | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

มาตรฐาน : ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)

: ND หมายถึง ตรวจไม่พบ

: <LOD หมายถึง Limit of detection (ขีดจำกัดการตรวจหาปริมาณต่ำสุดที่สามารถวัดได้)

: Influent หมายถึง น้ำเสียก่อนเข้าระบบบำบัด      Effluent หมายถึง น้ำทิ้งหลังผ่านระบบบำบัด      Final Discharge หมายถึง น้ำก่อนระบายออก

: น้ำทิ้งก่อนเข้าระบบบำบัด (Influent) ไม่เทียบค่ามาตรฐาน

หมายเหตุ : ไปรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ แสดงข้อมูลสารในภาคผนวกที่ 3

: เอกสารสอบเทียบเครื่องมือตรวจวิเคราะห์คุณภาพน้ำ แสดงข้อมูลสารในภาคผนวกที่ 4

: เอกสารขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน แสดงข้อมูลสารในภาคผนวกที่ 5

ตารางที่ 3-3 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH  | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|-----|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 2/2566     | 23/02/66           | Influent น้ำอาคาร ซี                | 7.5 | 40.0       | 89.5                    | 410                           | 500.0.              | 16.8       | <LOQ (5.0)          | 92,000                               |
|            |                    | Effluent น้ำอาคาร ซี                | 7.4 | 20.0       | 60.0                    | 430                           | 4900                | 12.8       | <LOQ (5.0)          | 54,000                               |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.7 | 147.5      | 247.9                   | 375                           | 622.9               | 85.7       | 7.6                 | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.9 | 29.3       | 55.1                    | 433                           | 487.6               | 12.8       | <LOQ (5.0)          | 11,000                               |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.4 | 122.5      | 145.6                   | 373                           | 518.1               | 68.3       | 13.0                | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.5 | 12.3       | 14.1                    | 450                           | 464.0               | 12.3       | <LOQ (5.0)          | 13,000                               |
|            |                    | Final Discharge                     | 7.6 | 32.0       | 22.3                    | 513                           | 535.1               | 39.8       | <LOQ (5.0)          | >160,000                             |
|            |                    | ค่ามาตรฐาน                          |     | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

มาตรฐาน : ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)

: ND หมายถึง ตรวจไม่พบ

: <LOD หมายถึง Limit of detection (ขีดจำกัดการตรวจหาปริมาณต่ำสุดที่สามารถวัดได้)

: Influent หมายถึง น้ำเสียก่อนเข้าระบบบำบัด      Effluent หมายถึง น้ำทิ้งหลังผ่านระบบบำบัด      Final Discharge หมายถึง น้ำก่อนระบายออก

: น้ำทิ้งก่อนเข้าระบบบำบัด (Influent) ไม่เทียบค่ามาตรฐาน

หมายเหตุ : ใบรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ แสดงข้อมูลสารในภาคผนวกที่ 3

: เอกสารสอบเทียบเครื่องมือตรวจวิเคราะห์คุณภาพน้ำ แสดงข้อมูลสารในภาคผนวกที่ 4

: เอกสารขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน แสดงข้อมูลสารในภาคผนวกที่ 5

ตารางที่ 3-3 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|------------|---------------------|--------------------------------------|
| 3/2566     | 23/03/66           | Influent น้ำอาคาร ซี                | 7.8     | 39.0       | 21.9                    | 406                           | 427.9      | <LOQ (5.0)          | 54,000                               |
|            |                    | Effluent น้ำอาคาร ซี                | 7.3     | 55.0       | 20.0                    | 533                           | 490.0      | <LOQ (5.0)          | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.6     | 50.5       | 90.6                    | 591                           | 681.6      | <LOQ (5.0)          | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.7     | 10.5       | 9.9                     | 389                           | 464.0      | <LOQ (5.0)          | 35,000                               |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.6     | 50.5       | 90.6                    | 591                           | 681.6      | <LOQ (5.0)          | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.7     | 10.5       | 9.9                     | 389                           | 464.0      | <LOQ (5.0)          | 35,000                               |
|            |                    | Final Discharge                     | 7.4     | 47.0.      | 41.4                    | 480                           | 521.4      | 6.8                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -          | ≤20                 | -                                    |

มาตรฐาน : ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)

: ND หมายถึง ตรวจไม่พบ

: <LOD หมายถึง Limit of detection (ขีดจำกัดการตรวจหาปริมาณต่ำสุดที่สามารถวัดได้)

: Influent หมายถึง น้ำเสียก่อนเข้าระบบบำบัด      Effluent หมายถึง น้ำทิ้งหลังผ่านระบบบำบัด      Final Discharge หมายถึง น้ำก่อนระบายออก

: น้ำทิ้งก่อนเข้าระบบบำบัด (Influent) ไม่เทียบค่ามาตรฐาน

หมายเหตุ : ใบรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 3

: เอกสารสอบเทียบเครื่องมือตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 4

: เอกสารขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน แสดงดังเอกสารในภาคผนวกที่ 5

ตารางที่ 3-3 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH  | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|-----|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 4/2566     | 28/04/66           | Influent น้ำอาคาร ซี                | 6.9 | 27.5       | 21.7                    | 518                           | 539.2               | 11.8       | 5.6                 | >160,000                             |
|            |                    | Effluent น้ำอาคาร ซี                | 7.9 | 22.8       | 74.0                    | 385                           | 4320                | 65.0.      | 5.0                 | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.4 | 150        | 1,616.0                 | 408                           | 2023.5              | 132.2      | 35.2                | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6 | 10.6       | 36.7                    | 500                           | 536.7               | 14.0       | 5.2                 | 4,900                                |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.8 | 280        | 1,214.3                 | 390                           | 1604.3              | 8.4        | 36.4                | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.7 | 24         | 20.0                    | 408                           | 427.5               | 3.9        | <LOQ (5.0)          | >160,000                             |
|            |                    | Final Discharge                     | 7.4 | 47         | 41.4                    | 480                           | 521.4               | 44.8       | 6.8                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          |     | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

มาตรฐาน : ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)

: ND หมายถึง ตรวจไม่พบ

: <LOD หมายถึง Limit of detection (ขีดจำกัดการตรวจหาปริมาณต่ำสุดที่สามารถวัดได้)

: Influent หมายถึง น้ำเสียก่อนเข้าระบบบำบัด      Effluent หมายถึง น้ำทิ้งหลังผ่านระบบบำบัด      Final Discharge หมายถึง น้ำก่อนระบายออก

: น้ำทิ้งก่อนเข้าระบบบำบัด (Influent) ไม่เทียบค่ามาตรฐาน

หมายเหตุ : ใบรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 3

: เอกสารสอบเทียบเครื่องมือตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 4

: เอกสารขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน แสดงดังเอกสารในภาคผนวกที่ 5

ตารางที่ 3-3 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง | pH                         | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |          |
|------------|--------------------|-----------------|----------------------------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|----------|
| 5/2566     | 25/05/66           | Influent        | หน้าอาคาร ซี               | 21.0       | 32.2                    | 340                           | 372.2               | 2.8        | <LOQ (5.0)          | 92,000                               |          |
|            |                    | Effluent        | หน้าอาคาร ซี               | 85.0       | 49.7                    | 330                           | 379.7               | 68.3       | 16.8                | 24,000                               |          |
|            |                    | Influent        | ข้างอาคาร ซี ฟังอาคาร เอ 3 | 8.3        | 17.1                    | 430                           | 447.1               | 7.3        | 7.0                 | 4,900                                |          |
|            |                    | Effluent        | ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.7        | 21.0                    | 444                           | 465.0               | 6.7        | 5.6                 | 2,200                                |          |
|            |                    | Influent        | ข้างอาคาร ซี ฟังอาคาร เอ 2 | 320.0      | 728.0                   | 410                           | 1138                | 39.2       | 9.4                 | >160,000                             |          |
|            |                    | Effluent        | ข้างอาคาร ซี ฟังอาคาร เอ 2 | 4.0        | 13.9                    | 436                           | 449.9               | <LOQ (4.0) | <LOQ (5.0)          | 24,000                               |          |
|            |                    | Final Discharge |                            | 7.3        | 36.5                    | 16.5                          | 392                 | 408.5      | 31.9                | 7.0                                  | >160,000 |
|            |                    |                 |                            |            |                         |                               |                     |            |                     |                                      |          |
|            |                    | ค่ามาตรฐาน      | 5.0-9.0                    | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |          |

มาตรฐาน : ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)

: ND หมายถึง ตรวจไม่พบ

: <LOD หมายถึง Limit of detection (ขีดจำกัดการตรวจหาปริมาณต่ำสุดที่สามารถวัดได้)

: Influent หมายถึง น้ำเสียก่อนเข้าระบบบำบัด      Effluent หมายถึง น้ำทิ้งหลังผ่านระบบบำบัด      Final Discharge หมายถึง น้ำก่อนระบายออก

: น้ำทิ้งก่อนเข้าระบบบำบัด (Influent) ไม่เทียบค่ามาตรฐาน

หมายเหตุ : ไปรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 3

: เอกสารสอบเทียบเครื่องมือตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 4

: เอกสารขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน แสดงดังเอกสารในภาคผนวกที่ 5

ตารางที่ 3-3 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH  | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|-----|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 6/2566     | 15/06/66           | Influent น้ำอาคาร ซี                | 6.7 | 47.0       | 41.9                    | 468                           | 509.9               | 9.5        | <LOQ (5.0)          | 160,000                              |
|            |                    | Effluent น้ำอาคาร ซี                | 6.7 | 12.0       | 15.3                    | 436                           | 451.3               | 11.2       | <LOQ (5.0)          | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8 | 16.0       | 17.9                    | 426                           | 443.9               | 13.4       | <LOQ (5.0)          | 54,000                               |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8 | 28.8       | 15.4                    | 478                           | 493.4               | 12.3       | <LOQ (5.0)          | 24,000                               |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.3 | 300.0      | 89.7                    | 404                           | 493.7               | 76.7       | 8.8                 | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.0 | 8.5        | 9.1                     | 458                           | 467.1               | <LOQ (4.0) | <LOQ (5.0)          | 24,000                               |
|            |                    | Final Discharge                     | 7.4 | 24.0       | 23.5                    | 398                           | 421.5               | 37.0       | <LOQ (5.0)          | >160,000                             |
|            |                    | ค่ามาตรฐาน                          |     | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

มาตรฐาน : ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)

: ND หมายถึง ตรวจไม่พบ

: <LOD หมายถึง Limit of detection (ขีดจำกัดการตรวจหาปริมาณต่ำสุดที่สามารถวัดได้)

: Influent หมายถึง น้ำเสียก่อนเข้าระบบบำบัด      Effluent หมายถึง น้ำทิ้งหลังผ่านระบบบำบัด      Final Discharge หมายถึง น้ำก่อนระบายออก

: น้ำทิ้งก่อนเข้าระบบบำบัด (Influent) ไม่เทียบค่ามาตรฐาน

หมายเหตุ : ไปรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 3

: เอกสารสอบเทียบเครื่องมือตรวจวิเคราะห์คุณภาพน้ำ แสดงดังเอกสารในภาคผนวกที่ 4

: เอกสารขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน แสดงดังเอกสารในภาคผนวกที่ 5



ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 4/2564     | 28/04/64           | Influent หน้าอาคาร ซี               | 7.2     | 1,130      | 5,734                   | 390                           | 6,060               | 89.5       | 4                   | > 160,000                            |
|            |                    | Effluent หน้าอาคาร ซี               | 7.4     | 39.9       | 6.8                     | 372                           | 381                 | 73.2       | ND                  | > 160,000                            |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.4     | 84.4       | 278                     | 470                           | 725                 | 129        | 8                   | > 160,000                            |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.7     | 4.5        | 9.9                     | 452                           | 462                 | < LOD      | ND                  | 7,900                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.5     | 77.1       | 333                     | 442                           | 777                 | 95.3       | 4                   | > 160,000                            |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.3     | 8.0        | 21.7                    | 438                           | 448                 | 9.2        | ND                  | 54,000                               |
| 5/2564     | 20/05/64           | Final Discharge                     | 7.5     | 33.2       | 84.1                    | 846                           | 966                 | 26.2       | ND                  | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.0     | 62.1       | 267                     | 291                           | 614                 | 70.0       | ND                  | 160,000                              |
|            |                    | Effluent หน้าอาคาร ซี               | 7.2     | 44.0       | 21.7                    | 330                           | 382                 | 68.2       | ND                  | > 160,000                            |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 21.8       | 241                     | 388                           | 666                 | 11.9       | ND                  | 17,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.7     | 15.7       | 105                     | 432                           | 538                 | 5.7        | ND                  | 35,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.8     | 81.0       | 246                     | 464                           | 742                 | 17.2       | ND                  | 13,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.0     | 3.6        | 8.8                     | 450                           | 460                 | 10.1       | ND                  | 1,100                                |
|            |                    | Final Discharge                     | 7.4     | 23         | 15.5                    | 598                           | 652                 | 25.3       | ND                  | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 6/2564     | 11/06/64           | Influent หน้าอาคาร ซี               | 7.1     | 56.6       | 191                     | 402                           | 582                 | 71.9       | ND                  | > 160,000                            |
|            |                    | Effluent หน้าอาคาร ซี               | 7.3     | 24.1       | 10.8                    | 400                           | 430                 | 72.3       | ND                  | > 160,000                            |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 5.3     | 19.2       | 208                     | 602                           | 836                 | 13.8       | ND                  | 24,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 5.4     | 16.9       | 131                     | 596                           | 734                 | 7.1        | ND                  | 11,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.0     | 38.8       | 189                     | 586                           | 776                 | 13.8       | ND                  | 24,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.4     | 5.4        | 11.2                    | 556                           | 570                 | 5.5        | ND                  | 4,900                                |
| 7/2564     | 22/07/64           | Final Discharge                     | 7.4     | 16.9       | 9.8                     | 566                           | 588                 | 36.7       | ND                  | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.2     | 361        | 1,013.00                | 429                           | 1,448.00            | 83.1       | 30                  | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.3     | 37.5       | 14.7                    | 542                           | 570                 | 542        | ND                  | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.1     | 13.2       | 326                     | 428                           | 764                 | 8          | ND                  | 3,300.00                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.1     | 9.4        | 104                     | 428                           | 538                 | 6          | ND                  | 790                                  |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.5     | 164        | 89                      | 591                           | 682                 | 98.2       | ND                  | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.7     | 18         | 25.6                    | 714                           | 750                 | 8          | ND                  | 17,000.00                            |
|            |                    | Final Discharge                     | 7.3     | 36.2       | 12.4                    | 480                           | 498                 | 25.9       | ND                  | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 8/2564     | 25/08/64           | Influent หน้าอาคาร ซี               | 6.9     | 66         | 37.6                    | 338                           | 436                 | 64.1       | ND                  | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.2     | 28.7       | 11.4                    | 372                           | 394                 | 61.3       | ND                  | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.6     | 23.8       | 102                     | 480                           | 638                 | 73.5       | ND                  | 54,000.00                            |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.2     | 10.1       | 153                     | 410                           | 667                 | 9.4        | ND                  | 17,000.00                            |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.2     | 204        | 191                     | 450                           | 697                 | 86.7       | ND                  | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.7     | 12.2       | 18.1                    | 502                           | 546                 | 7.3        | ND                  | 35,000.00                            |
| 9/2564     | 23/09/64           | Final Discharge                     | 7.4     | 15.1       | 14.5                    | 604                           | 640                 | 27.8       | ND                  | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 6.7     | 206        | 10,863                  | 467                           | 6,283               | 83.2       | 10                  | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7       | 58.5       | 33                      | 436                           | 498                 | 79         | ND                  | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.3     | 135        | 187                     | 456                           | 610                 | 86.1       | 6                   | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.2     | 44         | 71                      | 546                           | 592                 | 19.7       | ND                  | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.3     | 173        | 254                     | 424                           | 700                 | 89.5       | ND                  | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.1     | 28.7       | 24.6                    | 502                           | 560                 | 11.3       | ND                  | 92,000                               |
|            |                    | Final Discharge                     | 7.3     | 10         | 18.4                    | 212                           | 256                 | 14.9       | ND                  | 160,000                              |
| ค่ามาตรฐาน |                    |                                     | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 10/2564    | 21/10/64           | Influent หน้าอาคาร ซี               | 7.5     | 50.6       | 236.5                   | 482                           | 720                 | 49.1       | 3                   | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.5     | 52.8       | 28.4                    | 443                           | 472                 | 39.5       | ND                  | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.2     | 30.5       | 22.4                    | 435                           | 458                 | 34.4       | ND                  | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.2     | 18.4       | 17.5                    | 504                           | 520                 | 33.1       | ND                  | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.5     | 94.2       | 118.6                   | 402                           | 525                 | 86.1       | ND                  | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.2     | 25.2       | 22.5                    | 484                           | 510                 | 10.8       | ND                  | >160,000                             |
| 11/2564    | 24/11/64           | Final Discharge                     | 7.4     | 8.6        | 14.6                    | 204                           | 220                 | 35.1       | ND                  | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.3     | 98.4       | 202                     | 452                           | 655                 | 36.9       | 5                   | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.4     | 48.8       | 40                      | 412                           | 453                 | 33.2       | ND                  | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.3     | 78.4       | 64.5                    | 442                           | 513                 | 94.5       | ND                  | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.4     | 20.9       | 30.6                    | 498                           | 529                 | 18.3       | ND                  | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7       | 78.3       | 105.7                   | 427                           | 536                 | 86.4       | ND                  | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.8     | 50.8       | 47.7                    | 457                           | 503                 | 16.5       | ND                  | >160,000                             |
|            |                    | Final Discharge                     | 7.5     | 10.6       | 26.4                    | 218                           | 244                 | 50.5       | ND                  | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 12/2564    | 14/12/64           | Influent หน้าอาคาร ซี               | 7.4     | 70.5       | 172.5                   | 409                           | 582                 | 27.4       | 1.6                 | 160,000                              |
|            |                    | Effluent หน้าอาคาร ซี               | 7.4     | 70.5       | 172.5                   | 409                           | 582                 | 27.4       | 1.6                 | 160,000                              |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.5     | 19.5       | 35.2                    | 514                           | 550                 | 25         | <1.0                | 92,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.3     | 67.5       | 84.5                    | 411                           | 496                 | 105        | 2.5                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.3     | 67.5       | 84.5                    | 411                           | 496                 | 105        | 2.5                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.5     | 18.9       | 32.3                    | 422                           | 454                 | 95.1       | 1                   | >160,000                             |
| 1/2565     | 24/01/65           | Final Discharge                     | 7.5     | 13.1       | 28.2                    | 476                           | 505                 | 45.7       | 1.8                 | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.1     | 77.0       | 83.5                    | 543                           | 627                 | 43.6       | 2.0                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.0     | 18.4       | 6.4                     | 542                           | 542                 | 36.2       | <1.0                | 54,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.3     | 62.0       | 121.5                   | 358                           | 479                 | 54.3       | 2.0                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.4     | 19.9       | 4.4                     | 433                           | 438                 | 52.6       | 1.0                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.1     | 98.0       | 708                     | 687                           | 1,396               | 74.9       | 2.0                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.2     | 54.0       | 657                     | 467                           | 1,125               | 35.9       | 1.8                 | >160,000                             |
|            |                    | Final Discharge                     | 7.5     | 18.8       | 11.6                    | 706                           | 7,112               | 34.1       | 2.0                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 2/2565     | 23/02/65           | Influent น้ำอาคาร ซี                | 7.0     | 62.8       | 62.8                    | 586                           | 648                 | 38.2       | 0.3                 | >160,000                             |
|            |                    | Effluent น้ำอาคาร ซี                | 7.0     | 14.4       | 3.2                     | 544                           | 544                 | 35.2       | 0.3                 | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.0     | 62.8       | 62.8                    | 586                           | 648                 | 38.2       | 0.3                 | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 7.0     | 14.4       | 3.2                     | 544                           | 547                 | 35.2       | 0.3                 | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.1     | 76.0       | 112                     | 684                           | 796                 | 87.5       | 0.3                 | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.0     | 44.8       | 108                     | 442                           | 550                 | 11.3       | 0.3                 | 7,900                                |
| 3/2565     | 23/03/65           | Final Discharge                     | 7.3     | 15.2       | 7.4                     | 648                           | 655                 | 51.5       | 0.3                 | >160,000                             |
|            |                    | Influent น้ำอาคาร ซี                | 7.7     | 78.0       | 74.0                    | 556                           | 630.0               | 62.7       | 0.3                 | 160,000                              |
|            |                    | Effluent น้ำอาคาร ซี                | 7.8     | 10.2       | 73.78                   | 548                           | 621.7               | 59.6       | 0.3                 | 160,000                              |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.0     | 46.5       | 463.5                   | 388                           | 851.5               | 12.9       | 0.3                 | 7,900                                |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.1     | 20.5       | 24.7                    | 390                           | 414.7               | 8.1        | 0.3                 | 1,300                                |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.9     | 140.0      | 33.7                    | 382                           | 415.7               | 6.4        | 0.3                 | 54,000                               |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.8     | 28.0       | 49.5                    | 380                           | 429.5               | 5.0        | 0.3                 | 35,000                               |
|            |                    | Final Discharge                     | 7.3     | 19.3       | 14.3                    | 612                           | 626.3               | 49.6       | 0.3                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 4/2565     | 20/04/65           | Influent หน้าอาคาร ซี               | 7.5     | 42.0       | 328.3                   | 520                           | 848.3               | 52.9       | 3.4                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.5     | 21.0       | 79.2                    | 512                           | 591.2               | 51.24      | 2.4                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.3     | 23.0       | 65.0                    | 424                           | 489.0               | 15.1       | 2.0                 | 54,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.3     | 12.8       | 13.5                    | 418                           | 431.5               | 15.1       | 1.8                 | 7,900                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.5     | 39.5       | 252.1                   | 426                           | 678.1               | 22.4       | 3.2                 | 35,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.4     | 11.0       | 20.2                    | 420                           | 440.2               | 12.3       | 2.4                 | 1,700                                |
| 5/2565     | 26/05/65           | Final Discharge                     | 7.3     | 20.0       | 40.7                    | 554                           | 594.7               | 46.48      | 2.8                 | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.4     | 65.0       | 59.8                    | 556                           | 615.8               | 60.4       | 6.2                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.5     | 15.6       | 69.4                    | 572                           | 641.4               | 56.8       | 4.8                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.5     | 29.0       | 32.7                    | 642                           | 674.7               | 76.1       | 4.0                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.3     | 8.8        | 8.3                     | 420                           | 428.3               | 6.7        | 3.0                 | 2,200                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.4     | 102        | 107.8                   | 402                           | 509.8               | 47.6       | 3.8                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.2     | 8.0        | 5.9                     | 390                           | 395.9               | 6.7        | 2.0                 | 14,000                               |
|            |                    | Final Discharge                     | 7.3     | 18.0       | 112.8                   | 810                           | 922.8               | 34.4       | 3.2                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 6/2565     | 14/06/65           | Influent หน้าอาคาร ซี               | 7.6     | 46.0       | 59.5                    | 520                           | 556.5               | 54.3       | 3.4                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.6     | 19.0       | 36.5                    | 518                           | 36.5                | 53.2       | 3.0                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.3     | 32.0       | 63.2                    | 530                           | 593.2               | 66.1       | 3.4                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 5.2     | 6.4        | 5.0                     | 346                           | 351.0               | 9.5        | 1.4                 | 4,900                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.9     | 168        | 509                     | 644                           | 1,153               | 94.6       | 5.4                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.7     | 8.0        | 2.9                     | 358                           | 360.9               | 9.5        | 8.0                 | 7,900                                |
| 7/2565     | 20/07/65           | Final Discharge                     | 7.2     | 39.0       | 35.0                    | 516                           | 551.0               | 48.7       | 4.0                 | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.5     | 34.0       | 32.2                    | 541                           | 573.2               | 54.3       | 3.4                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.5     | 15.4       | 26.4                    | 494                           | 26.4                | 52.1       | <LOD (1.8)          | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.2     | 28.6       | 17.1                    | 516                           | 533.1               | 12.3       | <LOD (2.0)          | 7,900                                |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.2     | 19.3       | 22.8                    | 444                           | 466.8               | 14.0       | <LOD (2.2)          | 2,200                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 5.8     | 38.0       | 46.3                    | 554                           | 600.3               | 67.8       | <LOD (2.8)          | 4,600                                |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.3     | 9.0        | 6.8                     | 480                           | 486.8               | 9.5        | <LOD (2.0)          | 4,600                                |
|            |                    | Final Discharge                     | 7.5     | 19.2       | 19.4                    | 468                           | 487.4               | 36.9       | 3.2                 | >160,000                             |
|            | ค่ามาตรฐาน         |                                     | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |



ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 8/2565     | 25/08/65           | Influent หน้าอาคาร ซี               | 8.0     | 30         | <LOD (2.2)              | 332                           | 324.2               | 67.2       | 3.2                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 8.0     | 11.5       | <LOD (1.8)              | 327                           | 330.1               | 67.1       | <LOD (1.8)          | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 20.5       | 56.5                    | 363                           | 419.5               | 11.2       | 3.0                 | 24,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 9.8        | 39.7                    | 385                           | 424.7               | 6.7        | <LOD (1.0)          | 4,600                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.0     | 81.0       | 386.1                   | 443                           | 829.1               | 23.5       | 6.4                 | 17,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.3     | 7.8        | 17.1                    | 418                           | 435.1               | 14.6       | <LOD (2.6)          | 2,400                                |
|            |                    | Final Discharge                     | 7.5     | 44.5       | 25.4                    | 408.4                         | 433.8               | 50.4       | 3.0                 | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.7     | 102.5      | 14.3                    | 267                           | 281.3               | 70.6       | 3.8                 | >160,000                             |
| 9/2565     | 21/09/65           | Effluent หน้าอาคาร ซี               | 7.7     | 45.5       | 8                       | 288                           | 296                 | 71.12      | 3.2                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 50.0       | 103.7                   | 290                           | 393.7               | 11.8       | 3.2                 | 35,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.5     | 18.5       | 50.8                    | 332                           | 382.8               | 12.9       | <LOD (2.0)          | 14,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.3     | 90.0       | 300                     | 344                           | 644                 | 32.5       | 4.6                 | 54,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.4     | 7.5        | 11.3                    | 338                           | 349.3               | 9.0        | 3.0                 | 1,300                                |
|            |                    | Final Discharge                     | 7.3     | 52.5       | 33                      | 447                           | 480                 | 54.9       | 3.6                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 10/2565    | 20/10/65           | Influent หน้าอาคาร ซี               | 7.5     | 70         | 37.4                    | 287.1                         | 324.5               | 64.4       | 4.0                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.5     | 37         | 20                      | 266.7                         | 306.7               | 64.4       | 3.0                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 78.5       | 187                     | 353.3                         | 540.3               | 19.04      | 3.0                 | 13,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 19         | 80                      | 370.9                         | 451.0               | 15.7       | <LOD (2.0)          | 13,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.3     | 155        | 82                      | 346.7                         | 428.7               | 80.5       | 4.8                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.3     | 14.3       | 26                      | 367.7                         | 393.7               | 12.9       | 2.2                 | 35,000                               |
| 11/2565    | 24/11/65           | Final Discharge                     | 7.3     | 48         | 68.5                    | 434.0                         | 502.5               | 57.7       | 4.0                 | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.4     | 80.0       | 28.3                    | 285                           | 313.3               | 48         | <LOD (5.0)          | 232                                  |
|            |                    | Effluent หน้าอาคาร ซี               | 7.5     | 46.2       | 36.5                    | 277                           | 314                 | 45.7       | <LOD (5.0)          | 3                                    |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.4     | 89.0       | 261.8                   | 225                           | 486.8               | 51.8       | <LOD (5.0)          | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.5     | 15.4       | 49.1                    | 290                           | 339.1               | 5.7        | <LOD (5.0)          | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.0     | 41.0       | 449.5                   | 350                           | 799.5               | 33.4       | <LOD (5.0)          | 160,000                              |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.3     | 23.1       | 18.7                    | 337.5                         | 356.2               | 9.3        | <LOD (5.0)          | 160,000                              |
|            |                    | Final Discharge                     | 7.2     | 32.4       | 27.8                    | 432                           | 460.3               | 40.9       | <LOD (5.0)          | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 12/2565    | 15/12/65           | Influent หน้าอาคาร ซี               | 7.9     | 67.0       | 8.4                     | 350.0                         | 358.4               | 42.6       | <LOD (5.0)          | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.9     | 28.0       | 42.2                    | 340.0                         | 382.2               | 43.1       | <LOD (5.0)          | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8     | 20.0       | 144.8                   | 362.5                         | 465.9               | 20.2       | 5.8                 | 160,000                              |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8     | 11.3       | 94.7                    | 397.5                         | 492.2               | 14.0       | <LOD (5.0)          | 92,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 5.3     | 36.5       | 587.5                   | 552.5                         | 1,140               | 52.6       | 10.6                | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.4     | 12.3       | 148.2                   | 362.5                         | 583.2               | 14.0       | <LOD (5.0)          | 17,000                               |
| 1/2566     | 25/01/66           | Final Discharge                     | 7.6     | 20.5       | 17.9                    | 480.0                         | 497.9               | 40.9       | <LOD (5.0)          | >160,000                             |
|            |                    | 25/01/66                            | 7.0     | 34.5       | 12.4                    | 383                           | 395.4               | 44.2       | <LOQ (5.0)          | >160000                              |
|            |                    | Effluent หน้าอาคาร ซี               | 7.1     | 28         | 710.2                   | 345                           | 1055.2              | 14.6       | <LOQ (5.0)          | >160000                              |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.6     | 44.5       | 269.4                   | 424                           | 693.4               | 84.6       | <LOQ (5.0)          | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8     | 5.8        | 262.8                   | 486                           | 788.8               | 14.6       | <LOQ (5.0)          | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.1     | 27         | 552.6                   | 478                           | 1030.6              | 35.8       | <LOQ (5.0)          | 54,000                               |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.6     | 14.5       | 70.8                    | 362.5                         | 565.8               | 7.8        | <LOQ (5.0)          | 54,000                               |
|            |                    | Final Discharge                     | 7.3     | 60         | 29.8                    | 433                           | 462.8               | 53.2       | <LOQ (5.0)          | 17,000                               |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 2/2566     | 23/02/66           | Influent หน้าอาคาร ซี               | 7.5     | 40.0       | 89.5                    | 410                           | 500.0.              | 16.8       | <LOQ (5.0)          | 92,000                               |
|            |                    | Effluent หน้าอาคาร ซี               | 7.4     | 20.0       | 60.0                    | 430                           | 4900                | 12.8       | <LOQ (5.0)          | 54,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.7     | 147.5      | 247.9                   | 375                           | 622.9               | 85.7       | 7.6                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.9     | 29.3       | 55.1                    | 433                           | 487.6               | 12.8       | <LOQ (5.0)          | 11,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.4     | 122.5      | 145.6                   | 373                           | 518.1               | 68.3       | 13.0                | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.5     | 12.3       | 14.1                    | 450                           | 464.0               | 12.3       | <LOQ (5.0)          | 13,000                               |
| 3/2566     | 23/03/66           | Final Discharge                     | 7.6     | 32.0       | 22.3                    | 513                           | 535.1               | 39.8       | <LOQ (5.0)          | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 7.8     | 39.0       | 21.9                    | 406                           | 427.9               | 7.8        | <LOQ (5.0)          | 54,000                               |
|            |                    | Effluent หน้าอาคาร ซี               | 7.3     | 55.0       | 20.0                    | 533                           | 490.0               | 60.5       | <LOQ (5.0)          | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.6     | 50.5       | 90.6                    | 591                           | 681.6               | 78.4       | <LOQ (5.0)          | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.7     | 10.5       | 9.9                     | 389                           | 464.0               | 7.8        | <LOQ (5.0)          | 35,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 7.6     | 50.5       | 90.6                    | 591                           | 681.6               | 78.4       | <LOQ (5.0)          | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.7     | 10.5       | 9.9                     | 389                           | 464.0               | 7.8        | <LOQ (5.0)          | 35,000                               |
|            |                    | Final Discharge                     | 7.4     | 47.0.      | 41.4                    | 480                           | 521.4               | 44.8       | 6.8                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |

ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH      | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|---------|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 4/2566     | 28/04/66           | Influent หน้าอาคาร ซี               | 6.9     | 27.5       | 21.7                    | 518                           | 539.2               | 11.8       | 5.6                 | >160,000                             |
|            |                    | Effluent หน้าอาคาร ซี               | 7.9     | 22.8       | 74.0                    | 385                           | 4320                | 65.0.      | 5.0                 | >160,000                             |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 7.4     | 150        | 1,616.0                 | 408                           | 2023.5              | 132.2      | 35.2                | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 10.6       | 36.7                    | 500                           | 536.7               | 14.0       | 5.2                 | 4,900                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.8     | 280        | 1,214.3                 | 390                           | 1604.3              | 8.4        | 36.4                | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 6.7     | 24         | 20.0                    | 408                           | 427.5               | 3.9        | <LOQ (5.0)          | >160,000                             |
| 5/2566     | 25/05/66           | Final Discharge                     | 7.4     | 47         | 41.4                    | 480                           | 521.4               | 44.8       | 6.8                 | >160,000                             |
|            |                    | Influent หน้าอาคาร ซี               | 6.9     | 21.0       | 32.2                    | 340                           | 372.2               | 2.8        | <LOQ (5.0)          | 92,000                               |
|            |                    | Effluent หน้าอาคาร ซี               | 7.5     | 85.0       | 49.7                    | 330                           | 379.7               | 68.3       | 16.8                | 24,000                               |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.6     | 8.3        | 17.1                    | 430                           | 447.1               | 7.3        | 7.0                 | 4,900                                |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 3 | 6.5     | 7.7        | 21.0                    | 444                           | 465.0               | 6.7        | 5.6                 | 2,200                                |
|            |                    | Influent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 5.9     | 320.0      | 728.0                   | 410                           | 1138                | 39.2       | 9.4                 | >160,000                             |
|            |                    | Effluent ข้างอาคาร ซี ฟังอาคาร เอ 2 | 5.8     | 4.0        | 13.9                    | 436                           | 449.9               | <LOQ (4.0) | <LOQ (5.0)          | 24,000                               |
|            |                    | Final Discharge                     | 7.3     | 36.5       | 16.5                    | 392                           | 408.5               | 31.9       | 7.0                 | >160,000                             |
|            |                    | ค่ามาตรฐาน                          | 5.0-9.0 | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |



ตารางที่ 3-4 ผลการตรวจวิเคราะห์คุณภาพน้ำทิ้งที่ผ่านมา (ต่อ)

| ครั้งที่ปี | วันที่เก็บตัวอย่าง | จุดเก็บตัวอย่าง                     | pH  | BOD (mg/L) | Suspended Solids (mg/L) | Total Dissolved Solids (mg/L) | Total Solids (mg/L) | TKN (mg/L) | Grease & Oil (mg/L) | Total Coliform Bacteria (MPN/100 ml) |
|------------|--------------------|-------------------------------------|-----|------------|-------------------------|-------------------------------|---------------------|------------|---------------------|--------------------------------------|
| 6/2566     | 15/06/66           | Influent น้ำอาคาร ซี                | 6.7 | 47.0       | 41.9                    | 468                           | 509.9               | 9.5        | <LOQ (5.0)          | 160,000                              |
|            |                    | Effluent น้ำอาคาร ซี                | 6.7 | 12.0       | 15.3                    | 436                           | 451.3               | 11.2       | <LOQ (5.0)          | >160,000                             |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8 | 16.0       | 17.9                    | 426                           | 443.9               | 13.4       | <LOQ (5.0)          | 54,000                               |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 3 | 6.8 | 28.8       | 15.4                    | 478                           | 493.4               | 12.3       | <LOQ (5.0)          | 24,000                               |
|            |                    | Influent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 7.3 | 300.0      | 89.7                    | 404                           | 493.7               | 76.7       | 8.8                 | >160,000                             |
|            |                    | Effluent ช้างอาคาร ซี ฟังอาคาร เอ 2 | 6.0 | 8.5        | 9.1                     | 458                           | 467.1               | <LOQ (4.0) | <LOQ (5.0)          | 24,000                               |
|            |                    | Final Discharge                     | 7.4 | 24.0       | 23.5                    | 398                           | 421.5               | 37.0       | <LOQ (5.0)          | >160,000                             |
|            |                    | ค่ามาตรฐาน                          |     | ≤30        | ≤40                     | ≤500                          | -                   | ≤35        | ≤20                 | -                                    |



มาตรฐาน : ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานคุณภาพการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด พ.ศ. 2548 (อาคารประเภท ข)

: ND หมายถึง ตรวจไม่พบ

: <LOD หมายถึง Limit of detection (ขีดจำกัดการตรวจหาปริมาณต่ำสุดที่สามารถวัดได้)

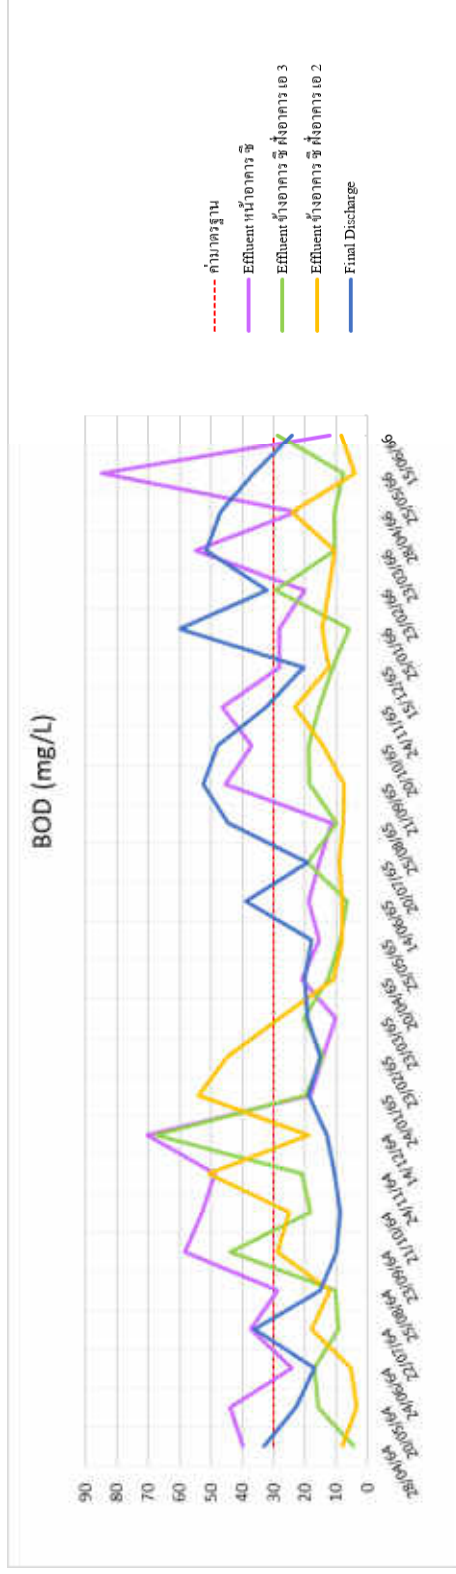
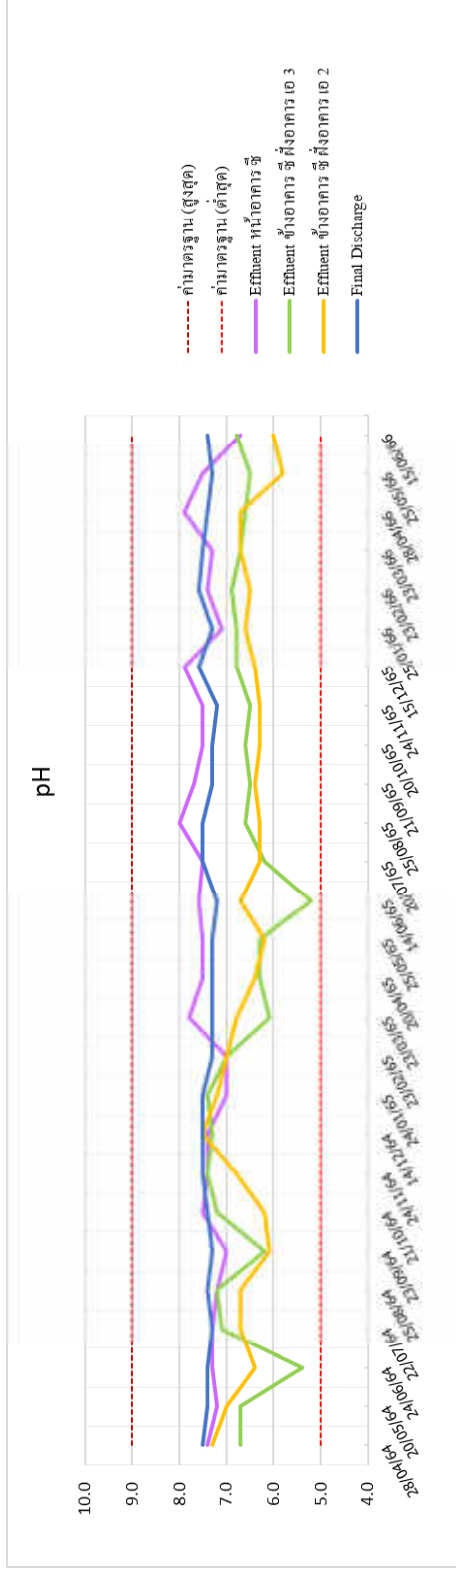


รูปที่ 3-2 กราฟแสดงผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง

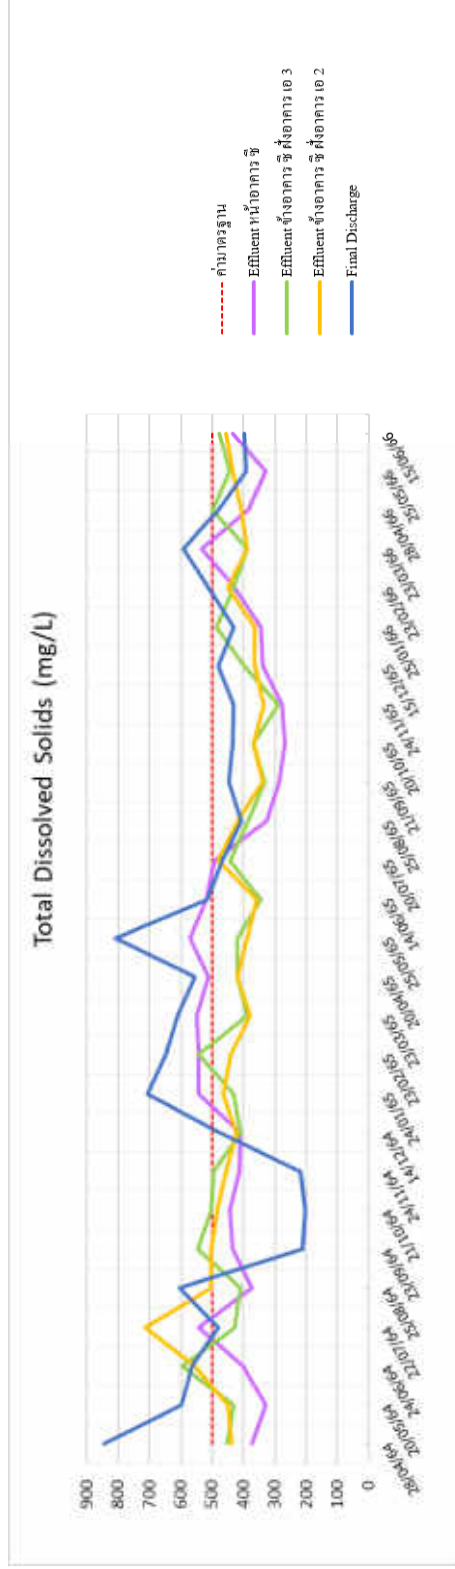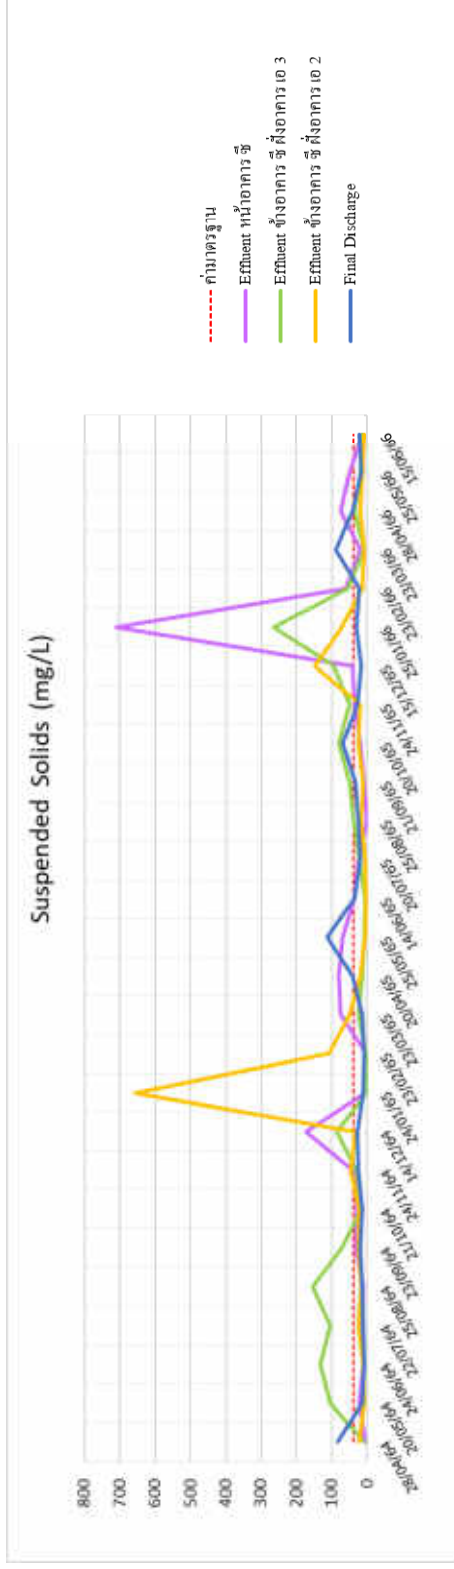


รูปที่ 3-2 กราฟแสดงผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)



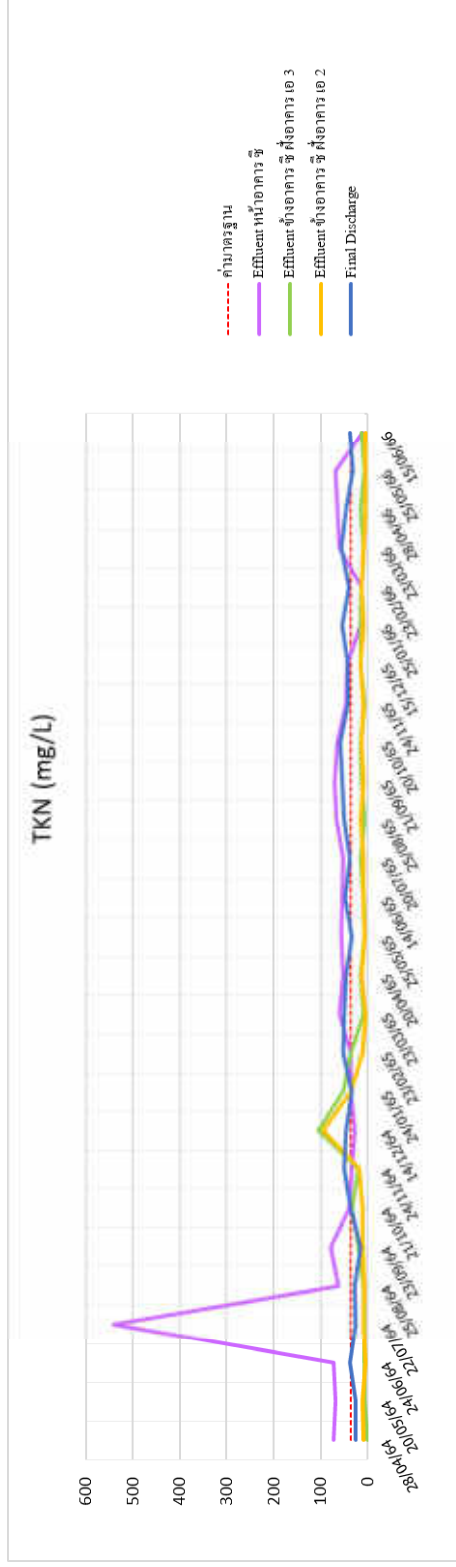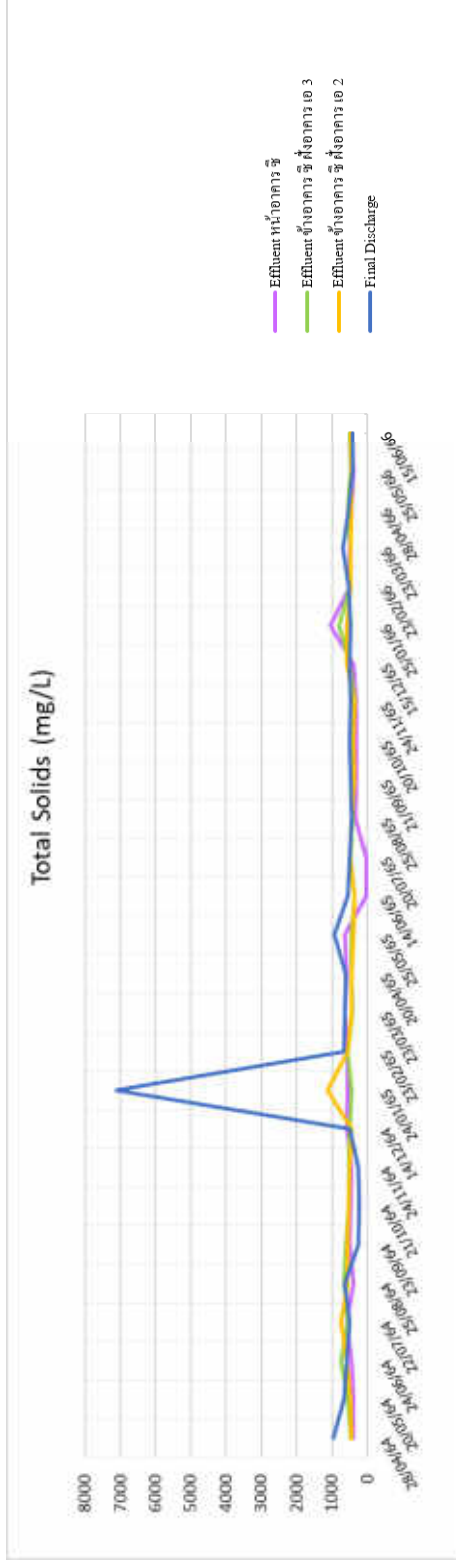

รูปที่ 3-2 กราฟแสดงผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)

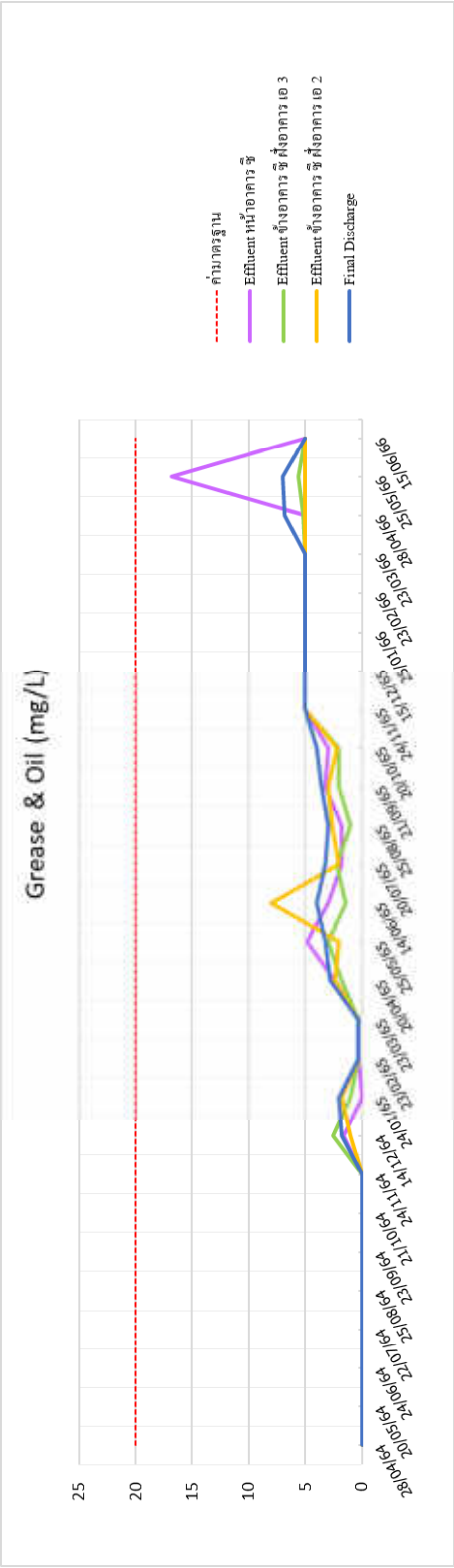

รูปที่ 3-2 กราฟแสดงผลการตรวจวิเคราะห์คุณภาพน้ำทิ้ง (ต่อ)

# บทที่ 4

บทสรุปและข้อเสนอแนะ

---

## บทสรุปและข้อเสนอแนะ

### 4.1 ผลการปฏิบัติตามมาตรการทั่วไป

ตามที่นิติบุคคลอาคารชุด กรีนไนน์ ในฐานะผู้ดำเนินโครงการ กรีนไนน์ (GREEN NINE) ได้จัดให้มีการดำเนินโครงการภายใต้ข้อกำหนดในมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อมที่ได้เสนอไว้ในรายงานการประเมินผลกระทบสิ่งแวดล้อม (EIA) และจัดทำรายงานฯ เพื่อนำส่งผลการดำเนินการต่อกรุงเทพมหานคร (หน่วยงานอนุญาต) ได้พิจารณา ทั้งนี้ ในช่วงระหว่างเดือนมกราคม-มิถุนายน 2566 โครงการไม่ได้มีความประสงค์จะเปลี่ยนแปลงรายละเอียดโครงการ และ/หรือมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อมที่ได้รับความเห็นชอบแต่อย่างใด

### 4.2 ผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม

ผลการติดตามตรวจสอบผลการปฏิบัติตามมาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม ระยะดำเนินการ โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี พบว่า ในระหว่างเดือนมกราคม-มิถุนายน 2566 นิติบุคคลอาคารชุด กรีนไนน์ อาคาร ซี ได้มีการดูแลโครงการให้เป็นไปตามมาตรการที่กำหนด และมีการกำหนดมาตรการ/ข้อปฏิบัติเพิ่มเติมนอกเหนือจากที่ EIA กำหนด สำหรับพนักงาน ผู้พักอาศัย และผู้มาติดต่อ เพื่อการป้องกันและเฝ้าระวังโรคติดเชื้อไวรัสโคโรนา 2019 (COVID-19)

### 4.3 ผลการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม

มาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม ในรายงานการประเมินผลกระทบสิ่งแวดล้อม ระยะดำเนินการ โครงการกรีนไนน์ (GREEN NINE) อาคาร ซี ได้กำหนดให้ติดตามตรวจสอบผลกระทบด้านคุณภาพน้ำ และด้านความปลอดภัยและการป้องกันอัคคีภัย จากการติดตามตรวจสอบมาตรการระหว่างเดือนมกราคม-มิถุนายน 2566 ไม่พบแนวโน้มของผลกระทบสิ่งแวดล้อมแต่อย่างใด

# ภาคผนวก 1

## หนังสือเห็นชอบรายงานฯ และใบอนุญาตโครงการ

---

- |            |  |
|------------|--|
| เอกสาร 1-1 | หนังสือแจ้งผลการพิจารณารายงานการประเมินผลกระทบสิ่งแวดล้อม                          |
| เอกสาร 1-2 | มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบผลกระทบสิ่งแวดล้อม |
| เอกสาร 1-3 | ใบรับรองการก่อสร้างอาคาร ดัดแปลงอาคาร หรือเคลื่อนย้ายอาคาร (แบบ อ.6)               |
| เอกสาร 1-4 | หนังสือสำคัญการจดทะเบียนอาคารชุด (อ.ช.10)  |
| เอกสาร 1-5 | หนังสือสำคัญการจดทะเบียนนิติบุคคลอาคารชุด (อ.ช.13)                                 |
| เอกสาร 1-6 | เอกสารการจดทะเบียนผู้จัดการนิติบุคคลอาคารชุด (อ.ช.12)                              |

## เอกสาร 1-1

หนังสือแจ้งผลการพิจารณารายงานการวิเคราะห์ผลกระทบสิ่งแวดล้อม

---

## เอกสาร 1-2

มาตรการป้องกันและแก้ไขผลกระทบสิ่งแวดล้อม และมาตรการติดตามตรวจสอบ  
ผลกระทบสิ่งแวดล้อม

---

## เอกสาร 1-3

ใบรับรองการก่อสร้างอาคาร ดัดแปลงอาคาร หรือเคลื่อนย้ายอาคาร (แบบ จ.6)

---



## เอกสาร 1-4

หนังสือสำคัญการจดทะเบียนอาคารชุด (อ.ช.10)

---

## เอกสาร 1-5

หนังสือสำคัญการจดทะเบียนนิติบุคคลอาคารชุด (อ.ช.13)

---

## เอกสาร 1-6

เอกสารการจดทะเบียนผู้จัดการนิติบุคคลอาคารชุด (อ.ช.12)

---

## ภาคผนวก 2

### เอกสารประกอบการปฏิบัติตามมาตรการฯ

---

|             |  |
|-------------|--|
| เอกสาร 2-1  | น้ำใช้   |
| เอกสาร 2-2  | น้ำเสียและสิ่งปฏิกูล   |
| เอกสาร 2-3  | การระบายน้ำ  |
| เอกสาร 2-4  | การจัดการมูลฝอย  |
| เอกสาร 2-5  | ระบบจราจร  |
| เอกสาร 2-6  | ระบบไฟฟ้า  |
| เอกสาร 2-7  | ระบบป้องกันอัคคีภัย  |
| เอกสาร 2-8  | ทัศนียภาพและสุนทรียภาพ   |
| เอกสาร 2-9  | สิ่งอำนวยความสะดวกและการบริหารความปลอดภัย                        |
| เอกสาร 2-10 | มาตรการป้องกันและเฝ้าระวังโรคติดเชื้อไวรัสโคโรนา 2019 (COVID-19) |

## เอกสาร 2-1

### น้ำใช้

- ระบบน้ำใช้ อาคาร ซี



ถังเก็บน้ำชั้นใต้ดิน



ถังเก็บน้ำชั้นดาดฟ้า



ระบบส่ง-จ่ายน้ำประปา



ระบบปั๊มสูบน้ำ

## เอกสาร 2-2

### น้ำเสียและสิ่งปฏิกูล

---

- ระบบการจัดการน้ำเสีย อาคาร ซี



ระบบบำบัดน้ำเสีย



แผงควบคุมระบบบำบัดน้ำเสีย



## เอกสาร 2-3

### การระบายน้ำ

---

- ระบบระบายน้ำ อาคาร ซี



ท่อระบายน้ำภายในอาคาร



รางระบายน้ำและบ่อพักน้ำภายนอกอาคาร

## เอกสาร 2-4

### การจัดการมูลฝอย

- ระบบการจัดการมูลฝอย อาคาร ซี



จุดพักมูลฝอยบริเวณชั้นใต้ดิน



กฎระเบียบการจัดการเก็บมูลฝอย



## เอกสาร 2-5

### ระบบจราจร


#### ■ ระบบจราจร อาคาร ซี



ทางเข้า-ออก



ลูกศรกำหนดทิศทางเดินรถ

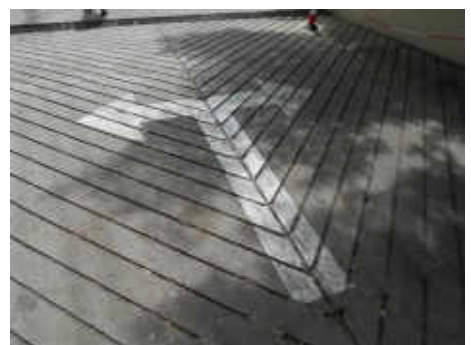

ป้ายสัญญาณจราจร



## เอกสาร 2-5

ระบบจราจร (ต่อ)

- ระบบจราจร อาคาร ซี



พื้นที่จอดรถชั้นใต้ดิน



พื้นที่จอดรถจักรยานยนต์



กฎระเบียบด้านจราจร



ระบบการเข้า-ออกโครงการ



## เอกสาร 2-6

### ระบบไฟฟ้า

---

- ระบบไฟฟ้า อาคาร ซี



หม้อแปลงไฟฟ้า



ตู้ควบคุมระบบไฟฟ้า



ไฟส่องสว่างภายในอาคาร

## เอกสาร 2-7

### ระบบป้องกันอัคคีภัย

- ระบบป้องกันอัคคีภัย อาคาร ซี



ตู้เก็บอุปกรณ์ดับเพลิง (FHC)



ถังดับเพลิงเคมีแบบมือถือ



ไฟส่องสว่างฉุกเฉิน (Emergency Light)



ป้ายบอกทางหนีไฟ



## เอกสาร 2-7

ระบบป้องกันอัคคีภัย (ต่อ)

- ระบบป้องกันอัคคีภัย อาคาร ซี



อุปกรณ์แจ้งเหตุเพลิงไหม้ด้วยมือ (Manual Station) และอุปกรณ์ส่งสัญญาณแบบกระดิ่ง (Alarm Bell)



โทรศัพท์ฉุกเฉิน



เครื่องตรวจจับความร้อน (Heat Detector)



Fireman Switch



แผนผังแสดงทางหนีไฟและตำแหน่งติดตั้งอุปกรณ์ดับเพลิง

## เอกสาร 2-7

ระบบป้องกันอัคคีภัย (ต่อ)

- ระบบป้องกันอัคคีภัย อาคาร ซี



บันไดหนีไฟ



ท่อจ่ายน้ำดับเพลิง



หัวรับน้ำดับเพลิงภายนอกอาคาร



จุดรวมพล



## เอกสาร 2-8

ทัศนียภาพและสุนทรียภาพ

- อาคารโครงการ ซี



ด้านหน้าอาคาร



สีและกระจกของตัวอาคาร

- พื้นที่สีเขียว



## เอกสาร 2-9

### สิ่งอำนวยความสะดวกและการบริหารความปลอดภัย

#### ■ สิ่งอำนวยความสะดวกและการบริหารความปลอดภัย อาคาร ซี




ระบบ Key Card ก่อนเข้าอาคาร



กล้อง CCTV ภายในอาคาร



กล้อง CCTV ภายนอกอาคาร

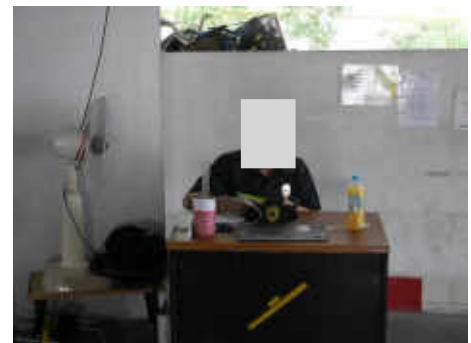

เจ้าหน้าที่รักษาความปลอดภัยบริเวณ  
ด้านล่างอาคาร



กล้อง CCTV ทางเข้า-ออก โครงการ



เจ้าหน้าที่รักษาความปลอดภัยและอำนวย  
ความด้านจราจรบริเวณทางเข้า-ออกโครงการ



## เอกสาร 2-10

มาตรการป้องกันและเฝ้าระวังโรคติดเชื้อไวรัสโคโรนา 2019 (COVID-19)

- มาตรการป้องกันและเฝ้าระวังโรคติดเชื้อไวรัสโคโรนา 2019 (COVID-19) อาคาร ซี



ประชาสัมพันธ์/ให้ความรู้ด้านการป้องกัน  
ตัวเองจากการติดเชื้อ



การใช้ลิฟต์ระบบสัมผัสเพื่อลดการสัมผัส



ป้ายเตือนให้สวมใส่หน้ากากอนามัย



การจัดเตรียมแอลกอฮอล์เจลบริเวณทาง  
เข้าอาคาร

## ภาคผนวก 3

ใบรายงานผลการตรวจวิเคราะห์คุณภาพน้ำ

---

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
ADDRESS : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water  
REPORT NO. : JEX-Ww-23-J0101  
SAMPLING DATE : January 25, 2023  
RECEIVED DATE : January 26, 2023  
SAMPLING TIME : 11.00 Hour  
ANALYTICAL DATE : January 26 - 31, 2023  
SAMPLING METHOD : Grab  
QUOTATION NO. : QL/23/0032/W/Pw  
SAMPLING BY : Anurak Tanirasaal(๓-295-๓-0001)  
WORK NO. : Ww-23-J0337

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | RESULT   |          | REGULATORY STANDARD |
|---------------------------|-----------|---|--|----------|---------------------|
|                           |           |   | Influent   | ถังบำบัด |                     |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 34.5   |          | -                   |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)   |          | -                   |
| pH                        | -         | Electrometric Method                      | 7.0 (25°C)   |          | -                   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 12.4   |          | -                   |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 395.4  |          | -                   |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 44.2   |          | -                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 383  |          | -                   |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED   |          | -                   |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000   |          | -                   |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear<br>Sediment : Black |          |                     |

**References:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** **Bold-Italic** number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : จะเป็นเลขที่ ๓-295

(Dr. Angana Romsalyud)

๓-295-H-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
ADDRESS : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water  
REPORT NO. : JEX-Ww-23-J0101  
SAMPLING DATE : January 25, 2023  
RECEIVED DATE : January 26, 2023  
SAMPLING TIME : 11.00 Hour  
ANALYTICAL DATE : January 26 - 31, 2023  
SAMPLING METHOD : Grab  
QUOTATION NO. : QL/23/0032/W/Pw  
SAMPLING BY : Anurak Tanirasaal(๓-295-๓-0001)  
WORK NO. : Ww-23-J0338

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | RESULT   |          | REGULATORY STANDARD |
|---------------------------|-----------|---|--|----------|---------------------|
|                           |           |   | Effluent   | ถังบำบัด |                     |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 28.0   |          | ≤ 20                |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)   |          | ≤ 20                |
| pH                        | -         | Electrometric Method                      | 7.1 (25°C)   |          | 5.0-9.0             |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 710.2  |          | ≤ 30                |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 1,055.2  |          | -                   |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 14.6   |          | ≤ 35                |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 345  |          | ≤ 500               |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED   |          | -                   |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000   |          | -                   |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear<br>Sediment : Black |          |                     |

**References:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** **Bold-Italic** number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : จะเป็นเลขที่ ๓-295

(Dr. Angana Romsalyud)

๓-295-H-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260

#### CONTACT DETAILS

**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมคลองนาคราชชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-Ww-23-J0101  
**SAMPLING DATE** : January 25, 2023  
**RECEIVED DATE** : January 26, 2023  
**SAMPLING TIME** : 11.00 Hour  
**ANALYTICAL DATE** : January 26 - 31, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ23/0032/W/PW  
**SAMPLING DY** : Anurak Tantrasai(๑-295-๙-0001)  
**WORK NO.** : Ww-23-40339

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |          |
|---------------------------|-----------|---|--|----------|
|                           |           |   | RESULT Influent                        | Effluent |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 27.0                                   |          |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ(5.0)                              |          |
| pH                        | -         | Electrometric Method                      | 6.1 (25°C)                             |          |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 552.6                                  |          |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 1,030.6                                |          |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 35.8                                   |          |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 478                                    |          |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NO1 DETECTED                           |          |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 54,000                                 |          |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |          |
|                           |           |   | Sediment : Black                       |          |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** *Bold-Italic* number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ ๑-295  
 (Dr. Angkana Romsaiyud)  
 ๑-295-๙-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260

#### CONTACT DETAILS

**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมคลองนาคราชชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-Ww-23-J0101  
**SAMPLING DATE** : January 25, 2023  
**RECEIVED DATE** : January 26, 2023  
**SAMPLING TIME** : 11.00 Hour  
**ANALYTICAL DATE** : January 26 - 31, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ23/0032/W/PW  
**SAMPLING BY** : Anurak Tantrasai(๑-295-๙-0001)  
**WORK NO.** : Ww-23-J0340

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |          |
|---------------------------|-----------|---|--|----------|
|                           |           |   | RESULT Effluent                        | Effluent |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 14.5                                   |          |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)                             |          |
| pH                        | -         | Electrometric Method                      | 6.6 (25°C)                             |          |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 70.8                                   |          |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 565.8                                  |          |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 7.8                                    |          |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 362.5                                  |          |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | 0.1                                    |          |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 54,000                                 |          |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |          |
|                           |           |   | Sediment : Black                       |          |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** *Bold-Italic* number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ ๑-295  
 (Dr. Angkana Romsaiyud)  
 ๑-295-๙-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.



### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punna Withi 24 Sukhumvit 101 Bangchak Phrakhanong Bangkok 10260

**CONTACT DETAILS**

**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-WW-23-J0101  
**SAMPLING DATE** : January 25, 2023  
**RECEIVED DATE** : January 26, 2023  
**SAMPLING TIME** : 11.00 Hour  
**ANALYTICAL DATE** : January 26 - 31, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ/23/0032W/PW  
**SAMPLING BY** : Anurak Tantrasai (๓-295-๓-0001)  
**WORK NO.** : WW-23-J0341

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                     |          |
|---------------------------|-----------|---|---|----------|
|                           |           |   | RESULT Influent                         | Effluent |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 44.5                                    |          |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ(5.0)                               |          |
| pH                        | -         | Electrometric Method                      | 7.6 (25°C)                              |          |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 269.4                                   |          |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 693.4                                   |          |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 84.6                                    |          |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 424                                     |          |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOI DETECTED                            |          |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000                                |          |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Cloudy |          |
|                           |           |   | Sediment : Black                        |          |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment. Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ไอออน : จะเป็นเลขที่ ๓-295

(Dr. Angana Romsaiyud)

๓-295-๓-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punna Withi 24 Sukhumvit 101 Bangchak Phrakhanong Bangkok 10260

**CONTACT DETAILS**

**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-WW-23-J0101  
**SAMPLING DATE** : January 25, 2023  
**RECEIVED DATE** : January 26, 2023  
**SAMPLING TIME** : 11.00 Hour  
**ANALYTICAL DATE** : January 26 - 31, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ/23/0032W/PW  
**SAMPLING BY** : Anurak Tantrasai (๓-295-๓-0001)  
**WORK NO.** : WW-23-J0342

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |          |
|---------------------------|-----------|---|--|----------|
|                           |           |   | RESULT Effluent                        | Effluent |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 5.8                                    |          |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)                             |          |
| pH                        | -         | Electrometric Method                      | 6.8 (25°C)                             |          |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 262.8                                  |          |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 788.8                                  |          |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 14.6                                   |          |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 486                                    |          |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | U.1                                    |          |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000                               |          |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |          |
|                           |           |   | Sediment : Black                       |          |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment. Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ไอออน : จะเป็นเลขที่ ๓-295

(Dr. Angana Romsaiyud)

๓-295-๓-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnaithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260

CONTACT DETAILS

SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water  
REPORT NO. : JEX-Ww-23-J0249  
RECEIVED DATE : February 24, 2023  
ANALYTICAL DATE : February 24 – March 6, 2023  
SAMPLING TIME : 10:30 Hour  
SAMPLING METHOD : Grab  
SAMPLING BY : Anurak Tantrasa(๓-295-๔-0001)  
WORK NO. : Ww-23-J0779

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS   | REGULATORY STANDARD         |   |
|---------------------------|-----------|--|-----------------------------|---|
|                           |           |  | RESULT Influent ข้างหน้าตึก |   |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                         | 40.0                        | - |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                  | <LOQ (5.0)                  | - |
| pH                        | -         | Electrometric Method                                       | 7.5 (25°C)                  | - |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                  | 89.5                        | - |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                            | 500.0                       | - |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                               | 16.8                        | - |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                      | 410                         | - |
| Chlorine (Residual)       | mg/l      | Iodometric Method  | NOT DETECTED                | - |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                       | 92,000                      | - |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Clear<br>Sediment : Black |                             |   |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ไอออน : ทะเบียนเลขที่ ๓-295

(Dr. Angsana Romsaiyud)

๓-295-๔-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnaithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260

CONTACT DETAILS

SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water  
REPORT NO. : JEX-Ww-23-J0249  
RECEIVED DATE : February 24, 2023  
ANALYTICAL DATE : February 24 – March 6, 2023  
SAMPLING TIME : 10:30 Hour  
SAMPLING METHOD : Grab  
SAMPLING BY : Anurak Tantrasa(๓-295-๔-0001)  
WORK NO. : Ww-23-J0780

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS   | REGULATORY STANDARD         |         |
|---------------------------|-----------|--|-----------------------------|---------|
|                           |           |  | RESULT Effluent ข้างหน้าตึก |         |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                         | 20.0                        | ≤ 20    |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                  | <LOQ (5.0)                  | ≤ 20    |
| pH                        | -         | Electrometric Method                                       | 7.4 (25°C)                  | 5.0-9.0 |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                  | 60.0                        | ≤ 30    |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                            | 490.0                       | -       |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                               | 12.8                        | ≤ 35    |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                      | 430                         | ≤ 500   |
| Chlorine (Residual)       | mg/l      | Iodometric Method  | 0.1                         | -       |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                       | 54,000                      | -       |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Clear<br>Sediment : Brown |                             |         |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ไอออน : ทะเบียนเลขที่ ๓-295

(Dr. Angsana Romsaiyud)

๓-295-๔-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.



## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punnavithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-WW-23-10249  
**SAMPLING DATE** : February 23, 2023 **RECEIVED DATE** : February 24, 2023  
**SAMPLING TIME** : 10.30 Hour **ANALYTICAL DATE** : February 24 - March 6, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QJ23/0032/W/PW  
**SAMPLING BY** : Anurak Tantrasal(๓-295-4-0001) **WORK NO.** : Ww-23-J0781

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |           |
|---------------------------|-----------|---|--|-----------|
|                           |           |   | RESULT Influent                        | ขังพัก A2 |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 122.5                                  | -         |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 13.0                                   | -         |
| pH                        | -         | Electrometric Method                      | 7.4 (25°C)                             | -         |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 145.6                                  | -         |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 518.1                                  | -         |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 68.3                                   | -         |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 373                                    | -         |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED                           | -         |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | > 160,000                              | -         |
| <b>SAMPLE CONDITION</b>   |           |   | Sample Color / Turbid : Green / Turbid |           |
|                           |           |   | Sediment : Black                       |           |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ ๓-295

(Dr. Angsana Romsaiyud)

๓-295-4-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punnavithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-WW-23-10249  
**SAMPLING DATE** : February 23, 2023 **RECEIVED DATE** : February 24, 2023  
**SAMPLING TIME** : 10.30 Hour **ANALYTICAL DATE** : February 24 - March 6, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QJ23/0032/W/PW  
**SAMPLING BY** : Anurak Tantrasal(๓-295-4-0001) **WORK NO.** : Ww-23-J0782

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                   |           |
|---------------------------|-----------|---|---------------------------------------|-----------|
|                           |           |   | RESULT Effluent                       | ขังพัก A2 |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 12.3                                  | ≤ 20      |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | < LOQ (5.0)                           | ≤ 20      |
| pH                        | -         | Electrometric Method                      | 6.5 (25°C)                            | 5.0-9.0   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 14.1                                  | ≤ 30      |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 464.0                                 | -         |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 12.3                                  | ≤ 35      |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 450                                   | ≤ 500     |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | 0.2                                   | -         |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 13,000                                | -         |
| <b>SAMPLE CONDITION</b>   |           |   | Sample Color / Turbid : Green / Clear |           |
|                           |           |   | Sediment : Black                      |           |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ ๓-295

(Dr. Angsana Romsaiyud)

๓-295-4-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnavithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10280  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-WW-23-10249  
SAMPLING DATE : February 23, 2023 RECEIVED DATE : February 24, 2023  
SAMPLING TIME : 10.30 Hour ANALYTICAL DATE : February 24 – March 6, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032W/Pw  
SAMPLING BY : Anurak Tantrasai(๓-295-4-0001) WORK NO. : Ww-23-J0783

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                     |             |
|---------------------------|-----------|---|---|-------------|
|                           |           |   | RESULT Influent                         | ห้ำงติัก A3 |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 147.5                                   | -           |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 7.6                                     | -           |
| pH                        | -         | Electrometric Method                      | 7.7 (25°C)                              | -           |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 247.9                                   | -           |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 622.9                                   | -           |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 85.7                                    | -           |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 375                                     | -           |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED                            | -           |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | > 160,000                               | -           |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Turbid |             |
|                           |           |   | Sediment : Black                        |             |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 1, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้ำงปฏิบัติการวิเคราะห์ห้ำกน : ะเป็นเลตที่ ๓-295

(Dr. Angana Romsaiyud)  
๓-295-๓-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnavithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10280  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-WW-23-10249  
SAMPLING DATE : February 23, 2023 RECEIVED DATE : February 24, 2023  
SAMPLING TIME : 10.30 Hour ANALYTICAL DATE : February 24 – March 6, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032W/Pw  
SAMPLING BY : Anurak Tantrasai(๓-295-4-0001) WORK NO. : Ww-23-J0784

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |             |
|---------------------------|-----------|---|--|-------------|
|                           |           |   | RESULT Effluent                        | ห้ำงติัก A3 |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 29.3                                   | ≤ 20        |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)                             | ≤ 20        |
| pH                        | -         | Electrometric Method                      | 6.9 (25°C)                             | 5.0-9.0     |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 55.1                                   | ≤ 30        |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 487.6                                  | -           |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 12.8                                   | ≤ 35        |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 433                                    | ≤ 500       |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED                           | -           |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 11,000                                 | -           |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |             |
|                           |           |   | Sediment : A bit                       |             |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 1, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้ำงปฏิบัติการวิเคราะห์ห้ำกน : ะเป็นเลตที่ ๓-295

(Dr. Angana Romsaiyud)  
๓-295-๓-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.



## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
ADDRESS : 30 Punna Witthi 24 Sukhumvit 101 Bangchak Phraknong Bangkok 10260

CONTACT DETAILS

SAMPLING SOURCE : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0402  
SAMPLING DATE : March 23, 2023 RECEIVED DATE : March 24, 2023  
SAMPLING TIME : 10:20 Hour ANALYTICAL DATE : March 24 - 31, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ/23/0032/W/Pw  
SAMPLING BY : Prephan Wongpaesom (0-295-4-0004) WORK NO. : Ww-23-J1216

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |          |
|---------------------------|-----------|---|--|----------|
|                           |           |   | RESULT Influent                        | STANDARD |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 39.0                                   | -        |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | 0.1                                    | -        |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)                             | -        |
| pH                        | -         | Electrometric Method                      | 6.8 (25°C)                             | -        |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 7.8                                    | -        |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 406                                    | -        |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 427.9                                  | -        |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 21.9                                   | -        |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 54,000                                 | -        |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |          |
|                           |           |   | Sediment : Black                       |          |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remarks:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ 0-295

(Dr. Angsada Romsaiyud)

0-295-4-0002

**Remarks:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
ADDRESS : 30 Punna Witthi 24 Sukhumvit 101 Bangchak Phraknong Bangkok 10260

CONTACT DETAILS

SAMPLING SOURCE : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0402  
SAMPLING DATE : March 23, 2023 RECEIVED DATE : March 24, 2023  
SAMPLING TIME : 10:20 Hour ANALYTICAL DATE : March 24 - 31, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ/23/0032/W/Pw  
SAMPLING BY : Anurak Tantiraai (0-295-4-0001) WORK NO. : Ww-23-J1217

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |          |
|---------------------------|-----------|---|--|----------|
|                           |           |   | RESULT Effluent                        | STANDARD |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 55.0                                   | ≤ 20     |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED                           | -        |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)                             | ≤ 20     |
| pH                        | -         | Electrometric Method                      | 7.3 (25°C)                             | 5.0-9.0  |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 60.5                                   | ≤ 35     |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 533                                    | ≤ 500    |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 490.0                                  | -        |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 20.0                                   | ≤ 30     |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000                               | -        |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |          |
|                           |           |   | Sediment : Black                       |          |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remarks:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ 0-295

(Dr. Angsada Romsaiyud)

0-295-4-0002

**Remarks:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
ADDRESS : 30 Punnavithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0402  
SAMPLING DATE : March 23, 2023 RECEIVED DATE : March 24, 2023  
SAMPLING TIME : 10:20 Hour ANALYTICAL DATE : March 24 -31, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032/WPw  
SAMPLING BY : Praphan Wongjaesam (9-295-4-0004) WORK NO. : Ww-23-J1218

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS   | RESULT       |           | REGULATORY STANDARD |
|---------------------------|-----------|--|--------------|-----------|---------------------|
|                           |           |  | Influent     | ถังดัก A2 |                     |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                           | 50.5         |           | -                   |
| Chlorine (Residual)       | mg/l      | Iodometric Method  | NOT DETECTED |           | -                   |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                    | <LOQ (5.0)   |           | -                   |
| pH                        | -         | Electrometric Method   | 7.6 (25°C)   |           | -                   |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                                 | 78.4         |           | -                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                        | 591          |           | -                   |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                              | 681.6        |           | -                   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                    | 90.6         |           | -                   |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                         | > 160,000    |           | -                   |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Turbid<br>Sediment : Yellow |              |           |                     |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 9-295

Laboratory Manager:

(Dr. Angsaha Romsalyud)

9-295-4-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
ADDRESS : 30 Punnavithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0402  
SAMPLING DATE : March 23, 2023 RECEIVED DATE : March 24, 2023  
SAMPLING TIME : 10:20 Hour ANALYTICAL DATE : March 24 -31, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032/WPw  
SAMPLING BY : Praphan Wongjaesam (9-295-4-0004) WORK NO. : Ww-23-J1219

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS  | RESULT     |           | REGULATORY STANDARD |
|---------------------------|-----------|---|------------|-----------|---------------------|
|                           |           |   | Effluent   | ถังดัก A2 |                     |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                        | 10.5       |           | ≤ 20                |
| Chlorine (Residual)       | mg/l      | Iodometric Method   | 0.1        |           | -                   |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                 | <LOQ (5.0) |           | ≤ 20                |
| pH                        | -         | Electrometric Method                                      | 6.7 (25°C) |           | 5.0-9.0             |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                              | 7.8        |           | ≤ 35                |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                     | 389        |           | ≤ 500               |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                           | 464.0      |           | -                   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                 | 9.9        |           | ≤ 30                |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                      | 35,000     |           | -                   |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Green / Clear<br>Sediment : A Bit |            |           |                     |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 9-295

Laboratory Manager:

(Dr. Angsaha Romsalyud)

9-295-4-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.



### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punawithi 24 Sukhumvit101 Bangchak Phrakonong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-J0402  
**SAMPLING DATE** : March 23, 2023 **RECEIVED DATE** : March 24, 2023  
**SAMPLING TIME** : 10:20 Hour **ANALYTICAL DATE** : March 24 -31, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QU/23/0032/W/Pw  
**SAMPLING BY** : Praphan Wonglaesem (๓-295-๓-0004) **WORK NO.** : Ww-23-J1220

| PARAMETERS                              | UNIT      | METHOD OF ANALYSIS                        | RESULT           |            | REGULATORY STANDARD |
|---|-----------|---|------------------|------------|---------------------|
|   |           |   | Influent         | ข้างตึก A3 |                     |
| BOD                                     | mg/l      | 5-day BOD Test, Azide Modification        | 81.0             | -          | -                   |
| Chlorine (Residual)                     | mg/l      | Iodometric Method                         | NOT DETECTED     | -          | -                   |
| Oil and Grease                          | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 7.4              | -          | -                   |
| pH                                      | -         | Electrometric Method                      | 7.8 (25°C)       | -          | -                   |
| TKN                                     | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 79.0             | -          | -                   |
| Total Dissolved Solids                  | mg/l      | Total Dissolved Solids Dried at 180°C     | 375              | -          | -                   |
| Total Solids                            | mg/l      | Total Solids Dried at 103-105°C           | 638              | -          | -                   |
| Total Suspended Solids                  | mg/l      | Total Suspended Solids Dried at 103-105°C | 230.9            | -          | -                   |
| Total Coliform Bacteria *               | MPN/100ml | Multiple Tube Fermentation Technique      | > 160,000        | -          | -                   |
| <b>SAMPLE CONDITION</b>                 |           |   |                  |            |                     |
| Sample Color / Turbid : Yellow / Turbid |           |   | Sediment : Black |            |                     |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์น้ำ : ทะเบียนเลขที่ ๓-295

Laboratory Manager:

(Dr. Angsana Romsalyud)

๓-295-๓-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punawithi 24 Sukhumvit101 Bangchak Phrakonong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-J0402  
**SAMPLING DATE** : March 23, 2023 **RECEIVED DATE** : March 24, 2023  
**SAMPLING TIME** : 10:20 Hour **ANALYTICAL DATE** : March 24 -31, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QU/23/0032/W/Pw  
**SAMPLING BY** : Praphan Wonglaesem (๓-295-๓-0004) **WORK NO.** : Ww-23-J1221

| PARAMETERS                             | UNIT      | METHOD OF ANALYSIS                        | RESULT           |            | REGULATORY STANDARD |
|--|-----------|---|------------------|------------|---------------------|
|  |           |   | Effluent         | ข้างตึก A3 |                     |
| BOD                                    | mg/l      | 5-day BOD Test, Azide Modification        | 14.8             | -          | ≤ 20                |
| Chlorine (Residual)                    | mg/l      | Iodometric Method                         | NOT DETECTED     | -          | -                   |
| Oil and Grease                         | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)       | -          | ≤ 20                |
| pH                                     | -         | Electrometric Method                      | 6.6 (25°C)       | -          | 5.0-9.0             |
| TKN                                    | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 10.6             | -          | ≤ 35                |
| Total Dissolved Solids                 | mg/l      | Total Dissolved Solids Dried at 180°C     | 446              | -          | ≤ 500               |
| Total Solids                           | mg/l      | Total Solids Dried at 103-105°C           | 153.8            | -          | -                   |
| Total Suspended Solids                 | mg/l      | Total Suspended Solids Dried at 103-105°C | 107.8            | -          | ≤ 30                |
| Total Coliform Bacteria *              | MPN/100ml | Multiple Tube Fermentation Technique      | 7,000            | -          | -                   |
| <b>SAMPLE CONDITION</b>                |           |   |                  |            |                     |
| Sample Color / Turbid : Yellow / Clear |           |   | Sediment : Black |            |                     |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์น้ำ : ทะเบียนเลขที่ ๓-295

Laboratory Manager:

(Dr. Angsana Romsalyud)

๓-295-๓-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punnaewithi 24 Sukhumvit 101 Bangchak Phrakarnong Bangkok 10260  
**CONTACT DETAILS** :  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-Ww-23-10562  
**SAMPLING DATE** : April 28, 2023  
**RECEIVED DATE** : April 29, 2023  
**SAMPLING TIME** : 10:20 Hour  
**ANALYTICAL DATE** : April 29 – May 11, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ23/0032W/Pw  
**SAMPLING BY** : Praphan Wongjaesam (0-295-A-0004)  
**WORK NO.** : Ww-23-J1746

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS  | RESULT     |              | REGULATORY STANDARD |
|---------------------------|-----------|---|------------|--------------|---------------------|
|                           |           |   | Influent   | Effluent     |                     |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                          | 27.5       | 22.8         | ≤ 20                |
| Chlorine (Residual)       | mg/l      | Iodometric Method   | 0.3        | NOT DETECTED | -                   |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                   | 5.6        | 5.0          | ≤ 20                |
| pH                        | -         | Electrometric Method  | 6.9 (25°C) | 7.9 (25°C)   | 5.0-9.0             |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                                | 11.8       | 65.0         | ≤ 35                |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                       | 518        | 385          | ≤ 500               |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                             | 539.2      | 432.0        | -                   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                   | 21.7       | 74.0         | ≤ 30                |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                        | > 160,000  | > 160,000    | -                   |
| <b>SAMPLE CONDITION</b>   |           | Sample Color / Turbid : Yellow / Turbid<br>Sediment : Black |            |              |                     |

**Reference:** Base on *Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017*  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** *Bold-Italic* number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 0-295

Laboratory Manager:

(Dr. Angsana Romsalyud)

0-295-A-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punnaewithi 24 Sukhumvit 101 Bangchak Phrakarnong Bangkok 10260  
**CONTACT DETAILS** :  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิคมอุตสาหกรรมชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-Ww-23-10562  
**SAMPLING DATE** : April 28, 2023  
**RECEIVED DATE** : April 29, 2023  
**SAMPLING TIME** : 10:20 Hour  
**ANALYTICAL DATE** : April 29 – May 11, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ23/0032W/Pw  
**SAMPLING BY** : Praphan Wongjaesam (0-295-A-0004)  
**WORK NO.** : Ww-23-J1747

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS  | RESULT     |              | REGULATORY STANDARD |
|---------------------------|-----------|---|------------|--------------|---------------------|
|                           |           |   | Influent   | Effluent     |                     |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                          | 27.5       | 22.8         | ≤ 20                |
| Chlorine (Residual)       | mg/l      | Iodometric Method   | 0.3        | NOT DETECTED | -                   |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                   | 5.6        | 5.0          | ≤ 20                |
| pH                        | -         | Electrometric Method  | 6.9 (25°C) | 7.9 (25°C)   | 5.0-9.0             |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                                | 11.8       | 65.0         | ≤ 35                |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                       | 518        | 385          | ≤ 500               |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                             | 539.2      | 432.0        | -                   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                   | 21.7       | 74.0         | ≤ 30                |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                        | > 160,000  | > 160,000    | -                   |
| <b>SAMPLE CONDITION</b>   |           | Sample Color / Turbid : Yellow / Turbid<br>Sediment : Black |            |              |                     |

**Reference:** Base on *Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017*  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** *Bold-Italic* number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 0-295

Laboratory Manager:

(Dr. Angsana Romsalyud)

0-295-A-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.



## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0562  
SAMPLING DATE : April 28, 2023 RECEIVED DATE : April 29, 2023  
SAMPLING TIME : 10:20 Hour ANALYTICAL DATE : April 29 - May 11, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032W/Pw  
SAMPLING BY : Praphan Wongjaesem (9-295-4-0004) WORK NO. : Ww-23-J1748

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS   | RESULT<br>Influent<br>ข้างตึก A2 | REGULATORY<br>STANDARD |
|---------------------------|-----------|--|----------------------------------|------------------------|
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                         | 280.0                            | -                      |
| Chlorine (Residual)       | mg/l      | Iodometric Method  | 0.1                              | -                      |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                  | 36.4                             | -                      |
| pH                        | -         | Electrometric Method                                       | 6.8 (25°C)                       | -                      |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                               | 8.4                              | -                      |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                      | 390                              | -                      |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                            | 1,604.3                          | -                      |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                  | 1,214.3                          | -                      |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                       | >160,000                         | -                      |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Clear<br>Sediment : Black |                                  |                        |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 9-295

(Dr. Angkana Romsalyud)

9-295-R-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0562  
SAMPLING DATE : April 28, 2023 RECEIVED DATE : April 29, 2023  
SAMPLING TIME : 10:20 Hour ANALYTICAL DATE : April 29 - May 11, 2023  
SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032W/Pw  
SAMPLING BY : Praphan Wongjaesem (9-295-4-0004) WORK NO. : Ww-23-J1748

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS   | RESULT<br>Effluent<br>ข้างตึก A2 | REGULATORY<br>STANDARD |
|---------------------------|-----------|--|----------------------------------|------------------------|
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification                         | 24.0                             | ≤ 20                   |
| Chlorine (Residual)       | mg/l      | Iodometric Method  | 0.6                              | -                      |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method                  | <LOQ (5.0)                       | ≤ 20                   |
| pH                        | -         | Electrometric Method                                       | 6.7 (25°C)                       | 5.0-9.0                |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                               | 3.9                              | ≤ 35                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                      | 408                              | ≤ 500                  |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                            | 427.5                            | -                      |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                  | 20.0                             | ≤ 30                   |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                       | >160,000                         | -                      |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Clear<br>Sediment : Black |                                  |                        |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 9-295

(Dr. Angkana Romsalyud)

9-295-R-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Purnawithi 24 Sukhumvit 101 Bangchak Phraknong Bangkok 10260  
**CONTACT DETAILS** :  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-10562  
**SAMPLING DATE** : April 28, 2023 **RECEIVED DATE** : April 29, 2023  
**SAMPLING TIME** : 10:20 Hour **ANALYTICAL DATE** : April 29 – May 11, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QU/23/0032/W/Pw  
**SAMPLING BY** : Praphan Wongjaesem (๓-295-๔-0004) **WORK NO.** : Ww-23-11750

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | RESULT<br>Influent<br>ข้างตึก A3        | REGULATORY<br>STANDARD |
|---------------------------|-----------|---|---|------------------------|
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 150.0                                   | -                      |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED                            | -                      |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 35.2                                    | -                      |
| pH                        | -         | Electrometric Method                      | 7.4 (25°C)                              | -                      |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 132.2                                   | -                      |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 408                                     | -                      |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 2,023.5                                 | -                      |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 1,616.0                                 | -                      |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | > 160,000                               | -                      |
| SAMPLE CONDITION          |           |   |   |                        |
|                           |           |   | Sample Color / Turbid : Yellow / Turbid |                        |
|                           |           |   | Sediment : Black                        |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater

from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-italic number meaning the value out of regulatory standard range



Laboratory Manager:



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ ๓-295  
 (Dr. Angsana Romsalyud)  
 ๓-295-๔-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Purnawithi 24 Sukhumvit 101 Bangchak Phraknong Bangkok 10260  
**CONTACT DETAILS** :  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-10562  
**SAMPLING DATE** : April 28, 2023 **RECEIVED DATE** : April 29, 2023  
**SAMPLING TIME** : 10:20 Hour **ANALYTICAL DATE** : April 29 – May 11, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QU/23/0032/W/Pw  
**SAMPLING BY** : Praphan Wongjaesem (๓-295-๔-0004) **WORK NO.** : Ww-23-11751

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | RESULT<br>Effluent<br>ข้างตึก A3       | REGULATORY<br>STANDARD |
|---------------------------|-----------|---|--|------------------------|
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 10.6                                   | ≤ 20                   |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | 0.1                                    | -                      |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 5.2                                    | ≤ 20                   |
| pH                        | -         | Electrometric Method                      | 6.6 (25°C)                             | 5.0-9.0                |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 14.0                                   | ≤ 35                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 500                                    | ≤ 500                  |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 536.7                                  | -                      |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 36.7                                   | ≤ 30                   |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 4,900                                  | -                      |
| SAMPLE CONDITION          |           |   |  |                        |
|                           |           |   | Sample Color / Turbid : Yellow / Clear |                        |
|                           |           |   | Sediment : Black                       |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater

from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-italic number meaning the value out of regulatory standard range



Laboratory Manager:



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ ๓-295  
 (Dr. Angsana Romsalyud)  
 ๓-295-๔-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.



## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punrawithi 24 Sukhumvit101 Bangchak Phrakonong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-J0683  
**SAMPLING DATE** : May 25, 2023 **RECEIVED DATE** : May 26, 2023  
**SAMPLING TIME** : 10:30 Hour **ANALYTICAL DATE** : May 26 – June 2, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QL/23/0032/W/Pw  
**SAMPLING BY** : Praphan Wongjaesem (๖-295-๙-0004) **WORK NO.** : Ww-23-J2027

| PARAMETERS                             | UNIT      | METHOD OF ANALYSIS                        | RESULT           |             | REGULATORY STANDARD |
|--|-----------|---|------------------|-------------|---------------------|
|  |           |   | Influent         | ข้างหน้าตึก |                     |
| BOD                                    | mg/l      | 5-day BOD Test, Azide Modification        | 21.0             |             | -                   |
| Chlorine (Residual)                    | mg/l      | Iodometric Method                         | <0.1             |             | -                   |
| Oil and Grease                         | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | < LOQ (5.0)      |             | -                   |
| pH                                     | -         | Electrometric Method                      | 6.9 (25°C)       |             | -                   |
| TKN                                    | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 2.8              |             | -                   |
| Total Dissolved Solids                 | mg/l      | Total Dissolved Solids Dried at 180°C     | 340              |             | -                   |
| Total Solids                           | mg/l      | Total Solids Dried at 103-105°C           | 372.2            |             | -                   |
| Total Suspended Solids                 | mg/l      | Total Suspended Solids Dried at 103-105°C | 32.2             |             | -                   |
| Total Coliform Bacteria *              | MPN/100ml | Multiple Tube Fermentation Technique      | 92,000           |             | -                   |
| <b>SAMPLE CONDITION</b>                |           |   |                  |             |                     |
| Sample Color / Turbid : Yellow / Clear |           |   | Sediment : A Bit |             |                     |

*Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017*

*Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater*

from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume

122, Chapter 125 D, dated 29 December 2005.

*Definition* \*: The test was subcontracted to another laboratory

*Remark:* **Bold-Italic** number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์น้ำ : ประเมียมผลที่ ๖-295

(Dr. Angsana Romsalyud)

๖-295-๙-0002

*Remark:* 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punrawithi 24 Sukhumvit101 Bangchak Phrakonong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-J0683  
**SAMPLING DATE** : May 25, 2023 **RECEIVED DATE** : May 26, 2023  
**SAMPLING TIME** : 10:30 Hour **ANALYTICAL DATE** : May 26 – June 2, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QL/23/0032/W/Pw  
**SAMPLING BY** : Praphan Wongjaesem (๖-295-๙-0004) **WORK NO.** : Ww-23-J2028

| PARAMETERS                              | UNIT      | METHOD OF ANALYSIS                        | RESULT           |             | REGULATORY STANDARD |
|---|-----------|---|------------------|-------------|---------------------|
|   |           |   | Effluent         | ข้างหน้าตึก |                     |
| BOD                                     | mg/l      | 5-day BOD Test, Azide Modification        | 85.0             |             | ≤ 20                |
| Chlorine (Residual)                     | mg/l      | Iodometric Method                         | NOT DETECTED     |             | -                   |
| Oil and Grease                          | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 16.8             |             | ≤ 20                |
| pH                                      | -         | Electrometric Method                      | 7.5 (25°C)       |             | 5.0-9.0             |
| TKN                                     | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 68.3             |             | ≤ 35                |
| Total Dissolved Solids                  | mg/l      | Total Dissolved Solids Dried at 180°C     | 330              |             | ≤ 500               |
| Total Solids                            | mg/l      | Total Solids Dried at 103-105°C           | 379.7            |             | -                   |
| Total Suspended Solids                  | mg/l      | Total Suspended Solids Dried at 103-105°C | 49.7             |             | ≤ 30                |
| Total Coliform Bacteria *               | MPN/100ml | Multiple Tube Fermentation Technique      | 24,000           |             | -                   |
| <b>SAMPLE CONDITION</b>                 |           |   |                  |             |                     |
| Sample Color / Turbid : Yellow / Cloudy |           |   | Sediment : Black |             |                     |

*Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017*

*Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater*

from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume

122, Chapter 125 D, dated 29 December 2005.

*Definition* \*: The test was subcontracted to another laboratory

*Remark:* **Bold-Italic** number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์น้ำ : ประเมียมผลที่ ๖-295

(Dr. Angsana Romsalyud)

๖-295-๙-0002

*Remark:* 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punrawithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-WW-23-J0683  
**SAMPLING DATE** : May 25, 2023  
**RECEIVED DATE** : May 26, 2023  
**SAMPLING TIME** : 10:30 Hour  
**ANALYTICAL DATE** : May 26 - June 2, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QL230032W/PW  
**SAMPLING BY** : Praphan Wongjaesem (9-295-4-0004)  
**WORK NO.** : Ww-23-10229

| PARAMETERS                             | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD |             |
|--|-----------|---|---------------------|-------------|
|  |           |   | RESULT Influent     | THANGDIK A2 |
| BOD                                    | mg/l      | 5-day BOD Test, Azide Modification        | 320.0               | -           |
| Chlorine (Residual)                    | mg/l      | Iodometric Method                         | <0.1                | -           |
| Oil and Grease                         | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 9.4                 | -           |
| pH                                     | -         | Electrometric Method                      | 5.9 (25°C)          | -           |
| TKN                                    | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 39.2                | -           |
| Total Dissolved Solids                 | mg/l      | Total Dissolved Solids Dried at 180°C     | 410                 | -           |
| Total Solids                           | mg/l      | Total Solids Dried at 103-105°C           | 1,138               | -           |
| Total Suspended Solids                 | mg/l      | Total Suspended Solids Dried at 103-105°C | 728.0               | -           |
| Total Coliform Bacteria *              | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000            | -           |
| <b>SAMPLE CONDITION</b>                |           |   |                     |             |
| Sample Color / Turbid : Yellow / Clear |           |   | Sediment : Black    |             |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 9-295

Laboratory Manager:

(Dr. Angsana Romsaiyud)

9-295-4-0002

**Remarks:** 1) The above results are valid only for the analysed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punrawithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-WW-23-J0683  
**SAMPLING DATE** : May 25, 2023  
**RECEIVED DATE** : May 26, 2023  
**SAMPLING TIME** : 10:30 Hour  
**ANALYTICAL DATE** : May 26 - June 2, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QL230032W/PW  
**SAMPLING BY** : Praphan Wongjaesem (9-295-4-0004)  
**WORK NO.** : Ww-23-10330

| PARAMETERS                             | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD |             |
|--|-----------|---|---------------------|-------------|
|  |           |   | RESULT Effluent     | THANGDIK A2 |
| BOD                                    | mg/l      | 5-day BOD Test, Azide Modification        | 4.0                 | ≤ 20        |
| Chlorine (Residual)                    | mg/l      | Iodometric Method                         | <0.1                | -           |
| Oil and Grease                         | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)          | ≤ 20        |
| pH                                     | -         | Electrometric Method                      | 5.8 (25°C)          | 5.0-9.0     |
| TKN                                    | mg/l      | Semi-Micro Kjeldahl Nitrogen              | <LOQ (4.0)          | ≤ 35        |
| Total Dissolved Solids                 | mg/l      | Total Dissolved Solids Dried at 180°C     | 436                 | ≤ 500       |
| Total Solids                           | mg/l      | Total Solids Dried at 103-105°C           | 449.9               | -           |
| Total Suspended Solids                 | mg/l      | Total Suspended Solids Dried at 103-105°C | 13.9                | ≤ 30        |
| Total Coliform Bacteria *              | MPN/100ml | Multiple Tube Fermentation Technique      | 24,000              | -           |
| <b>SAMPLE CONDITION</b>                |           |   |                     |             |
| Sample Color / Turbid : Yellow / Clear |           |   | Sediment : A Bit    |             |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



ห้องปฏิบัติการวิเคราะห์เอกชน : ทะเบียนเลขที่ 9-295

Laboratory Manager:

(Dr. Angsana Romsaiyud)

9-295-4-0002

**Remarks:** 1) The above results are valid only for the analysed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.



## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
 ADDRESS : 30 Punrawithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
 CONTACT DETAILS :  
 SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมลาด C  
 SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0683  
 SAMPLING DATE : May 25, 2023 RECEIVED DATE : May 26, 2023  
 SAMPLING TIME : 10:30 Hour ANALYTICAL DATE : May 26 - June 2, 2023  
 SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032/W/Pw  
 SAMPLING BY : Praphan Wonglaesem (๖-295-๙-0004) WORK NO. : Ww-23-0301

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |            |
|---------------------------|-----------|---|--|------------|
|                           |           |   | RESULT Influent                        | ขังเก็บ A3 |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 8.3                                    | -          |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | 0.1                                    | -          |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 7.0                                    | -          |
| pH                        | -         | Electrometric Method                      | 6.6 (25°C)                             | -          |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 7.3                                    | -          |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 430                                    | -          |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 447.1                                  | -          |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 17.1                                   | -          |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 4,900                                  | -          |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |            |
|                           |           |   | Sediment : A Bit                       |            |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
 Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater

from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume

122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ ๖-295

(Dr. Angsana Romsaiyud)

๖-295-๙-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co., Ltd.  
 ADDRESS : 30 Punrawithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
 CONTACT DETAILS :  
 SAMPLING SOURCE : The Green Nine Rama 9 นิคมอุตสาหกรรมลาด C  
 SAMPLE TYPE/NAME : Waste Water REPORT NO. : JEX-Ww-23-J0683  
 SAMPLING DATE : May 25, 2023 RECEIVED DATE : May 26, 2023  
 SAMPLING TIME : 10:30 Hour ANALYTICAL DATE : May 26 - June 2, 2023  
 SAMPLING METHOD : Grab QUOTATION NO. : QJ23/0032/W/Pw  
 SAMPLING BY : Praphan Wonglaesem (๖-295-๙-0004) WORK NO. : Ww-23-J0302

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD                    |            |
|---------------------------|-----------|---|--|------------|
|                           |           |   | RESULT Effluent                        | ขังเก็บ A3 |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 7.7                                    | ≤ 20       |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | 0.1                                    | -          |
| Oil and Grease            | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 5.6                                    | ≤ 20       |
| pH                        | -         | Electrometric Method                      | 6.5 (25°C)                             | 5.0-9.0    |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 6.7                                    | ≤ 35       |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 444                                    | ≤ 500      |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 465.0                                  | -          |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 21.0                                   | ≤ 30       |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | 2,200                                  | -          |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Clear |            |
|                           |           |   | Sediment : A Bit                       |            |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
 Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater

from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume

122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ ๖-295

(Dr. Angsana Romsaiyud)

๖-295-๙-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punna Wittai 24 Sukhumvit 101 Bangchak Phrakhanong Bangkok 10260

**CONTACT DETAILS**

**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-Ww-23-10776  
**SAMPLING DATE** : June 15, 2023  
**RECEIVED DATE** : June 16, 2023  
**SAMPLING TIME** : 10:05 Hour  
**ANALYTICAL DATE** : June 16 - 22, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QL/23/0032/WPw  
**SAMPLING BY** : Praphan Wongjaseem (9-295-9-0004)  
**WORK NO.** : Ww-23-12254

| PARAMETERS                             | UNIT      | METHOD OF ANALYSIS                        | RESULT<br>Influent<br>ข้างหน้าตึก | REGULATORY<br>STANDARD |
|--|-----------|---|-----------------------------------|------------------------|
| BOD                                    | mg/l      | 5-day BOD Test, Azide Modification        | 47.0                              | -                      |
| Chlorine (Residual)                    | mg/l      | Iodometric Method                         | NOT DETECTED                      | -                      |
| Oil and Grease                         | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | < LOQ (5.0)                       | -                      |
| pH                                     | -         | Electrometric Method                      | 6.7 (25°C)                        | -                      |
| TKN                                    | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 9.5                               | -                      |
| Total Dissolved Solids                 | mg/l      | Total Dissolved Solids Dried at 180°C     | 468                               | -                      |
| Total Solids                           | mg/l      | Total Solids Dried at 103-105°C           | 509.9                             | -                      |
| Total Suspended Solids                 | mg/l      | Total Suspended Solids Dried at 103-105°C | 41.9                              | -                      |
| Total Coliform Bacteria *              | MPN/100ml | Multiple Tube Fermentation Technique      | 160,000                           | -                      |
| SAMPLE CONDITION                       |           |   |                                   |                        |
| Sample Color / Turbid : Yellow / Clear |           |   | Sediment : Black                  |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ 9-295

(Dr. Angkana Romsaiyud)  
9-295-9-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punna Wittai 24 Sukhumvit 101 Bangchak Phrakhanong Bangkok 10260

**CONTACT DETAILS**

**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-Ww-23-10776  
**SAMPLING DATE** : June 15, 2023  
**RECEIVED DATE** : June 16, 2023  
**SAMPLING TIME** : 10:05 Hour  
**ANALYTICAL DATE** : June 16 - 22, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QL/23/0032/WPw  
**SAMPLING BY** : Praphan Wongjaseem (9-295-9-0004)  
**WORK NO.** : Ww-23-12255

| PARAMETERS                             | UNIT      | METHOD OF ANALYSIS                        | RESULT<br>Effluent<br>ข้างหน้าตึก | REGULATORY<br>STANDARD |
|--|-----------|---|-----------------------------------|------------------------|
| BOD                                    | mg/l      | 5-day BOD Test, Azide Modification        | 12.0                              | ≤ 20                   |
| Chlorine (Residual)                    | mg/l      | Iodometric Method                         | NOT DETECTED                      | -                      |
| Oil and Grease                         | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | < LOQ (5.0)                       | ≤ 20                   |
| pH                                     | -         | Electrometric Method                      | 6.7 (25°C)                        | 5.0-9.0                |
| TKN                                    | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 11.2                              | ≤ 35                   |
| Total Dissolved Solids                 | mg/l      | Total Dissolved Solids Dried at 180°C     | 436                               | ≤ 500                  |
| Total Solids                           | mg/l      | Total Solids Dried at 103-105°C           | 451.3                             | -                      |
| Total Suspended Solids                 | mg/l      | Total Suspended Solids Dried at 103-105°C | 15.3                              | ≤ 30                   |
| Total Coliform Bacteria *              | MPN/100ml | Multiple Tube Fermentation Technique      | > 160,000                         | -                      |
| SAMPLE CONDITION                       |           |   |                                   |                        |
| Sample Color / Turbid : Yellow / Clear |           |   | Sediment : A Bit                  |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ 9-295

(Dr. Angkana Romsaiyud)  
9-295-9-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.



### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punrawithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260

**CONTACT DETAILS**

**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-0776  
**SAMPLING DATE** : June 15, 2023 **RECEIVED DATE** : June 16, 2023  
**SAMPLING TIME** : 10:05 Hour **ANALYTICAL DATE** : June 16 - 22, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QJ23/0032W/PW  
**SAMPLING BY** : Praphan Wongjaesom (9-295-A-0004) **WORK NO.** : Ww-23-J2256

| PARAMETERS                              | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD |             |
|---|-----------|---|---------------------|-------------|
|   |           |   | RESULT Influent     | ห้ำงติัก A2 |
| BOD                                     | mg/l      | 5-day BOD Test, Azide Modification        | 300.0               | -           |
| Chlorine (Residual)                     | mg/l      | Iodometric Method                         | NOT DETECTED        | -           |
| Oil and Grease                          | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | 8.8                 | -           |
| pH                                      | -         | Electrometric Method                      | 7.3 (25°C)          | -           |
| TKN                                     | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 76.7                | -           |
| Total Dissolved Solids                  | mg/l      | Total Dissolved Solids Dried at 180°C     | 404                 | -           |
| Total Solids                            | mg/l      | Total Solids Dried at 103-105°C           | 493.7               | -           |
| Total Suspended Solids                  | mg/l      | Total Suspended Solids Dried at 103-105°C | 89.7                | -           |
| Total Coliform Bacteria *               | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000            | -           |
| <b>SAMPLE CONDITION</b>                 |           |   |                     |             |
| Sample Color / Turbid : Yellow / Turbid |           |   | Sediment : A Bit    |             |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range

 **ECOTECH**  
 WATER SYSTEMS CO., LTD.

**ห้องปฏิบัติการวิเคราะห์คุณภาพน้ำ** : ทะเบียนเลขที่ 9-295  
**Laboratory Manager:**  (Dr. Angkana Romsalyud)  
 9-295-A-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punrawithi 24 Sukhumvit101 Bangchak Phraknong Bangkok 10260

**CONTACT DETAILS**

**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-Ww-23-0776  
**SAMPLING DATE** : June 15, 2023 **RECEIVED DATE** : June 16, 2023  
**SAMPLING TIME** : 10:05 Hour **ANALYTICAL DATE** : June 16 - 22, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QJ23/0032W/PW  
**SAMPLING BY** : Praphan Wongjaesom (9-295-A-0004) **WORK NO.** : Ww-23-J2257

| PARAMETERS                             | UNIT      | METHOD OF ANALYSIS                        | REGULATORY STANDARD |             |
|--|-----------|---|---------------------|-------------|
|  |           |   | RESULT Effluent     | ห้ำงติัก A2 |
| BOD                                    | mg/l      | 5-day BOD Test, Azide Modification        | 8.5                 | ≤ 20        |
| Chlorine (Residual)                    | mg/l      | Iodometric Method                         | <0.1                | -           |
| Oil and Grease                         | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)          | ≤ 20        |
| pH                                     | -         | Electrometric Method                      | 6.0 (25°C)          | 5.0-9.0     |
| TKN                                    | mg/l      | Semi-Micro Kjeldahl Nitrogen              | <LOQ (4.0)          | ≤ 35        |
| Total Dissolved Solids                 | mg/l      | Total Dissolved Solids Dried at 180°C     | 458                 | ≤ 500       |
| Total Solids                           | mg/l      | Total Solids Dried at 103-105°C           | 467.1               | -           |
| Total Suspended Solids                 | mg/l      | Total Suspended Solids Dried at 103-105°C | 9.1                 | ≤ 30        |
| Total Coliform Bacteria *              | MPN/100ml | Multiple Tube Fermentation Technique      | 24,000              | -           |
| <b>SAMPLE CONDITION</b>                |           |   |                     |             |
| Sample Color / Turbid : Yellow / Clear |           |   | Sediment : A Bit    |             |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017

**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range

 **ECOTECH**  
 WATER SYSTEMS CO., LTD.

**ห้องปฏิบัติการวิเคราะห์คุณภาพน้ำ** : ทะเบียนเลขที่ 9-295  
**Laboratory Manager:**  (Dr. Angkana Romsalyud)  
 9-295-A-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punnaithi 24 Sukhumvit101 Bangchak Phrakong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-WW-23-10776  
**SAMPLING DATE** : June 15, 2023 **RECEIVED DATE** : June 16, 2023  
**SAMPLING TIME** : 10:05 Hour **ANALYTICAL DATE** : June 16 - 22, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QJ23/0032W/PW  
**SAMPLING BY** : Praphan Wongjaesem (๓-295-๔-๐004) **WORK NO.** : Ww-23-J2258

| PARAMETERS  | UNIT      | METHOD OF ANALYSIS                        | RESULT<br>Influent<br>ข้างตึก A3 | REGULATORY<br>STANDARD |
|---|-----------|---|----------------------------------|------------------------|
| BOD   | mg/l      | 5-day BOD Test, Azide Modification        | 16.0                             | -                      |
| Chlorine (Residual)   | mg/l      | Iodometric Method                         | NOT DETECTED                     | -                      |
| Oil and Grease  | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)                       | -                      |
| pH  | -         | Electrometric Method                      | 6.8 (25°C)                       | -                      |
| TKN   | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 13.4                             | -                      |
| Total Dissolved Solids  | mg/l      | Total Dissolved Solids Dried at 180°C     | 426                              | -                      |
| Total Solids  | mg/l      | Total Solids Dried at 103-105°C           | 443.9                            | -                      |
| Total Suspended Solids  | mg/l      | Total Suspended Solids Dried at 103-106°C | 17.9                             | -                      |
| Total Coliform Bacteria *   | MPN/100ml | Multiple Tube Fermentation Technique      | 54,000                           | -                      |
| <b>SAMPLE CONDITION</b><br>Sample Color / Turbid : Yellow / Clear<br>Sediment : A Bit |           |   |                                  |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** *Bold-Italic* number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์น้ำ : ทะเบียนเลขที่ ๓-295

(Dr. Angkana Romsalyud)  
๓-295-๔-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punnaithi 24 Sukhumvit101 Bangchak Phrakong Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9 นิติบุคคลอาคารชุด C  
**SAMPLE TYPE/NAME** : Waste Water **REPORT NO.** : JEX-WW-23-10776  
**SAMPLING DATE** : June 15, 2023 **RECEIVED DATE** : June 16, 2023  
**SAMPLING TIME** : 10:05 Hour **ANALYTICAL DATE** : June 16 - 22, 2023  
**SAMPLING METHOD** : Grab **QUOTATION NO.** : QJ23/0032W/PW  
**SAMPLING BY** : Praphan Wongjaesem (๓-295-๔-๐004) **WORK NO.** : Ww-23-J2259

| PARAMETERS  | UNIT      | METHOD OF ANALYSIS                        | RESULT<br>Effluent<br>ข้างตึก A3 | REGULATORY<br>STANDARD |
|---|-----------|---|----------------------------------|------------------------|
| BOD   | mg/l      | 5-day BOD Test, Azide Modification        | 28.8                             | ≤ 20                   |
| Chlorine (Residual)   | mg/l      | Iodometric Method                         | <0.1                             | -                      |
| Oil and Grease  | mg/L      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)                       | ≤ 20                   |
| pH  | -         | Electrometric Method                      | 6.8 (25°C)                       | 5.0-9.0                |
| TKN   | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 12.3                             | ≤ 35                   |
| Total Dissolved Solids  | mg/l      | Total Dissolved Solids Dried at 180°C     | 478                              | ≤ 500                  |
| Total Solids  | mg/l      | Total Solids Dried at 103-105°C           | 493.4                            | -                      |
| Total Suspended Solids  | mg/l      | Total Suspended Solids Dried at 103-105°C | 15.4                             | ≤ 30                   |
| Total Coliform Bacteria *   | MPN/100ml | Multiple Tube Fermentation Technique      | 24,000                           | -                      |
| <b>SAMPLE CONDITION</b><br>Sample Color / Turbid : Yellow / Clear<br>Sediment : A Bit |           |   |                                  |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** *Bold-Italic* number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์น้ำ : ทะเบียนเลขที่ ๓-295

(Dr. Angkana Romsalyud)  
๓-295-๔-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
2) Do not copy partial of this analysis report without official approval.



## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9  
SAMPLE TYPE/NAME : Waste Water  
REPORT NO. : JEX-Ww-23-J0102  
SAMPLING DATE : January 25, 2023  
RECEIVED DATE : January 26, 2023  
SAMPLING TIME : 11.00 Hour  
ANALYTICAL DATE : January 28 - 31, 2023  
SAMPLING METHOD : Grab  
QUOTATION NO. : QU23/0032/WPw  
SAMPLING BY : Anurak Tantrasai (295-A-0001)  
WORK NO. : Ww-23-00343

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS   | RESULT<br>จุดปล่อยน้ำทิ้งออก<br>จากโครงการ | REGULATORY<br>STANDARD |
|---------------------------|-----------|--|--|------------------------|
| BOD                       | mg/l      | 5-Day BOD Test, Azide Modification Method                            | 60.0                                       | ≤ 20                   |
| Grease and Oil            | mg/l      | Liquid-Liquid, Partial-Gravimetric Method                            | <LOQ (5.0)                                 | ≤ 20.0                 |
| pH                        | -         | Electrometric Method   | 7.3 (25°C)                                 | 5.0-9.0                |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                            | 29.8                                       | ≤ 30                   |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                                      | 462.8                                      | -                      |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen   | 53.2                                       | ≤ 35                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                                | 433  | ≤ 500                  |
| Chlorine (Residual)       | mg/l      | Iodometric Method  | NOT DETECTED                               | -                      |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                                 | 17,000                                     | -                      |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Slightly Cloudy<br>Sediment : Black |  |                        |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ไอเทค : ทะเบียนเลขที่ 295  
(Dr. Angsana Romsalyud)  
295-A-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

## Report for Sample Analysis

CUSTOMER NAME : Presearch Co.,Ltd.  
ADDRESS : 30 Punnaewithi 24 Sukhumvit101 Bangchak Phrakhanong Bangkok 10260  
CONTACT DETAILS :  
SAMPLING SOURCE : The Green Nine Rama 9  
SAMPLE TYPE/NAME : Waste Water  
REPORT NO. : JEX-Ww-23-J0250  
SAMPLING DATE : February 23, 2023  
RECEIVED DATE : February 24, 2023  
SAMPLING TIME : 10.30 Hour  
ANALYTICAL DATE : February 24 - March 6, 2023  
SAMPLING METHOD : Grab  
QUOTATION NO. : QU23/0032/WPw  
SAMPLING BY : Anurak Tantrasai (295-A-0001)  
WORK NO. : Ww-23-J0785

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS   | RESULT<br>จุดปล่อยน้ำทิ้งออก<br>จากโครงการ | REGULATORY<br>STANDARD |
|---------------------------|-----------|--|--|------------------------|
| BOD                       | mg/l      | 5-Day BOD Test, Azide Modification Method                  | 32.0                                       | ≤ 20                   |
| Grease and Oil            | mg/l      | Liquid-Liquid, Partial-Gravimetric Method                  | <LOQ (5.0)                                 | ≤ 20.0                 |
| pH                        | -         | Electrometric Method                                       | 7.6 (25°C)                                 | 5.0-9.0                |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                  | 22.3                                       | ≤ 30                   |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                            | 535.1                                      | -                      |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                               | 39.8                                       | ≤ 35                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                      | 513  | ≤ 500                  |
| Chlorine (Residual)       | mg/l      | Iodometric Method  | 0.1  | -                      |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                       | >160,000                                   | -                      |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Black / Turbid<br>Sediment : Black |  |                        |

Reference: Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
Standard: Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

Definition \*: The test was subcontracted to another laboratory

Remark: Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ไอเทค : ทะเบียนเลขที่ 295  
(Dr. Angsana Romsalyud)  
295-A-0002

Remark: 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punnawithi 24 Sukhumvit101 Bangchak Phraknon Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9  
**SAMPLE TYPE/NAME** : Waste Water  
**SAMPLING DATE** : March 23, 2023  
**SAMPLING TIME** : 10:20 Hour  
**SAMPLING METHOD** : Grab  
**SAMPLING BY** : Praphan Wonglaesem (9-295-9-0004)  
**REPORT NO.** : JEX-Ww-23-J0403  
**RECEIVED DATE** : March 24, 2023  
**ANALYTICAL DATE** : March 24 - 31, 2023  
**QUOTATION NO.** : QL/23/0032/WPw  
**WORK NO.** : Ww-23-J1222

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | RESULT   |            | REGULATORY STANDARD |
|---------------------------|-----------|---|--|------------|---------------------|
|                           |           |   | จุดปล่อยน้ำทิ้งออก   | จากโครงการ |                     |
| BOD                       | mg/l      | 5-Day BOD Test, Azide Modification Method | 51.5   |            | ≤ 20                |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED   |            | -                   |
| Grease and Oil            | mg/l      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)   |            | ≤ 20.0              |
| pH                        | -         | Electrometric Method                      | 7.5 (25°C)   |            | 5.0-9.0             |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 57.1   |            | ≤ 35                |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 594  |            | ≤ 500               |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 682.5  |            | -                   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 88.5   |            | ≤ 30                |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | >180,000   |            | -                   |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Black / Turbid<br>Sediment : Black |            |                     |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ 9-295

(Dr. Angsana Romsalyud)  
9-295-R-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co., Ltd.  
**ADDRESS** : 30 Punnawithi 24 Sukhumvit101 Bangchak Phraknon Bangkok 10260  
**CONTACT DETAILS**  
**SAMPLING SOURCE** : The Green Nine Rama 9  
**SAMPLE TYPE/NAME** : Waste Water  
**SAMPLING DATE** : April 28, 2023  
**SAMPLING TIME** : 10:15 Hour  
**SAMPLING METHOD** : Grab  
**SAMPLING BY** : Praphan Wonglaesem (9-295-9-0004)  
**REPORT NO.** : JEX-Ww-23-J0563  
**RECEIVED DATE** : April 29, 2023  
**ANALYTICAL DATE** : April 29 - May 11, 2023  
**QUOTATION NO.** : QL/23/0032/WPw  
**WORK NO.** : Ww-23-J1752

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS  | RESULT<br>จุดปล่อยน้ำทิ้งออก<br>จากโครงการ | REGULATORY<br>STANDARD |
|---------------------------|-----------|---|--|------------------------|
| BOD                       | mg/l      | 5-Day BOD Test, Azide Modification Method                   | 47.0                                       | ≤ 20                   |
| Chlorine (Residual)       | mg/l      | Iodometric Method   | NOT DETECTED                               | -                      |
| Grease and Oil            | mg/l      | Liquid-Liquid, Partial-Gravimetric Method                   | 6.8  | ≤ 20.0                 |
| pH                        | -         | Electrometric Method  | 7.4 (25°C)                                 | 5.0-9.0                |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                                | 44.8                                       | ≤ 35                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                       | 480  | ≤ 500                  |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                             | 521.4                                      | -                      |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C                   | 41.4                                       | ≤ 30                   |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                        | >160,000                                   | -                      |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Turbid<br>Sediment : Black |  |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 29 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์ : ทะเบียนเลขที่ 9-295

(Dr. Angsana Romsalyud)  
9-295-R-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.

2) Do not copy partial of this analysis report without official approval.



### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punmawithi 24 Sukhumvit101 Bangchak Phrakonong Bangkok 10260  
**CONTACT DETAILS** :  
**SAMPLING SOURCE** : The Green Nine Rama 9  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-WW-23-J0687  
**SAMPLING DATE** : May 25, 2023  
**RECEIVED DATE** : May 26, 2023  
**SAMPLING TIME** : 10:30 Hour  
**ANALYTICAL DATE** : May 26 - June 2, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ23/0032/W/PW  
**SAMPLING BY** : Praphan Wongjaesem (1-295-4-0004)  
**WORK NO.** : WW-23-J2037

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS  | RESULT<br>จุดปล่อยน้ำทิ้งออก<br>จากโครงการ | REGULATORY<br>STANDARD |
|---------------------------|-----------|---|--|------------------------|
| BOD                       | mg/l      | 5-Day BOD Test, Azide Modification Method                   | 36.5                                       | ≤ 20                   |
| Chlorine (Residual)       | mg/l      | Iodometric Method   | 0.1  | -                      |
| Grease and Oil            | mg/l      | Liquid-Liquid, Partial-Gravimetric Method                   | 7.0  | ≤ 20.0                 |
| pH                        | -         | Electrometric Method  | 7.3 (25°C)                                 | 5.0-9.0                |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen                                | 31.9                                       | ≤ 35                   |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C                       | 392  | ≤ 500                  |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C                             | 408.5                                      | -                      |
| Total Suspended Solids    | mg/l      | Total suspended Solids Uried at 103-105°C                   | 16.5                                       | ≤ 30                   |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique                        | >160,000                                   | -                      |
| SAMPLE CONDITION          |           | Sample Color / Turbid : Yellow / Cloudy<br>Sediment : A Bit |  |                        |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 28 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์คุณภาพน้ำ : ประเด็นเลขที่ 2-295

(Dr. Angkana Romsalyud)  
1-295-P-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.

### Report for Sample Analysis

**CUSTOMER NAME** : Presearch Co.,Ltd.  
**ADDRESS** : 30 Punmawithi 24 Sukhumvit101 Bangchak Phrakonong Bangkok 10260  
**CONTACT DETAILS** :  
**SAMPLING SOURCE** : The Green Nine Rama 9  
**SAMPLE TYPE/NAME** : Waste Water  
**REPORT NO.** : JEX-WW-23-J077Z  
**SAMPLING DATE** : June 15, 2023  
**RECEIVED DATE** : June 16, 2023  
**SAMPLING TIME** : 10:05 Hour  
**ANALYTICAL DATE** : June 16 - 22, 2023  
**SAMPLING METHOD** : Grab  
**QUOTATION NO.** : QJ23/0032/W/PW  
**SAMPLING BY** : Praphan Wongjaesem (1-295-4-0004)  
**WORK NO.** : WW-23-J2260

| PARAMETERS                | UNIT      | METHOD OF ANALYSIS                        | RESULT  |  | REGULATORY STANDARD |
|---------------------------|-----------|---|---|--|---------------------|
|                           |           |   | จุดปล่อยน้ำทิ้งออก<br>จากโครงการ                            |  |                     |
| BOD                       | mg/l      | 5-day BOD Test, Azide Modification        | 24.0  |  | ≤ 20                |
| Chlorine (Residual)       | mg/l      | Iodometric Method                         | NOT DETECTED  |  | -                   |
| Grease and Oil            | mg/l      | Liquid-Liquid, Partial-Gravimetric Method | <LOQ (5.0)  |  | ≤ 20.0              |
| pH                        | -         | Electrometric Method                      | 7.4 (25°C)  |  | 5.0-9.0             |
| TKN                       | mg/l      | Semi-Micro Kjeldahl Nitrogen              | 37.0  |  | ≤ 35                |
| Total Dissolved Solids    | mg/l      | Total Dissolved Solids Dried at 180°C     | 398   |  | ≤ 500               |
| Total Solids              | mg/l      | Total Solids Dried at 103-105°C           | 421.5   |  | -                   |
| Total Suspended Solids    | mg/l      | Total Suspended Solids Dried at 103-105°C | 23.5  |  | ≤ 30                |
| Total Coliform Bacteria * | MPN/100ml | Multiple Tube Fermentation Technique      | >160,000  |  | -                   |
| SAMPLE CONDITION          |           |   | Sample Color / Turbid : Yellow / Cloudy<br>Sediment : A Bit |  |                     |

**Reference:** Base on Standard Methods for the Examination of Water and Wastewater, APHA, AWWA, WEF, 23rd ed. Washington, 2017  
**Standard:** Notification of the Ministry of Natural Resources and Environment, Subject: Establish control standards Drainage of wastewater from certain types and buildings of certain sizes, dated November 7, 2005, announced in the Government Gazette, Volume 122, Chapter 125 D, dated 28 December 2005.

**Definition** \*: The test was subcontracted to another laboratory

**Remark:** Bold-Italic number meaning the value out of regulatory standard range



Laboratory Manager:

ห้องปฏิบัติการวิเคราะห์คุณภาพน้ำ : ประเด็นเลขที่ 2-295

(Dr. Angkana Romsalyud)  
1-295-P-0002

**Remark:** 1) The above results are valid only for the analyzed / tested sample (s) as indicated in this report only.  
 2) Do not copy partial of this analysis report without official approval.

## ภาคผนวก 4

เอกสารสอบเทียบเครื่องมือการตรวจวิเคราะห์คุณภาพน้ำ

---



## ภาคผนวก 5

ใบรับรอง/หนังสืออนุญาตขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

---