

ภาคผนวก จ

สำเนาเอกสารรับรองเครื่องมือการตรวจวัด



Certificate of Calibration

Certificate No. : 66-420087-1

Page : 1 of 2

Submitted by :

M Green Group Co.,Ltd.

188/46 Wisetukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

pH Meter with electrode

pH meter

Manufacturer : Eutech

Model : pH 700

Range : N/A pH

Resolution : 0.01 pH

Serial No. : 2884323

ID No. : N/A

Electrode

Model : N/A

Serial No. : 01X099320

Environment : On site calibration was carried out at the Laboratory, M Green Group Co.,Ltd.

Ambient Temperature : (25.0 to 25.5)°C

Relative Humidity : (45 to 50) %

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by : Permpoon Chanpu

Calibration Method : In-house method CAL-M4201 direct measurement by using standard voltage calibrator and using certified reference material (CRM)

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Multiproduct Calibrator

ID No.	Cert.No.	Due Date	Traceability
400005	SG-E-00307/66	23 Aug 2025	National Institute of Metrology Thailand (NIMT)

2. Standard Buffer Solution

pH	Cert. No.	Lot No.	Exp. Date	Traceability
4.008	61270213	915161	19 Jul 2025	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
6.985	61275614	898428	28 May 2024	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
9.997	61281073	915163	19 Jul 2024	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 66-420087-1

Page : 2 of 2

Result of Calibration :

UUC Condition As-Received : Good

Function : Electrical measurement

pH meter

Performing standard curve by Multiproduct Calibrator at pH (4,7,10)

Adjustment Curve at nominal pH	Applied Voltage (mV)	Nominal Value (pH)	UUC Reading		Correction (mV)	Uncertainty (± mV)
			(pH)	(mV)		
4, 7, 10	177.4800	4	4.00	177.5	0.0	0.12
	0.0000	7	7.00	0.1	-0.1	0.086
	-177.4800	10	10.00	-177.4	-0.1	0.12

Function : pH meter with electrode

Performing a three - buffer standard curve using buffer nominal pH (4,7,10)

Adjustment Curve at nominal pH	Standard Buffer (pH)	UUC Reading (pH)	Correction (pH)	Uncertainty (± pH)
4, 7, 10	4.008	4.01	0.00	0.010
	6.985	7.00	-0.01	0.011
	9.997	10.01	-0.01	0.014

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- o/o -





Certificate of Calibration

Certificate No. : 66-400519-1

Page : 1 of 2

Submitted by :

M Green Group Co.,Ltd.

188/46 Wisatesukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Digital Thermometer with Thermistor probe

Temperature Indicator

Manufacturer : Eutech

Model : pH 700

Range : N/A °C

Resolution : 0.1 °C

Serial No. : 2884323

ID No. : N/A

Thermistor probe

Model : N/A

Sheath Material : Stainless

Diameter : 3.2 mm.

Length : 100 mm.

Serial No. : PHSTEMB01P

ID No. : N/A

On site calibration was carried out at the M Green Group Co.,Ltd.

Environment :

Ambient Temperature : (25.0 to 26.0) °C

Relative Humidity : (56 to 60) %

Line Voltage : (224.0 to 225.2) VAC

Date of Received :

20 September 2023

Date of Calibration :

20 September 2023

Date of Issue :

25 September 2023

Calibrated by :

Permpoon Chanpu

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4003 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert.No. Due Date Traceability

400002 TT-0074-22 20 Jun 2024

National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert.No. Due Date Traceability

400033 22E569 22 Feb 2024

National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)
Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 66-400519

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function :

Temperature measurement

Immersion Depth (mm.)	Standard Reading (° C)	UUC Reading (° C)	Correction (° C)	Uncertainty (± ° C)
100	25.006	24.9	0.1	0.19

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2 ,
providing a level of confidence of approximately 95%

-oOo-





NSG-TIS-17025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 66-200300-1 Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Electronic Balance

Manufacturer : SHIMADZU

Model : AP225WD

Serial No. : D316300690

Capacity : 220 g Resolution : 0.00001g/102g, 0.0001g/220g

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.6 to 26.7) °C

Relative Humidity : (54.4 to 56.6) %

Air Pressure : 1010.0 mbar

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 22 September 2023

Calibrated by : Akaradath Thippichai

Calibration Method : In-house method CAL-M2001 based on UKAS Publication ref : LAB 14

Edition 7 - November 2022

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No. E261-E2624

Cert. No. C02222345

Due Date 10 Nov 2023

Traceability

National Institute of Metrology (Thailand), (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 66-200300-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Departure of indication from nominal value

Nominal Value (g)	Correction (g)	Uncertainty \pm (g)
0.001	0.00000	0.000012
0.01	0.00000	0.000013
0.1	0.00000	0.000015
1	0.00000	0.000026
10	0.00000	0.000053
20	-0.00003	0.000071
50	0.00004	0.00011
100	-0.00009	0.00020
150	0.0000	0.00038
200	-0.0001	0.00038

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.15$, providing a level of confidence of approximately 95%

Eccentric error

Load test : 50 g



A B C D E
-0.00003 0.00000 0.00000 -0.00005 0.00000 g

Repeatability

Load test : 200 g

Sidev. : 0.000048 g

-o0o-





Certificate of Calibration

Certificate No. : 66-400531-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisetukrakhon 25, Pracha-Ud Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Liquid in Glass Thermometer

Manufacturer : N/A

Model : N/A

Range : 0 °C to 100 °C

Resolution : 1 °C

Serial No. : N/A

Immersion : Total

ID No. : 94-49747

Environment :

Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Line Voltage : (220 ± 22) VAC

Date of Received : 21 September 2023

Date of Calibration : 23 September to 26 September 2023

Date of Issue : 26 September 2022

Calibrated by : Chortip Samchusri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4001 based on ASTM E77-07 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert. No. Due Date Traceability

400001 TT-0016-22 07 Feb 2024 National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert. No. Due Date Traceability

400003 23E1866 01 Jun 2025 National Institute of Metrology Thailand (NIMT)

400004 23E1866 01 Jun 2025 National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 66-400531-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function :

Temperature measurement

Ice point check : UUC* reading 0 °C Standard reading 0.0352 °C

Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
39.7228	40	-0.3	0.31

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- o O o -





Certificate of Calibration

Certificate No. : 66-400520-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment : Air Chamber (Refrigerator)

Manufacturer : Biobase

Range : N/A °C Model : BXC-V250M (II)

Resolution : 0.1 °C

Serial No. : YC025025190108 ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.0 to 26.0) °C

Relative Humidity : (40 to 50) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by : Permpoon Chanpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No. Cert. No. Due Date Traceability

400046 & 400042 66-400453-1 31 Jan 2024 National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration


Certificate No. : 66-400520-1 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)



Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
4.0	2.0	2.0	4.05	4.04	4.27	4.89	4.10	4.05	4.92	4.37	4.43	0.46

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
4.0	2.0	2.0	0.60	0.21	1.2

Remark The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o00o-



Certificate of Calibration

Certificate No. : **66-400520-2** Page : **1 of 2**Submitted by : M Green Group Co., Ltd.
188/46 Wisatesukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 ThailandEquipment : Air Chamber (Oven)
Manufacturer : Memmert
Range : N/A °C
Serial No. : B419.1092
Model : UF110
Resolution : 0.1 °C
ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.0 to 26.0) °C
Relative Humidity : (40 to 50) %
Line Voltage : (226.0 to 230.0) VDate of Received : 20 September 2023
Date of Calibration : 20 September 2023
Date of Issue : 25 September 2023
Calibrated by : Permpoon Chianpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units
Standard Digital Thermometer with Thermocouple probeID No. Cert.No. Due Date Traceability
400046 & 400028 66-400184-3 04 Oct 2023 National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)
Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



Certificate of Calibration


Certificate No. : **66-400520-2** Page : **2 of 2**

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)

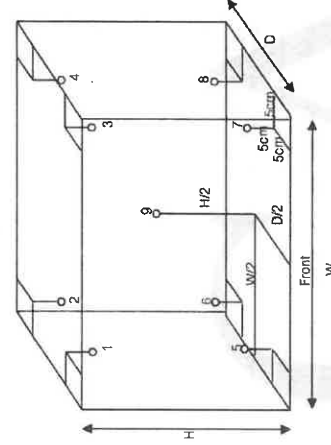Inside of Chamber
W = 0.56 m
D = 0.40 m
H = 0.48 m
Capacity = 0.11 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
103.0	103.0	103.0	103.3	103.0	103.7	103.3	103.1	103.0	103.8	102.7	103.3	0.69
105.0	105.0	105.0	105.3	105.0	105.7	105.3	105.2	105.0	105.8	104.6	105.3	0.71
180.0	180.0	180.0	180.4	180.1	181.2	180.4	180.3	180.0	181.4	179.0	180.5	0.95

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
103.0	103.0	103.0	0.8	0.1	1.3
105.0	105.0	105.0	0.9	0.1	1.4
180.0	180.0	180.0	1.7	0.2	2.7

Remark The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-oOo-





Certificate of Calibration

Certificate No. : 66-400520-3 Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Prachar-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Water Bath

Manufacturer : Memmert

Model : WNB29

Range : N/A °C

Resolution : 0.1 °C

Serial No. : L619.0037

ID No. : N/A

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.0 to 26.0) °C

Relative Humidity : (40 to 50) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by : Permpon Chanpu

Calibration Method : This instrument was calibrated by In-house method CAL-M4006 based on ASTM E715-80

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD probe

ID No. Cert. No. Due Date Traceability

400046 & 400024 66-400184-2 06 Oct 2023 National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.




Certificate of Calibration

Certificate No. : 66-400520-3 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

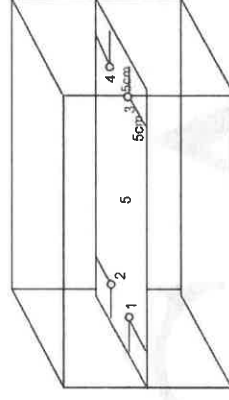

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.					Uncertainty (± °C)	Measured Uniformity (°C)	Measured Stability (°C)
			1	2	3	4	5			
85.0	85.0	85.0	85.08	85.04	84.98	85.17	85.02	0.18	0.2	0.05

Remark The uncertainty is not combine uniformity of the water bath

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Page : 1 of 2

Certificate No. : 66-400520-4

Submitted by : M Green Group Co., Ltd.

188/46 Wisutesukhakdon 25, Pracha-Utd Rd., Thungku Bangkok 10140 Thailand

Equipment : Air Chamber (Incubator)

Model : Biochemistry Incubator

Resolution : 0.1 °C

ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.0 to 25.5) °C

Relative Humidity : (45 to 50) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by : Permporn Chanpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No. Cert.No. Due Date Traceability

400029 & 400043 66-400226-1 27 Oct 2023 National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



Certificate of Calibration


Certificate No. : 66-400520-4

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)

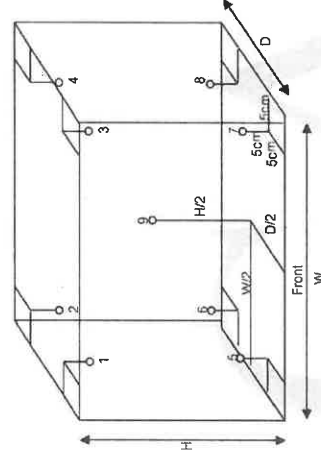

Inside of Chamber
 W = 0.45 m
 D = 0.41 m
 H = 0.85 m
 Capacity = 0.16 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
20.0	20.0	20.0	20.14	20.04	19.91	19.97	20.03	19.96	19.91	19.96	19.92	0.70

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
20.0	20.0	20.0	0.28	0.37	0.8

Remarks The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 66-300589-7

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Burette

Manufacturer : GLASSCO

Class : A

Capacity : 10 ml

Graduation : 0.05 ml

ID No. : 2212-0344-1

Environment

: Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1006.7 mbar.

Date of Received

: 20 September 2023

Date of Calibration

: 27 September 2023

Date of Issue

: 27 September 2023

Calibrated by

: Wipa Tovadee

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

241003

Cert. No.

66-200196-2

Due Date

02 Dec 2023

Traceability

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 66-300589-7

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 21.33 sec.

Nominal Volume (ml)	Measuring Volume (ml)
10	9.9913

Uncertainty of measurement with in ± 0.0039 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o -





Certificate of Calibration

Certificate No. : 66-300589-8

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Burette

Manufacturer : GLASSCO

Class : A

Capacity : 25 ml

Graduation : 0.1 ml

ID No. : 2212-0344-2

Environment

: Ambient Temperature : (20 ± 3) °C

: Relative Humidity : (50 ± 10) %

: Air Pressure : 1006.7 mbar.

Date of Received : 20 September 2023

Date of Calibration : 27 September 2023

Date of Issue : 27 September 2023

Calibrated by : Wipa Tovadee

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert.No.

Due Date

Traceability

241003

66-200196-2

02 Dec 2023

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd



Certificate of Calibration

Certificate No. : 66-300589-8

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 46.01 sec.

Nominal Volume (ml)	Measuring Volume (ml)
25	24.9741

Uncertainty of measurement with in ± 0.0066 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 ,

providing a level of confidence of approximately 95%

- o O o -



Certificate of Calibration

Certificate No. : 66-300590-1

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Imhoff Cone

Manufacturer : VITLAB

Capacity : 1000 ml Graduation : 50 ml

ID No. : CY1000/01/22

Environment : Ambient Temperature : (20 ± 3) °CRelative Humidity : (50 ± 10) %

Air Pressure : 1005.4 mbar.

Date of Received : 20 September 2023

Date of Calibration : 26 September 2023

Date of Issue : 26 September 2023

Calibrated by : Areearat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.	Cert. No.	Due Date	Traceability
241002	66-200196-1	02 Dec 2023	National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 66-300590-1

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
500	501.19
1000	1010.67

Uncertainty of measurement with in \pm 0.17 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o-o-



การดูแลบำรุงรักษาเชิงป้องกัน

Preventive Maintenance



ใบรับรองการทวนสอบ "เครื่องกลั่นไนโตรเจน"

(Calibration Certificate of Distillation Unit VAPODEST
VAP20, VAP30s)

๗15



บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด

ฝ่ายบริการหลังการขาย

โทร 0 2 639 7000 E-mail: service.th@dksh.com

ฝ่ายขายและการตลาด

โทร 0 2 639 7000 E-Mail : marketing.th@dksh.com

Website : www.dksh.com/th/technology/solution-thailand

เงื่อนไขการให้บริการ Preventive Maintenance

บริษัทฯ จะส่งวิศวกรผู้ชำนาญ เพื่อให้ให้บริการตามขอบเขตของการบริการ เฉพาะ ในวันและเวลา ราชการ หากมีความประสงค์ที่จะรับบริการนอกเหนือจากวัน เวลา ราชการ (วันหยุดเสาร์ – อาทิตย์ หรือวันหยุด นักชดถุณ) บริษัทฯ จะคิดค่าบริการที่เพิ่มเติมตามอัตราที่กำหนดไว้

ขอบข่ายการบริการ

- ตรวจสอบสภาพการทำงานต่าง ๆ ของเครื่องมือ
- ทดสอบประสิทธิภาพการทำงานของเครื่องมือ
- รายการผลการตรวจสอบเครื่องมือ

หมายเหตุ

- ราหมีไม่รวมถึงค่าบริการซ่อม หรือ เปลี่ยนอะไหล่ที่ชำรุดเสียหาย หรือหมดสภาพการใช้งาน
- ในกรณีที่ผู้รับบริการอยู่นอกเขตพื้นที่ให้บริการ บริษัทฯ จำเป็นต้องคิดค่าใช้จ่ายเพิ่มเติม ได้แก่ ค่าเดินทาง เป็นต้น
- บริษัท ฯ ขอสงวนสิทธิ์ในการเปลี่ยนแปลงราคา โดยไม่แจ้งให้ทราบล่วงหน้า

ช่องทางการติดต่อ



DKSH Technology Limited (บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด)
เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260
เลขประจำตัวผู้เสียภาษี 010-555-001-4547 (สำนักงานใหญ่)



Call center 0 2 639 7000



DKSH Scientific



www.dksh.com/scientific-thailand



marketing.sc.th@dksh.com



@dkshscientific

Preventive Maintenance Contract

จำนวนใบการที่สัญญาบริการ 1 ครั้ง ต่อ ปี
 ครั้งนี้/วันที่ 28 Mar 2023

รายละเอียดผู้ให้บริการ

หน่วยงาน	บริษัท เทค เทคโนโลยี		
ที่อยู่	3032 ซอยธรรมาที่ 2 ซอย 63 ถนนธรรมาที่ 2 แขวงแสนคำ เขตบางขุนเทียน กรุงเทพมหานคร 10150		
โทรศัพท์	0-2893-4211-7	แฟกซ์	0-2893-4218

ผู้ติดต่อ

ชื่อ - นามสกุล	คุณวิภา วิเศษสังข์		
ตำแหน่ง	หัวหน้างาน		
โทรศัพท์	0-2893-4211-7	เบอร์ติดต่อ	แฟกซ์ 0-2893-4218
E-mail	Lab_center@testech.co.th		

รายละเอียดผู้ให้บริการ


บริษัท ลีเคอเอส เทคโนโลยี จำกัด (ฝ่ายบริการช่างขาย) (สำนักงานใหญ่) เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260 โทรศัพท์ 0 2 693 7000 Email: siripon@lsc.com Line ID : siripon3007			
เจ้าหน้าที่ประสานงาน : คุณศิริพร อยู่ทองชัย โทรศัพท์ 090 678 6924 , 02 301 7467			
เจ้าหน้าที่ผู้ให้บริการ	นายจิร ชุม สดอ ฑ		
ตำแหน่ง	Specialist, Technical Service.		
โทรศัพท์	0938138736	แฟกซ์	-
E-mail	jirayut.12@lsc.com		

ลงนามผู้รับบริการ	ลงนามผู้ให้บริการ
ตำแหน่ง	ตำแหน่ง
ตำแหน่ง	ตำแหน่ง
วันที่ / ประทับตราบริษัท	วันที่ / ประทับตราบริษัท

JOB No: Lap2302591..... MODEL: Vap30..... SN: 003718


Part : Operational Qualification (OO)

ตรวจสอบสภาพเครื่อง
 FRONT

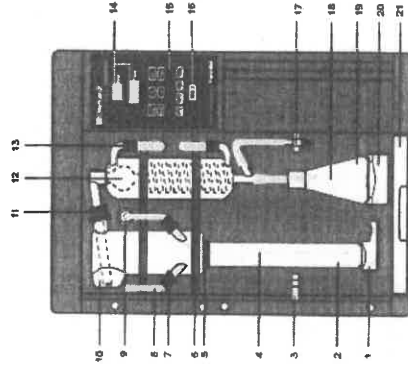

Pass	Fail	N/A	Remark
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1.Quick clamping device with wedge
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2. Kjeldatherm digestion tube
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3. Holder for steam inlet tubing
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4. PTFP-Inlet tubing, steam
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	5. Viton-cone
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	6. Clamping for glassware
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7. Screw cap GL18 with silicone seal
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	8. PTFP-Inlet tubing, NaOH
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	9. PP-Distributor with PP-threaded joint
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	10. Distribution head, glass
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	11. Screw cap GL32 with silicone seal
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	12. Distillation condenser
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	13. Screw cap GL14 with plastic screw connection
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	14. Display
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	15. Keyboard, chemical-resistant
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16. Main switch, green
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	17. Ventilation valve
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	18. Distillate outlet tubing
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	19. Erlenmeyer flask
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	20. Platform
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	21. Drip tray

REAR



	Pass	Fail	N/A	Remark
1. Diaphragm pump NaOH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2. Diaphragm pump H ₃ BO ₃	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	vap 40 only
3. Diaphragm pump H ₂ O for steam generator	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4. Diaphragm pump H ₂ O for sample	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
5. Peristaltic pump for suction sample	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
6. Peristaltic pump for suction receiver	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	option
7. Pinch-solenoid valve, steam	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8. Magnetic valve with pressure control	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9. Pinch-solenoid valve, shut-off	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10. Verprene-tubing 4x8 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11. Verprene-tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
12. Non-return valve for diaphragm pumps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13. Tubing reduction PP 51x10x5 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
14. Silicone tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	vap 40 only
15. Silicone tubing 4x7 mm.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	option
16. Silicone tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
17. Verprene-tubing 8x12 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
18. Verprene tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	vap 30,40 only
19. Silicone tubing 4x7 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20. Ventilation glass	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21. Novoprene-tubing 4.8x8 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
22. Tubing reduction	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23. Silicone tubing 6x10 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
24. PP-distributor with PP-thread	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
25. SKT-valve (built in with brass fitting)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
26. Silicone tubing 8x16x80 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
27. Steam generator	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
28. PTFE-inlet tubing NaOH	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
29. Silicone tubing 8x16 for cooling water inlet	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30. Silicone tubing 8x16 for cooling water outlet	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
31. Viton-tubing 6x12*50 mm.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
32. Silicone tubing 4x7 mm.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	option

รายละเอียดการตรวจสอบ ขั้นตอนการบริการ

ตรวจสอบระบบไฟฟ้า (Electrical Test)

- ความดันทางไฟฟ้าของเครื่องกับกราวด์
- กระแสไฟฟ้าที่ใช้งาน

ตรวจสอบสภาพเครื่อง (Optical Test)

- Main cable
- Electric wiring
- Pumps
- Distribution Head
- Condensor
- Steam generator
- Tubing
- Viton cone

ตรวจสอบ Function การทำงาน (The Function Test)

- ระบบสร้างและควบคุมความดันของ Steam
- ระบบการเดินน้ำเข้า Sample Tube
- ระบบการเติม Na OH
- ระบบการ Suction ค้าง Sample Tube และ Receiver

แบบทดสอบการปฏิบัติงาน

1. TECHNICAL DATA

Main Supply 220 volt + 10% 50 Hz with ground
Nominal current

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
6 a

1.1 COOLING WATER BATH

Temperature 15-20 °C
Cooling Water Outlet
Control Temperature

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....

1.2 OPTICAL TEST VAP..30..

Screw cap GL14
Screw cap GL18
Screw cap GL32
Distillation Head
Condensor
Viton Cone
Ventilation Valve
Micro Switch Sample

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

2. SYSTEM COOLING WATER INLET

Cooling Water Inlet
Cooling Water Outlet
Magnetic valve

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....

3.SYSTEM CONTROL

Key Board
Display
Program
Adding H₂O
Adding NaOH
Adding H₂BO₃
Suction Sample

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
vap 30,40 only
vap 40 only
vap 30,40 only

4.SYSTEM DISTILLATION

Boiler
Level Sensor
Nonreturn-Tubing
Solenoid Valve Shut-Off
Solenoid Valve Steam
Excess Pressure Detector
Ventilation Valve
Heater

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

5. PUMP

Pump H₂O Steam
- Non-Return Valve
Pump H₂O Sample
- Non-Return Valve
Pump NaOH
- Non-Return Valve
Pump H3BO3
- Non-Return Valve
Pump Suction

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

6. The Following Program Run :

Addition H₂O 0-99 sec.
Addition NaOH 0-99 sec.
Addition H₂BO₃ 0-99 sec.
Reaction Time 0-99 min.
Distillation Time 0-99 min
Steam Capacity 30%-100%
Suction Time 0-99 sec.
The Instrument is in perfect technical shape

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

Remark :

.....
.....

Part : ข้อมูลสนับสนุนด้านเทคนิค (General Technical Support)
การบำรุงรักษาทั่วไป (Basic maintenance)

Cleaning

Glass parts and suction pump should be cleaned before long periods of non-usage (i.e. holidays). This way blockages caused by crystalline deposits are avoided.

The following program should be run:

Addition H_2BO_3 0 s
Addition H_2O_2 13 s
Addition NaOH 0 s
Reaction time: 0 s
Distillation time: 7 min.
Steam capacity: 100 %
Suction time: 20 s

Place an empty digestion tube and an Erlenmeyer flask into position, and start the program.

In case of extreme deposits in the glassware you can clean the system by putting about 10 ml of sulphuric acid into the digestion tube.

Error Code

The micro-processor continually surveys all the functions of the distillation system. As soon as an error arises it is shown on the display and accompanied by an acoustic signal.

Error message	Measures
No tap water	Check cooling water inlet for blockages. Ensure the tap is turned on
No sample tube	Insert tube
Check chemicals	Check set of tanks
Low water Press Enter	Check the water inlet distilled H_2O
Filling steam generator	This message disappears as soon as steam generator is filled
After the above mentioned errors are corrected, the following message is displayed.	
Error message	Measures
Stop Prog. No. x Continue=Enter	Enter = continue of interrupted program Reset = Standby-mode
Other error messages	
Error message	Measures
Wait for steam	Message disappears as soon as stand-by is reached
Add sol. > 1min Continue=Enter	Check programming Enter=continue of interrupted program Reset=Standby-mode
Program undefined	Check programming
Excess steam pressure	Switch the system off and call service
Sensor error	Switch the system off and call service



CERTIFICATE No : 23T1387
REFERENCE No : 68174-5

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 110
SERIAL No : D415.0802
ID No : EQL-190
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEDAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



CERTIFICATE No : 23T1387

PAGE : 2 OF 2

Calibration Report


EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 110
ID No : EQL-190
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
SN : D415.0802
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TIAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER, AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2. REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER WITH RTD : HYDRA 2635A
2) THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
- 3. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
- 4. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.
- RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 5
Overall Line Voltage (V) variation : 8
Instrument Condition : Normal
Chamber Size (W*L*H): 56*40*48 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
37.0	37.0	37.0	36.93	0.07	0.16	0.26
44.0	44.0	44.0	44.17	0.07	0.22	0.27

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Indicating Temp (°C)		Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
		#1	#2	#3	#4	#5	#6	#7	#8	#9	
37.0	37.0	36.97	36.95	36.94	36.96	36.94	36.92	36.91	36.90	36.84	0.25
44.0	44.0	44.21	44.23	44.09	44.23	44.23	44.13	44.21	44.15	44.07	0.36

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 3 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA. THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.
END OF CALIBRATION REPORT

F-G010 REV : 02



CERTIFICATE No : 23TI1386
REFERENCE No : 68174-4

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D518.0082
No :
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEDAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



CERTIFICATE No : 23TI1386

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-205
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
SN : D518.0082
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 %RH


CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TIAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2. REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER WITH RTD
INSTRUMENT : HYDRA 2635A
MODEL : 6653300
SERIAL No : 2277509
CERTIFICATE No : 2277509
DUE DATE : 10-Jul-23
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 2
Overall Line Voltage (V) variation : 9
Instrument Condition : Normal
Chamber Size (W*L*H): 56*40*72 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation
35.0	35.0	35.0	34.99	0.02	0.14	0.20
36.0	36.0	36.0	36.00	0.03	0.14	0.22
41.5	41.5	41.5	41.46	0.05	0.10	0.19

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Measured Temperature (°C) at Spread Locations							Uncertainty (± °C)
	#1	#2	#3	#4	#5	#6	#7	
35.0	34.91	34.94	34.93	34.93	34.98	35.03	35.01	35.08
36.0	35.93	35.95	35.94	36.00	36.05	36.10	36.10	36.10
41.5	41.46	41.47	41.41	41.47	41.50	41.47	41.43	41.49

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.
END OF CALIBRATION REPORT



QUALITY CALIBRATION CO.,LTD.

235 Petchkasem 63/2 Road, Laksoeng, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 23TI385
REFERENCE No : 68174-3

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D518.0240
No : EQL-218
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEDAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



QUALITY CALIBRATION CO.,LTD.

235 Petchkasem 63/2 Road, Laksoeng, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

CERTIFICATE No : 23TI385

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-218
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
SN : D518.0240
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION


1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TIAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER WITH RTD
- 2) HYDRA 2635A
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-

- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 2
Overall Line Voltage (V) variation : 12
Instrument Condition : Normal
Chamber Size (W*H*D): 56*40*72 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
35.0	35.0	35.0	35.00	0.05	0.15	0.26
36.0	36.0	36.0	36.00	0.04	0.16	0.26

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
	#1	#2	#3	#4	Ref. 5	#6	#7	#8	#9	
35.0	34.94	34.98	34.93	34.97	35.10	34.94	35.07	35.04	35.05	0.25
36.0	35.94	35.97	35.92	35.96	36.07	36.11	35.95	36.03	36.05	0.25

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%
END OF CALIBRATION REPORT

F-G010 REV : 02



CERTIFICATE No : 23T1384
REFERENCE No : 68174-2

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D519,0140
D No : EQL-231
CONDITION AS RECEIVED : USED ITEM

SUBMITTED BY : TEST TECH CO., LTD.
30.32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKOKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



CERTIFICATE No : 23T1384

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-231
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
S/N : D519,0140
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO IAS Q-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.3 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2-REFERENCE STANDARD INSTRUMENTS :-


INSTRUMENT : MODEL : SERIAL No : CERTIFICATE No : DUE DATE :
HYDRA 2635A 6635300 2217509 10-Jul-23
1) DATA LOGGER WITH RTD
3. THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACES OF CALIBRATION ONLY.

4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.

5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-

- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 2
Overall Line Voltage (V) variation : 8
Instrument Condition : Normal
Chamber Size (W*L*H): 56*40*72 cm

CHAMBER PERFORMANCE

Calibration Point (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
35.0	35.0	35.0	35.03	0.08	0.17	0.32
37.0	37.0	37.0	37.02	0.08	0.22	0.32
41.5	41.5	41.5	41.54	0.04	0.13	0.20

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
		#1	#2	#3	#4	#5	#6	#7	#8	#9	
35.0	35.0	34.92	35.02	34.99	35.01	35.04	35.06	35.09	35.10	35.10	0.25
37.0	37.0	37.00	36.99	36.95	36.95	37.00	37.02	37.09	37.07	37.11	0.25
41.5	41.5	41.52	41.51	41.47	41.49	41.54	41.53	41.62	41.58	41.56	0.36

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2: LOCATION 5 WAS REFERENCE LOCATION

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGB FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%

END OF CALIBRATION REPORT

F-G010 REV : 02



QUALITY CALIBRATION CO.,LTD.

235 Petchkasem 63/2 Road, Laksoeng, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 23T1391
REFERENCE No : 68175-1

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : AUTOCLAVE
MANUFACTURER : HIRAYAMA
MODEL : HVE-50
SERIAL No : 30612085166
No : EQL-155
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD.,
SAMAEDAM, BANGKHUNTHIAN, BANGKOK
10150

CALIBRATED BY : PRASERT P.
CALIBRATION DATE : 13-Feb-23

APPROVED BY :
ISSUED DATE : 14-Feb-23
RECEIVED DATE : 13-Feb-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 02



QUALITY CALIBRATION CO.,LTD.

235 Petchkasem 63/2 Road, Laksoeng, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

CERTIFICATE No : 23T1391

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : AUTOCLAVE
MANUFACTURER : HIRAYAMA
ID NUMBER : EQL-155
RECEIVED DATE : 13-Feb-23
AMBIENT TEMPERATURE : 30° C ± 1° C
MODEL : HVE-50
SERIAL NUMBER : 30612085166
CALIBRATION DATE : 13-Feb-23
RELATIVE HUMIDITY : 50 %RH ± 10 % RH


CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED BASED ON BS 2646 : Part 5 : 1993 BY COMPARISON WITH CALIBRATED THERMOCOUPLE TYPE K UNDER NO LOAD CONDITION. THE THERMOCOUPLES WERE PLACED ON FIVE LOCATIONS AS SHOWN IN THE PICTURE. TWO PROBES WERE PLACES NEAR TOP AND BOTTOM WALL AND EACH PROBE WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE THIRD PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE INSTRUMENT CHAMBER. PROBE NUMBER 4 WAS ATTACHED TO THE LOAD TEMPERATURE PROBE, IF FITTED, WITHIN 20 mm OF ITS TIP. PROBE NUMBER 5 WAS PLACED IN THE CHAMBER DRAIN OR VENT WITHIN 100 mm OF ITS CONNECTION TO THE CHAMBER.

2. REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER VALPROBE S350, DV35, DN94
- 2) THIS RESULT WAS FOUND ACCURATE AS SHOWN ON DATE AND PLACE OF CALIBRATION ONLY.
- 3. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
- 4. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- 5. NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber variation : 1.2 °C

Autoclave Condition : Normal

Chamber Size (Diameter*H): 30 * 71 cm

CHAMBER PERFORMANCE

Controller Temperature (°C)	Average All Locations (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)	Pressure (MPa)	Holding time (min)	Operating Cycle time (min)
116	116.48	0.09	0.10	0.27	0.090	15	60
122	122.43	0.09	0.13	0.27	0.130	15	60

TEMPERATURE MEASUREMENT ACCURACY TEST(° C)

Cont Temp	Ind Temp	Measured Temperature (°C) at Spread Locations				Uncertainty (± °C)
		#1	#2	#3	#4	
116	116	116.45	116.50	116.53	116.45	0.59
122	122	122.40	122.46	122.50	122.39	0.59

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT OF TEMPERATURE MEASUREMENT ACCURACY TEST EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : THE STABILITY TERM IN THE UNCERTAINTY BUDGET WAS REPLACED BY THE STANDARD REPEATABILITY.

NOTE 3 : LOCATION 3 WAS REFERENCE LOCATION.

NOTE 4 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA. THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

F-G010 REV : 02



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLIANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



Certificate of Calibration

Certificate No.: 23M259
Page: 1 of 2

Equipment: Standard Weight
Manufacturer: LS
Model: -
Serial No.: -
ID No.: EOL-121
Condition As-Received: Used Item
Received Date: 02 February 2023
Calibration Date: 07 February 2023
Reference: 2302-0080DN
Submitted by: TEST TECH CO.,LTD. (HEAD Office)
Ambient Temperature: (23 ± 2) °C
Relative Humidity: (50 ± 15) %
Atmospheric Pressure: 1008.9 mbar

30, 32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkhuntian, Bangkok 10150

Procedure used: Calibration were conducted using in-house calibration procedure CP-M01 according to comparison method against standard weights on the basis of weightings at an average air density of 1.2 kg/m³ and a temperature of 23.4 °C material density of weight is 8000 kg/m³.

Condition of this result of calibration

1. Reference standards Instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Standard weight Set (E2)	YCS31-712-00	50202985	MM-0109-22	11 Jul 2024

2. This certificate is not certified for any commercial transaction.

3. The certificate is valid only to the item calibrated on date and place of calibration.

4. This Certification is traceable to the International System of Unit maintained at:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by: Chaowalit Ritirak
Issue Date: 08 February 2023

Approved Signatory: [] Phalinee Prabpaijal
[x] Sura Suwanasri
[] Chaowalit Ritirak



Cert No.: 23M259
Page: 2 of 2

Result of calibration

Nominal Value	Conventional mass	Uncertainty of Measurement (±)	Maximum Permissible error (±)
50 g	50.00015 g	0.10 mg	0.30 mg

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95 %.

-000-



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLIANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2715-9484



Certificate of Calibration

Certificate No.: 23M260
Page : 1 of 2

Equipment: Standard Weight
Manufacturer: -
Model: -
Serial No.: -
ID No.: EOL-258
Condition As-Received: Used Item
Received Date: 02 February 2023
Calibration Date: 07 February 2023

Reference: 2302-0080DN
Submitted by: TEST TECH CO.,LTD. (HEAD Office)
Ambient Temperature: (23 ± 2) °C
Relative Humidity: (50 ± 15) %
Atmospheric Pressure: 1012 mbar
30, 32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkhuntian, Bangkok 10150

Procedure used: Calibration were conducted using in-house calibration procedure CP-M01 according to comparison method against standard weights on the basis of weightings at an average air density of 1.2 kg/m³ and a temperature of 23.6 °C material density of weight is 8000 kg/m³.

Condition of this result of calibration

1.Reference standards Instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Standard weight Set (E2)	YCS31-712-00	50202965	MM-0108-22	11 Jul 2024

2.This certificate is not certified for any commercial transaction.

3.The certificate is valid only to the item calibrated on date and place of calibration.

4.This Certification is traceable to the International System of Unit maintained at:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by: Chaowalit Rittrak
Issue Date: 08 February 2023

Approved Signatory:

[] Phalinee Prabpai
[x] Sura Suwannast
[] Chaowalit Rittrak



Cert No.: 23M260
Page: 2 of 2

Result of calibration

Without adjustment

Nominal Value	Conventional mass	Uncertainty of Measurement (±)	Maximum Permissible error (±)
2 kg	2.0000034 kg	3.0 mg	10 mg

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-00-

a 1146232

B 0307756



MAINTENANCE AND TEST CERTIFICATE MODEL OPTIMA 8000

SERIAL NUMBER : 078S1411171C **DATE TESTED :** May 18, 2023

1. MECHANICAL CHECKS

A. Inspect and clean all fans and filters. ☐ OK

B. Inspect and replace as necessary, all torch components including the RF coil. ☐ OK

C. Inspect all tubing for sign of clacking or leaking. ☐ OK

D. Adjust water and gas pressure regulator settings. ☐ OK

E. Inspect and leak check pneumatics drawers. ☐ OK

F. Clean the exterior of the instrument. ☐ OK

2. OPTICAL CHECKS

A. Inspect and clean all optical components. ☐ OK

B. As required, check and replace all purgeblfilters. ☐ OK

C. Recheck optical alignment. ☐ OK

3. COOLING SYSTEM CHECKS

A. Perform preventive maintenance on chiller. ☐ OK

B. Flush out the chiller every six months. ☐ OK

4. PERFORMANCE CHECKS

A. Torch View Alignment. ☐ OK

B. Wavelength Calibration. ☐ OK



MAINTENANCE AND TEST CERTIFICATE MODEL OPTIMA 8000

Customer : บริษัท เพลท เทคโนโลยี **Date Tested:** May 18, 2023

Address : 30, 32 ซอยพระรามที่ 2 ซอย 63 **Recommendation Recertification Period** 12

ถนนพระรามที่ 2 แขวงถนนเก่า **Recertification Due:** May 17, 2024

เขตบางกอกใหญ่ กรุงเทพมหานคร 10150 **Date Last Certified:** May 19, 2022

User Name: คุณณัฐวิภา สาระจันทร์ **Visit Number:** 1 of 1

Phone: 02-893-4211-17 **PerkinElmer Phone:** 02-719-6420 ext 206

Fax: lab_center@testtech.co.th **PerkinElmer Fax:** 02-318-5597

CONFIGURATION TESTED		ACCESSORIES/COMPONENT NOT INCLUDED	
MODEL	SERIAL NUMBER		
OPTIMA 8000	078S1411171C	WinLab32 Version 5.5.0.0714	
N0772045	2F1441085	PN:6150T21E4Q1E	
EQL-180			
TESTED EQUIPMENT	CALIBRATION NUMBER	EXPIRATION	
IPV Methods			
TEST STANDARD USED	PART NUMBER	EXPIRATION DATE	
Mixed standard 1/10	N069-1579	NOV 30, 2023	
Mixed standard 1/100	N930-0221	NOV 30, 2023	
CUSTOMER SUPPLIED	COMMENTS	CUSTOMER INITIALS	
2 % HNO3			
10 % HNO3			



ICP02329207

MAINTENANCE AND TEST CERTIFICATE MODEL
OPTIMA 8000

SERIAL NUMBER : 078S1411171C		DATE TESTED : May 18, 2023	
PARAMETER	SPECIFICATION	FINAL VALUE	
Spectral Resolution : UV	As 193.696 nm	≤ 0.009 nm	0.00720 nm
	Ni 231.604 nm	≤ 0.011 nm	0.00892 nm
	Ni 341.476 nm	≤ 0.015 nm	0.01343 nm
Spectral Resolution : VIS	Ba 455.403 nm	≤ 0.020 nm	0.01726 nm
Precision	Zn 206.200 nm	% RSD ≤ 1.0 %	0.35 %
	Mg 280.271 nm	% RSD ≤ 1.0 %	0.19 %
	Mg 285.213 nm	% RSD ≤ 1.0 %	0.19 %
	Ba 455.403 nm	% RSD ≤ 1.0 %	0.13 %
Detection Limits : Axial	Tl 190.801 nm	3(SD) ppb ≤ 10 ppb	1.54 ppb
	As 193.696 nm	3(SD) ppb ≤ 10 ppb	2.10 ppb
	Se 196.026 nm	3(SD) ppb ≤ 5.0 ppb	2.43 ppb
	Pb 220.353 nm	3(SD) ppb ≤ 3.0 ppb	1.40 ppb
Detection Limits : Radial	As 193.696 nm	3(SD) ppb ≤ 60 ppb	4.44 ppb
	Zn 213.857 nm	3(SD) ppb ≤ 2.0 ppb	0.12 ppb
	Mn 257.610 nm	3(SD) ppb ≤ 1.0 ppb	0.05 ppb
	La 379.478 nm	3(SD) ppb ≤ 3.0 ppb	0.21 ppb
	Ba 455.403 nm	3(SD) ppb ≤ 0.3 ppb	0.01 ppb
	Ba 493.408 nm	3(SD) ppb ≤ 0.6 ppb	0.01 ppb
BEC : Axial (IB X 1000)/(IS-IB)	Mn 257.610 nm	≤ 30 ppb	6.83 ppb
BEC : Radial (IB X 1000)/(IS-IB)	Mn 257.610 nm	≤ 30 ppb	9.29 ppb

Page 3 of 4



ICP02329207

MAINTENANCE REPORT AND IPV TEST CERTIFICATE
OPTIMA 8000

SERIAL NUMBER : 078S1411171C DATE TESTED : May 18, 2023

Remarks :
Commissioning follow as commissioning performance sheets.

☒

☐

meets
does not meet

This is to certify that the above tests have been performed and the configuration tested

the PerkinElmer Specifications listed on this certificate.

This certificate does not modify PerkinElmer's standard terms and condition of sale,
including warranty terms.

Service Department PerkinElmer Ltd.

Authorized Representative :
(Khwanchai Siangwong)
Customer Support Engineer

Page 4 of 4



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhohi, Saraburi 18110, Thailand.

Saraburi Tel : +66 3627 3096 Fax : +66 3627 3100

Bangkok Tel : +668 9205 6851 , +669 8247 2360

Website : www.scieco.co.th E-Mail : calibrate@scg.com



Certificate No. T230022

Page 1 of 4

Certificate of Calibration

Equipment : Chamber (Cooling Room)

Manufacturer : -

Model : -

Serial No. : -

Customer Code : EQL-167

ID No. : T1447A1

Customer : Test Tech Co.,Ltd

30, 32 Rama II Soi 63, Rama II Rd., Samaedam,

Bangkhunthian Bangkok 10150

Customer Location : LABORATORY FLOOR 3

Date of Receipt : 13 January 2023

Calibrated By : Sujjar Naknakred (Site Calibration Manager)

Approved By : [Redacted] / Boonchai Suriyawong (Site Calibration Manager)

24 JAN 2023

Date of Issue :

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrological Center.

FM-L1418/31-08-64



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhohi, Saraburi 18110, Thailand.



Certificate No. T230022

Page 2 of 4

Calibration Report

Equipment : Chamber (Cooling Room)
Date of Calibration : 18 January 2023
Environment : Temperature : 25.0-27.2 °C
Line Voltage : 221.9-227.3 V
Relative Humidity : 55 - 65 %RH

Condition of this results of calibration :

1. This equipment was calibrated by insert nine standard thermocouples type T into its chamber , the other one standard thermocouples type T use for ambient temperature measurement . The calibration was done in according to WI-T20 (based on ASTM E145-94 (Reapproved 2001) and AS2853-1986).
All data show below were final values and the initial data from customer request . The temperature scale used was based on ITS - 90 .

2. Reference Standard Instrument :

Instrument	Model	Instrument No.	Certificate No.	Due Date
TC	TYPE T	TN141-TN150	T222123	5 October 2023
TC	TYPE T	TN151-TN160	T222123	5 October 2023
DATA LOGGER	34970A	T150	T222123	5 October 2023

3. This certificate is traceable to :

National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244).

4. Condition of calibrated item : good

Equipment Description :

Time Constant 2 Hour 8 Minute At 3 °C
Fresh Air Damper ☐ Open ☐ Min ☐ Medium ☐ Max
☒ Close ☒ Not Available

5. Adjustment :

() without adjustment (X) after adjustment

Approved By: [Redacted]


FM-L15 117/15-05-63



Certificate No. T230022

Page 3 of 4

Calibration Report

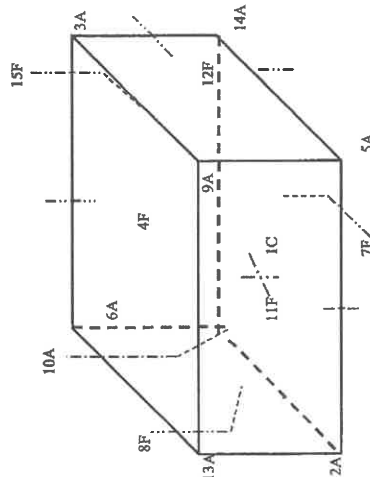

C = Centre, F = Centre of Face, A = Corner, E = Centre of Edge

1C	=	TN141
2A	=	TN142
3A	=	TN143
4F	=	TN144
5A	=	TN145
6A	=	TN146
7F	=	TN147
8F	=	TN148
9A	=	TN149
10A	=	TN150

11F	=	TN151
12F	=	TN152
13A	=	TN153
14A	=	TN154
15F	=	TN155

Approved By. _____



Certificate No. T230022

Page 4 of 4

Calibration Report

Measurement Results:

Average Standard Reading at each position (°C)										
Calibration Point	TN141	TN142	TN143	TN144	TN145	TN146	TN147	TN148	TN149	TN150
3	2.93	2.77	2.79	2.26	3.04	3.39	2.91	3.05	3.54	2.95
	TN151	TN152	TN153	TN154	TN155					
	3.32	3.28	3.00	2.96	2.90					

Chamber (Cooling Room)			Temperature Distribution					Coverage Factor <i>k</i>
Setting (°C)	Reading (°C)		Average (°C)	Stability (± °C)	Uniformity (°C)	Uncertainty (± °C)		
	Min , Max	Average						
3.0	2.9 , 3.1	3.0	3.01	0.47	1.04	0.98	2.00	

* The quoted uncertainty exclude "uniformity"

The calibration result apply only the above calibrated item.

The result of test was found accurate as shown on date and place of test only.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k which for a t-distribution, providing a level of confidence of approximately 95 %.

Approved By. _____



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Keengkhoi, Saraburi 18110, Thailand.

Saraburi Tel : +66 3627 3096 Fax : +66 3627 3100

Bangkok Tel : +668 9205 6851 , +669 8247 2360

Website : www.scieco.co.th E-Mail : calibrate@scg.com



Certificate No. T230121

Page 1 of 4

Certificate of Calibration

Equipment : Chamber (Cooling Room)
Manufacturer : -
Model : -
Serial No. : -
Customer Code : EQL-181
ID No. : T0399A5
Customer : Test Tech Co.,Ltd
30, 32 Rama II Soi 63, Rama II Rd., Samaedam,
Bangkhunthian Bangkok 10150
Customer Location : LABORATORY FLOOR 4
Date of Receipt : 26 January 2023
Calibrated By : Sujjar Naknakred (Site Calibration Manager)
Approved By : [REDACTED] / Boonchai Suriyawong (Site Calibration Manager)
Date of Issue : 01 FEB 2023

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrological Center.

FM-L1418/31-08-64



Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Keengkhoi, Saraburi 18110, Thailand.



Certificate No. T230121

Page 2 of 4

Calibration Report

Equipment : Chamber (Cooling Room)
Date of Calibration : 30 January 2023
Environment : Temperature : 25.0-27.2 °C
Line Voltage : 221.9-227.3 V
Relative Humidity : 55 - 65 %RH

Condition of this results of calibration :

1. This equipment was calibrated by insert nine standard thermocouples type T into its chamber , the other one standard thermocouples type T use for ambient temperature measurement . The calibration was done in according to W1-T20 (based on ASTM E145-94 (Reapproved 2001) and AS2853-1986) .

All data show below were final values and the initial data from customer request . The temperature scale used was based on ITS - 90 .

2. Reference Standard Instrument :

Instrument	Model	Instrument No.	Certificate No.	Due Date
TC	TYPE T	TN141-TN150	T222123	5 October 2023
TC	TYPE T	TN151-TN160	T222123	5 October 2023
DATA LOGGER	34970A	T150	T222123	5 October 2023

3. This certificate is traceable to :

National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244.)

4. Condition of calibrated item : good

Equipment Description :

Time Constant 1 Hour 30 Minute At 3 °C
Fresh Air Damper ☐ Open ☐ Min ☐ Medium ☐ Max
☐ Close ☒ Not Available

5. Adjustment :

() without adjustment

(X) after adjustment

Approved By [REDACTED]


FM-L15 117/15-05-63



Certificate No. T230121

Page 3 of 4

Calibration Report

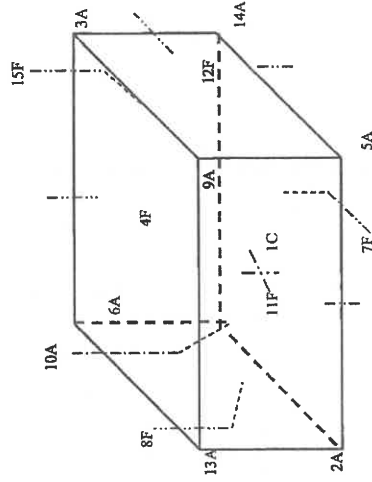

C = Centre, F = Centre of Face, A = Corner, E = Centre of Edge

1C	=	TN141
2A	=	TN142
3A	=	TN143
4F	=	TN144
5A	=	TN145
6A	=	TN146
7F	=	TN147
8F	=	TN148
9A	=	TN149
10A	=	TN150

11F	=	TN151
12F	=	TN152
13A	=	TN153
14A	=	TN154
15F	=	TN155

Approved By _____

FM-LJ5 117/15-05-63



Certificate No. T230121

Page 4 of 4

Calibration Report

Measurement Results:

Average Standard Reading at each position (°C)										
Calibration Point	TN141	TN142	TN143	TN144	TN145	TN146	TN147	TN148	TN149	TN150
3	2.84	2.89	3.01	3.07	3.13	3.19	3.04	2.99	3.15	2.94
	TN151	TN152	TN153	TN154	TN155					
	2.99	2.99	3.14	2.85	2.88					

Chamber (Cooling Room)			Temperature Distribution				
S g (°C)	Reading (°C)		Average (°C)	Stability (± °C)	Uniformity (°C)	Uncertainty (± °C)	Coverage Factor k
	Min, Max	Average					
3.0	2.8, 3.1	3.0	3.01	0.48	0.93	0.99	2.00

*The quoted uncertainty exclude " uniformity "
The calibration result apply only the above calibrated item.
The result of test was found accurate as shown on date and place of test only.
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k which for a t-distribution, providing a level of confidence of approximately 95 % .

Approved By _____

FM-LJ5 117/15-05-63



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



Certificate of Calibration

Certificate No. : 23H2216
Page : 1 of 2

Equipment : Dial Thermo-Hygrometer
Manufacturer: Barigo
Model :
Serial No.:
ID No.: EQL-064
Condition As-Received: Used Item
Received Date: 12 October 2023
Calibration Date: 17 October 2023
Reference: 2310-0447DN
Ambient Temperature: (25 ± 3) °C
Relative Humidity: (50 ± 20) %

This certificate may not be reproduced other than in full,
except with the prior written approval of the head of
Corporate Services 3: Equipment Calibration and Testing Services.

Submitted by: TEST TECH CO.,LTD. (HEAD Office)

30, 32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkhunthian, Bangkok 10150

Procedure used: Calibration were conducted using in-house calibration procedure CP-H02 according to comparison
with standard chilled mirror sensor for humidity measurement function and comparison with standard
temperature probe for temperature measurement function into humidity / temperature chamber.

Condition of this result of calibration

1.Reference standards Instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Handheld Thermometer With Sensor	1523	3240076	23305	15 Mar 2024
2) Dew Point Hygrometer	Optidew 401	164756	TH-0158-22	13 Dec 2023

2.The certificate is valid only to the item calibrated on date and place of calibration.

3.This Certification is traceable to the International System of Unit maintained through:-

-Technology Promotion Association (Thailand-Japan), NSG-ONSC Accredited No. Calibration 0008
-National Institute of Metrology Thailand (NIMT)

Calibrated by : Sunail Phansuindol
Issue Date : 28 October 2023

Approved Signatory:

[] Chakrit Waeewanjua
[] Ponthippa Tameyaku
[✓] Viporn Tantsyewutti

B 0327545



Cert. No.: 23H2216
Page.: 2 of 2

Result of Calibration:-
Function: Humidity Measurement

Reference Temperature (°C)	Standard Humidity (%R.H.)	UUC* Reading (%R.H.)	Error (%R.H.)	Uncertainty of Measurement (±%R.H.)
25.0	30.1	30.0	-0.1	1.5
25.0	40.1	39.0	-1.1	1.5
25.0	50.1	49.0	-1.1	1.7
25.0	60.0	59.0	-1.0	1.7
25.0	75.2	75.5	0.3	1.8

Result of Calibration:-
Function: Temperature Measurement

Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of Measurement (±°C)
15.046	15.0	-0.046	0.72
19.975	20.0	0.025	0.72
25.022	25.0	-0.022	0.72
30.000	30.0	0.000	0.72

UUC* : Unit Under Calibration

The reported uncertainty of measurement was base on standard uncertainty multiplied by coverage factor k = 2.00, providing confidence level approximately 95%.

-cdo-

a 1185882



CERTIFICATE No : 23M6754
REFERENCE No : 69854-1

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : DIGITAL BALANCE
MANUFACTURER : SARTORIUS
MODEL : BP210S
SERIAL No : S0736477
ID No : EQL-008
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD.,
SAMAEDAM, BANGKHUNTHIAN, BANGKOK
10150

CALIBRATED BY : PRASERT D.
CALIBRATION DATE : 13-Jul-23

APPROVED BY : 
ISSUED DATE : 17-Jul-23
RECEIVED DATE : 13-Jul-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.



CERTIFICATE No : 23M6754

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : DIGITAL BALANCE
MANUFACTURER : SARTORIUS
ID No : EQL-008
AIR PRESSURE : 1011 mbar ± 1 mbar
AMBIENT TEMPERATURE : 23° C ± 1° C
RECEIVED DATE : 13-Jul-23
RELATIVE HUMIDITY : 50 %RH ± 10 % RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED BY ACCORDING TO UKAS LAB 14 EDITION 6:2019 BY USING KNOWN WEIGHT STANDARD WEIGHT. THE BALANCE WAS ADJUSTED USING INTERNAL WEIGHT TO ADJUST. THE BALANCE HAS NO ZERO TRACKING FUNCTION. REPEATABILITY WAS MEASURED BY USING 10 REPEATED MEASUREMENTS. LINEARITY WAS MEASURED COVERING 10 POINTS, EVENLY SPREAD OVER THE RANGE. THE INSTRUMENT WAS SET ZERO BEFORE PERFORMING THE LINEARITY TEST. OFF-CENTER LOADING WAS MEASURED BY USING STANDARD WEIGHTS PLACED ON THE PAN AND MOVED TO VARIOUS POSITIONS ON THE PAN. THE INTERNAL WEIGHT WAS CHECKED BY USING 2. REFERENCE STANDARD INSTRUMENTS :-

INSTRUMENT MODEL SERIAL No CERTIFICATE No DUE DATE
1) STANDARD WEIGHT SET E2 QK-1-151 M23020135 02-Feb-25
2) STANDARD WEIGHT E2 15843 M23020145 02-Feb-25

3. THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.

4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.

5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-

- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH CENTRAL BUREAU OF WEIGHTS&MEASURES

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

1. ZERO SETTING FUNCTION : NORMAL


2. TARE FUNCTION : NORMAL

3. REPEATABILITY OF READING AT 200 g WAS 0 g

4. DEPARTURE FROM NOMINAL VALUE/ LINEARITY

NOMINAL VALUE (g)	BALANCE READING (g)	CORRECTION (g)	UNCERTAINTY (±g)
0.0	0.0000	0.0000	0.000082
0.1	0.1000	0.0000	0.000083
0.2	0.2000	0.0000	0.000083
0.5	0.5000	0.0000	0.000083
1.0	1.0000	0.0000	0.000084
2.0	2.0000	0.0000	0.000086
5.0	5.0000	0.0000	0.000089
10.0	10.0000	0.0000	0.000094
20.0	20.0001	-0.0001	0.00012
50.0	49.9999	0.0001	0.00019
100.0	99.9999	0.0001	0.00032
200.0	199.9997	0.0003	0.00032

5. OFF CENTER LOADING ERROR



POINT	READING (g)
1	99.9998
2	99.9997
3	99.9998
4	99.9998
5	99.9998
OFF-CENTER LOADING	0.0001

6. INTERNAL WEIGHT ERROR :0.000499999999988177 g

NOTE: THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A

COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT





CERTIFICATE No : 23T8798
REFERENCE No : 70515-6

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UFE 500
SERIAL No : G508.0791
ID No : EQL-128
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30.32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : CHAICHARN CH.
CALIBRATION DATE : 11-Sep-23

APPROVED BY :
ISSUED DATE : 15-Sep-23
RECEIVED DATE : 11-Sep-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 03



CERTIFICATE No : 23T8798

PAGE : 2 OF 2

Calibration Report


EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UFE 500
ID No : EQL-128
RECEIVED DATE : 11-Sep-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
SN : G508.0791
CALIBRATION DATE : 11-Sep-23
RELATIVE HUMIDITY : 51 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION

- THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TIAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.
- REFERENCE STANDARD INSTRUMENTS :-
 - 1) DATA LOGGER WITH RTD HYDRA 2635A 7301307
 - 2) THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
 3. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
 4. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.
- RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 1
Overall Line Voltage (V) variation : 10
Instrument Condition : Normal
Chamber Size (W*H*P): 56*40*48 cm



CHAMBER PERFORMANCE

Calibrate Point (°C)	Average All Position Temp. (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
104.0	104.49	0.28	0.66	0.93
180.0	180.25	0.32	0.62	1.11

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
		#1	#2	#3	#4	#5	#6	#7	#8	#9	
104.0	104.0	104.46	104.13	104.45	104.28	104.57	104.67	104.60	104.58	104.67	0.38
180.0	180.0	180.27	179.85	180.41	179.93	180.19	180.54	180.41	180.51	180.13	1.1

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 3 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k =2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

F-G010 REV : 03



QUALITY CALIBRATION CO., LTD.
233 Petchkasem 63/2 Road, Laksong, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 23T8799
REFERENCE No : 70515-7

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UFE 500
SERIAL No : G512.2005
ID No : EQL-161
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
3032 RAMA II SOI 63, RAMA II RD., SAMAEDAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : CHAICHARN CH.
CALIBRATION DATE : 11-Sep-23

APPROVED BY :
ISSUED DATE : 15-Sep-23
RECEIVED DATE : 11-Sep-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 03



QUALITY CALIBRATION CO., LTD.
233 Petchkasem 63/2 Road, Laksong, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

CERTIFICATE No : 23T8799

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : HOT AIR OVEN
MANUFACTURER : MEMMERT
MODEL : UFE 500
ID No : G512.2005
RECEIVED DATE : 11-Sep-23
CALIBRATION DATE : 11-Sep-23
AMBIENT TEMPERATURE : 24 °C ± 1 °C
RELATIVE HUMIDITY : 51 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLAS G-20 BY COMPARISON WITH CALIBRATED RTD PH100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.

2. REFERENCE STANDARD INSTRUMENTS :


INSTRUMENT : MODEL : SERIAL No : CERTIFICATE No : DUE DATE :
1) DATA LOGGER WITH RTD : HYDRA 2635A : 7301307 : 23T6636 : 10-Jul-24
3. THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDES LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.

5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO., LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 1
Overall Line Voltage (V) variation : 10
Instrument Condition : Normal
Chamber Size (W*L*H): 56*40*48 cm



CHAMBER PERFORMANCE

Calibrate Point (°C)	Average All Position Temp. (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
104.0	103.96	0.14	0.58	0.73
180.0	179.55	0.22	0.93	1.47

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
		#1	#2	#3	#4	Ref. 5	#6	#7	#8	#9	
104.0	104.0	104.16	104.13	104.20	103.98	103.76	104.06	103.71	103.93	103.93	0.38
180.0	180.0	179.73	179.89	180.04	179.54	179.30	178.98	179.75	178.97	179.77	1.1

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.
END OF CALIBRATION REPORT

F-G010 REV : 03



Certificate of Calibration

Equipment: TURBIDIMETER
Model: 2100N
Serial No. (or ID.): 970400003415 (EQL-024)
Manufacturer: HACH
Condition: In Condition

Certificate No.: C08230153
Issued Date: 15 September 2023
Job No.: WO-00005228
Page: 1 of 2

Customer: TEST TECH CO., LTD.
30/32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkokthien Bangkok 10150 Thailand

Environment Condition: Temperature 23 °C ± 2 °C
Humidity 50 %RH ± 15 %RH

Calibration Place: Environment Laboratory, DKSH Technology Limited,
2533 Sukhumvit Road, Bangkok,
Phrakhanong, Bangkok 10260 Thailand

Calibration By: Miss.Orawan Khialphol
Calibration Date: 14 September 2023
The Method used: In house method, CAL-WI-23, base on Hach Manufacturer Method 8195
Traceability: This certificate is traceable to Primary standard Fromazin and StabCal accepted by
United States Environmental Protection Agency (EPA) through Hach Company
Certificate No. A1075 , A1074 , A1091 , A1074 , A1074

(Miss Orawan Khialphol)

Person in charge

(Mr. Nitnun Srihawan)

Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

DKSH Technology Limited
2533 Sukhumvit Road, Bangkok, Thailand 10260
Phone: +66 2638 7000 Email: info.calibration@dksh.com Website: www.dksh.com/calibration-thailand

Delivering Growth - In Asia and Beyond.

CAL-FM-C08-08: 20 Jul 2022



Certificate No.: C08230153

Page 2 of 2

Calibration Results:

Before Adjustment

Std Turbidity (NTU)	UUC Reading	Correction	Deviation	Uncertainty
0.050	0.088	-0.038	0.0	0.070
20.40	19.1	1.30	0.0	1.0
205.0	195	10.0	0.5	10
1028.0	952	76.0	0.9	50
4068.0	3942	126.0	0.9	200

After Adjustment

Std Turbidity (NTU)	UUC Reading	Correction	Deviation	Uncertainty
0.050	0.084	-0.034	0.0	0.070
20.40	20.4	0.00	0.0	1.0
205.0	205	0.0	0.5	10
1028.0	1026	2.0	0.5	50
4068.0	4063	5.0	0.5	200

The End of Certificate

DKSH Technology Limited
2533 Sukhumvit Road, Bangkok, Thailand 10260
Phone: +66 2638 7000 Email: info.calibration@dksh.com Website: www.dksh.com/calibration-thailand

Delivering Growth - In Asia and Beyond.

CAL-FM-C08-08: 20 Jul 2022

ใบรับรองการทดสอบ "เครื่อง Spectrophotometer"
(Calibration Certificate of Spectrophotometer)



Bara Scientific
Division of Success

Bara Scientific Co., Ltd.
988 U Chu Liang Building Floor 7 Rama4 Road
Silom Bangkok Bangkok Thailand 10500
Tel : 02-6324300 Fax : 02-6376496-7
www.barascientific.com



Certificate of Calibration

Number of Page(s) 1 of 3

Certificate No.	BSCC-UV-163/23
Equipment	UV/Vis Spectrophotometer
Model	UV-1900i
Manufacturer	Shimadzu
Serial No.	A12535780311ML
ID No.	EQL-233
Date of receipt	27 April 2023
Date of calibration	27 April 2023
Date of issue	8 May 2023
Customer name	Test Tech Co., Ltd.
Address	30, 32 Rama II Soi 63, Rama II RD., Samaedam, Bangkhunthian, Bangkok 10150
Temperature	(23.5-24.4) °C (On site)
Humidity	(50.8-48.2) %RH (On site)
Equipment condition	Good Operation
Calibration Location	Clean Room Circubond
Calibration Procedure	In-house method WI-UV-702-01 based on ASTM E275-01
Traceability	Wavelength Accuracy is traceable to certificate No. 96367 and 96368 Photometric Accuracy is traceable to certificate No. 99925 and 96363 Siray Light is traceable to certificate No. 96346 The above certificate are traceable to SI unit through Starna Scientific Ltd. (UKAS accredited calibration laboratory NO. 0659)
Calibrated by	Mr.Poomjai Korsawatvorakul

Approved by



Mr.Kanchit Choothep
Technical Manager

The above results are valid exclusively for the calibrated item(s) as mention in this report / certificate.
Advertising the report / Certificate and publicity of the results are prohibited and also shall not be reproduced
except in full, without written approval of the Bara Scientific Co., Ltd.



Bara Scientific Co., Ltd.
988 U Chu Liang Building Floor7 Rama4 Road
Sliom Bangkok Thailand 10500
Tel : 02-6324300 Fax : 02-6375486-7
www.barascientific.com



Certificate of Calibration

Certificate No.

BSCC-UV-163/23

Number of Page(s)

2 of 3

Calibration Results:

1.Wavelength Accuracy

Certified Wavelength (nm)	UUC (nm)	Error (nm)	Uncertainty (±nm)
279.44	279.17	-0.27	0.18
418.53	418.45	-0.08	0.18
538.52	536.58	0.06	0.18
684.50	684.62	0.12	0.18
879.41	879.43	0.02	0.18

2.Photometric Accuracy (UV)

Wavelength (nm)	Certified Absorbance (A)	UUC (A)	Error (A)	Uncertainty (±A)
235	CNR	CNR	CNR	CNR
257	CNR	CNR	CNR	CNR
313	CNR	CNR	CNR	CNR
350	CNR	CNR	CNR	CNR

*CNR = Customer not request

The above results are valid exclusively for the calibrated item(s) as mention in this report / certificate.
Advertising the report / Certificate and publicity of the results are prohibited and also shall not be reproduced except in full, without written approval of the Bara Scientific Co., Ltd.



Bara Scientific Co., Ltd.
988 U Chu Liang Building Floor7 Rama4 Road
Sliom Bangkok Thailand 10500
Tel : 02-6324300 Fax : 02-6375486-7
www.barascientific.com



Certificate of Calibration

Certificate No.

BSCC-UV-163/23

Number of Page(s)

3 of 3

Calibration Results:

3.Photometric Accuracy (Visible)

Wavelength (nm)	Certified Absorbance (A)	UUC (A)	Error (A)	Uncertainty (±A)
420.0	0.0000	0.0000	0.0000	0.0042
	0.5472	0.5485	0.0013	0.0042
	0.7637	0.7637	0.0000	0.0042
	1.0480	1.0494	0.0014	0.0042
	0.0000	0.0000	0.0000	0.0042
440.0	0.5371	0.5384	0.0013	0.0042
	0.7457	0.7457	0.0000	0.0042
	1.0233	1.0247	0.0014	0.0042
465.0	CNR	CNR	CNR	0.0042
	CNR	CNR	CNR	0.0042
	CNR	CNR	CNR	0.0042
	CNR	CNR	CNR	0.0042
546.1	0.5006	0.5017	0.0011	0.0042
	0.6961	0.6954	-0.0007	0.0042
	0.9563	0.9565	0.0002	0.0042
590.0	CNR	CNR	CNR	0.0042
	CNR	CNR	CNR	0.0042
	CNR	CNR	CNR	0.0042
635.0	0.0000	0.0000	0.0000	0.0042
	0.5137	0.5147	0.0010	0.0042
	0.6907	0.6900	-0.0007	0.0042
	0.9533	0.9536	0.0003	0.0042

*CNR = Customer not request

4.Stray Light*

Standard cut-off wavelength (nm)	Wavelength (nm)	Transmission (%T)	Absorbance (A)
200.91±0.11nm	200.55	0.9670	2.0147

The Stray light transmission reference is less than 1.0%T and Stray light absorbance reference is greater than 2.00A
*Stray Light not NSC-ONSC Accredited.

The measurement uncertainty is base on a standard uncertainty multiplied by a coverage factor k=2 providing a level of confidence of approximately 95%.

End of Certificate

The above results are valid exclusively for the calibrated item(s) as mention in this report / certificate.
Advertising the report / Certificate and publicity of the results are prohibited and also shall not be reproduced except in full, without written approval of the Bara Scientific Co., Ltd.



Certificate of Calibration

Equipment: SPECTROPHOTOMETER
Model: DR6000
Serial No. (or ID.): 1693421 (EQL-197)
Manufacturer: HACH
Condition: In Condition

Customer: TEST TECH CO., LTD.
30,32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkokhunting Bangkok 10150 Thailand

Environment Condition: Temperature 25.3 °C ± 0.2 °C
Humidity 48.9 %RH ± 1.7 %RH

Calibration Place: TEST TECH CO., LTD. (ในเขตพื้นที่)
30,32 Rama II Soi 63, Rama II Rd.,
Samaedam, Bangkokhunting Bangkok 10150 Thailand

Calibration By: Mr. Atachai Ngamchanat
Calibration Date: 21 April 2023
The Method used: In house method, CAL-VI-24, base on ASTM E 275-08 and ASTM E 387-04
Traceability: This certificate is traceable to the CRM maintained by National Institute of Standards and Technology (NIST) through Sigma Scientific Limited.
The standard for Wavelength Certificate No. 93907 and 93914
The standard for Photometric Certificate No. 94010 and 93900
The standard for Stray light Certificate No. 93903 and 93902
The standard for Spectral resolution Certificate No. 103140

(Mr. Atachai Ngamchanat)
Person in charge
(Mr. Nitnun Sittaworn)
Authorized signatory
This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to International or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

DKSH Technology Limited
2533 Sukhumvit Road, Bangkok, Prachinburi, Bangkok 10250
Phone: 02-2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand
Delivering Growth - In Asia and Beyond.

CAL-FM-C08-15: 12 Sep 2022



Certificate No.: C06230165

Page 2 of 3

Calibration Results: Without Adjustment

Wavelength Accuracy (nm), The spectral bandwidth of Std at 2 nm and UUC at 2 nm				
Standard Wavelength	Unit Under Calibration	Correction	Uncertainty	
418.61	418.5	0.11	0.13	
536.66	536.7	-0.04	0.13	
637.98	637.9	0.08	0.13	
748.48	748.7	-0.22	0.13	
807.03	807.5	-0.47	0.13	
Photometric Accuracy (Absorbance)				
Wavelength	Standard absorbance	Unit Under Calibration	Correction	Uncertainty
420 nm	0.0000	0.000	0.0000	0.0045
	0.5816	0.580	0.0016	0.0045
	0.7130	0.712	0.0010	0.0045
440 nm	1.0151	1.013	0.0021	0.0045
	0.0000	0.000	0.0000	0.0045
	0.5649	0.563	0.0019	0.0045
465 nm	0.7012	0.699	0.0022	0.0045
	0.9982	0.996	0.0022	0.0045
	0.0000	0.000	0.0000	0.0045
546.1 nm	0.5249	0.524	0.0009	0.0045
	0.6621	0.661	0.0011	0.0045
	0.9420	0.939	0.0030	0.0045
590 nm	0.0000	0.000	0.0000	0.0045
	0.5214	0.520	0.0014	0.0045
	0.6982	0.697	0.0012	0.0045
635 nm	0.9947	0.992	0.0027	0.0045
	0.0000	0.000	0.0000	0.0045
	0.5549	0.553	0.0019	0.0045
685 nm	0.7736	0.771	0.0026	0.0045
	1.1041	1.101	0.0031	0.0045
	0.0000	0.000	0.0000	0.0045
	0.5621	0.561	0.0011	0.0045
	0.7630	0.761	0.0020	0.0045
	1.0890	1.086	0.0030	0.0045

DKSH Technology Limited
2533 Sukhumvit Road, Bangkok, Prachinburi, Bangkok 10250
Phone: 02-2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand

Delivering Growth - In Asia and Beyond.

CAL-FM-C08-15: 12 Sep 2022



Certificate No.: C06230165 Page 3 of 3

Calibration Results: Without Adjustment

Photometric Accuracy (Absorbance)				
Wavelength	Standard absorbance	Unit Under Calibration	Correction	Uncertainty
235 nm	0.0000	0.000	0.0000	0.0080
	0.7440	0.737	0.0070	0.0080
257 nm	0.0000	0.000	0.0000	0.0080
	0.8635	0.855	0.0085	0.0080
313 nm	0.0000	0.000	0.0000	0.0080
	0.2902	0.288	0.0022	0.0080
350 nm	0.0000	0.000	0.0000	0.0080
	0.6409	0.634	0.0069	0.0080
Stray light *				
Standard cut-off	UUC: Wavelength (nm)	UUC: Transmittance (%T)	Absorbance (A)	
280.51 +/- 0.11 nm	280.5	0.7	2.155	
391.84 +/- 0.11 nm	391.8	1.2	1.921	

Spectral Resolution *				
Nominal Concentration 0.02 % w/v	Peak	Trough	Ratio	SBW
Standard Wavelength (nm)	268.73	268.77	1.35	2.00
UUC: Wavelength (nm)	268.6	268.6		
Std Absorbance (A)	0.4237	0.2581		
Absorbance (A)	0.385	0.285		

* Calibration Marked "Not TISI Accredited" in this Certificate have been included for completeness.

The End of Certificate

บริษัท ดีเคเอส อีเซีย จำกัด
DKSH Technology Limited
2333 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2839 7000 Email: info.calibration@dksh.com Website: www.dksh.com/certificate-thailand

Delivering Growth - In Asia and Beyond.

CAL-FM-C06-15: 12 Sep 2022



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-27 FAX. 0-2719-9484



Cert.No.: 23CH92
Page.: 1 of 3

Certificate of Calibration

Equipment : Conductivity Meter
Manufacturer : TOA
Model : CM-41X
Serial No. : 842572
ID No. : EQL-211
Condition As-Received: Used Item
Received Date : 19 January 2023
Calibration Date : 20 January 2023
Reference : 2301-0614DN-1
Submitted by : TEST TECH CO.,LTD. (HEAD Office)
30, 32 Rama II Sol 63, Rama II Rd.,
Samaedarn, Bangkhunthian, Bangkok 10150
Ambient Temperature : (25 ± 2.5) °C
Relative Humidity : (50 ± 15) %
Calibration Procedure : In -house method :
- CP-CH6 by direct measurement
with certified reference material (CRM)
- CP-CH8 by comparison with standard thermometer
Calibrated by : Warakorn Lemgagtrakul

Approved by :

(/) Malee Bulkuea
() Sathip Meangmai
() Warakorn Lemgagtrakul

Approved Signatory

Issue Date :

24 January 2023

The Uncertainties are for a confidence probability of approximately 95 %

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0049391



Cert.No.: 23CH92

Page.: 2 of 3

Condition of this result of calibration

1. Reference Standard Instrument :-

Instrument	Serial No.	ID No.	Certificate No.	Due date
1) Thermometer	1963878	130RC095	221140	12 Sep 2023
2) Ref. Std Thermometer	4982054	110RC044	2211306	27 Oct 2023

This certification is traceable to the International System of Unit maintained at:-

- Traceable to National Institute of Metrology (Thailand), NIMT

2. Certified Reference Materials :-

- Conductivity calibration solution, CPA chem Ltd., The measurement results are traceable to SI through CPA chem Ltd., ANSI-ASQ National Accreditation Board, Accredited No. AR-1835

Conductivity Solution	Manufacturer	Lot No.	Exp. date
147.0 $\mu\text{S/cm}$	CPA Chem	823327	20 June 2023
1,413 mS/cm	CPA Chem	823328	20 June 2023
12,880 mS/cm	CPA Chem	823329	20 June 2023

- Control Conductivity calibration solution temperature by Water bath (25 \pm 0.1) $^{\circ}\text{C}$

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration results

Function : Conductivity Measurement

(*) After Adjustment at 147.0, 1413.0, 12880 $\mu\text{S/cm}$

Conductivity Electrode Serial No.: 806F0005

Standard Conductivity Solution	Before Adjustment UUC* Reading	After Adjustment UUC* Reading	Uncertainty of Measurement (\pm)	Coverage factor k
147.0 $\mu\text{S/cm}$	150.3 $\mu\text{S/cm}$	147.0 $\mu\text{S/cm}$	0.99 $\mu\text{S/cm}$	2.00
1,413 mS/cm	1,428 mS/cm	1,413 mS/cm	0.0092 mS/cm	2.00
12,880 mS/cm	12,71 mS/cm	12,88 mS/cm	0.086 mS/cm	2.00

Remark

- UUC* = Unit Under Calibration
- 147.0 $\mu\text{S/cm}$ Adjustment Cell constant = 98.5 m^{-1}
- 1,413 mS/cm Adjustment Cell constant = 99.5 m^{-1}
- 12,880 mS/cm Adjustment Cell constant = 101.8 m^{-1}



a 1144880



Cert.No.: 23CH92

Page.: 3 of 3

Calibration Results

Function : Temperature Measurement

(*) Without adjustment

This equipment was connected with Temperature Probe;

- Model :	CT-58101B
- Serial No. :	806F0005

Dimension of probe;

- Length :	114 mm.
- Diameter :	12 mm.
- Immersion Depth :	100 mm.

Calibration Point ($^{\circ}\text{C}$)	Standard Temperature ($^{\circ}\text{C}$)	UUC* Reading ($^{\circ}\text{C}$)	Error ($^{\circ}\text{C}$)	Uncertainty of Measurement (\pm $^{\circ}\text{C}$)	Coverage factor k
25.0	25.003	25.0	-0.003	0.13	2.00

Remark : - UUC* = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

-o0o-



a 1144879



QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksong, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 23T8796
REFERENCE No : 70515-4

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : WATER BATH
MANUFACTURER : MEMMERT
MODEL : WNE 45
SERIAL No : L720.0266
ID No : EQL-241
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : CHAICHARN CH.
CALIBRATION DATE : 16-Aug-23

APPROVED BY : 
ISSUED DATE : 16-Aug-23
RECEIVED DATE : 16-Aug-23

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 03



QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksong, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

CERTIFICATE No : 23T8796

PAGE : 2 OF 2

Calibration Report


EQUIPMENT : WATER BATH
MANUFACTURER : MEMMERT
ID NUMBER : EQL-241
RECEIVED DATE : 16-Aug-23
AMBIENT TEMPERATURE : 25 °C ± 1 °C
RELATIVE HUMIDITY : 50 %RH ± 10 % RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO ASTM E715-80 (REAPPROVED 2001) BY COMPARISON WITH CALIBRATED RTD. THE PROBES WERE PLACED ON FIVE POINTS AND LOCATED ONE PROBE IN EACH OF THE FOUR CORNERS OF THE BATH AND PLACED THE FIFTH RTD WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE WATER VOLUME (REFERENCE LOCATION) UNDER NO LOAD CONDITION.
2. REFERENCE STANDARD INSTRUMENTS :-

- | INSTRUMENT | MODEL | SERIAL No | CERTIFICATE No | DUE DATE |
|-------------------------|-------|-----------|----------------|-----------|
| 1) DATA LOGGER WITH RTD | 2625A | 6603614 | 23T6642 | 19-Jul-24 |
3. THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
 4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
 5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT :-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



PROBE INSTALLATION
POSITION IN THE BATH

GENERAL INFORMATION

Overall Variation of Ambient Temperature around the Bath (°C) : 0.6
Overall Variation of Line Voltage (V) : 3
Instrument Condition : Normal
Bath Inner Size (W*L*H) : 59*35*20 cm

BATH PERFORMANCE

Calibrate Point (°C)	Average All Position Temp. (±°C)	Temperature Stability (±°C)	Radius Uniformity (°C)	Axial Uniformity (°C)	Overall Variation (°C)
83.0	83.09	0.05	0.07	0.05	0.16
92.0	92.13	0.11	0.06	0.06	0.28

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations					Uncertainty (± °C)
		#1	#2	#3	#4	Ref. 5	
83.0	83.0	83.08	83.09	83.06	83.11	83.12	0.15
92.0	92.0	92.11	92.13	92.10	92.16	92.16	0.19

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE BATH.
NOTE 2 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.
THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

F-G010 REV : 03