

ภาคผนวก จ

กฎหมายที่เกี่ยวข้อง



ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

ฉบับที่ ๒๔ (พ.ศ. ๒๕๔๗)

เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป

อาศัยอำนาจตามความในมาตรา ๓๒ และมาตรา ๓๔ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการเกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา ๒๙ ประกอบกับมาตรา ๓๕ มาตรา ๔๘ มาตรา ๕๐ และมาตรา ๕๑ ของรัฐธรรมนูญแห่งราชอาณาจักรไทยบัญญัติให้กระทำได้โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย คณะกรรมการสิ่งแวดล้อมแห่งชาติ จึงได้มีมติในคราวการประชุมครั้งที่ ๒/๒๕๔๗ เมื่อวันที่ ๒๔ กุมภาพันธ์ ๒๕๔๗ ให้ปรับปรุงแก้ไขมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิกความใน (๔) ของข้อ ๒ แห่งประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๑๐ (พ.ศ. ๒๕๓๔) ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป และให้ใช้ความต่อไปนี้แทน

“(๔) ค่าเฉลี่ยของก๊าซซัลเฟอร์ไดออกไซด์ ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๐.๑๒ ส่วนในล้านส่วน หรือไม่เกิน ๐.๓๐ มิลลิกรัมต่อลูกบาศก์เมตร และค่ามัธยฐานเลขคณิต (Arithmetic Mean) ในเวลา ๑ ปี จะต้องไม่เกิน ๐.๐๔ ส่วนในล้านส่วน หรือไม่เกิน ๐.๑๐ มิลลิกรัมต่อลูกบาศก์เมตร”

ข้อ ๒ ให้ยกเลิกความใน (๒) และ (๓) ของข้อ ๔ แห่งประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๑๐ (พ.ศ. ๒๕๓๔) ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป และให้ใช้ความต่อไปนี้แทน

- ๒ -

“(๒) ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๑๐ ไมครอน ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๐.๑๒ มิลลิกรัมต่อลูกบาศก์เมตร และค่ามัธยฐานเลขคณิต (Arithmetic Mean) ในเวลา ๑ ปี จะต้องไม่เกิน ๐.๐๕ มิลลิกรัมต่อลูกบาศก์เมตร

(๓) ค่าเฉลี่ยของฝุ่นละอองรวมหรือฝุ่นละอองขนาดไม่เกิน ๑๐๐ ไมครอน ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๐.๓๓ มิลลิกรัมต่อลูกบาศก์เมตร และค่ามัธยฐานเลขคณิต (Arithmetic Mean) ในเวลา ๑ ปี จะต้องไม่เกิน ๐.๑๐ มิลลิกรัมต่อลูกบาศก์เมตร”

ประกาศ ณ วันที่ ๙ สิงหาคม พ.ศ. ๒๕๔๗

(ลงนาม) จาตุรนต์ ฉายแสง

(นายจาตุรนต์ ฉายแสง)

รองนายกรัฐมนตรี

ปฏิบัติหน้าที่ประธานคณะกรรมการสิ่งแวดล้อมแห่งชาติ

ราชกิจจานุเบกษา ฉบับประกาศทั่วไป เล่ม ๑๒๑ ตอนพิเศษ ๑๐๔ ง วันที่ ๒๒ กันยายน ๒๕๔๗



ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

ฉบับที่ ๑๐ (พ.ศ. ๒๕๓๕)

ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ

พ.ศ. ๒๕๓๕

เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป

อาศัยอำนาจตามความในมาตรา ๓๒ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ คณะกรรมการสิ่งแวดล้อมแห่งชาติกำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป ไว้ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

“เครื่องวัด ระบบนัณดิสเพอร์ซีฟ อินฟราเรด ดีเทกชัน (Non- dispersive Infrared Detection)” หมายความว่า เครื่องมือวัดค่าก๊าซคาร์บอนมอนอกไซด์โดยใช้รังสีอินฟราเรด

“เครื่องวัดระบบเคมีลูมิเนสเซน (Chemiluminescence)” หมายความว่า

(๑) เครื่องมือวัดค่าก๊าซไนโตรเจนไดออกไซด์โดยใช้ก๊าซโอโซนทำปฏิกิริยากับก๊าซไนตรัสออกไซด์ ซึ่งถูกเปลี่ยนมาจากก๊าซไนโตรเจนไดออกไซด์แล้ววัดความเข้มของแสงซึ่งเกิดจากปฏิกิริยานั้น ณ ที่ความยาวคลื่นที่สูงกว่า ๖๐๐ นาโนมิเตอร์ (Nanometer) หรือ

(๒) เครื่องมือวัดค่าก๊าซโอโซนโดยใช้ก๊าซเอธิลีนทำปฏิกิริยากับก๊าซโอโซนแล้ววัดความเข้มของแสงซึ่งเกิดจากปฏิกิริยานั้น ณ ที่ความยาวคลื่นระหว่าง ๓๕๐ ถึง ๕๕๐ นาโนมิเตอร์

“ระบบพาราโรซานิลีน (Pararosaniline)” หมายความว่า การวัดค่าก๊าซซัลเฟอร์ไดออกไซด์ โดยการดูดอากาศผ่านสารละลายโปตัสเซียม เตตราคลอโรเมอร์คิวเรต (Potassium Tetrachloromercurate) เกิดเป็นสารไดคลอโรซัลไฟโตเมอร์คิวเรต คอมเพลกซ์

(Dichlorosulfito Mercurate Complex) ทำปฏิกิริยากับสารพาราโรซานิลีนและฟอร์มาลดีไฮด์ (Pararosaniline and Formaldehyde) เกิดเป็นสีของพาราโรซานิลีนเมทิล ซัลฟอนิก แอซิด (Pararosaniline Methyl Sulfonic Acid) ซึ่งจะวัดความสามารถในการดูดซึมแสง ณ ที่ช่วงคลื่น ๕๔๘ นาโนมิเตอร์

“เครื่องวัดระบบอะตอมมิก แอ็บซอร์ปชัน สเปกโตรมิเตอร์ (Atomic Absorption Spectrometer)” หมายความว่า เครื่องมือวัดปริมาณของตะกั่ว โดยใช้เปลวไฟอะเซทีลีน (Acetylene Flame) ที่ความยาวคลื่น ๒๘๓.๓ หรือ ๒๑๓ นาโนมิเตอร์

“ระบบกราวิเมตริก (Gravimetric)” หมายความว่า การวัดค่าฝุ่นละออง โดยดูดอากาศผ่านแผ่นกรอง ซึ่งมีประสิทธิภาพในการกรองฝุ่นละอองขนาด ๐.๓ ไมครอน (Micron) ได้ร้อยละ ๘๕ แล้วหาน้ำหนักฝุ่นละอองจากแผ่นกรองนั้น

ข้อ ๒ ค่าก๊าซในบรรยากาศโดยทั่วไปในช่วงเวลาหนึ่งเวลาใดให้เป็นไปดังต่อไปนี้

(๑) ค่าเฉลี่ยของก๊าซคาร์บอนมอนอกไซด์ในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๓๐ ส่วนในล้านส่วน (ppm) หรือไม่เกิน ๓๔.๒ มิลลิกรัมต่อลูกบาศก์เมตรและในเวลา ๘ ชั่วโมง จะต้องไม่เกิน ๘ ส่วนในล้านส่วน หรือไม่เกิน ๑๐.๒๖ มิลลิกรัมต่อลูกบาศก์เมตร

(๒) ค่าเฉลี่ยของก๊าซไนโตรเจนไดออกไซด์ในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๐.๑๓ ส่วนในล้านส่วน หรือไม่เกิน ๐.๓๒ มิลลิกรัมต่อลูกบาศก์เมตร

(๓) ค่าเฉลี่ยของก๊าซโอโซนในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๐.๑๐ ส่วนในล้านส่วน หรือไม่เกิน ๐.๒๐ มิลลิกรัมต่อลูกบาศก์เมตร

(๔) ค่าเฉลี่ยของก๊าซซัลเฟอร์ไดออกไซด์ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๐.๑๒ ส่วนในล้านส่วน หรือไม่เกิน ๐.๓๐ มิลลิกรัมต่อลูกบาศก์เมตร และค่ามัธยฐานเรขาคณิต (Geometric Mean) ในเวลา ๑ ปี จะต้องไม่เกิน ๐.๐๔ ส่วนในล้านส่วน หรือไม่เกิน ๐.๑๐ มิลลิกรัมต่อลูกบาศก์เมตร

ข้อ ๓ การคำนวณค่าความเข้มข้นของก๊าซแต่ละชนิดในบรรยากาศโดยทั่วไปให้คำนวณเทียบที่ความดัน ๑ บรรยากาศ และอุณหภูมิ ๒๕ องศาเซลเซียส

ข้อ ๔ ค่าสารในบรรยากาศโดยทั่วไป ในช่วงเวลาหนึ่งเวลาใดให้เป็นไปดังต่อไปนี้

(๑) ค่าเฉลี่ยของตะกั่วในเวลา ๑ เดือน จะต้องไม่เกิน ๑.๕ ไมโครกรัมต่อลูกบาศก์เมตร

(๒) ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๑๐ ไมครอน ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๐.๑๒ มิลลิกรัมต่อลูกบาศก์เมตร และค่ามัธยฐานเรขาคณิตของสารดังกล่าวในเวลา ๑ ปี จะต้องไม่เกิน ๐.๑๕ มิลลิกรัมต่อลูกบาศก์เมตร

(๓) ค่าเฉลี่ยของฝุ่นละอองรวมหรือฝุ่นละอองขนาดเล็กไม่เกิน ๑๐๐ ไมครอน ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๐.๓๓ มิลลิกรัมต่อลูกบาศก์เมตร และค่ามัธยฐานเรขาคณิตของสารดังกล่าวในเวลา ๑ ปี จะต้องไม่เกิน ๐.๑๐ มิลลิกรัมต่อลูกบาศก์เมตร

ข้อ ๕ การวัดหาค่าเฉลี่ยของก๊าซคาร์บอนมอนอกไซด์ในเวลา ๑ ชั่วโมงหรือในเวลา ๘ ชั่วโมง ให้ใช้เครื่องวัดระบบนันทิสเปอร์ซีฟ อินฟราเรด ดีเทกชั่น หรือระบบอื่นที่กรมควบคุมมลพิษให้ความเห็นชอบ

ข้อ ๖ การวัดหาค่าเฉลี่ยของก๊าซไนโตรเจนไดออกไซด์หรือก๊าซโอโซนในเวลา ๑ ชั่วโมง ให้ใช้เครื่องวัดระบบเคมีลูมิเนสเซน หรือระบบอื่นที่กรมควบคุมมลพิษให้ความเห็นชอบ

ข้อ ๗ การวัดหาค่าเฉลี่ยของก๊าซซัลเฟอร์ไดออกไซด์ในเวลา ๒๔ ชั่วโมง หรือในเวลา ๑ ปี ให้ใช้วิธีการวัดตามระบบพาราโรซานิน หรือระบบอื่นที่กรมควบคุมมลพิษให้ความเห็นชอบ

ข้อ ๘ การวัดหาค่าเฉลี่ยของตะกั่วในเวลา ๑ เดือน ให้เก็บอากาศผ่านแผ่นกรองในเครื่องเก็บตัวอย่างอากาศชนิดไฮวอลุ่ม (High Volume-Air Sampler) สกัดตะกั่วออกจากแผ่นกรองโดยใช้กรดดินประสิวและกรดเกลือ แล้วนำไปวัดค่าของตะกั่วโดยใช้เครื่องวัดระบบอะตอมมิก แอปซอพชั่น สเปกโตรมิเตอร์ หรือระบบอื่นที่กรมควบคุมมลพิษให้ความเห็นชอบ

ข้อ ๙ การวัดหาค่าเฉลี่ยของฝุ่นละอองรวมหรือฝุ่นละอองขนาดเล็กไม่เกิน ๑๐ ไมครอน ในเวลา ๒๔ ชั่วโมง หรือในเวลา ๑ ปี ให้ใช้วิธีการวัดตามระบบกราวิเมตริก หรือระบบอื่นที่กรมควบคุมมลพิษให้ความเห็นชอบ

ข้อ ๑๐ การวัดหาค่าเฉลี่ยของก๊าซหรือสารอย่างหนึ่งอย่างใดตามข้อ ๕ ถึงข้อ ๗ ให้ทำในบรรยากาศทั่วๆ ไป และต้องสูงจากพื้นดินอย่างน้อย ๓ เมตร แต่ไม่เกิน ๖ เมตร

การวัดหาค่าเฉลี่ยของตะกั่วและฝุ่นละอองตามข้อ ๘ และข้อ ๙ ให้ทำในบรรยากาศทั่วๆ ไป และต้องสูงจากพื้นดินอย่างน้อย ๑.๕๐ เมตร แต่ไม่เกิน ๖ เมตร

ประกาศ ณ วันที่ ๑๗ เมษายน พ.ศ. ๒๕๓๘

ชวน หลีกภัย

นายกรัฐมนตรี

ประธานคณะกรรมการสิ่งแวดล้อมแห่งชาติ

(ประกาศในราชกิจจานุเบกษา เล่ม ๑๑๒ ตอนที่ ๔๒ ง วันที่ ๒๕ พฤษภาคม ๒๕๓๘)

แก้คำผิด

ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

ฉบับที่ ๑๐ (พ.ศ. ๒๕๓๘) ออกตามความในพระราชบัญญัติส่งเสริมและรักษา

คุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕

เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป

ซึ่งประกาศในราชกิจจานุเบกษา

ฉบับประกาศทั่วไป เล่ม ๑๑๒ ตอนที่ ๔๒ ง ลงวันที่ ๒๕ พฤษภาคม ๒๕๓๘

หน้า ๕๑ บรรทัดที่ ๑๕ คำว่า

“ไม่เกิน ๐.๑๕ มิลลิกรัม” ให้แก้เป็น

“ไม่เกิน ๐.๐๕ มิลลิกรัม”

(ประกาศในราชกิจจานุเบกษา เล่ม ๑๑๒ ตอนที่ ๗๑ ง วันที่ ๕ กันยายน ๒๕๓๘)

ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

ฉบับที่ ๓๓ (พ.ศ. ๒๕๕๒)

เรื่อง กำหนดมาตรฐานค่าก๊าซในโตรเจนไดออกไซด์ในบรรยากาศโดยทั่วไป

โดยที่เป็นการสมควรกำหนดมาตรฐานค่าก๊าซในโตรเจนไดออกไซด์ในบรรยากาศโดยทั่วไป เพื่อเป็นเกณฑ์ทั่วไปสำหรับการส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมตามพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕

อาศัยอำนาจตามความในมาตรา ๓๒ (๔) และมาตรา ๓๔ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการเกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา ๒๘ ประกอบกับมาตรา ๓๓ มาตรา ๓๔ มาตรา ๔๑ และมาตรา ๔๓ ของรัฐธรรมนูญแห่งราชอาณาจักรไทย บัญญัติให้กระทำได้ โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย คณะกรรมการสิ่งแวดล้อมแห่งชาติจึงออกประกาศ กำหนดมาตรฐานค่าก๊าซในโตรเจนไดออกไซด์ในบรรยากาศโดยทั่วไปไว้ ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

“เครื่องวัดระบบเคมีลูมิเนสเซน” (Chemiluminescence) หมายความว่า เครื่องมือวัดค่าก๊าซในโตรเจนไดออกไซด์โดยใช้ก๊าซไอโซนทำปฏิกิริยากับก๊าซไนตริกออกไซด์ซึ่งถูกเปลี่ยนมาจากก๊าซในโตรเจนไดออกไซด์แล้ววัดความเข้มของแสงซึ่งเกิดจากปฏิกิริยานั้น ณ ที่ความยาวคลื่นที่สูงกว่า ๖๐๐ นาโนเมตร (Nanometer)

ข้อ ๒ ให้ยกเลิก

(๑) ความใน (๒) ของข้อ ๒ แห่งประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๑๐ (พ.ศ. ๒๕๓๕) ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป

(๒) ความใน (๑) ของข้อ ๖ แห่งประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๑๐ (พ.ศ. ๒๕๓๕) ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป แก้ไขเพิ่มเติมโดยประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๒๘ (พ.ศ. ๒๕๕๐) เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป

ข้อ ๓ ให้กำหนดมาตรฐานค่าก๊าซในโตรเจนไดออกไซด์ในบรรยากาศโดยทั่วไปไว้ ดังต่อไปนี้

(๑) ค่าเฉลี่ยของก๊าซในโตรเจนไดออกไซด์ในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๐.๑๖ ส่วนในล้านส่วนหรือไม่เกิน ๐.๓๒ มิลลิกรัมต่อลูกบาศก์เมตร

(๒) ค่ามัธยฐานเลขคณิต (Arithmetic Mean) ของก๊าซในโตรเจนไดออกไซด์ในเวลา ๑ ปี จะต้องไม่เกิน ๐.๐๓ ส่วนในล้านส่วน หรือไม่เกิน ๐.๐๕๗ มิลลิกรัมต่อลูกบาศก์เมตร

ข้อ ๔ การคำนวณค่าความเข้มข้นของก๊าซในโตรเจนไดออกไซด์ในบรรยากาศโดยทั่วไป ให้คำนวณเทียบที่ความดัน ๑ บรรยากาศ และอุณหภูมิ ๒๕ องศาเซลเซียส

ข้อ ๕ การวัดค่าเฉลี่ยของก๊าซในโตรเจนไดออกไซด์ในเวลา ๑ ชั่วโมง หรือค่ามัธยฐานเลขคณิต (Arithmetic Mean) ในเวลา ๑ ปี ให้ใช้เครื่องวัดระบบเคมีลูมิเนสเซน หรือระบบอื่นที่กรมควบคุมมลพิษ ให้ความเห็นชอบ

ประกาศ ณ วันที่ ๑๗ มิถุนายน พ.ศ. ๒๕๕๒

อภิสิทธิ์ เวชชาชีวะ

นายกรัฐมนตรี

ประธานกรรมการสิ่งแวดล้อมแห่งชาติ



ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

ฉบับที่ ๑๕ (พ.ศ. ๒๕๔๐)

เรื่อง กำหนดมาตรฐานระดับเสียงโดยทั่วไป

อาศัยอำนาจตามความในมาตรา ๓๒ (๕) แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ คณะกรรมการสิ่งแวดล้อมแห่งชาติกำหนดมาตรฐานระดับเสียงโดยทั่วไปไว้ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

“ระดับเสียงโดยทั่วไป” หมายความว่า ระดับเสียงที่เกิดขึ้นในสิ่งแวดล้อม

“ค่าระดับเสียงสูงสุด” หมายความว่า ค่าระดับเสียงสูงสุดที่เกิดขึ้นในขณะใดขณะหนึ่งระหว่างการตรวจวัดระดับเสียง โดยมีหน่วยเป็นเดซิเบลเอ หรือ dB (A)

“ค่าระดับเสียงเฉลี่ย ๒๔ ชั่วโมง” หมายความว่า ค่าระดับเสียงคงที่ที่มีพลังงานเทียบเท่าระดับเสียงที่เกิดขึ้นจริง ซึ่งมีระดับเสียงเปลี่ยนแปลงตามเวลาในช่วง ๒๔ ชั่วโมง (๒๔ hours A-weighted Equivalent Continuous Sound Level) ซึ่งเรียกโดยย่อว่า Leq ๒๔ hr โดยมีหน่วยเป็นเดซิเบลเอ หรือ dB (A)

“มาตรฐานระดับเสียง” หมายความว่า เครื่องวัดระดับเสียงตามมาตรฐาน IEC ๖๕๑ หรือ IEC ๘๐๔ ของคณะกรรมการวิชาการระหว่างประเทศว่าด้วยเทคนิคไฟฟ้า (International Electrotechnical Commission, IEC)

ข้อ ๒ ให้กำหนดมาตรฐานระดับเสียงโดยทั่วไป ไว้ดังต่อไปนี้

(๑) ค่าระดับเสียงสูงสุด ไม่เกิน ๑๑๕ เดซิเบลเอ

(๒) ค่าระดับเสียงเฉลี่ย ๒๔ ชั่วโมง ไม่เกิน ๗๐ เดซิเบลเอ

ข้อ ๓ การตรวจวัดระดับเสียงโดยทั่วไป ให้ดำเนินการดังต่อไปนี้

(๑) การตรวจวัดค่าระดับเสียงสูงสุด ให้ใช้มาตรระดับเสียงตรวจวัดระดับเสียงในบริเวณที่มีคนอยู่หรืออาศัยอยู่

(๒) การตรวจวัดค่าระดับเสียงเฉลี่ย ๒๔ ชั่วโมง ให้ใช้มาตรระดับเสียงตรวจวัดระดับเสียงอย่างต่อเนื่องตลอดเวลา ๒๔ ชั่วโมงใดๆ

(๓) การตั้งไมโครโฟนของมาตรระดับเสียงที่บริเวณภายนอกอาคารให้ตั้งสูงจากพื้นไม่น้อยกว่า ๑.๒๐ เมตร โดยในรัศมี ๓.๕๐ เมตร ตามแนวราบรอบไมโครโฟนต้องไม่มีกำแพงหรือสิ่งใดที่มีคุณสมบัติในการสะท้อนเสียงกีดขวางอยู่

(๔) การตั้งไมโครโฟนของมาตรระดับเสียงที่บริเวณภายในอาคารให้ตั้งสูงจากพื้นไม่น้อยกว่า ๑.๒๐ เมตร โดยในรัศมี ๑.๐๐ เมตร ตามแนวราบรอบไมโครโฟนต้องไม่มีกำแพงสิ่งใดที่มีคุณสมบัติในการสะท้อนเสียงกีดขวางอยู่และต้องห่างจากช่องหน้าต่างหรือช่องทางที่เปิดออกนอกอาคารอย่างน้อย ๑.๕๐ เมตร

ข้อ ๔ การคำนวณค่าระดับเสียงจะต้องเป็นไปตามวิธีการที่องค์การระหว่างประเทศว่าด้วยมาตรฐาน (International Organization for Standardization, ISO) กำหนด ซึ่งกรมควบคุมมลพิษจะประกาศในราชกิจจานุเบกษา

ประกาศ ณ วันที่ ๑๒ มีนาคม พ.ศ. ๒๕๔๐

พลเอก ชวลิต ยงใจยุทธ

นายกรัฐมนตรี

ประธานคณะกรรมการสิ่งแวดล้อมแห่งชาติ

(ประกาศในราชกิจจานุเบกษา เล่ม ๑๑๔ ตอนที่ ๒๗ ง วันที่ ๓ เมษายน ๒๕๔๐)

ประกาศกระทรวงอุตสาหกรรม

เรื่อง กำหนดค่าระดับเสียงการรบกวนและระดับเสียงที่เกิดจากการประกอบกิจการโรงงาน

พ.ศ. ๒๕๔๘

อาศัยอำนาจตามความในข้อ ๑๑ แห่งกฎกระทรวง ฉบับที่ ๒ (พ.ศ. ๒๕๓๕) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. ๒๕๓๕ อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการเกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา ๒๕ ประกอบกับมาตรา ๓๕ มาตรา ๔๘ และมาตรา ๕๐ ของรัฐธรรมนูญแห่งราชอาณาจักรไทย บัญญัติให้กระทำได้โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย รัฐมนตรีว่าการกระทรวงอุตสาหกรรมจึงได้ออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

“เสียงรบกวน” หมายความว่า ระดับเสียงตรวจวัดนอกบริเวณโรงงาน ที่เกิดจากการประกอบกิจการโรงงาน ขณะมีการรบกวน ซึ่งมีระดับเสียงสูงกว่าระดับเสียงพื้นฐาน และมีระดับการรบกวนเกินกว่าค่าที่กำหนดไว้ในประกาศนี้

“ระดับเสียงพื้นฐาน” หมายความว่า ระดับเสียงที่ตรวจวัดในสิ่งแวดล้อมเดิม ขณะยังไม่มีเสียงรบกวนจากการประกอบกิจการโรงงานเป็นระดับเสียงเปอร์เซ็นต์ไทล์ที่ ๕๐ (Percentile Level 90, L₉₀)

“ระดับเสียงเปอร์เซ็นต์ไทล์ที่ ๕๐ (L₉₀)” หมายความว่า ระดับเสียงที่ร้อยละ ๕๐ ของเวลาที่ตรวจวัดจะมีระดับเสียงเกินระดับนี้

“ระดับเสียงขณะมีการรบกวน” หมายความว่า ระดับเสียงที่ตรวจวัดหรือคำนวณจากการประกอบกิจการโรงงานขณะเกิดเสียงรบกวน

“ระดับการรบกวน” หมายความว่า ระดับความแตกต่างของระดับเสียงขณะมีการรบกวนกับระดับเสียงพื้นฐาน

“ระดับเสียงเฉลี่ย ๒๔ ชั่วโมง” หมายความว่า ระดับเสียงคงที่นอกบริเวณโรงงานที่มีพลังงานเทียบเท่าระดับเสียงที่เกิดขึ้นจริง ซึ่งมีระดับเสียงเปลี่ยนแปลงตามเวลาในช่วง ๒๔ ชั่วโมง (24 hours A-weighted Equivalent Continuous Sound Level) ซึ่งเรียกโดยย่อว่า Leq 24 hr โดยมีหน่วยเป็นเดซิเบลเอ หรือ dB(A)

“ระดับเสียงสูงสุด” หมายความว่า ระดับเสียงสูงสุดนอกบริเวณโรงงาน ที่เกิดขึ้นในขณะใดขณะหนึ่งระหว่างการตรวจวัดระดับเสียง โดยมีหน่วยเป็นเดซิเบลเอ หรือ dB(A)

“มาตรฐานระดับเสียง” หมายความว่า เครื่องวัดระดับเสียงตามมาตรฐาน IEC 60804 หรือ IEC 61672 ของคณะกรรมการระหว่างประเทศว่าด้วยเทคนิคไฟฟ้า (International Electrotechnical Commission, IEC)

ข้อ ๒ ค่าระดับการรบกวน ที่เกิดจากการประกอบกิจการโรงงาน ไม่เกิน ๑๐ เดซิเบลเอ

ข้อ ๓ ค่าระดับเสียงเฉลี่ย ๒๔ ชั่วโมง ที่เกิดจากการประกอบกิจการโรงงาน ไม่เกิน ๗๐ เดซิเบลเอ

ข้อ ๔ ค่าระดับเสียงสูงสุด ที่เกิดจากการประกอบกิจการโรงงาน ไม่เกิน ๑๑๕ เดซิเบลเอ

ข้อ ๕ วิธีการตรวจวัดระดับเสียงการรบกวน ระดับเสียงเฉลี่ย ๒๔ ชั่วโมง และระดับเสียงสูงสุด ที่เกิดจากการประกอบกิจการโรงงาน ให้เป็นไปตามที่กรมโรงงานอุตสาหกรรมกำหนด ทั้งนี้ ให้ใช้บังคับตั้งแต่วันถัดจากวันประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๒๖ ธันวาคม พ.ศ. ๒๕๔๘

สุริยะ จิรุงเรืองกิจ

รัฐมนตรีว่าการกระทรวงอุตสาหกรรม

ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

ฉบับที่ ๓๗ (พ.ศ. ๒๕๕๓)

เรื่อง กำหนดมาตรฐานความสั่นสะเทือนเพื่อป้องกันผลกระทบต่ออาคาร

โดยที่เป็นการสมควรกำหนดมาตรฐานความสั่นสะเทือนเพื่อป้องกันผลกระทบต่ออาคาร เพื่อเป็นเกณฑ์ทั่วไปสำหรับการส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมตามพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕

อาศัยอำนาจตามความในมาตรา ๓๒ (๕) แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการเกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา ๒๕ ประกอบกับมาตรา ๓๓ มาตรา ๓๘ มาตรา ๔๑ และมาตรา ๔๓ ของรัฐธรรมนูญแห่งราชอาณาจักรไทย บัญญัติให้กระทำได้โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย คณะกรรมการสิ่งแวดล้อมแห่งชาติ จึงออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

“อาคารประเภทที่ ๑” หมายความว่า

(๑) อาคารที่ใช้เป็นโรงงานตามกฎหมายว่าด้วยโรงงาน

(๒) อาคารพาณิชย์ อาคารสำนักงาน อาคารคลังสินค้า อาคารพิเศษ อาคารขนาดใหญ่ ตามกฎหมายว่าด้วยการควบคุมอาคาร

(๓) อาคารอื่นใดที่มีการใช้ประโยชน์ในอาคารเช่นเดียวกันกับอาคารตาม (๑) และ (๒)

“อาคารประเภทที่ ๒” หมายความว่า

(๑) อาคารอยู่อาศัย อาคารอยู่อาศัยรวม ห้องแถว ดึกแถว บ้านแถว บ้านแฝด ตามกฎหมายว่าด้วยการควบคุมอาคาร

(๒) อาคารชุดตามกฎหมายว่าด้วยอาคารชุด

(๓) หอพักตามกฎหมายว่าด้วยหอพัก

(๔) อาคารที่ใช้เป็นสถานพยาบาลตามกฎหมายว่าด้วยสถานพยาบาล และอาคารที่ใช้เป็นโรงพยาบาลของทางราชการ

(๕) อาคารที่ใช้เป็นสถานที่ศึกษาตามกฎหมายว่าด้วยโรงเรียนเอกชน อาคารที่ใช้เป็นโรงเรียนของทางราชการ อาคารที่ใช้เป็นสถานที่ศึกษาของสถาบันอุดมศึกษาของเอกชนตามกฎหมายว่าด้วยสถาบันอุดมศึกษาเอกชน และอาคารที่ใช้เป็นสถานที่ศึกษาของสถาบันอุดมศึกษาของทางราชการ

(๖) อาคารที่ใช้ประโยชน์เพื่อกิจกรรมทางศาสนา

(๗) อาคารอื่นใดที่มีลักษณะของการใช้ประโยชน์ในอาคารเช่นเดียวกันกับอาคารตาม (๑)

(๒) (๓) (๔) (๕) และ (๖)

“อาคารประเภทที่ ๓” หมายความว่า

(๑) โบราณสถานตามกฎหมายว่าด้วยโบราณสถาน โบราณวัตถุ ศิลปวัตถุ และพิพิธภัณฑสถานแห่งชาติ

(๒) อาคารหรือสิ่งปลูกสร้างในลักษณะอื่นใดที่มีลักษณะไม่มั่นคงแข็งแรงแต่มีคุณค่าทางวัฒนธรรม

“ความเร็วอนุภาคสูงสุด (Peak Particle Velocity: PPV, V_{max})” หมายความว่า ค่าความเร็วของความสั่นสะเทือนในแนวแกนอน (แกน X หรือ แกน Y) หรือแนวแกนตั้ง (แกน Z) ที่มีค่าสูงสุด

“ความสั่นสะเทือนกรณีที่ ๑” หมายความว่า ความสั่นสะเทือนที่ไม่ทำให้เกิดการล้มและการสั่นพ้องของโครงสร้างอาคาร

“ความสั่นสะเทือนกรณีที่ ๒” หมายความว่า ความสั่นสะเทือนที่ทำให้เกิดการล้มหรือการสั่นพ้องของโครงสร้างอาคาร

“การสั่นพ้อง (Resonance) ของโครงสร้างอาคาร” หมายความว่า ปรากฏการณ์ใดๆ ที่ก่อให้เกิดการสั่นสะเทือนใกล้เคียงหรือมีค่าเท่ากับความถี่ธรรมชาติ (Natural Frequency) ของโครงสร้างอาคารนั้น

“ความถี่ธรรมชาติ (Natural Frequency) ของโครงสร้างอาคาร” หมายความว่า ความถี่ในการสั่นสะเทือนของโครงสร้างอาคารหรือส่วนประกอบของอาคารแต่ละอาคารที่มีลักษณะเฉพาะภายใต้การสั่นแบบอิสระ

“โครงสร้างอาคาร” หมายความว่า ส่วนของอาคารที่เป็นเสา คาน ดง พื้นหรือส่วนอื่นซึ่งโดยสภาพถือได้ว่ามีความสำคัญต่อความมั่นคงแข็งแรงของอาคารนั้น

“ส่วนประกอบของอาคาร” หมายความว่า ส่วนของอาคารที่นอกเหนือจากโครงสร้างอาคารที่มีการยึดอย่างมั่นคงกับโครงสร้างอาคาร

ข้อ ๒ กำหนดมาตรฐานความสั่นสะเทือนเพื่อป้องกันผลกระทบต่ออาคารดังต่อไปนี้

อาคารประเภทที่	จุดตรวจวัด	ความถี่ (เฮิรตซ์)	ความเร็วอนุภาคสูงสุดไม่เกิน (มิลลิเมตรต่อวินาที)	
			ความสั่นสะเทือนกรณีที่ ๑	ความสั่นสะเทือนกรณีที่ ๒
๑	๑.๑ ฐานรากหรือชั้นล่างของอาคาร	$f \leq ๑๐$	๒๐	-
		$๑๐ < f \leq ๕๐$	$๐.๕ f + ๑๕$	
		$๕๐ < f \leq ๑๐๐$	$๐.๒ f + ๓๐$	
		$f > ๑๐๐$	๕๐	
	๑.๒ ชั้นบนสุดของอาคาร	ทุกความถี่	๔๐ [*]	๑๐ [*]
	๑.๓ พื้นอาคารในแต่ละชั้น	ทุกความถี่	๒๐ ^{**}	๑๐ ^{**}
๒	๒.๑ ฐานรากหรือชั้นล่างของอาคาร	$f \leq ๑๐$	๕	-
		$๑๐ < f \leq ๕๐$	$๐.๒๕ f + ๒.๕$	
		$๕๐ < f \leq ๑๐๐$	$๐.๑ f + ๑๐$	
		$f > ๑๐๐$	๒๐	
	๒.๒ ชั้นบนสุดของอาคาร	ทุกความถี่	๑๕ [*]	๕ [*]
	๒.๓ พื้นอาคารในแต่ละชั้น	ทุกความถี่	๒๐ ^{**}	๑๐ ^{**}
๓	๓.๑ ฐานรากหรือชั้นล่างของอาคาร	$f \leq ๑๐$	๓	-
		$๑๐ < f \leq ๕๐$	$๐.๑๒๕ f + ๑.๗๕$	
		$๕๐ < f \leq ๑๐๐$	$๐.๐๔ f + ๖$	
		$f > ๑๐๐$	๑๐	
	๓.๒ ชั้นบนสุดของอาคาร	ทุกความถี่	๘ [*]	๒.๕ [*]
	๓.๓ พื้นอาคารในแต่ละชั้น	ทุกความถี่	๒๐ ^{**}	๑๐ ^{**}

หมายเหตุ

- ๑) f = ความถี่ของความสั่นสะเทือน ณ เวลาที่มีความเร็วอนุภาคสูงสุดมีหน่วยเป็นเฮิรตซ์
- ๒) * = กำหนดมาตรฐานไว้เฉพาะค่าความเร็วอนุภาคสูงสุดในแกนนอน
- ๓) ** = กำหนดมาตรฐานไว้เฉพาะค่าความเร็วอนุภาคสูงสุดในแกนตั้ง
- ๔) การวัดค่าความสั่นสะเทือนสูงสุดสำหรับความสั่นสะเทือนกรณีที่ ๒ ตามข้อ ๑.๒, ๒.๒ และ ๓.๒ ให้วัดที่ชั้นบนสุดของอาคารหรือชั้นอื่นซึ่งมีค่าความสั่นสะเทือนสูงสุด
- ๕) การวัดค่าความสั่นสะเทือนที่พื้นอาคารในแต่ละชั้นตามข้อ ๑.๓, ๒.๓ และ ๓.๓ ให้ยกเว้นการวัดที่ฐานรากหรือชั้นล่างของอาคาร

ข้อ ๓ หลักเกณฑ์ และวิธีตรวจวัดความสั่นสะเทือน ให้เป็นไปตามรายละเอียดในภาคผนวกท้ายประกาศนี้

ข้อ ๔ ประกาศนี้ให้มีผลตั้งแต่วันถัดจากวันประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๒๖ เมษายน พ.ศ. ๒๕๕๓

อภิสิทธิ์ เวชชาชีวะ

นายกรัฐมนตรี

ประธานกรรมการสิ่งแวดล้อมแห่งชาติ

ประกาศกรมเจ้าท่า

ที่ ๑๖๔/๒๕๖๐

เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากแหล่งกำเนิดประเภทร
โรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม

เพื่อให้การปฏิบัติงานเป็นไปตามมาตรา ๑๑๙ และมาตรา ๑๑๙ ทวิ แห่งพระราชบัญญัติการเดินเรือในน่านน้ำไทย พระพุทธศักราช ๒๔๕๖ ซึ่งแก้ไขเพิ่มเติมโดยพระราชบัญญัติการเดินเรือในน่านน้ำไทย (ฉบับที่ ๑๔) พ.ศ. ๒๕๓๕ ในการดำเนินการติดตามและตรวจสอบมลพิษทางน้ำของกรมเจ้าท่าประกอบการพิจารณาตามบทบัญญัติของกฎหมายดังกล่าว เป็นไปอย่างมีประสิทธิภาพต่อการบังคับใช้กฎหมาย และให้สอดคล้องกับประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม ในการออกประกาศการกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากแหล่งกำเนิดมลพิษประเภทโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ที่ได้กำหนดค่ามาตรฐานใหม่ออกมาบังคับใช้กรมเจ้าท่าจึงเห็นสมควรออกประกาศ ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิกประกาศกรมเจ้าท่า ที่ ๔๑๙/๒๕๔๐ เรื่องกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากแหล่งกำเนิดประเภทรโรงงานอุตสาหกรรมและนิคมอุตสาหกรรม ลงวันที่ ๒๒ สิงหาคม พ.ศ. ๒๕๔๐

บรรดาประกาศ ระเบียบ ข้อบังคับ คำสั่ง และบันทึกอื่นใดที่ได้กำหนดไว้แล้วซึ่งขัดหรือแย้งกับประกาศนี้ให้ใช้ประกาศนี้แทน

ข้อ ๒ ในประกาศนี้

“โรงงานอุตสาหกรรม” หมายความว่า โรงงาน ตามกฎหมายว่าด้วยโรงงาน

“นิคมอุตสาหกรรม” หมายความว่า นิคมอุตสาหกรรม ตามกฎหมายว่าด้วยการนิคมอุตสาหกรรม

“เขตประกอบการอุตสาหกรรม” หมายความว่า เขตประกอบการอุตสาหกรรม ตามกฎหมายว่าด้วยโรงงาน หรือพื้นที่จัดสรรเพื่อการอุตสาหกรรมที่มีการจัดการระบายน้ำทิ้งสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อมร่วมกัน

“น้ำทิ้ง” หมายความว่า น้ำที่เกิดจากการประกอบกิจการ น้ำจากการใช้ของคณงาน หรือน้ำจากกิจกรรมอื่นในโรงงานอุตสาหกรรม นิคมอุตสาหกรรม หรือเขตประกอบการอุตสาหกรรม ที่จะระบายลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อม

ข้อ ๓ กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงานอุตสาหกรรมนิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรมไว้ ดังต่อไปนี้

(๓.๑) ค่าของความเป็นกรดและด่าง (pH) ต้องมีค่าระหว่าง ๕.๕ ถึง ๙.๐

(๓.๒) อุณหภูมิ (Temperature) ไม่เกิน ๔๐ องศาเซลเซียส

(๓.๓) สี (Color) ไม่เกิน ๓๐๐ เอดีเอ็มไอ

(๓.๔) ของแข็งละลายน้ำทั้งหมด (Total Dissolved Solids หรือ TDS) มีค่าดังนี้

(๑) กรณีระบายลงน้ำ ต้องไม่เกิน ๓,๐๐๐ มิลลิกรัมต่อลิตร

(๒) กรณีระบายลงแหล่งน้ำที่มีค่าของแข็งละลายน้ำทั้งหมดเกินกว่า ๓,๐๐๐ มิลลิกรัมต่อลิตรค่าของแข็งละลายน้ำทั้งหมดในน้ำที่จะระบายได้ต้องมีค่าไม่เกินกว่าค่าของแข็งละลายน้ำทั้งหมดที่มีอยู่ในแหล่งน้ำนั้นไม่เกิน ๕,๐๐๐ มิลลิกรัมต่อลิตร

(๓.๕) ของแข็งแขวนลอยทั้งหมด (Total Suspended Solids) ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร

(๓.๖) บีโอดี (Biochemical Oxygen Demand) ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร

(๓.๗) ซีโอดี (Chemical Oxygen Demand) ไม่เกิน ๑๒๐ มิลลิกรัมต่อลิตร

(๓.๘) ซัลไฟด์ (Sulfide) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

(๓.๙) ไซยาไนด์ (Cyanides HCN) ไม่เกิน ๐.๒ มิลลิกรัมต่อลิตร

(๓.๑๐) น้ำมันและไขมัน (Fat Oil and Grease) ไม่เกิน ๕ มิลลิกรัมต่อลิตร

(๓.๑๑) ฟORMALDEHYDE (Formaldehyde) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

(๓.๑๒) สารประกอบฟีนอล (Phenols) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

(๓.๑๓) คลอรีนอิสระ (Free Chlorine) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

(๓.๑๔) สารฆ่าศัตรูพืชและสัตว์ (Pesticide) ต้องตรวจไม่พบ

(๓.๑๕) ทีเคเอ็น (Total Kjeldahl Nitrogen) ไม่เกิน ๑๐๐ มิลลิกรัมต่อลิตร

(๓.๑๖) โลหะหนัก มีค่าดังนี้

(๑) สังกะสี (Zn) ไม่เกิน ๕.๐ มิลลิกรัมต่อลิตร

(๒) โครเมียมเฮกซะวาเลนท์ (Hexavalent Chromium) ไม่เกิน ๐.๒๕

มิลลิกรัมต่อลิตร

(๓) โครเมียมไตรวาเลนท์ (Trivalent Chromium) ไม่เกิน ๐.๗๕

มิลลิกรัมต่อลิตร

(๔) สารหนู (As) ไม่เกิน ๐.๒๕ มิลลิกรัมต่อลิตร

(๕) ทองแดง (Cu) ไม่เกิน ๒.๐ มิลลิกรัมต่อลิตร

(๖)ปรอท (Hg) ไม่เกิน ๐.๐๐๕ มิลลิกรัมต่อลิตร

(๗) แคดเมียม (Cd) ไม่เกิน ๐.๐๓ มิลลิกรัมต่อลิตร

(๘) แบเรียม (Ba) ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร

(๙) ซีลีเนียม (Se) ไม่เกิน ๐.๐๒ มิลลิกรัมต่อลิตร

(๑๐) ตะกั่ว (Pb) ไม่เกิน ๐.๒ มิลลิกรัมต่อลิตร

(๑๑) นิกเกิล (Ni) ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร

(๑๒) แมงกานีส (Mn) ไม่เกิน ๕.๐ มิลลิกรัมต่อลิตร

ข้อ ๔ การตรวจสอบค่ามาตรฐานน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ตามข้อ ๓ ให้ใช้วิธีดังต่อไปนี้

(๔.๑) ความเป็นกรดและด่าง ให้ใช้เครื่องวัดความเป็นกรดและด่างของน้ำ (pH Meter) ที่มีความละเอียดไม่ต่ำกว่า ๐.๑ หน่วย

(๔.๒) อุณหภูมิ ให้ใช้เครื่องวัดอุณหภูมิวัดขณะทำการเก็บตัวอย่าง

(๔.๓) สี ให้ใช้วิธีเอ็ดเอ็มไอ (ADMI Method)

(๔.๔) ของแข็งละลายน้ำทั้งหมด ให้ใช้วิธีระเหยตัวอย่างที่กรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter Disk) และอบแห้งที่อุณหภูมิ ๑๘๐ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

(๔.๕) ของแข็งแขวนลอยทั้งหมด ให้ใช้วิธีระเหยตัวอย่างที่กรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter Disk) และอบแห้งที่อุณหภูมิ ๑๐๓ - ๑๐๕ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

(๔.๖) บีโอดี ให้ใช้วิธีบ่มตัวอย่างที่อุณหภูมิ ๒๐ องศาเซลเซียส เป็นเวลา ๕ วัน ติดต่อกัน และหาค่าออกซิเจนละลายด้วยวิธีเอไซด์โมดิฟิเคชัน (Azide Modification) หรือวิธีเมมเบรนอิเล็กโทรด (Membrane Electrode)

(๔.๗) ซีโอดี ให้ใช้วิธีย่อยสลายโดยใช้โพแทสเซียมไดโครเมต (Potassium Dichromate)

(๔.๘) ซัลไฟด์ ให้ใช้วิธีไอโอดิเมตริก (Iodometric Method) หรือวิธีเมทิลีนบลู (Methylene Blue Method)

(๔.๙) ไซยาไนด์ ให้ใช้การกลั่น (Distillation) และตรวจวัดด้วยวิธีเทียบสี (Colorimetric Method) หรือวิธี Flow Injection Analysis

(๔.๑๐) น้ำมันและไขมัน ให้ใช้วิธีสกัดด้วยเทคนิค Liquid - Liquid Extraction หรือ Soxhlet Extraction ด้วยตัวทำละลายแล้วแยกหาน้ำหนักของน้ำมันและไขมัน

(๔.๑๑) ฟอสฟอรัส ให้ใช้วิธีเทียบสี (Colorimetric Method)

(๔.๑๒) สารประกอบฟีนอล ให้ใช้การกลั่น (Distillation) และตรวจวัดด้วยวิธีเทียบสี (Colorimetric Method)

(๔.๑๓) คลอรีนอิสระ ให้ใช้วิธีไตเตรท (Titrimetric Method) หรือวิธีเทียบสี (Colorimetric Method)

(๔.๑๔) สารฆ่าศัตรูพืชและสัตว์ ให้ใช้วิธีก๊าซโครมาโตกราฟิค (Gas-Chromatographic Method)

(๔.๑๕) ทีเคเอ็น ให้ใช้วิธีเจลดาล์ (Kjeldahl)

(๔.๑๖) โลหะหนัก

(๑) สังกะสี ทองแดง แคดเมียม แบเรียม ตะกั่ว นิกเกิล และแมงกานีส ให้ใช้วิธีย่อยสลายตัวอย่างด้วยกรด (Acid digestion) และวัดหาปริมาณโลหะด้วยวิธีอะตอมมิกแอบซอร์ปชันสเปกโตรเมตรี (Atomic Absorption Spectrometry : AAS) หรือวิธีอินดักทีฟลีคัพเพิลพลาสมา (Inductively Coupled Plasma)

(๒) โครเมียม

(ก) โครเมียมทั้งหมด ให้ใช้วิธีย่อยสลายด้วยกรด (Acid digestion) และวัดหาปริมาณโลหะด้วยวิธีอะตอมมิกแอบซอร์ปชันสเปกโตรเมตรี (Atomic Absorption Spectrometry : AAS) หรือวิธีอินดักทีฟลีคัพเพิลพลาสมา (Inductively Coupled Plasma)

(ข) โครเมียมเฮกซะวาเลนท์ ให้ใช้วิธีเทียบสี (Colorimetric Method) หรือวิธีสกัดและตรวจวัดด้วยวิธีอะตอมมิกแอบซอร์ปชันสเปกโตรเมตรี (Atomic Absorption Spectrometry : AAS) หรือวิธีสกัดและตรวจวัดด้วยวิธีอินดักทีฟลีคัพเพิลพลาสมา (Inductively Coupled Plasma)

(ค) โครเมียมไตรวาเลนท์ ให้ใช้วิธีคำนวณจากค่าส่วนต่างของโครเมียมทั้งหมดกับโครเมียมเฮกซะวาเลนท์

(๓) สารหนูและซีลีเนียม ให้ใช้วิธีอะตอมมิกแอบซอร์ปชันสเปกโตรเมตรี (Atomic Absorption Spectrometry : AAS) ชนิดไฮโดรด์เจนเนอเรชัน (Hydrude Generation) หรือวิธีอินดักทีฟลีคัพเพิลพลาสมา (Inductively Coupled Plasma)

(๔) ปรอท ให้ใช้วิธีโคลด์เวเปอร์อะตอมมิกแอบซอร์ปชันสเปกโตรเมตรี (Cold Vapor Atomic Absorption Spectrometry) หรือวิธีโคลด์เวเปอร์อะตอมมิกฟลูออเรสเซนซ์สเปกโตร-เมตรี (Cold Vapor Atomic Fluorescence Spectrometry) หรือวิธีอินดักทีฟลีคัพเพิลพลาสมา (Inductively Coupled Plasma)

ข้อ ๕ การตรวจสอบค่ามาตรฐานน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ตามข้อ ๓ ให้เป็นไปตามคู่มือวิเคราะห์น้ำและน้ำเสียของสมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย หรือ Standard method for the Examination of Water and Wastewater ซึ่ง American Public Health Association, American Water Work Association และ Water Environment Federation ของประเทศสหรัฐอเมริกากำหนดหรือตามที่คณะกรรมการควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ข้อ ๖ การเก็บตัวอย่างน้ำทิ้งเพื่อการตรวจสอบมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ตามข้อ ๓ ให้เป็นดังต่อไปนี้

(๖.๑) จุดเก็บตัวอย่าง ให้เก็บในจุดระบายน้ำทิ้งลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อมหรือจุดอื่นที่สามารถใช้เป็นตัวแทนของน้ำทิ้งที่ระบายออกจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ในกรณีมีการระบายน้ำทิ้งหลายจุดให้เก็บทุกจุด

(๖.๒) วิธีการเก็บตัวอย่างน้ำทิ้ง ณ จุดเก็บตัวอย่างตาม ๖.๑ ให้เก็บแบบจ้วง (Grab Sample)

ข้อ ๗ ประกาศนี้ไม่ใช้บังคับกับแหล่งกำเนิดมลพิษที่มีการกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งตามกฎหมายว่าด้วยการส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติไว้เป็นการเฉพาะ จึงประกาศให้ทราบกันทั่วไป

ประกาศ ณ วันที่ ๒๙ สิงหาคม พ.ศ. ๒๕๕๙
ศรศักดิ์ แสนสมบัติ
อธิบดีกรมเจ้าท่า

ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม

เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม

โดยที่เป็นการสมควรปรับปรุงการกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ให้มีความเหมาะสมยิ่งขึ้น

อาศัยอำนาจตามความในมาตรา ๕๕ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม โดยคำแนะนำของคณะกรรมการควบคุมมลพิษ และโดยความเห็นชอบของคณะกรรมการสิ่งแวดล้อมแห่งชาติ จึงออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิกประกาศกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม ฉบับที่ ๓ (พ.ศ. ๒๕๓๙) เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากแหล่งกำเนิดประเภทโรงงานอุตสาหกรรม และนิคมอุตสาหกรรม ลงวันที่ ๓ มกราคม พ.ศ. ๒๕๓๙

ข้อ ๒ ให้ประกาศคณะกรรมการควบคุมมลพิษ เรื่อง กำหนดประเภทของโรงงานอุตสาหกรรม ที่อนุญาตให้ระบายน้ำทิ้งให้มีค่ามาตรฐานแตกต่างจากค่ามาตรฐานควบคุมการระบายน้ำทิ้งที่กำหนดไว้ในประกาศกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม ฉบับที่ ๓ (พ.ศ. ๒๕๓๙) เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากแหล่งกำเนิดประเภทโรงงานอุตสาหกรรมและนิคมอุตสาหกรรม ลงวันที่ ๒๐ สิงหาคม พ.ศ. ๒๕๓๙ ยังคงมีผลใช้บังคับต่อไปจนกว่าจะมีการออกประกาศกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม เฉพาะประเภทฉบับใหม่

ข้อ ๓ ในประกาศนี้

“โรงงานอุตสาหกรรม” หมายความว่า โรงงาน ตามกฎหมายว่าด้วยโรงงาน

“นิคมอุตสาหกรรม” หมายความว่า นิคมอุตสาหกรรม ตามกฎหมายว่าด้วยการนิคมอุตสาหกรรม

“เขตประกอบการอุตสาหกรรม” หมายความว่า เขตประกอบการอุตสาหกรรม ตามกฎหมายว่าด้วยโรงงาน หรือพื้นที่จัดสรรเพื่อการอุตสาหกรรมที่มีการจัดการระบายน้ำทิ้งลงสู่แหล่งน้ำสาธารณะ หรือออกสู่สิ่งแวดล้อมร่วมกัน

“น้ำทิ้ง” หมายความว่า น้ำที่เกิดจากการประกอบกิจการ น้ำจากการใช้น้ำของคนงาน หรือน้ำจากกิจกรรมอื่นในโรงงานอุตสาหกรรม นิคมอุตสาหกรรม หรือเขตประกอบการอุตสาหกรรมที่จะระบายลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อม

ข้อ ๔ กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงานอุตสาหกรรมนิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรมไว้ ดังต่อไปนี้

๔.๑ ความเป็นกรดและด่าง (pH) ตั้งแต่ ๕.๕ ถึง ๙.๐

๔.๒	อุณหภูมิ (Temperature) ไม่เกิน ๔๐ องศาเซลเซียส
๔.๓	สี (Color) ไม่เกิน ๓๐๐ เอดีเอ็มไอ
๔.๔	ของแข็งละลายน้ำทั้งหมด (Total Dissolved Solids หรือ TDS) มีค่าดังนี้ (๑) กรณีระบายลงแหล่งน้ำ ต้องไม่เกิน ๓,๐๐๐ มิลลิกรัมต่อลิตร (๒) กรณีระบายลงแหล่งน้ำที่มีค่าของแข็งละลายน้ำทั้งหมดเกินกว่า ๓,๐๐๐ มิลลิกรัมต่อลิตร ค่าของแข็งละลายน้ำทั้งหมดในน้ำที่จะระบายได้ต้องมีค่าเกินกว่าค่าของแข็งละลายน้ำทั้งหมดที่มีอยู่ในแหล่งน้ำนั้นไม่เกิน ๕,๐๐๐ มิลลิกรัมต่อลิตร
๔.๕	ของแข็งแขวนลอยทั้งหมด (Total Suspended Solids) ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร
๔.๖	บีโอดี (Biochemical Oxygen Demand) ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร
๔.๗	ซีโอดี (Chemical Oxygen Demand) ไม่เกิน ๑๒๐ มิลลิกรัมต่อลิตร
๔.๘	ซัลไฟด์ (Sulfide) ไม่เกิน ๑ มิลลิกรัมต่อลิตร
๔.๙	ไซยาไนด์ (Cyanides HCN) ไม่เกิน ๐.๒ มิลลิกรัมต่อลิตร
๔.๑๐	น้ำมันและไขมัน (Fat Oil and Grease) ไม่เกิน ๕ มิลลิกรัมต่อลิตร
๔.๑๑	ฟอร์มาลดีไฮด์ (Formaldehyde) ไม่เกิน ๑ มิลลิกรัมต่อลิตร
๔.๑๒	สารประกอบฟีนอล (Phenols) ไม่เกิน ๑ มิลลิกรัมต่อลิตร
๔.๑๓	คลอรีนอิสระ (Free Chlorine) ไม่เกิน ๑ มิลลิกรัมต่อลิตร
๔.๑๔	สารฆ่าศัตรูพืชและสัตว์ (Pesticide) ต้องตรวจไม่พบ
๔.๑๕	ทีเคเอ็น (Total Kjeldahl Nitrogen) ไม่เกิน ๑๐๐ มิลลิกรัมต่อลิตร
๔.๑๖	โลหะหนัก มีค่าดังนี้ (๑) สังกะสี (Zn) ไม่เกิน ๕.๐ มิลลิกรัมต่อลิตร (๒) โครเมียมเฮกซะวาเลนต์ (Hexavalent Chromium) ไม่เกิน ๐.๒๕ มิลลิกรัมต่อลิตร (๓) โครเมียมไตรวาเลนต์ (Trivalent Chromium) ไม่เกิน ๐.๗๕ มิลลิกรัมต่อลิตร (๔) สารหนู (As) ไม่เกิน ๐.๒๕ มิลลิกรัมต่อลิตร (๕) ทองแดง (Cu) ไม่เกิน ๒.๐ มิลลิกรัมต่อลิตร (๖)ปรอท (Hg) ไม่เกิน ๐.๐๐๕ มิลลิกรัมต่อลิตร (๗) แคดเมียม (Cd) ไม่เกิน ๐.๐๓ มิลลิกรัมต่อลิตร (๘) แบเรียม (Ba) ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร (๙) ซีลีเนียม (Se) ไม่เกิน ๐.๐๒ มิลลิกรัมต่อลิตร (๑๐) ตะกั่ว (Pb) ไม่เกิน ๐.๒ มิลลิกรัมต่อลิตร (๑๑) นิกเกิล (Ni) ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร (๑๒) แมงกานีส (Mn) ไม่เกิน ๕.๐ มิลลิกรัมต่อลิตร

ข้อ ๕	การตรวจสอบค่ามาตรฐานน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ตามข้อ ๔ ให้ใช้วิธีดังต่อไปนี้ ๕.๑ ความเป็นกรดและด่าง ให้ใช้เครื่องวัดความเป็นกรดและด่างของน้ำ (pH Meter) ที่มีความละเอียดไม่ต่ำกว่า ๐.๑ หน่วย ๕.๒ อุณหภูมิ ให้ใช้เครื่องวัดอุณหภูมิวัดขณะทำการเก็บตัวอย่าง ๕.๓ สี ให้ใช้วิธีเอดีเอ็มไอ (ADMI Method) ๕.๔ ของแข็งละลายน้ำทั้งหมด ให้ใช้วิธีระเหยตัวอย่างที่กรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter Disk) และอบแห้งที่อุณหภูมิ ๑๘๐ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง ๕.๕ ของแข็งแขวนลอยทั้งหมด ให้ใช้วิธีกรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter Disk) และอบแห้งที่อุณหภูมิ ๑๐๓ - ๑๐๕ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง ๕.๖ บีโอดี ให้ใช้วิธีบ่มตัวอย่างที่อุณหภูมิ ๒๐ องศาเซลเซียส เป็นเวลา ๕ วันติดต่อกัน และหาค่าออกซิเจนละลายด้วยวิธีเอไซด์โมดิฟิเคชัน (Azide Modification) หรือวิธีเมมเบรนอิเล็กโทรด (Membrane Electrode) ๕.๗ ซีโอดี ให้ใช้วิธีย่อยสลายโดยใช้โพแทสเซียมไดโครเมต (Potassium Dichromate) ๕.๘ ซัลไฟด์ ให้ใช้วิธีไอโอดิเมตริก (Iodometric Method) หรือวิธีเมทิลีนบลู (Methylene Blue Method) ๕.๙ ไซยาไนด์ ให้ใช้การกลั่น (Distillation) และตรวจวัดด้วยวิธีเทียบสี (Colorimetric Method) หรือวิธี Flow Injection Analysis ๕.๑๐ น้ำมันและไขมัน ให้ใช้วิธีสกัดด้วยเทคนิค Liquid - Liquid Extraction หรือ Soxhlet Extraction ด้วยตัวทำละลายแล้วแยกหาน้ำมันของน้ำมันและไขมัน ๕.๑๑ ฟอร์มาลดีไฮด์ ให้ใช้วิธีเทียบสี (Colorimetric Method) ๕.๑๒ สารประกอบฟีนอล ให้ใช้การกลั่น (Distillation) และตรวจวัดด้วยวิธีเทียบสี (Colorimetric Method) ๕.๑๓ คลอรีนอิสระ ให้ใช้วิธีไตเตรท (Titrimetric Method) หรือวิธีเทียบสี (Colorimetric Method) ๕.๑๔ สารฆ่าศัตรูพืชและสัตว์ ให้ใช้วิธีก๊าซโครมาโตกราฟี (Gas-Chromatographic Method) ๕.๑๕ ทีเคเอ็น ให้ใช้วิธีเจลดาล์ (Kjeldahl) ๕.๑๖ โลหะหนัก (๑) สังกะสี ทองแดง แคดเมียม แบเรียม ตะกั่ว นิกเกิล และแมงกานีส ให้ใช้วิธีย่อยสลายตัวอย่างด้วยกรด (Acid digestion) และวัดหาปริมาณโลหะด้วยวิธีอะตอมมิกแอบซอร์พชันสเปกโตรเมตรี (Atomic Absorption Spectrometry : AAS) หรือวิธีอินดักทีฟพลาสมาสม่า (Inductively Coupled Plasma)
-------	---

(๒) โครเมียม

(ก) โครเมียมทั้งหมด ให้ใช้วิธีย่อยสลายตัวอย่างด้วยกรด (Acid digestion) และวัดหาปริมาณโลหะด้วยวิธีอะตอมมิคแอบซอร์พชันสเปกโตรเมตตรี (Atomic Absorption Spectrometry: AAS) หรือวิธีอินดักทีฟพลาสมา (Inductively Coupled Plasma)

(ข) โครเมียมเฮกซะวาเลนต์ ให้ใช้วิธีเทียบสี (Colorimetric Method) หรือวิธีสกัดและตรวจวัดด้วยวิธีอะตอมมิคแอบซอร์พชันสเปกโตรเมตตรี (Atomic Absorption Spectrometry: AAS) หรือวิธีสกัดและตรวจวัดด้วยวิธีอินดักทีฟพลาสมา (Inductively Coupled Plasma)

(ค) โครเมียมไตรวาเลนต์ ให้ใช้วิธีคำนวณจากค่าส่วนต่างของโครเมียมทั้งหมดกับโครเมียมเฮกซะวาเลนต์

(๓) สารหนูและซีลีเนียม ให้ใช้วิธีอะตอมมิคแอบซอร์พชันสเปกโตรโฟโตเมตตรี (Atomic Absorption Spectrophotometry) ชนิดไฮไดรด์เจเนอเรชัน (Hydride Generation) หรือวิธีอินดักทีฟพลาสมา (Inductively Coupled Plasma)

(๔) โปรท ให้ใช้วิธีโคลด์เวปอโรอะตอมมิคแอบซอร์พชันสเปกโตรเมตตรี (Cold Vapor Atomic Absorption Spectrometry) หรือวิธีโคลด์เวปอโรอะตอมมิคฟลูออเรสเซนซ์สเปกโตรเมตตรี (Cold Vapor Atomic Fluorescence Spectrometry) หรือวิธีอินดักทีฟพลาสมา (Inductively Coupled Plasma)

ข้อ ๖ การตรวจสอบค่ามาตรฐานน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ตามข้อ ๕ ให้เป็นไปตามคู่มือวิเคราะห์น้ำและน้ำเสียของสมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย หรือ Standard Methods for the Examination of Water and Wastewater ซึ่ง American Public Health Association, American Water Work Association และ Water Environment Federation ของประเทศสหรัฐอเมริกากำหนด หรือตามที่คณะกรรมการควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ข้อ ๗ การเก็บตัวอย่างน้ำทิ้งเพื่อการตรวจสอบมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ตามข้อ ๔ ให้เป็นดังต่อไปนี้

๗.๑ จุดเก็บตัวอย่าง ให้เก็บในจุดระบายทิ้งลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อมหรือจุดอื่นที่สามารถใช้เป็นตัวแทนของน้ำทิ้งที่ระบายออกจากโรงงานอุตสาหกรรม นิคมอุตสาหกรรม และเขตประกอบการอุตสาหกรรม ในกรณีมีการระบายทิ้งหลายจุดให้เก็บทุกจุด

๗.๒ วิธีเก็บตัวอย่างน้ำทิ้ง ณ จุดเก็บตัวอย่างตาม ๗.๑ ให้เก็บแบบจ้วง (Grab Sample)

ข้อ ๘ ประกาศนี้ไม่ใช้บังคับกับแหล่งกำเนิดมลพิษที่มีการกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งตามกฎหมายว่าด้วยการส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติไว้เป็นการเฉพาะ

ข้อ ๙ ประกาศนี้ให้ใช้บังคับเมื่อพ้นกำหนดหนึ่งปีนับจากแต่วันประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๒๙ มีนาคม พ.ศ. ๒๕๕๙

พลเอก สุรศักดิ์ กาญจนรัตน์

รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม

ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

เรื่อง กำหนดมาตรฐานคุณภาพน้ำทะเล

โดยที่เป็นการสมควรปรับปรุงการกำหนดมาตรฐานคุณภาพน้ำทะเล ให้เหมาะสมกับการส่งเสริมและรักษาคุณภาพสิ่งแวดล้อม ด้วยการกำหนดประเภทการใช้ประโยชน์ของคุณภาพน้ำทะเลให้มีความชัดเจน เพื่อให้เป็นประโยชน์สำหรับการเฝ้าระวัง ติดตามตรวจสอบคุณภาพของน้ำทะเล และเพื่อเป็นเกณฑ์ทั่วไปสำหรับการส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมตามพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕

อาศัยอำนาจตามความในมาตรา ๓๒ (๒) และมาตรา ๓๔ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ และคำสั่งสำนักนายกรัฐมนตรี ที่ ๒๓๙/๒๕๖๓ ลงวันที่ ๑๓ สิงหาคม พ.ศ. ๒๕๖๓ เรื่อง มอบหมายและมอบอำนาจให้รองนายกรัฐมนตรี และรัฐมนตรีประจำสำนักนายกรัฐมนตรีปฏิบัติหน้าที่ประธานกรรมการในคณะกรรมการต่าง ๆ ตามกฎหมายและระเบียบสำนักนายกรัฐมนตรี และมติคณะกรรมการสิ่งแวดล้อมแห่งชาติ ในการประชุมครั้งที่ ๓/๒๕๖๔ เมื่อวันที่ ๒๑ มิถุนายน พ.ศ. ๒๕๖๔ จึงออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิกประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ เรื่อง กำหนดมาตรฐานคุณภาพน้ำทะเล ลงวันที่ ๑๓ ตุลาคม พ.ศ. ๒๕๖๐

ข้อ ๒ ในประกาศนี้

“น้ำทะเล” หมายความว่า น้ำทั้งหมดในเขตน่านน้ำไทย แต่ไม่รวมถึง น้ำในแหล่งน้ำผิวดินตามประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ เรื่อง กำหนดมาตรฐานคุณภาพน้ำในแหล่งน้ำผิวดิน

“น่านน้ำไทย” หมายความว่า บรรดาน่านน้ำที่อยู่ภายใต้อำนาจอธิปไตยของประเทศไทยตามกฎหมายว่าด้วยการเดินเรือในน่านน้ำไทย

“ค่าความโปร่งใสต่ำสุด” หมายความว่า ค่าความโปร่งใสต่ำสุดที่ตรวจวัดได้ของตัวอย่างน้ำทะเลที่เก็บจากสถานีเก็บตัวอย่างน้ำทะเลเดียวกันย้อนหลัง ๑ ปี ในช่วงเวลาน้ำขึ้น น้ำลง และฤดูกาลเดียวกัน

“ค่าความเค็มต่ำสุด” หมายความว่า ค่าความเค็มต่ำสุดที่ตรวจวัดได้ของตัวอย่างน้ำทะเลที่เก็บจากสถานีเก็บตัวอย่างน้ำทะเลเดียวกันย้อนหลัง ๑ ปี ในช่วงเวลาน้ำขึ้น น้ำลง และฤดูกาลเดียวกัน

“เขตกันชน” หมายความว่า เขตรอยต่อระหว่างประเภทการใช้ประโยชน์คุณภาพน้ำทะเลโดยเขตกันชนมีพื้นที่นับตั้งแต่แนวแบ่งเขตคุณภาพน้ำทะเลด้านที่มีคุณภาพน้ำทะเลต่ำกว่าออกไปเป็นระยะ ๕๐๐ เมตร ติดต่อกันเป็นเส้นขนาน

หมวด ๑

ประเภทและมาตรฐานคุณภาพน้ำทะเลในเขตน่านน้ำไทย

ข้อ ๓ ให้แบ่งคุณภาพน้ำทะเลในเขตน่านน้ำไทยออกเป็น ๖ ประเภท ดังต่อไปนี้

๓.๑ คุณภาพน้ำทะเลเพื่อการอนุรักษ์ทรัพยากรธรรมชาติ ได้แก่ แหล่งน้ำทะเลที่มีได้จัดไว้เพื่อการใช้ประโยชน์อย่างใดอย่างหนึ่งโดยเฉพาะตามประกาศนี้

๓.๒ คุณภาพน้ำทะเลเพื่อการอนุรักษ์แหล่งปะการัง ได้แก่ แหล่งน้ำทะเลที่มีปะการัง โดยมีขอบเขตครอบคลุมพื้นที่ในรัศมีแนวราบกับผิวน้ำ นับจากเส้นตรงที่ลากตั้งฉากกับเส้นที่เชื่อมจุดนอกสุดของแนวปะการังออกไปเป็นระยะ ๑,๐๐๐ เมตร

๓.๓ คุณภาพน้ำทะเลเพื่อการเพาะเลี้ยงสัตว์น้ำ ได้แก่ แหล่งน้ำทะเลซึ่งมีประกาศกำหนดให้เป็นทีเพาะเลี้ยงสัตว์น้ำตามกฎหมายว่าด้วยการประมง

๓.๔ คุณภาพน้ำทะเลเพื่อการนันทนาการ ได้แก่ แหล่งน้ำทะเลซึ่งมีประกาศขององค์กรปกครองส่วนท้องถิ่นกำหนดให้เป็นเขตเพื่อการว่ายน้ำหรือใช้ประโยชน์เพื่อการนันทนาการทางน้ำหรือตามประกาศกรมควบคุมมลพิษ เรื่อง กำหนดเขตคุณภาพน้ำทะเลเพื่อการนันทนาการ

๓.๕ คุณภาพน้ำทะเลเพื่อการอุตสาหกรรมและท่าเรือ ได้แก่

(๑) แหล่งน้ำทะเลที่อยู่ประชิดกับเขตนิคมอุตสาหกรรมตามกฎหมายว่าด้วยการนิคมอุตสาหกรรมแห่งประเทศไทย เขตประกอบการอุตสาหกรรมตามกฎหมายว่าด้วยโรงงาน โดยมีขอบเขตนับตั้งแต่แนวน้ำขึ้นสูงสุดจนถึงแนวน้ำลงต่ำสุดออกไปจนถึงระยะ ๑,๐๐๐ เมตรตามแนวราบกับผิวน้ำ

(๒) แหล่งน้ำทะเลในเขตท่าเรือ เขตจอดเรือตามกฎหมายว่าด้วยการเดินเรือในน่านน้ำไทย

(๓) แหล่งน้ำทะเลที่อยู่ประชิดท่าเทียบเรือ ที่รับเรือขนาดตั้งแต่ ๕๐๐ ตันกรอสขึ้นไป หรือความยาวหน้าท่า ตั้งแต่ ๑๐๐ เมตรขึ้นไป หรือมีพื้นที่ท่าเทียบเรือรวม ตั้งแต่ ๑,๐๐๐ ตารางเมตรขึ้นไป โดยมีขอบเขตนับตั้งแต่แนวประชิดท่าเทียบเรือออกไปเป็นระยะ ๑,๐๐๐ เมตร ตามแนวราบกับผิวน้ำ

๓.๖ คุณภาพน้ำทะเลสำหรับเขตชุมชน ได้แก่ แหล่งน้ำทะเลที่อยู่ประชิดกับชุมชนที่มีประกาศกำหนดให้เป็นเทศบาล ตามกฎหมายว่าด้วยเทศบาล เมืองพัทยา หรือกรุงเทพมหานคร โดยมีขอบเขตนับตั้งแต่แนวน้ำขึ้นสูงสุดจนถึงแนวน้ำลงต่ำสุดออกไปจนถึงระยะ ๑,๐๐๐ เมตรตามแนวราบกับผิวน้ำ

ข้อ ๔ คุณภาพน้ำทะเลตามข้อ ๓.๑ ต้องมีมาตรฐาน ดังต่อไปนี้

๔.๑ ไม่มีวัตถุที่น้ำรังเกียจลอยอยู่บนผิวน้ำ

๔.๒ ไม่มีน้ำมันหรือไขมันที่สามารถมองเห็นได้ด้วยตาเปล่าลอยอยู่บนผิวน้ำ

๔.๓ สีของน้ำทะเลอยู่ใน Scale ของสารละลาย Forel - Ule ซึ่งมีค่าตั้งแต่ ๑ - ๒๒

๔.๔ กลิ่นต้องไม่เป็นที่น่ารังเกียจ คือ ไม่มีกลิ่นที่ก่อให้เกิดความเดือดร้อนรำคาญ เช่น กลิ่นน้ำมัน กลิ่นก๊าซไข่เน่า กลิ่นสารเคมี กลิ่นขยะ กลิ่นเน่า เป็นต้น โดยความเห็นของคณะผู้ตรวจวัดต้องเป็นเอกฉันท์

๔.๕ อุณหภูมิ (Temperature) เปลี่ยนแปลงเพิ่มขึ้นไม่เกิน ๑ องศาเซลเซียสจากสภาพธรรมชาติ
๔.๖ ความเป็นกรดและด่าง (pH) มีค่าระหว่าง ๗.๐ - ๘.๕
๔.๗ ความโปร่งใส (Transparency) มีค่าลดลงจากสภาพธรรมชาติไม่เกินร้อยละ ๑๐ จากค่าความโปร่งใสต่ำสุด
๔.๘ สารแขวนลอย (Suspended Solids) มีค่าเปลี่ยนแปลงเพิ่มขึ้นไม่เกินผลรวมของค่าเฉลี่ย ๑ วัน หรือ ๑ เดือน หรือ ๑ ปี บวกกับค่าเบี่ยงเบนมาตรฐานของค่าเฉลี่ยนั้น ๆ โดยค่าเฉลี่ย ๑ วัน ให้วัดทุกชั่วโมง หรืออย่างน้อย ๕ ครั้ง ที่ช่วงเวลาเท่า ๆ กัน ค่าเฉลี่ย ๑ เดือน ให้วัดทุกวันหรืออย่างน้อย ๔ ครั้ง ที่ช่วงเวลาเท่า ๆ กัน ใน ๑ เดือน ณ เวลาเดียวกัน และค่าเฉลี่ย ๑ ปี ให้วัดทุกเดือน ณ วันที่และเวลาเดียวกัน
๔.๙ ความเค็ม (Salinity) มีค่าเปลี่ยนแปลงไม่เกินร้อยละ ๑๐ ของค่าความเค็มต่ำสุด
๔.๑๐ ปิโตรเลียมไฮโดรคาร์บอน (Petroleum Hydrocarbon) มีค่าไม่เกิน ๐.๕ ไมโครกรัมต่อลิตร
๔.๑๑ ออกซิเจนละลาย (Dissolved Oxygen) มีค่าไม่น้อยกว่า ๔ มิลลิกรัมต่อลิตร
๔.๑๒ แบคทีเรียกลุ่มโคลิฟอร์มทั้งหมด (Total Coliform Bacteria) มีค่าไม่เกิน ๑,๐๐๐ เอ็มพีเอ็นต่อ ๑๐๐ มิลลิลิตร
๔.๑๓ แบคทีเรียกลุ่มฟีคอลโคลิฟอร์ม (Fecal Coliform Bacteria) มีค่าไม่เกิน ๗๐ ซีเอฟยูต่อ ๑๐๐ มิลลิลิตร
๔.๑๔ ไนเตรท - ไนโตรเจน (Nitrate - Nitrogen) มีค่าไม่เกิน ๒๐ ไมโครกรัม - ไนโตรเจนต่อลิตร
๔.๑๕ ฟอสเฟต - ฟอสฟอรัส (Phosphate - Phosphorus) มีค่าไม่เกิน ๑๕ ไมโครกรัม - ฟอสฟอรัสต่อลิตร
๔.๑๖ แอมโมเนียรวม (Total Ammonia) มีค่าไม่เกิน ๑๐๐ ไมโครกรัม - ไนโตรเจนต่อลิตร
๔.๑๗ปรอทรวม (Total Mercury) มีค่าไม่เกิน ๐.๑ ไมโครกรัมต่อลิตร
๔.๑๘ แคดเมียม (Cadmium) มีค่าไม่เกิน ๕ ไมโครกรัมต่อลิตร
๔.๑๙ โครเมียมรวม (Total Chromium) มีค่าไม่เกิน ๑๐๐ ไมโครกรัมต่อลิตร
๔.๒๐ โครเมียมเฮกซะวาเลนต์ (Chromium Hexavalent) มีค่าไม่เกิน ๕๐ ไมโครกรัมต่อลิตร
๔.๒๑ ตะกั่ว (Lead) มีค่าไม่เกิน ๘.๕ ไมโครกรัมต่อลิตร
๔.๒๒ ทองแดง (Copper) มีค่าไม่เกิน ๘ ไมโครกรัมต่อลิตร

๔.๒๓ แมงกานีส (Manganese) มีค่าไม่เกิน ๑๐๐ ไมโครกรัมต่อลิตร
๔.๒๔ สังกะสี (Zinc) มีค่าไม่เกิน ๕๐ ไมโครกรัมต่อลิตร
๔.๒๕ เหล็ก (Iron) มีค่าไม่เกิน ๓๐๐ ไมโครกรัมต่อลิตร
๔.๒๖ ฟลูออไรด์ (Fluoride) มีค่าไม่เกิน ๑ มิลลิกรัมต่อลิตร
๔.๒๗ ฟีนอล (Phenol) มีค่าไม่เกิน ๐.๐๓ มิลลิกรัมต่อลิตร
๔.๒๘ ซัลไฟด์ (Sulfide) มีค่าไม่เกิน ๑๐ ไมโครกรัมต่อลิตร
๔.๒๙ ไซยาไนด์ (Cyanide) มีค่าไม่เกิน ๗ ไมโครกรัมต่อลิตร
๔.๓๐ พีซีบี (PCBs, Polychlorinated Biphenyl) ต้องตรวจไม่พบ
๔.๓๑ สารหนู (Arsenic) มีค่าไม่เกิน ๑๐ ไมโครกรัมต่อลิตร
๔.๓๒ แกมมันตภาพรังสี (Radioactivity) มีค่าแกมมันตภาพรังสีรวมแอลฟา (Alpha) ไม่เกิน ๐.๑ เบคเคอเรลต่อลิตร ค่าแกมมันตภาพรังสีรวมเบตา (Beta) ที่ไม่รวมรังสีจากโปตัสเซียม - ๔๐ มีค่าไม่เกิน ๑.๐ เบคเคอเรลต่อลิตร
๔.๓๓ สารประกอบดีบุกอินทรีย์ชนิดไตรบิวทิล (Tributyltin) มีค่าไม่เกิน ๑๐ นาโนกรัมต่อลิตร
๔.๓๔ สารเคมีที่ใช้ในการป้องกันกำจัดศัตรูพืชและสัตว์ชนิดที่มีคลอรีน ได้แก่ <div> <div>(๑) อัลดริน (Aldrin) มีค่าไม่เกิน ๑.๓ ไมโครกรัมต่อลิตร</div> <div>(๒) คลอเดน (Chlordane) มีค่าไม่เกิน ๐.๐๐๔ ไมโครกรัมต่อลิตร</div> <div>(๓) ดีดีที (DDT) มีค่าไม่เกิน ๐.๐๐๑ ไมโครกรัมต่อลิตร</div> <div>(๔) ดีลดริน (Dieldrin) มีค่าไม่เกิน ๐.๐๐๑๙ ไมโครกรัมต่อลิตร</div> <div>(๕) เอลดริน (Endrin) มีค่าไม่เกิน ๐.๐๐๒๓ ไมโครกรัมต่อลิตร</div> <div>(๖) เอ็นโดซัลฟาน (Endosulfan) มีค่าไม่เกิน ๐.๐๐๘๗ ไมโครกรัมต่อลิตร</div> <div>(๗) เฮปตาคลอร์ (Heptachlor) มีค่าไม่เกิน ๐.๐๐๓๖ ไมโครกรัมต่อลิตร</div> <div>(๘) ลินเดน (Lindane) มีค่าไม่เกิน ๐.๑๖ ไมโครกรัมต่อลิตร</div> </div>
๔.๓๕ สารเคมีที่ใช้ในการป้องกันกำจัดศัตรูพืชและสัตว์ชนิดอื่น ได้แก่ <div> <div>(๑) อะลาคลอร์ (Alachlor) ต้องตรวจไม่พบ</div> <div>(๒) อะเมทริน (Ametryn) ต้องตรวจไม่พบ</div> <div>(๓) อะทราซีน (Atrazine) ต้องตรวจไม่พบ</div> <div>(๔) คาร์บาริล (Carbaryl) ต้องตรวจไม่พบ</div> <div>(๕) คาร์เบนดาซิม (Carbendazim) ต้องตรวจไม่พบ</div> <div>(๖) คลอไพริฟอส (Chlorpyrifos) ต้องตรวจไม่พบ</div> <div>(๗) ไซเปอร์เมทริน (Cypermethrin) ต้องตรวจไม่พบ</div> <div>(๘) ๒,๔-ดี (2,4-D) ต้องตรวจไม่พบ</div> </div>

		(๙) ไดเอรอน (Diuron) ต้องตรวจไม่พบ
		(๑๐) ไกลโฟเซท (Glyphosate) ต้องตรวจไม่พบ
		(๑๑) มาลาไธออน (Malathion) ต้องตรวจไม่พบ
		(๑๒) แมนโคเซบ (Mancozeb) ต้องตรวจไม่พบ
		(๑๓) เมพธิล พาราไธออน (Methyl Parathion) ต้องตรวจไม่พบ
		(๑๔) พาราไธออน (Parathion) ต้องตรวจไม่พบ
		(๑๕) โปรพานิล (Propanil) ต้องตรวจไม่พบ
ข้อ ๕	คุณภาพน้ำทะเลตามข้อ ๓.๒ ต้องมีมาตรฐานตามข้อ ๔ เว้นแต่	
	๕.๑ อุณหภูมิ (Temperature) ห้ามมีค่าเปลี่ยนแปลงจากสภาพธรรมชาติ	
	๕.๒ ออกซิเจนละลาย (Dissolved Oxygen) มีค่าไม่น้อยกว่า ๖ มิลลิกรัมต่อลิตร	
	๕.๓ แบคทีเรียกลุ่มเ็นเทอโรคอกไค (Enterococci Bacteria) มีค่าไม่เกิน	
๓๕ ซีเอฟยูต่อ ๑๐๐ มิลลิลิตร		
ข้อ ๖	คุณภาพน้ำทะเลตามข้อ ๓.๓ ต้องมีมาตรฐานตามข้อ ๔ เว้นแต่	
	๖.๑ ไนเตรท - ไนโตรเจน (Nitrate - Nitrogen) มีค่าไม่เกิน ๖๐ ไมโครกรัม -	
ไนโตรเจนต่อลิตร		
	๖.๒ ฟอสเฟต - ฟอสฟอรัส (Phosphate - Phosphorus) มีค่าไม่เกิน ๔๕ ไมโครกรัม -	
ฟอสฟอรัสต่อลิตร		
	๖.๓ แอมโมเนียรวม (Total Ammonia) มีค่าไม่เกิน ๗๐๐ ไมโครกรัม - ไนโตรเจน	
ต่อลิตร		
ข้อ ๗	คุณภาพน้ำทะเลตามข้อ ๓.๔ ต้องมีมาตรฐานตามข้อ ๔ เว้นแต่	
	๗.๑ อุณหภูมิ (Temperature) มีค่าเปลี่ยนแปลงเพิ่มขึ้นไม่เกิน ๒ องศาเซลเซียส	
จากสภาพธรรมชาติ		
	๗.๒ ปีโตรเลียมไฮโดรคาร์บอน (Petroleum Hydrocarbon) มีค่าไม่เกิน	
๑ ไมโครกรัมต่อลิตร		
	๗.๓ แบคทีเรียกลุ่มฟีคอลโคลิฟอร์ม (Fecal Coliform Bacteria) มีค่าไม่เกิน	
๑๐๐ ซีเอฟยูต่อ ๑๐๐ มิลลิลิตร		
	๗.๔ แบคทีเรียกลุ่มเ็นเทอโรคอกไค (Enterococci Bacteria) มีค่าไม่เกิน	
๓๕ ซีเอฟยูต่อ ๑๐๐ มิลลิลิตร		
	๗.๕ ไนเตรท - ไนโตรเจน (Nitrate - Nitrogen) มีค่าไม่เกิน ๖๐ ไมโครกรัม -	
ไนโตรเจนต่อลิตร		
	๗.๖ แอมโมเนียรวม (Total Ammonia) มีค่าไม่เกิน ๒๐๐ ไมโครกรัม -	
ไนโตรเจนต่อลิตร		

		ข้อ ๘	คุณภาพน้ำทะเลตามข้อ ๓.๕ ต้องมีมาตรฐานตามข้อ ๔ เว้นแต่
		๘.๑	อุณหภูมิ (Temperature) มีค่าเปลี่ยนแปลงเพิ่มขึ้นไม่เกิน ๒ องศาเซลเซียส
จากสภาพธรรมชาติ			
		๘.๒	ปีโตรเลียมไฮโดรคาร์บอน (Petroleum Hydrocarbon) มีค่าไม่เกิน ๕ ไมโครกรัม
ต่อลิตร			
		๘.๓	แบคทีเรียกลุ่มฟีคอลโคลิฟอร์ม (Fecal Coliform Bacteria) มีค่าไม่เกิน
๑๐๐ ซีเอฟยูต่อ ๑๐๐ มิลลิลิตร			
		๘.๔	ไนเตรท - ไนโตรเจน (Nitrate - Nitrogen) มีค่าไม่เกิน ๖๐ ไมโครกรัม -
ไนโตรเจนต่อลิตร			
		๘.๕	ฟอสเฟต - ฟอสฟอรัส (Phosphate - Phosphorus) มีค่าไม่เกิน ๔๕ ไมโครกรัม -
ฟอสฟอรัสต่อลิตร			
		๘.๖	แอมโมเนียรวม (Total Ammonia) มีค่าไม่เกิน ๙๕๐ ไมโครกรัม -
ไนโตรเจนต่อลิตร			
		๘.๗	คลอรีนคงเหลือ (Residual Chlorine) มีค่าไม่เกิน ๐.๐๑ มิลลิกรัมต่อลิตร
ข้อ ๙	คุณภาพน้ำทะเล ตามข้อ ๓.๖ ต้องมีมาตรฐานตามข้อ ๔ เว้นแต่		
	๙.๑ อุณหภูมิ (Temperature) มีค่าเปลี่ยนแปลงเพิ่มขึ้นไม่เกิน ๒ องศาเซลเซียส		
จากสภาพธรรมชาติ			
		๙.๒	ปีโตรเลียมไฮโดรคาร์บอน (Petroleum Hydrocarbon) มีค่าไม่เกิน ๕ ไมโครกรัม
ต่อลิตร			
		๙.๓	แบคทีเรียกลุ่มฟีคอลโคลิฟอร์ม (Fecal Coliform Bacteria) มีค่าไม่เกิน
๑๐๐ ซีเอฟยูต่อ ๑๐๐ มิลลิลิตร			
		๙.๔	ไนเตรท - ไนโตรเจน (Nitrate - Nitrogen) มีค่าไม่เกิน ๖๐ ไมโครกรัม -
ไนโตรเจนต่อลิตร			
		๙.๕	ฟอสเฟต - ฟอสฟอรัส (Phosphate - Phosphorus) มีค่าไม่เกิน ๔๕ ไมโครกรัม -
ฟอสฟอรัสต่อลิตร			
		๙.๖	แอมโมเนียรวม (Total Ammonia) มีค่าไม่เกิน ๙๕๐ ไมโครกรัม -
ไนโตรเจนต่อลิตร			
		๙.๗	คลอรีนคงเหลือ (Residual Chlorine) มีค่าไม่เกิน ๐.๐๑ มิลลิกรัมต่อลิตร
ข้อ ๑๐	ในกรณีเขตคุณภาพน้ำทะเลเพื่อการอุตสาหกรรมและท่าเรือ หรือคุณภาพน้ำทะเล		
สำหรับเขตชุมชนทับซ้อนกับเขตคุณภาพน้ำทะเลเพื่อการอนุรักษ์แหล่งปะการัง การเพาะเลี้ยงสัตว์น้ำ			
หรือการนันทนาการ แล้วแต่กรณี มาตรฐานคุณภาพน้ำทะเลในเขตพื้นที่ทับซ้อนดังกล่าวให้เป็นไป			
ตามค่ามาตรฐานคุณภาพน้ำทะเลประเภทที่มีค่าเข้มงวดมากที่สุด			

ข้อ ๑๑ การแบ่งประเภทคุณภาพน้ำทะเลตามข้อ ๓ จะต้องกำหนดเขตกันชน (Buffer Zone) ระหว่างคุณภาพน้ำทะเลแต่ละประเภทไว้ด้วย โดยมาตรฐานคุณภาพน้ำทะเลในเขตกันชน (Buffer Zone) จะต้องไม่ค่าไม่เกินกว่าค่าเฉลี่ยระหว่างค่ามาตรฐานคุณภาพน้ำทะเลที่อยู่ติดต่อกัน เว้นแต่

๑๑.๑ การแบ่งประเภทคุณภาพน้ำทะเลประเภทใดประเภทหนึ่ง ไม่ได้กำหนดค่ามาตรฐานค่าใดค่าหนึ่งไว้ ค่ามาตรฐานน้ำทะเลในเขตกันชนจะต้องมีค่าไม่เกินกว่าค่ามาตรฐานคุณภาพน้ำทะเลตามประเภทของคุณภาพน้ำทะเลที่ได้มีการกำหนดไว้

๑๑.๒ การแบ่งประเภทคุณภาพน้ำทะเลใด กำหนดค่ามาตรฐานคุณภาพน้ำทะเลไว้ โดยห้ามเปลี่ยนแปลงไปจากค่าเดิมตามธรรมชาติ ค่ามาตรฐานคุณภาพน้ำทะเลในเขตกันชนต้องมีค่าไม่เกินครึ่งหนึ่งของค่ามาตรฐานคุณภาพน้ำทะเล ตามประเภทของคุณภาพน้ำทะเลที่มีการกำหนดไว้ เป็นตัวเลข

หมวด ๒ วิธีการเก็บตัวอย่างและตรวจสอบคุณภาพน้ำทะเลในเขตน่านน้ำไทย

ข้อ ๑๒ ให้ทำการเก็บตัวอย่างน้ำทะเล ดังนี้

๑๒.๑ หาก ณ จุดตรวจสอบ มีความลึกน้อยกว่า ๕ เมตร ให้เก็บตัวอย่างน้ำทะเล ที่ความลึก ๑ เมตร และสูงจากท้องน้ำ ๑ เมตร

๑๒.๒ หาก ณ จุดตรวจสอบ มีความลึกอยู่ระหว่าง ๕ - ๒๐ เมตร ให้เก็บตัวอย่างน้ำทะเลที่ความลึก ๑ เมตร กึ่งกลางน้ำ และสูงจากท้องน้ำ ๑ เมตร

๑๒.๓ หาก ณ จุดตรวจสอบ มีความลึกอยู่ระหว่าง ๒๐ - ๔๐ เมตร ให้เก็บตัวอย่างน้ำทะเลที่ความลึก ๑ เมตร ๑๐ เมตร ๒๐ เมตร ๓๐ เมตร และสูงจากท้องน้ำ ๑ เมตร

๑๒.๔ หาก ณ จุดตรวจสอบ มีความลึกอยู่ระหว่าง ๔๐ - ๑๐๐ เมตร ให้เก็บตัวอย่างน้ำทะเลที่ความลึก ๑ เมตร ๒๐ เมตร ๔๐ เมตร ๘๐ เมตร และสูงจากท้องน้ำ ๑ เมตร

๑๒.๕ หาก ณ จุดตรวจสอบ มีความลึกมากกว่า ๑๐๐ เมตร ให้เก็บตัวอย่างน้ำทะเล ที่ความลึก ๑ เมตร ที่ทุก ๆ ความลึก ๕๐ เมตร และสูงจากท้องน้ำ ๑ เมตร

๑๒.๖ หาก ณ จุดตรวจสอบมีความลึกของน้ำน้อยกว่าหรือเท่ากับ ๑ เมตร ให้เก็บตัวอย่างน้ำทะเลที่ระดับกึ่งกลางความลึกของน้ำ เว้นแต่แบคทีเรียกลุ่มโคลิฟอร์มทั้งหมด (Total Coliform Bacteria) แบคทีเรียกลุ่มฟิโคไลฟอร์ม (Fecal Coliform Bacteria) และแบคทีเรียกลุ่มเอนเทอโรคอคโค (Enterococci Bacteria) ให้เก็บตัวอย่างที่ระดับความลึกใต้ผิวน้ำ ๓๐ เซนติเมตร สำหรับวัดอุณหภูมิ สี ความโปร่งใส น้ำมันและไขมันบนผิวน้ำ ไม่ต้องเก็บตัวอย่าง แต่ให้ตรวจวัด ณ จุดตรวจสอบ

ข้อ ๑๓ ให้เก็บตัวอย่างน้ำทะเลในช่วงเวลาตั้งแต่เช้าถึงน้ำลงต่ำสุด เฉพาะในบริเวณที่ได้รับอิทธิพลจากน้ำขึ้นน้ำลง

ข้อ ๑๔ การเก็บตัวอย่างน้ำทะเลและอุปกรณ์ที่ใช้จะต้องเป็นไปตามที่กำหนดในคู่มือการเก็บและวิเคราะห์ตัวอย่างน้ำทะเลของกรมควบคุมมลพิษหรือตามที่กำหนดไว้ใน Standard Method for the Examination of Water and Wastewater (APHA, AWWA and WEF, ฉบับล่าสุด) Method of Seawater Analysis (Grasshoff ,1999) Practical Handbook of Seawater Analysis (Strickland and Parson, 1972) A Manual of Chemical and Biological Methods for Seawater Analysis (Parsons et.al., 1984) Recommended guidelines for measuring organic compounds in Puget Sound water, sediment and tissue samples (Puget Sound Estuary Program, 1997) Prescribed Procedures for Measurement of Radioactivity in Drinking Water (Krieger and Whittaker, 1980) Proceedings of the organotin symposium, Comprehensive method for determination of aquatic butyltin and butylmethyltin species at ultra trace levels using simultaneous hybridization/extraction with GC/FPD detection (Matthias et. Al, 1986 a,b) หรือวิธีการอื่นใดที่คณะกรรมการควบคุมมลพิษประกาศกำหนด และให้มีการดำเนินการเพื่อลดผลการรบกวนจากคลอไรด์ หรือมีการ Pre - concentration ก่อนการวิเคราะห์

ข้อ ๑๕ การตรวจสอบคุณภาพน้ำทะเล ให้ใช้วิธีการดังต่อไปนี้

๑๕.๑ วัดอุณหภูมิ น้ำมันและไขมันบนผิวน้ำ ให้สังเกตบริเวณผิวน้ำ

๑๕.๒ สี ให้ใช้วิธีสังเกตโดยเทียบกับ Forel-Ule Color Scale

๑๕.๓ กลิ่น ให้ใช้วิธีการดมกลิ่น โดยต้องมีผู้ตรวจวัดไม่น้อยกว่า ๓ คน และเก็บตัวอย่างในขวดแก้ว หรือ TFE - line ๒ ขวดต่อ ๑ จุดเก็บตัวอย่าง ทำการตรวจวัดทันทีเมื่อถึงจุดตรวจวัด โดยความเห็นของคณะผู้ตรวจวัดต้องเป็นเอกฉันท์

๑๕.๔ อุณหภูมิ (Temperature) ให้ใช้ Thermometer หรือ Electrical Sensor Method

๑๕.๕ ความเป็นกรดและด่าง (pH) ให้ใช้เครื่องวัดความเป็นกรดและด่าง (pH Meter) หรือวิธีตรวจสอบค่าความเป็นกรดและด่างของน้ำทะเลด้วย Spectrophotometric Determination

๑๕.๖ ความโปร่งใส (Transparency) ให้ใช้แผ่น Secchi Disc สำหรับตรวจวัดน้ำทะเล

๑๕.๗ สารแขวนลอย (Suspended Solids) ให้ใช้วิธี Gravimetric Method

๑๕.๘ ความเค็ม (Salinity) ให้ใช้วิธี Argentometric หรือวิธี Electrical Conductivity Method หรือวิธี Density หรือวิธี Refractometer

๑๕.๙ ปีโตรเลียมไฮโดรคาร์บอน (Petroleum Hydrocarbon) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Fluorescence Spectrophotometry

๑๕.๑๐ ออกซิเจนละลาย (Dissolved Oxygen) ให้ใช้วิธี Azide Modification Method หรือวิธี Membrane Electrode Method หรือวิธี Winkler Method

๑๕.๑๑ แบคทีเรียกลุ่มโคลิฟอร์มทั้งหมด (Total Coliform Bacteria) ให้ใช้วิธี Multiple Tube Fermentation Technique

๑๕.๑๒ แบคทีเรียกลุ่มฟีคัลโคลิฟอร์ม (Fecal Coliform Bacteria) และแบคทีเรียกลุ่มเอนเทอโรคอคโค (Enterococci Bacteria) ให้ใช้วิธี Membrane Filter Technique

๑๕.๑๓ ไนเตรท - ไนโตรเจน (Nitrate-Nitrogen) ให้ใช้วิธี Cadmium Reduction Method เปลี่ยนไนเตรทเป็นไนไตรท์ก่อน แล้วใช้วิธี Colorimetric Method

๑๕.๑๔ ฟอสเฟต - ฟอสฟอรัส (Phosphate - Phosphorus) ให้ใช้วิธี Colorimetric Method

๑๕.๑๕ แอมโมเนียรวม (Total Ammonia) ให้ใช้วิธี Phenol - Hypochlorite Method

๑๕.๑๖ปรอทรวม (Total Mercury) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Cold - Vapor/Hydride Generation - Atomic Absorption Spectrometric Method หรือวิธี Cold - Vapor/ Hydride Generation - Atomic Fluorescence Spectrmetric Method หรือวิธี Inductively Coupled Plasma

๑๕.๑๗ แคดเมียม (Cadmium) โครเมียมรวม (Total Chromium) ตะกั่ว (Lead) และทองแดง (Copper) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Electrothermal Atomic Absorption Spectrometric Method หรือวิธี Inductively Coupled Plasma Method

๑๕.๑๘ โครเมียมเฮกซาวาเลนต์ (Chromium Hexavalent) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Electrothermal Atomic Absorption Spectrometric Method หรือวิธี Inductively Coupled Plasma Method

๑๕.๑๙ แมงกานีส (Manganese) สังกะสี (Zinc) และเหล็ก (Iron) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Flame Atomic Absorption Spectrometric Method หรือวิธี Electrothermal Atomic Absorption Spectrometric Method หรือวิธี Inductively Coupled Plasma Method

๑๕.๒๐ ฟลูออไรด์ (Fluoride) ให้ใช้วิธี SPADNS Colorimetric Method

๑๕.๒๑ คลอรีนคงเหลือ (Residual Chlorine) ให้ใช้วิธี N, N - diethyl - p - phenylenediamine Method

๑๕.๒๒ ฟีนอล (Phenol) ให้ใช้วิธี Distillation ตามด้วย Aminoantipyrine Colorimetric Method

๑๕.๒๓ ซัลไฟด์ (Sulfide) ให้ใช้วิธี Methylene Blue Colorimetric Method

๑๕.๒๔ ไซยาไนด์ (Cyanide) ให้ใช้วิธี Pyridine Barbituric Acid Colorimetric Method

๑๕.๒๕ พีซีบี (PCBs, Polychlorinated Biphenyl) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Gas Chromatography with Electron Capture Detector

๑๕.๒๖ สารหนู (Arsenic) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Hydride Generation - Atomic Absorption Spectrometric Method หรือวิธี Electrothermal Atomic Absorption Spectrometric Method หรือวิธี Inductively Coupled Plasma Method ที่มีระบบขจัดกรรบกวนของคลอไรด์

๑๕.๒๗ สารประกอบดีบุกอินทรีย์ชนิดไตรบิวทิล (Tributyltin) ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Gas Chromatography with Flame Photometric Detector หรือวิธี Gas Chromatography with Mass Spectrophotometry หรือวิธี High Performance Liquid Chromatography - ICP - MS

๑๕.๒๘ กัมมันตภาพรังสีรวมเบตา (Beta) ให้ใช้วิธี Evaporation กัมมันตภาพรังสีรวมแอลฟา (Alpha) ให้ใช้วิธี Co - precipitation และโปตัสเซียม - ๔๐ ให้ใช้วิธี Gamma Spectrometry (USEPA) หรือวิธีคำนวณจากค่า Salinity

๑๕.๒๙ สารเคมีที่ใช้ในการป้องกันกำจัดศัตรูพืชและสัตว์ ให้ใช้วิธี Pre - concentration ตามด้วยวิธี Gas Chromatography with Mass Spectrophotometry หรือวิธี High Performance Liquid Chromatography (HPLC)

ข้อ ๑๖ ประกาศนี้ให้ใช้บังคับตั้งแต่วันถัดจากประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๓๑ สิงหาคม พ.ศ. ๒๕๖๔

พลเอก ประวิตร วงษ์สุวรรณ
รองนายกรัฐมนตรี ปฏิบัติหน้าที่
ประธานกรรมการสิ่งแวดล้อมแห่งชาติ



ประกาศกรมควบคุมมลพิษ
เรื่อง กำหนดหลักเกณฑ์คุณภาพตะกอนดินชายฝั่งทะเล

โดยที่เป็นการสมควรกำหนดหลักเกณฑ์คุณภาพตะกอนดินชายฝั่งทะเล เพื่อเป็นแนวทางในการเฝ้าระวังการปนเปื้อนมลสารในสิ่งแวดล้อมทางทะเล และป้องกันผลกระทบของมลสารในตะกอนดินที่มีต่อสัตว์ทะเลหน้าดิน

ดังนั้น กรมควบคุมมลพิษในฐานะหน่วยงานที่มีภารกิจเกี่ยวกับการกำกับ ดูแล อำนวยการ ประสานงาน ติดตามและประเมินผลเกี่ยวกับการฟื้นฟู คุ้มครองและรักษาคุณภาพสิ่งแวดล้อม อธิบดีกรมควบคุมมลพิษ จึงออกประกาศกำหนดหลักเกณฑ์คุณภาพตะกอนดินชายฝั่งทะเลไว้ ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

“ตะกอนดินชายฝั่งทะเล” หมายความว่า ชั้นของอนุภาคที่ไม่ละลายน้ำซึ่งสะสมอยู่บนพื้นทะเล ประกอบด้วยอนุภาคของหิน ดิน โครงสร้างของสิ่งมีชีวิต ชั้นส่วนของภูเขาไฟใต้ทะเล สารเคมีที่ตกตะกอนจากน้ำทะเล และชั้นส่วนที่มาจากภายนอกโลก โดยเคลื่อนที่จากแผ่นดินมาซึ่งมหาสมุทร และเคลื่อนที่จากทะเลกลับสู่ชายฝั่ง ซึ่งอยู่บริเวณนอกเขตปากแม่น้ำและปากทะเลสาบ และให้หมายรวมถึงบริเวณรอบเกาะที่อยู่ในทะเลด้วย ทั้งนี้ ปากแม่น้ำและปากทะเลสาบให้อธิบายตามที่กรมเจ้าท่ากำหนด

“หลักเกณฑ์คุณภาพตะกอนดินชายฝั่งทะเล” หมายความว่า หลักเกณฑ์การปนเปื้อนของมลสารในตะกอนดินชายฝั่งทะเลที่ยอมให้มีได้โดยไม่ก่อให้เกิดผลกระทบต่อสัตว์ทะเลหน้าดินและคุณภาพสิ่งแวดล้อมทางทะเล

ข้อ ๒ กำหนดหลักเกณฑ์คุณภาพตะกอนดินชายฝั่งทะเลไว้ ดังต่อไปนี้

- (๑) แคดเมียม (Cd) มีค่าไม่เกิน ๒ มิลลิกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๒) โครเมียม (Cr) มีค่าไม่เกิน ๔๒ มิลลิกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๓) ตะกั่ว (Pb) มีค่าไม่เกิน ๕๒ มิลลิกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๔) ทองแดง (Cu) มีค่าไม่เกิน ๒๕ มิลลิกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๕)ปรอท (Hg) มีค่าไม่เกิน ๐.๔ มิลลิกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๖) สังกะสี (Zn) มีค่าไม่เกิน ๑๐๒ มิลลิกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๗) สารหนู (As) มีค่าไม่เกิน ๗ มิลลิกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๘) คลอเดน (Chlordane) มีค่าไม่เกิน ๓ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง
- (๙) ดีลดีริน (Dieldrin) มีค่าไม่เกิน ๐.๘ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง

(๑๐) ดีดีที (DDT) มีค่าไม่เกิน ๑๑ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง

(๑๑) เฮปตะคลอร์ (Heptachlor) มีค่าไม่เกิน ๐.๖ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง

(๑๒) พีเอชทั้งหมด (Total PAHs : TPAHs) มีค่าไม่เกิน ๔,๐๐๐ ไมโครกรัมต่อกิโลกรัม

น้ำหนักแห้ง

(๑๓) พีเอชน้ำหนักโมเลกุลต่ำ (Low Molecular Weight PAHs : LPAHs) มีค่าไม่เกิน ๕๕๐ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง

(๑๔) พีเอชน้ำหนักโมเลกุลสูง (High Molecular Weight PAHs : HPAHs) มีค่าไม่เกิน ๑,๗๐๐ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง

(๑๕) พีซีบี (Polychlorinated biphenyls : PCBs) มีค่าไม่เกิน ๒๓ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง

(๑๖) ทีบีที (Tributyltin : TBT) มีค่าไม่เกิน ๕,๕๐๐ ไมโครกรัมต่อกิโลกรัมน้ำหนักแห้ง

ข้อ ๓ วิธีการเก็บตัวอย่างตะกอนดินชายฝั่งทะเล

ให้เก็บด้วยเครื่องมือเก็บตัวอย่างที่ทำจากวัสดุสังเคราะห์หรือโลหะปลอดสนิม และควรวิเคราะห์ตัวอย่างดินตะกอนชายฝั่งที่ผ่านการร่อนด้วยตะแกรงที่ทำจากในลอนหรือโลหะปลอดสนิมขนาดตา ๖๓ ไมครอน ซึ่งทำให้แห้งแล้วด้วยวิธี Freeze dry ทั้งนี้ วิธีการเก็บตัวอย่างและอุปกรณ์ในการเก็บตัวอย่างจะต้องเป็นไปตามที่กำหนดไว้ในเอกสารดังนี้

(๑) Manual for geochemical analyses of marine sediments and suspended particulate matter (UNEP, ๑๙๙๕)

(๒) Recommended guidelines for sampling marine sediment, water column, and tissue in Puget Sound (U.S.EPA Region ๑๐, ๑๙๙๗)

(๓) Sediment Sampling and Analysis Plan (Washington State, ๒๐๐๓)

(๔) Handbook for Sediment Quality Assessment (Simpson et al, ๒๐๐๕)

(๕) Method for collection, storage and manipulation of sediments for chemical and toxicological analyses: technical manual (U.S.EPA, ๒๐๐๑)

(๖) Sediment sampling guide and methodologies (3rd edition) (Ohio EPA, ๒๐๑๒)

(๗) วิธีการอื่นที่กรมควบคุมมลพิษเห็นชอบ

ข้อ ๔ การเตรียมตัวอย่างตะกอนดินชายฝั่งทะเลสำหรับมัลสารกลุ่มโลหะหนัก การวิเคราะห์สัดส่วนขนาดอนุภาคตะกอนดินชายฝั่งทะเล (Size fraction) ปริมาณสารอินทรีย์ในตะกอนดินชายฝั่งทะเล (Organic matter) ให้ดำเนินการตามขั้นตอนที่กำหนดใน Manual for geochemical analyses of marine sediments and suspended particulate matter (UNEP, ๑๙๙๕)

ข้อ ๕ วิธีการตรวจสอบคุณภาพตะกอนดินชายฝั่งทะเล ให้ใช้วิธี Test Methods Evaluating Solid Waste, Physical/Chemical Methods (SW - 846) ขององค์การพิทักษ์สิ่งแวดล้อมแห่งสหรัฐอเมริกา (United States Environmental Protection Agency) ดังต่อไปนี้

(๑) การตรวจสอบค่าแคดเมียม โครเมียม ตะกั่ว ทองแดง และสังกะสี ให้ใช้วิธี Acid Digestion และเลือกใช้เทคนิค Inductively Coupled Plasma - Optical Emission Spectrometry (ICP/OES) หรือ Inductively Coupled Plasma - Mass Spectrometry (ICP/MS) หรือ Flame Atomic Absorption Spectrometry (FAAS) หรือ Graphite Furnace Atomic Absorption Spectrometry (GFAAS) หรือวิธีอื่นที่กรมควบคุมมลพิษเห็นชอบ

(๒) การตรวจสอบค่าปรอท ให้ใช้วิธี Acid Digestion และเลือกใช้เทคนิค Inductively Coupled Plasma - Optical Emission Spectrometry (ICP/OES) หรือ Inductively Coupled Plasma - Mass Spectrometry (ICP/MS) หรือ Cold Vapor - Atomic Absorption Spectrometry (CVAAS) หรือ Cold Vapor - Atomic Fluorescence Spectrometry (CVAFS) หรือ Mercury in Solids and Solutions by Thermal Decomposition, Amalgamation, and Atomic Absorption Spectrophotometry หรือวิธีอื่นที่กรมควบคุมมลพิษเห็นชอบ

(๓) การตรวจสอบค่าสารหนู ให้ใช้วิธี Acid Digestion และเลือกใช้เทคนิค Inductively Coupled Plasma - Optical Emission Spectrometry (ICP/OES) หรือ Inductively Coupled Plasma - Mass Spectrometry (ICP/MS) หรือ Graphite Furnace Atomic Absorption Spectrometry (GFAAS) หรือ Hydride Generation Atomic Absorption Spectrometry (HGAAS) หรือวิธีอื่นที่กรมควบคุมมลพิษเห็นชอบ

(๔) การตรวจสอบคลอเดน ดีดีที และเฮปตะคลอร์ ให้ใช้วิธี Gas Chromatography (GC) with appropriate detector หรือวิธี Gas Chromatography - Mass Spectrometry (GC/MS) หรือวิธีอื่นที่กรมควบคุมมลพิษเห็นชอบ

(๕) การตรวจสอบสารโพลีไซคลิก อะโรมาติก ไฮโดรคาร์บอน (พีเอเอช) ประกอบด้วย พีเอชทั้งหมด (Total - PAHs) พีเอชน้ำหนักโมเลกุลต่ำ (Total - LMW PAHs) และพีเอชน้ำหนักโมเลกุลสูง (Total - HMW PAHs) ให้ใช้วิธี Gas Chromatography - Mass Spectrometry (GC/MS) หรือวิธี High Performance Liquid Chromatography - (HPLC) หรือวิธี Gas Chromatography - Fourier Transform Infrared Spectrometry (GC/FTIR) หรือวิธี Two - dimensional gas chromatography - Time - of - flight mass spectrometry (GCxGC TOFMS) หรือวิธีอื่นที่กรมควบคุมมลพิษเห็นชอบ

(๖) การตรวจสอบสารโพลีคลอรีเนตเตด - ไบฟีนิล (พีซีบี) ให้ใช้วิธี Gas Chromatography (GC/ECD, GC/ELCD) - Polychlorinated Biphenyls (PCBs) หรือวิธี Gas Chromatography - Mass Spectrometry (GC/MS) หรือวิธีอื่นที่กรมควบคุมมลพิษเห็นชอบ

(๗) การตรวจสอบสารไตรบิฟีนิน (ทีบีที) ให้ใช้วิธี Gas Chromatography - Flame Photometric Detector selective (GC/FPD) หรือวิธี Gas Chromatography - Mass Spectrometry (GC/MS) หรือวิธี High Performance Liquid Chromatography (HPLC) หรือวิธี Graphite Furnace Atomic Absorption

/Spectro...

Spectrophotometry (GFAAS) หรือวิธี Inductively Coupled Plasma - Optical Emission Spectrometry (ICP/OES) หรือวิธี Inductively Coupled Plasma - Mass Spectrometry (ICP/MS) หรือวิธีอื่นที่กรมควบคุมมลพิษเห็นชอบ

ประกาศ ณ วันที่ ๙ ตุลาคม พ.ศ. ๒๕๕๘



(นายวิจารณ์ สิมานายา)

อธิบดีกรมควบคุมมลพิษ

ภาคผนวก ฉ

เอกสารรับรองการสอบเทียบเครื่องมือ

รายการใบรับรองสอบเทียบ/ทวนสอบ เครื่องมือหลักประจำห้องปฏิบัติการวิเคราะห์สิ่งแวดล้อม

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration*	Remark
-----	----------------------	-----------	--------------	------------------	------------	-------------------	---------------------	--------------------------	--------

เครื่องมือหลักประจำห้องปฏิบัติการตรวจอากาศ

1	Analytical Balance	TSP	Mettler-Toledo	AB204-S / 1128312528	Technology Promotion Association (Thailand-Japan)	23MM331	7 Apr 23	5 Apr 24	-
2	Analytical Balance	PM2.5	Mettler-Toledo	AB204-S/FACT / 8108115858	Technology Promotion Association (Thailand-Japan)	23MM332	7 Apr 23	5 Apr 24	-
3	Gas Chromatography (GC)	Formaldehyde	Agilent Technologies	System ID:CN13113001 7890 / CN13113001	Agilent Technologies (Thailand) Co.,Ltd.	System Qualification GC-OQ Certificate of	19 Apr 23	18 Apr 24	-
4	Incubator	TBC	Memmert	IPP 260 / V615.0187	Technology Promotion Association (Thailand-Japan)	23TM378	12 Apr 23	11 Apr 24	-
5	Auto Clave	TFC	ALP	CL-40L / 807298	National Food Institute, Ministry of Industry, Thailand	2304203-001-01	10 Aug 23	9 Aug 24	-
6	Analytical Balance		OHAUS	PX623 / C236754745	DKSH (Thailand) Ltd.	C01234158	7 Dec 23	6 Dec 24	-

เครื่องมือหลักประจำห้องปฏิบัติการตรวจคุณภาพน้ำ

7	pH Meter	pH	Mettler-Toledo	Seven Easy 520 / 1230525212	National Food Institute, Ministry of Industry, Thailand	2302181-001-01	24 Mar 23	23 Mar 24	-
8	pH Meter	Conductivity	Mettler-Toledo	SevenCompact 5220/ C113432421	National Food Institute, Ministry of Industry, Thailand	2303560-001-01	26 Jun 23	25 Jun 24	-
9	Conductivity Meter		SI Analytics	Lab955 / 16300356	DKSH (Thailand) Ltd.	C24230059	16 Mar 23	15 Mar 24	-
10	Turbidity Meter	Turbidity	Oakton	T100IR / 1120501017	Technology Promotion Association (Thailand-Japan)	23CH1148	14 Sep 23	13 Sep 24	-
11	Analytical Balance	SS	Mettler-Toledo	XSR205DU / C210685394	Technology Promotion Association (Thailand-Japan)	23MM113	26 Apr 23	25 Apr 24	-
12	Hot Air Oven		Memmert	UF55 / B216.1666	National Food Institute, Ministry of Industry, Thailand	2400141-001-01	11 Oct 23	10 Oct 24	-
13	Analytical Balance		Mettler-Toledo	XSR204 / C117635043	National Food Institute, Ministry of Industry, Thailand	2302827-001-01	10 May 23	9 May 24	-
14	COD Reactor	COD	Hanna	HI839800-02 / H018500I	Hanna Instruments (Thailand) Ltd.	HIIT-2312-0342	10 Mar 23	9 Mar 24	-
15	BOD Incubator	BOD	Arco	UC4-1320 / (UAE:WAO.015/2561)	Technology Promotion Association (Thailand-Japan)	23TM449	15 Feb 23	14 Feb 24	-

รายการใบรับรองสอบเทียบ/ตรวจสอบเครื่องมือของหน่วยงานราชการ สำหรับใช้ตรวจวิเคราะห์คุณภาพสิ่งแวดล้อม

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration*	Remark
16	DO Meter		YSI	5100 / 11B101863	Harkul Science	HSU012C	1 Mar 23	29 Feb 24	-
17	Digester Unit	TKN	FOSS	2520auto / 91794469	National Food Institute, Ministry of Industry, Thailand	2302413-001-01	30 Mar 23	29 Mar 24	-
18	Distillation Unit (Kjeldahl Method)		TECATOR	FOSS KT8100/ 91889052	FOSS South East Asia	8411	29 May 23	28 May 24	
19	UV-VIS Spectrophotometer		Agilent	Cary60 G660A / MY15410009	DOE Services Co.,Ltd.	SP23-021	20 May 23	19 May 24	-
20	Fluorescence Spectrophotometer	Petroleum HC	Perkin Elmer	LS 55 / 81440	Perkin Elmer Ltd.	FLR1001/2023	21 Feb 23	20 Feb 24	-
21	Atomic Absorption Spectrophotometer (AAS)	Pb, Cd, Total Cr, Zn, Cu, Cr, Mn, Sn, Cr ⁶⁺	Agilent	System ID:G8432A AA240FS / MY13160001	Thailand Institute of Scientific and Technological Research(TISTR)	MTC, ACL No. 387/66	2 Feb 23	1 Feb 24	-
22	Inductively Coupled Plasma (ICP)		Agilent	System ID:G8015A G8015AA / MY18030001	Agilent Technologies (Thailand) Co.,Ltd.	Preventive Maintenance Checklist	13 Nov 23	12 Nov 24	-
23	Cold Vapor Atomic Fluorescence Spectrometer (CVAFS)		Analytik Jena	mercur DUC plus / K170A0153	Analytik Jena Fastest Thailand Ltd.	Maintenance Protocol	2 Feb 23	1 Feb 24	-
24	Incubator	TCB	Memmert	IPP 260 / V615.0187	Technology Promotion Association (Thailand-Japan)	23TM378	12 Apr 23	11 Apr 24	-
25	Incubator	FCB	Memmert	IPP 260 / V618.0033	Technology Promotion Association (Thailand-Japan)	23TM729	27 Apr 23	26 Apr 24	-
26	Water Bath		Memmert	WNE 14 / L416.0606	Technology Promotion Association (Thailand-Japan)	23TM193	15 Feb 23	14 Feb 24	-
27	Water Bath		Memmert	WNE 14 / L416.0612	Technology Promotion Association (Thailand-Japan)	23TM194	15 Feb 23	14 Feb 24	-
28	Auto Clave		ALP	CL-40L / 807298	National Food Institute, Ministry of Industry, Thailand	2304203-001-01	10 Aug 23	9 Aug 24	-
29	Auto Clave	TCB	ALP	CL-40L / 808763	Technology Promotion Association (Thailand-Japan)	23TM763	27 Apr 23	26 Apr 24	-
30	Analytical Balance		OHAUS	PX623 / C236754745	DKSH (Thailand) Ltd.	CO1234158	7 Dec 23	6 Dec 24	-

เครื่องมือเหล่านี้ทั้งหมดอยู่ภายใต้การตรวจคุณภาพ

Due Date of Calibration* : Based on the annual calibration plan. At least 1 time per year.

Calibration Certificate

Certificate No.: 2303074-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road,
Bangchack, Prakhonong, Bangkok 10260

Page 1 of 3

Equipment: Electronic Balance

Manufacturer: METTLER TOLEDO

Model: AB204-S/FACT

Serial No.: 1129361010

ID No.: UAE.WAS.002/2552

Order No.: 2303074

Operation No.: 2303074-001

Date of Receipt: 26 May 2023

Date of Calibration: 26 May 2023

Calibrated by Mr.Pheraphat Tuanjit
Scientist

Approved by *P. Jengcharit*
(Miss Preeyaporn Jaengkarnkit)
Vice President, Department of Laboratory Services
Responsible for the Technical Management Team

Date of Issue: 29 May 2023

The uncertainties are for a confidence probability of approximately 95%

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full, except with the prior written approval of the National Food Institute.

FCS-009 Revision: 01 Date: 20-04-65

2008 ปีที่ 36 มูลนิธิพัฒนาเทคโนโลยีอาหาร
2008 ปีที่ 36, Aun Amarn Road, Bang Yi Khan, Subdino, Bang Phai District, Bangkok 10700, Thailand
Tel: +66(0) 2422 8668 Fax: +66(0) 2422 8645

Calibration Report

Certificate No.: 2303074-001-01
Equipment: Electronic Balance
Manufacturer: METTLER TOLEDO
Model: AB204-S/FACT
Serial No.: 1129361010
ID No.: UAE.WAS.002/2552
Capacity: 220 g

Date of Calibration: 26 May 2023

Page 3 of 3

Calibration Results: (Continued)

Calibration Range: 0-200 g

Calibration Adjustment: Internal Calibration

3. Departure from Nominal Value:

Nominal Value (g)	Standard Value (g)	Average Reading (g)	Correction (g)	Uncertainty (± g)	Coverage Factor k
Unload	0.0000	0.0000	0.0000	0.000088	2.00
0.01	0.01000	0.01000	0.0000	0.000088	2.00
0.05	0.05000	0.05000	0.0000	0.000088	2.00
0.1	0.10001	0.09999	0.0001	0.000088	2.00
0.2	0.20001	0.19999	0.0001	0.000088	2.00
0.5	0.50002	0.50000	0.0000	0.000088	2.00
1	1.00000	1.00000	0.0000	0.000088	2.00
2	2.00002	2.00000	0.0000	0.000089	2.00
5	5.00002	5.00000	0.0000	0.000090	2.00
10	10.00001	9.99999	0.0001	0.000091	2.00
20	20.00003	20.00000	0.0000	0.000095	2.00
50	50.00003	49.99999	0.0001	0.00011	2.00
70	70.00006	69.99999	0.0002	0.00013	2.00
100	100.00006	99.99999	0.0002	0.00015	2.00
150	150.00009	149.99999	0.0002	0.00021	2.00
200	200.00016	199.99998	0.0004	0.00028	2.00

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

FCS-012 Revision: 01 Date: 20-04-65

2008 ปีที่ 36 มูลนิธิพัฒนาเทคโนโลยีอาหาร
2008 ปีที่ 36, Aun Amarn Road, Bang Yi Khan, Subdino, Bang Phai District, Bangkok 10700, Thailand
Tel: +66(0) 2422 8668 Fax: +66(0) 2422 8645

Calibration Report

Certificate No.: 2303074-001-01
Equipment: Electronic Balance
Manufacturer: METTLER TOLEDO
Model: AB204-S/FACT
Serial No.: 1129361010
Capacity: 220 g
Resolution: 0.0001 g
ID No.: UAE.WAS.002/2552

Page 2 of 3

Environment Condition: Ambient Temperature: 23.7 ± 0.1 °C Relative Humidity: 61 ± 2.2 %

Place of Calibration: Room 108 Balance Room, UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD.

Condition of Equipment: Good Condition

Condition of This Results of Calibration:

1. Calibration Method: NFI Method W-MA-001 In-House Method based on UKAS Lab 14 : 2019

2. Reference Standards:

Reference Standard	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Standard Weight Class E2	1mg to 200g	8505567572	TCS	M23040535	8 April 2024
Instrument	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Thermo-Hygro Meter	608-H1	NFLBTH 018/23	Quality Reborn	QR23-9491	21 February 2024

3. This certification is traceable to SI UNIT

4. This certificate was certified only for the instrument we calibrated.

5. This result of calibration was shown accurate as shown on date and place of calibration only.

Calibration Results:

1. Repeatability of Reading:

Nominal Value (g)	Standard Deviation of Reading (g)
100	0.000948
200	0.000948

2. Off-Center Error:

A mass of 100 g was placed and moved to various position on pan.

The balance reading obtained is given in the table.

<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
1	2	3
(g)	(g)	(g)
99.9995	99.9995	99.9995
99.9999	99.9999	99.9999
99.9997	99.9997	99.9997
(Maximum Difference)	(g)	(g)
0.0003		

FCS-012 Revision: 01 Date: 20-04-65

2008 ปีที่ 36 มูลนิธิพัฒนาเทคโนโลยีอาหาร
2008 ปีที่ 36, Aun Amarn Road, Bang Yi Khan, Subdino, Bang Phai District, Bangkok 10700, Thailand
Tel: +66(0) 2422 8668 Fax: +66(0) 2422 8645

Certificate of Calibration

Cert.No.: 24MM292
Page: 1 of 3

Equipment : Electronic Balance
Manufacturer : Mettler Toledo
Model : AB204-S/FACT
Serial No. : 1129361010
ID No. : UAE.WAS.002/2552
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260

Location : Balance Room (108)

Received order : 11 May 2024

Calibration Date : 11 May 2024

Ambient Temperature : 15 °C to 40 °C

Relative Humidity : 30 % to 90 %

Calibrated by : Khit Ruttanaprapachai

Approved by : *Kunchit*
Approved Signatory

() Ponpan Paipim
() Suwit Imjai
(✓) Kunchit Promprat

Issue Date : 15 May 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

2008 ปีที่ 36 มูลนิธิพัฒนาเทคโนโลยีอาหาร
2008 ปีที่ 36, Aun Amarn Road, Bang Yi Khan, Subdino, Bang Phai District, Bangkok 10700, Thailand
Tel: +66(0) 2422 8668 Fax: +66(0) 2422 8645

เอกสารไม่ควบคุม



Equipment : Electronic Balance
Condition As-Received : Used Item
Reference : 2405-0166OC-1
Procedure used :-

Cert.No.: 24MM292
Page: 2 of 3

Calibration were conducted using in-house calibration procedure CP-OB01 based on UKAS LAB 14 according to direct measurement method against standard weight.

Condition of this result of calibration

1. Reference standard instruments:-

Instruments	Model	Serial No.	ID No.	Test report No.	Due date
1) Standard Weight Set (E2)	15884	24053	70RC007	MM-0013-24	25 Jan 2026

- This certificate is valid only to the item calibrated on date and place of calibration.
- This result of calibration was made on requested at the point specified by customer.
- This certificate is not certified for any commercial transaction.
- This certificate is traceable to the International System of Unit.

Result of calibration () Without Adjustment (*) After Adjustment by Internal Calibration

Range capacity : 0 g to 220 g Resolution 0.0001 g

Before Adjustment :

Applied Weight (g)	Balance Reading (g)	Correction (g)	Measurement Uncertainty (± mg)	Coverage Factor (k)
100	100.0000	0.0000	0.19	2.03
200	200.0006	-0.0006	0.30	2

After Adjustment :


1. Determination of the standard deviation of weighing machine (n = 10)

Applied Weight (g)	Standard Deviation of Reading (g)
100	0.00007
200	0.00005



Equipment : Electronic Balance
Condition As-Received : Used Item
Reference : 2405-0166OC-1
Result of calibration

Cert.No.: 24MM292
Page: 3 of 3



2. Effect of off center loading

A mass of 100 g was placed to various position on the pan.
The weighing machine reading error obtained is given in the table

Position 1 (g)	Position 2 (g)	Position 3 (g)	Position 4 (g)	Position 5 (g)	Maximum difference between off-center and central loading (g)
-0.0004	-0.0004	-0.0003	-0.0003	-0.0004	0.0001

3. Departure from nominal value

Applied Weight (g)	Balance Reading (g)	Correction (g)	Measurement Uncertainty (± mg)	Coverage Factor (k)
Unload	0.0000	0.0000	0.15	2.13
0.01	0.0100	0.0000	0.15	2.13
0.05	0.0500	0.0000	0.15	2.13
0.1	0.1000	0.0000	0.15	2.13
0.5	0.5000	0.0000	0.15	2.13
1	1.0000	0.0000	0.15	2.13
10	10.0000	0.0000	0.15	2.11
50	49.9999	+0.0001	0.17	2.06
100	99.9999	+0.0001	0.19	2.03
150	149.9998	+0.0002	0.29	2
200	199.9990	+0.0010	0.30	2

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-000-

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



Agilent CrossLab Start Up Services Agilent 7890 Gas Chromatograph Preventive Maintenance Checklist

Agilent Preventive Maintenance provides factory recommended service for your analytical instruments to assure reliable operation and the accuracy of your results.

Delivered by highly trained and certified service engineers using genuine Agilent parts and supplies, Agilent Preventive Maintenance provides everything you need to reduce unplanned downtime and keep your systems operating at their peak. This checklist will be completed at the end of the service and provided to you as a record of the preventive maintenance activities.

Agilent 7890 GC Preventive Maintenance Checklist



Introduction

Customer Information

- Customers should provide all necessary operating supplies upon request of the engineer.
- A customer representative should be available to the engineer while performing the preventive maintenance procedures.
- Any parts, not included in the Parts Lists section of this document, are not part of the recommended Preventive Maintenance service, nor are they included in the price of this service.
- If a system requires the use of extra or special procedures and/or parts for the maintenance service, then these must be ordered separately and charged as a repair, which may incur additional costs.

Important Customer Web Links

- For more information about **Agilent Technologies services**, please visit our website using the following URL: <http://www.agilent.com/en-us/products/crosslab-instrument-services/service-repair>
- The **Agilent Community** is an excellent place to get answers, collaborate with others about applications and Agilent products, and find in-depth documents and videos relevant to Agilent technologies. Visit <https://community.agilent.com/welcome>.
- To access **Agilent University**, visit <http://www.agilent.com/crosslab/university/> to learn about training options, which include online, classroom and onsite delivery. A training specialist can work directly with you to help determine your best options.
- A useful **Agilent Resource Center** web page is available, which includes short videos on maintenance, quick lists of consumables for new instruments, and other valuable information. Check out the Resource Page here: <https://www.agilent.com/en-us/agilentresources>.
- Need technical support, FAQs, supplies? – visit our **Support Home page** <http://www.agilent.com/search/support>.
- Videos about specific preparation requirements for your instrument can be found by searching the **Agilent YouTube** channel at <https://www.youtube.com/user/agilent>.
- 7890B Manuals** are also available on Agilent.com:
 - Safety**
https://www.agilent.com/cs/library/usermanuals/public/7890B_Safety.pdf
 - Installation and First Startup**
https://www.agilent.com/cs/library/usermanuals/Public/7890B_Installation.pdf
 - Operation Manual**
https://www.agilent.com/cs/library/usermanuals/Public/7890B_Operation.pdf
 - Maintaining Your GC**
https://www.agilent.com/cs/library/usermanuals/public/G3430-90052%207890B_Maintaining%20Guide.pdf

Revision: 2.00, Issued: December 30, 2020
Agilent Document Number: D0007063
DE number: 44166.759722222
© Agilent Technologies, Inc. 2020

Page 2 of 9



เอกสารไม่ควบคุม

เอกสารไม่ควบคุม

Service Engineer's Responsibilities

- Contact the customer and ensure that all necessary supplies are available before the preventive maintenance visit.
- Only select those pages that relate to the system or module being serviced.
- Complete empty fields with the relevant information.
- Complete the relevant checkboxes in the checklist using either a "X" or tick mark "✓".
- Check "Section not applicable" check boxes to indicate services/tasks not delivered, as appropriate.
- Complete the Preventive Maintenance service in the order of the tasks listed.
- Complete the Service Review section together with the customer.
- Complete the fields for page numbers at the foot of each selected page
- Complete the total number of pages field in the Service Completion section
- **Ask the customer to sign the Service Completion section including the customer's and your signature.**

Additional Instruction Notes

- Check for any active service notes for this unit. If there are any applicable "Safety" or "Modification Recommended" Service notes, plan to implement the changes on this unit before doing any qualification service.
- Do not implement firmware updates, unless you get approval from the customer and are sure that they are compatible with the instrument control software.

Revision: 2.00, Issued: December 30, 2020
 Agile Document Number: D0007063
 DE number: 44166.759722222
 © Agilent Technologies, Inc. 2020

Page 3 of 9



เอกสารไม่ควบคุม

Preventive Maintenance Procedure

Clean and inspect GC

- ✓ Unplug power cord from the power source.
- ✓ Open GC covers and vacuum/remove any dust/debris. Pay particular attention to cooling fans.
- ✓ Inspect internal connectors for proper contact and placement.
- ✓ Reconnect Power to the GC. Power the GC on and verify the power on self-test passed.
- ✓ Verify oven motor spins freely and turns on with the oven door closed; off when the door is opened.
- ✓ Verify operation of all other fans - the inlet and EPC cooling fans.
- ✓ Verify oven intake/outlet flap assembly is operating smoothly while heating and cooling the oven

Inlet and detector consumable replacement

- ✓ For the inlets installed, perform inlet maintenance as defined in the 7890 manual - "Maintaining Your GC" - for the inlet(s) installed.
- ✓ Replace the split vent trap cartridge filter on units with these inlets: Split/Splitless Capillary (SSL), Multi-Mode Inlet (MMI), Programmed Temperature Vaporizer (PTV), Volatiles Interface (VI).
- ✓ If the inlet system is used in Split Mode with viscous samples, inspect and clean the split vent tube on the inlet and flush or replace the tubing between the inlet and the split vent trap.
- ✓ If the GC includes a Flame Ionization Detector (FID), replace the jet. If the ignitor shows any buildup of sample or corrosion, replace the ignitor. Examine the FID collector and castle assemblies for contamination - clean as necessary.

Zero Sensors and Leak test

- ✓ Zero all pressure sensors per the procedure in the 7890 "Advanced User Guide".
- ✓ Perform inlet pressure decay test(s) as defined in the 7890 "Troubleshooting Manual". If the PM is done in preparation for an Operational Qualification, then the pressure decay test defined within that protocol can be used for the PM.
- ✓ Record if test passed or failed in the results table.

Revision: 2.00, Issued: December 30, 2020
 Agile Document Number: D0007063
 DE number: 44166.759722222
 © Agilent Technologies, Inc. 2020

Page 5 of 9



เอกสารไม่ควบคุม

System Information

- ✓ Check this box if an instrument configuration report is attached instead of completing the table below.

Instrument System Name and ID	UAE_TOX.021/2556_CN13113001
Instrument System Site and Location	Room 404

List System Component Product Numbers	List the Serial Numbers of each Component
1. G3440B	CN13113001
2. G4513A	CN22285355
3. G4514A	CN13200169
4.	
5.	
6.	
7.	
8.	
9.	
10.	

Preparation

- ✓ Discuss any specific issues with the customer before starting.
- ✓ Review the instrument logbook for recorded problems and comments.
- ✓ Save instrument control settings before starting the procedure.
- ✓ Perform a general inspection of the system for cleanliness.
- ✓ Check for proper installation of parts, assemblies, sensors etc.
- ✓ Check system for required installation of components, settings as defined by current Service Notes.
- ✓ Check for required firmware updates and verify with customers if they would like them installed.
- ✓ Before starting the following procedures, record the Detector Signal Output(s) in the results table. If the GC is turned OFF or in a service mode, comparing the detector outputs before and after the service is not possible.

Revision: 2.00, Issued: December 30, 2020
 Agile Document Number: D0007063
 DE number: 44166.759722222
 © Agilent Technologies, Inc. 2020

Page 4 of 9



เอกสารไม่ควบคุม

ALS Maintenance

- ✓ **Section NOT applicable**
- ✓ Check all cabling and configuration settings between GC, tray, and injectors.
- ✓ Vacuum or remove any dust, especially around fans.
- ✓ Check operation of all fans.
- ✓ Check syringe for smooth plunger operation.
- ✓ Check for smooth operation of the needle support - clean if necessary

Restore Instrument

- ✓ Restore the normal operating conditions or customer method using the Browser interface or Data System.
- ✓ Purge the system with carrier flow for 15 minutes
- ✓ Bake out the system, then restore the normal operating conditions
- ✓ After equilibration, check and record the post PM detector signal output values. Results should be similar or lower than the detector outputs recorded prior to PM.
- ✓ Perform a chemical checkout. If this is a routine PM, inject the customer's sample using the ALS if applicable. This will act as a final checkout of both the ALS and the GC.

Note: If the PM Service is performed prior to a qualification service, then use the qualification procedure as a guide for final instrument set up and checkout.

Revision: 2.00, Issued: December 30, 2020
 Agile Document Number: D0007063
 DE number: 44166.759722222
 © Agilent Technologies, Inc. 2020

Page 6 of 9



เอกสารไม่ควบคุม

Signature Page

Service Review

- ☒ Attach available reports/printouts of all tests to this documentation.
- ☒ Record the Preventive Maintenance service activity in the customer's records/logbook.
- ☒ Update/reset instrument maintenance counters as appropriate.
- ☒ Affix the PM sticker to the system or instrument logbook based on the customer's request.
- ☒ Complete the Service Engineer Comments section if there are additional comments.
- ☒ Review with the customer this service, parts replaced, and test results obtained.
- ☒ If the instrument firmware was updated, record the details of the change in the Service Engineer's Comments box or if necessary, in the customer's IQ records.
- ☐ Supply the customer with a copy of the Smart Alerts flyer.
- ☐ Describe Smart Alerts to the customer.
- ☐ Install Smart Alerts if requested.

7890 GC Test Results Table

Detector Signal Outputs	Before PM Service	After PM Service
Front detector output		24.2
Back detector output		NA.
AUX detector output		NA.
Pressure decay test	Expected test result	Actual test result
Front inlet pressure decay test	Pass	Pass
Back inlet pressure decay test	Pass	NA.

Revision: 2.00, Issued: December 30, 2020
Agile Document Number: D0007063
DE number: 44166.759722222
© Agilent Technologies, Inc. 2020

Page 7 of 9



เอกสารไม่ควบคุม


7890 Parts List Table

The following kits are recommended for capillary and purged packed inlets. If this is a general PM and the customer has a preferred set of consumables, you may use the customer's consumables.

Part description	Part number	Product or model# where used	Quantity consumed
SSL Capillary Inlet PM kit, Splitless	5188-6497	7890A/B	2
SSL Capillary Inlet PM kit, split	5188-6496	7890A/B	
SSL Capillary Ultra Inert Inlet Gold Seal with Washer	5190-6144	7890A/B	
SSL Capillary Ultra Inert Inlet Splitless Liner - Single taper with Glass Wool	5190-2293	7890A/B	
SSL Capillary Ultra Inert Inlet Low Pressure Drop Split Liner - with Glass Wool	5190-2295	7890A/B	
PP Inlet PM kit	5188-6498	7890A/B	
Split vent trap PM kit, single cartridge (for MMI, PTV & VI)	5188-6495	7890A/B	
MMI Cleaning Kit	G3510-60820	7890A/B	
PTV Septumless Head Rebuild Kit	5182-9747	7890A/B	
PTV Septumless Head Teflon Guide	5182-9748	7890A/B	
Ignitor (glow plug) assembly with O-ring	19231-60680	7890A/B	
FID Collector Rebuild/Cleaning Kit	G1531-67000	7890A/B	
Standard .011-inch FID Jet for capillary FID base	G1531-80560	7890A/B	1
High Temperature .018-inch FID Jet for capillary FID base	G1531-80620	7890A/B	
Standard .018-inch FID Jet for packed column with packed FID base	18710-20119	7890A/B	
Standard .011-inch FID Jet for capillary column with packed/adaptable FID base	19244-80560	7890A/B	
High Temperature .018-inch FID Jet for capillary column with packed/adaptable FID base	19244-80620	7890A/B	
NPD Jet, universal fit, .011-inch ID	G1534-80580	7890A/B	
NPD Jet, universal fit, .011-inch ID Extended tip	G1534-80590	7890A/B	
SSL Capillary Ultra Inert Inlet Gold Seal with Washer	5190-6144	7890A/B	
SSL Capillary Ultra Inert Inlet Splitless Liner - Single taper with Glass Wool	5190-2293	7890A/B	
**FID Collector Replacement Kit, if needed	G1531-67001	7890A/B	

Revision: 2.00, Issued: December 30, 2020
Agile Document Number: D0007063
DE number: 44166.759722222
© Agilent Technologies, Inc. 2020

Page 8 of 9



เอกสารไม่ควบคุม

Service Engineer Comments

If there are any specific points you wish to note as part of performing the service or other items of interest for the customer, please write include them in this box.

Service Completion

Service request number 8006748423 Date service completed 17 April 2024
Agilent signature Phuwana Customer signature
Total number of pages in this document 9

Revision: 2.00, Issued: December 30, 2020
Agile Document Number: D0007063
DE number: 44166.759722222
© Agilent Technologies, Inc. 2020

Page 9 of 9



เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



Certificate of Calibration

Cert. No.: 24TM648
Page : 1 of 3

Equipment : Incubator
Manufacturer : Memmert
Model : IPP 260
Serial No. : V615.0187
ID No. : UAE.MIC.003/2559
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : Microbiology Laboratory
Received Order : 01 April 2024
Calibration Date : 01 April 2024
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %

Calibrated by : Man Pattanasongpaiboon

Approved by :

() Ponpan Paipim
(✓) Suwit Imjai
() Kunchit Promprat

Issue Date : 7 April 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3: Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2404-0003OC-1
Procedure Used :-

Cert. No.: 24TM648
Page : 2 of 3

Calibration were conducted using calibration procedure CP-OT02 based on TLAS G-20 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).
The temperature scale was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49023932	23LM122	TPA	26 Jul 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certification is traceable to the International System of Unit.


Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Close

Environment during calibration		
	Beginning	Finished
Temp. (°C)	24	24
REL.Humid. (%)	54	57
AC Supply (Volt)	221	223



Probe Installation Details :

a = 5.0 cm
b = 5.0 cm
c = 5.0 cm

Dimension of Chamber :

D = 0.50 m
W = 0.64 m
H = 0.80 m
Capacity = 0.26 m³

Position :	Ref. Std. ID No.:
1	19-16RTD-01
2	19-16RTD-02
3	19-16RTD-03
4	19-16RTD-04
5	19-16RTD-05
6	19-16RTD-06
7	21-16RTD-07
8	19-16RTD-08
9 (ref.)	19-16RTD-09

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2404-0003OC-1
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Cert. No.: 24TM648
Page : 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Coverage Factor
35.0	35.0	35.0	0.028	0.13	0.24	2

Calibration Point (°C)	Measured Temperature (°C)									Uncertainty (± °C)
	1	2	3	4	5	6	7	8	9 (ref.)	
35.0	34.908	35.004	34.989	35.099	35.089	35.095	34.921	34.936	35.002	0.30

Average* : The average of 30 values in each position.

Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.

Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.

UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม



มูลนิธิสถาบันพัฒนาอุตสาหกรรมอาหาร
Foundation for Industrial Development National Food Institute
Food Industrial Laboratory Service Center



Calibration Certificate

Certificate No.: 2304203-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road,
Bangchack, Phrakhanong, Bangkok 10260

Page 1 of 3

Equipment: Autoclave
Manufacturer: ALP
Model: CL-40L
Serial No.: 807298
ID No.: UAE.MIC.019/2560
Order No.: 2304203
Operation No.: 2304203-001
Date of Receipt: 10 August 2023
Date of Calibration: 10 August 2023

Calibrated by Mr.Worapob Sooktong Scientist
Approved by (Mr.Pheraphat Tuanjit)
Manager, Division of Calibration Laboratory
Responsible for the Technical Management Team
Date of Issue: 15 August 2023

The uncertainties are for a confidence probability of approximately 95 %.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-C-009 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม

Calibration Report

Certificate No.: 2304203-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 807298
Resolution: 1 °C ID No.: UAE.MIC.019/2560
Manufacturer: ALP
Date of Calibration: 10 August 2023 Page 2 of 3

Location: 301, UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Environment Condition: Ambient Temperature (28 ± 1) °C
Relative Humidity (65 ± 2) %
Line Voltage (225 ± 1) Volt

Condition of this results of Calibration:

- This instrument was calibrated by insert 3 standard temperature recorder with RTD into its autoclave and calibration according to W-TE-018 based on BS 2646-1(2021) : Autoclaves for sterilization in laboratories Design, construction, safety and performance Specification.
- The temperature scale used was based on ITS - 90.
- All data show below were final values and the initial data may be obtained upon request.

2. Reference Standard Instrument :

Instrument	Model	Serial No.	Certificate No.	Due Date	Through
Digital Thermometer with RTD (Data Logger)	HiTemp140-2	S25601	NC-22-11-22-175	9-Nov-23	MADGETECH INC.
	HiTemp140-2	S25602	NC-22-11-22-175	9-Nov-23	MADGETECH INC.
	HiTemp140-2	R54918	TE 560383-01	8-Apr-24	NATIONAL FOOD INSTITUTE

- This certificate is traceable to International System of Units (SI Units).
- This certificate was certified only for the instrument we calibrated.
- This result of calibration was found accurate as shown on date and place of calibration only.
- This standard does not apply to sterilizers or disinfectors used for medical, dental, pharmaceutical.
- Condition of Calibrated item : Good
- UUC Description : Setting program function sterilization : STERILIZE/NORMAL
Time of sterilization 15 Minute At 121 °C
- Result of Calibration : ☒ Without adjustment
☐ After adjustment

F-CS-012 Revision: 01 Date: 20-04-65

2008 ใบอนุญาตเลขที่ 36 ม.ป.ช.เลขที่ 10700 กรุงเทพมหานคร 10700
2008 Sol. 36, Aun Amun Road, Bang Yi Khan, Suburban, Bang Phli District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8668 Fax : +66(0) 2422 8545




Calibration Report

Certificate No.: 2304203-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 807298
Resolution: 1 °C ID No.: UAE.MIC.019/2560
Manufacturer: ALP
Date of Calibration: 10 August 2023 Page 3 of 3

Calibration point: 121 °C

Calibration result:

Calibration Condition	Temperature (°C)	Relative Humidity (%)	Line Voltage (Volt)
Min	27.0	63.5	223.3
Max	28.3	67.3	225.9



SENSOR 1: Attached to the load temperature probe, within 50 mm.
SENSOR 2: In the upper half of the chamber.
SENSOR 3: In the chamber area, within 100 mm.

Table1 : Reporting of Temperature

Calibration Point (°C)	Measured Temperature (°C) @ Sensor No. (Sensor No.2 is REF)			Uncertainty ± (°C)
	Std.# 1	Std.# 2 (Ref)	Std.# 3	
121	121.68	121.70	121.66	0.66

Table 2 : Reporting of Characterization Result

UUC* Setting (°C)	UUC* Reading				Stability ± (°C)	Uniformity (°C)	Overall Variation (°C)
	Min (°C)	Max (°C)	Average (°C)	MPa			
121	121	121	121	0.10	0.11	0.12	0.23

Note

- The quoted uncertainty include " Stability " and " Loading effect (20% of Uniformity) "
- UUC* = Unit Under Calibration
- Stability = One-half of the greatest maximum difference of measured temperatures at any one sensors, for at least half an hour after reaching steady state.
- Uniformity = The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time.
- Overall Variation = The difference of the maximum and minimum measured temperatures throughout observation time.
- The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor k= 2, providing a level of confidence of approximately 95 %.

----- End -----

F-CS-012 Revision: 01 Date: 20-04-65

2008 ใบอนุญาตเลขที่ 36 ม.ป.ช.เลขที่ 10700 กรุงเทพมหานคร 10700
2008 Sol. 36, Aun Amun Road, Bang Yi Khan, Suburban, Bang Phli District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8668 Fax : +66(0) 2422 8545

2008 ใบอนุญาตเลขที่ 36 ม.ป.ช.เลขที่ 10700 กรุงเทพมหานคร 10700
2008 Sol. 36, Aun Amun Road, Bang Yi Khan, Suburban, Bang Phli District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8668 Fax : +66(0) 2422 8545



Calibration Certificate

Certificate No.: 2402419-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road, Bangchack, Prakhonong, Bangkok 10260
Page 1 of 3

Equipment: Electronic Balance

Manufacturer: OHAUS

Model: PX623

Serial No.: C236754745

ID No.: UAE.MIC.055/2565

Order No.: 2402419

Operation No.: 2402419-001

Date of Receipt: 19 April 2024

Date of Calibration: 19 April 2024

Calibrated by Mr.Pheraphat Tuanjit
Scientist

Approved by
(Miss Preeyaporn Jaengkarnkit)
Vice President, Department of Laboratory Services
Responsible for the Technical Management Team

Date of Issue: 23 April 2024

The uncertainties are for a confidence probability of approximately 95%

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full, except with the prior written approval of the National Food Institute.

F-CS-009 Revision: 01 Date: 20-04-65

2008 ใบอนุญาตเลขที่ 36 ม.ป.ช.เลขที่ 10700 กรุงเทพมหานคร 10700
2008 Sol. 36, Aun Amun Road, Bang Yi Khan, Suburban, Bang Phli District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8668 Fax : +66(0) 2422 8545



Calibration Report

Certificate No.: 2402419-001-01
Equipment: Electronic Balance
Manufacturer: OHAUS
Model: PX623
Serial No.: C236754745
Capacity: 620 g
Date of Calibration: 19 April 2024 Page 2 of 3

Environment Condition: Ambient Temperature: 26.0 ± 0.3 °C Relative Humidity: 57 ± 8.4 %

Place of Calibration: Room 301, UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.

Condition of Equipment: Good Condition

Condition of This Results of Calibration:

- Calibration Method: NFI Method W-MA-001 In-House Method based on UKAS Lab 14 : 2019
- Reference Standards:

Reference Standard	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Standard Weight Class E2	1-500g	15882	TCS	M23111825	28 November 2024
Instrument	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Therm-Hygro Meter	608-H1	NFI.BTH 019/23	Quality Reborn	QR24-0492	4 March 2025

- This certification is traceable to SI UNIT
- This certificate was certified only for the instrument we calibrated.
- This result of calibration was found accurate as shown on date and place of calibration only.


Calibration Results:

1. Repeatability of Reading:

Nominal Value (g)	Standard Deviation of Reading (g)
300	0.00067
600	0.0010

2. Off-Center Error:

A mass of 200 g was placed and moved to various position on pan.
The balance reading obtained is given in the table.



1 (g)	2 (g)	3 (g)	4 (g)	5 (g)	6 (g)	(Maximum Difference) (g)
200.000	200.002	200.001	199.999	200.000	200.000	0.002

F-CS-012 Revision: 01 Date: 20-04-65

2008 ใบอนุญาตเลขที่ 36 ม.ป.ช.เลขที่ 10700 กรุงเทพมหานคร 10700
2008 Sol. 36, Aun Amun Road, Bang Yi Khan, Suburban, Bang Phli District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8668 Fax : +66(0) 2422 8545



Calibration Report

Certificate No.: 2402419-001-01
Equipment: Electronic Balance
Model: FX623
Serial No.: C236754745
Capacity: 620 g
Manufacturer: OHAUS
Resolution: 0.001 g
ID No.: UAE.MIC.055/2565

Date of Calibration: 19 April 2024 Page 3 of 3

Calibration Results: (Continued)
Calibration Range: 0-600 g
Calibration Adjustment: Internal Calibration
3. Departure from Nominal Value:

Nominal Value (g)	Standard Value (g)	Average Reading (g)	Correction (g)	Uncertainty (g)	Coverage Factor k
Unread	0.0000	0.000	0.000	0.00093	2.00
1	1.0000	1.000	0.000	0.00093	2.00
5	5.0000	5.000	0.000	0.00093	2.00
10	10.0000	10.000	0.000	0.00093	2.00
20	20.0000	20.000	0.000	0.00093	2.00
50	50.0000	50.001	-0.001	0.00093	2.00
100	100.0000	100.001	-0.001	0.00094	2.00
200	200.0000	200.001	-0.001	0.0011	2.00
300	300.0000	300.003	-0.003	0.0011	2.00
400	400.0000	400.003	-0.003	0.0012	2.00
500	499.9999	500.003	-0.003	0.0013	2.00
600	599.9999	600.002	-0.002	0.0014	2.00

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95%.

----- End -----

F-CS-012 Revision: 01 Date: 20-04-65

2008 ถนนสุขุมวิท 41 แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10700
2008 Soi 41, Asoh Anom Road, Bang Yikhen Subdistrict, Bang Phat District, Bangkok 10700, Thailand
Tel: +66(0) 2422 6568 Fax: +66(0) 2422 6545

เอกสารไม่ควบคุม
nfi.com



Certificate of Calibration

Equipment: pH METER
Model: SevenEasy
Serial No. (or ID.): 1230525212 (UAE.WAS.003/2553) Job No.: WO-00024208
Manufacturer: METTLER TOLEDO Page: 1 of 3
Electrode Serial No.: 1156883 Model: InLab Solids Brand: METTLER TOLEDO
Condition: In Condition

Customer: United Analyst and Engineering Consultant Company Limited
3 Soi Udumsuk 41 Sukhumvit Road,
Bangcack, Prakanong, Bangkok 10260 Thailand

Environment Condition: Temperature 23 °C ± 2 °C
Humidity 50 %RH ± 15 %RH

Calibration Place: Environment Laboratory, DKSH Technology Limited.
2533 Sukhumvit Road, Bangchak,
Phrakhanong, Bangkok 10260 Thailand

Calibration By: Miss.Orawan Khlaiphloi
Calibration Date: 9 April 2024

The Method used: In house method, CAL-WI-58, base on ASTM E 70-07

Traceability: This certificate is traceable to SI Units, Sample Test is assured through primary measurement method Harned cell, through CPChem Ltd. (ISO/IEC 17034) Certificate No. 938377, 931985, 931984 And pH Scale traceable to the SI Units maintained by National Institute of Metrology (NIMT), Thailand through Industrial Foundation Electrical and Electronics Institute Certificate No. CA20230350EA

Orawan
(Miss Orawan Khlaiphloi)
Person in charge

Mr. Nitinun Srichawan
(Mr. Nitinun Srichawan)
Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor ($k=2$) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

Equipment: Electronic Balance					
Model: FX623					
ID No: UAE.MIC.055/2565					
Nominal Value (g)	Standard Value (g)	Average Reading (g)	Error (g)	Correction (g)	Uncertainty (U) (g)
0	0.0000	0.000	0.000	0.000	0.00093
1	1.0000	1.000	0.000	0.000	0.00093
5	5.0000	5.000	0.000	0.000	0.00093
10	10.0000	10.000	0.000	0.000	0.00093
20	20.0000	20.000	0.000	0.000	0.00093
50	50.0000	50.001	0.001	-0.001	0.00093
100	100.0000	100.001	0.001	-0.001	0.00094
200	200.0000	200.001	0.001	-0.001	0.00110
300	300.0000	300.003	0.003	-0.003	0.0011
400	400.0000	400.003	0.003	-0.003	0.0012
500	499.9999	500.003	0.003	-0.003	0.0013
600	599.9999	600.002	0.002	-0.002	0.0014
U = U + Error					
Total Error (g)					
Judgement					
(Pass / Fail)					
(Total Error < Judgement)					

Calibration Results:

pH Scale

Input	pH Meter Reading				Uncertainty of Measurement (mV)	Coverage Factor (k)
	(mV)	(mV)	Error (mV)	(pH)		
414.12	414		-0.12	0.00	0.58	2.00
354.96	355		0.04	1.00	0.58	2.00
295.8	296		0.20	2.00	0.58	2.00
236.64	237		0.36	3.00	0.58	2.00
177.48	178		0.52	4.00	0.58	2.00
118.32	118		-0.32	5.00	0.58	2.00
59.16	59		-0.16	6.00	0.58	2.00
0	0		0.00	7.00	0.58	2.00
-59.16	-59		0.16	8.00	0.58	2.00
-118.32	-118		0.32	9.00	0.58	2.00
-177.48	-177		0.48	10.00	0.58	2.00
-236.64	-236		0.64	11.00	0.58	2.00
-295.8	-296		-0.20	12.00	0.58	2.00
-354.96	-355		-0.04	13.00	0.58	2.00
-414.12	-414		0.12	14.00	0.58	2.00

Practical slope and zero point*

The three-point calibration using three standard buffer solutions; pH 4.008 , pH 6.985 and pH 9.997
-During calibration, display of pH meter reading; pH 4.00 , pH 7.00 and pH 10.01
The practical slope of the pH electrode; 57.01 (mV/pH), 96.37%
The zero point of the pH electrode; 6.88 (pH)

Sample Test Results

Standard Buffer Solution (pH)	Unit Under Calibration (pH)	Difference (pH)	Uncertainty of Measurement (pH)	Coverage Factor (k)
4.008	3.99	-0.018	0.0070	2.00
6.985	7.00	0.015	0.0091	2.00
9.997	10.02	0.023	0.0074	2.00

* Calibration Marked * Not TISI Accredited * in this Certificate have been included for completeness.

The End of Certificate

บริษัท ดีเคเอส อีเซีย จำกัด
DKSH Technology Limited
2533 สุขุมวิท 41 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
Phone: +66 2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand

Delivering Growth - in Asia and Beyond.

เอกสารไม่ควบคุม

CAL-FM-C07-14; 9 Apr 2024



Certificate of Calibration

Equipment: Digital Thermometer with Probe
Model: SevenEasy pH
Serial No.: 1230525212
Manufacturer: METTLER TOLEDO
ID No.: UAE.WAS.003/2553
Certificate No.: C15240373
Issued Date: 09 April 2024
Job No.: WO-00024208
Page: 1 of 2
Condition: In Condition

Customer: United Analyst and Engineering Consultant Company Limited
3 Sol Udomsuk 41 Sukhumvit Road,
Bangkok, Prakanong, Bangkok 10260 Thailand

Environment Condition: Temperature: 22 °C ± 3 °C
Humidity: 50 %RH ± 20 %RH
Voltage: 220 VAC ± 10 %

Calibration Place: Thermo-Hygro Laboratory, DKSH Technology Limited,
2533 Sukhumvit Road, Bangkok,
Phrakhanong, Bangkok 10260 Thailand

Calibration By: Mr. Nateekarn Mitjit
Calibration Date: 09 April 2024
The Method used: In house method, CAL-WI-19, by comparison with standard thermometer
Traceability: This certificate is traceable to the International System of Unit maintained by Quality Reborn Co.,Ltd. (QR) Certificate No. QR23-1073

(Mr. Nateekarn Mitjit)
Person in charge

(Mr. Pramote Ramrong)
Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

บริษัท ดีเคเอส อีเซีย จำกัด
DKSH Technology Limited
2533 สุขุมวิท 41 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
Phone: +66 2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand

Delivering Growth - in Asia and Beyond.

เอกสารไม่ควบคุม

CAL-FM-C15-14; 06 Dec 2022

Certificate No.: C15240373

Page: 2 of 2

Reference standard equipment:

Equipment	Certificate no	Cal. date	Next Cal. date
Digital Thermometer with Probe	QR23-1073	2 May 23	2 May 24

Calibration Results:

Without Adjustment

Sensor Type: RTD

Channel: -

Diameter (mm) 4

Length (mm): 135

Immersion (mm): 110

Calibrate Point (°C)	STD. Reading (°C)	UUC. Reading (°C)	Correction of UUC (°C)	Uncertainty (± °C)
15.0	15.010	15.1	-0.090	0.076
25.0	25.006	25.1	-0.094	0.076
35.0	35.004	35.0	0.004	0.076

The End of Certificate


บริษัท ดีเคเอส อีเซีย จำกัด
DKSH Technology Limited
2533 สุขุมวิท 41 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
Phone: +66 2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand

Delivering Growth - in Asia and Beyond.

เอกสารไม่ควบคุม

CAL-FM-C15-14; 06 Dec 2022

C15240373
Without Adjustment

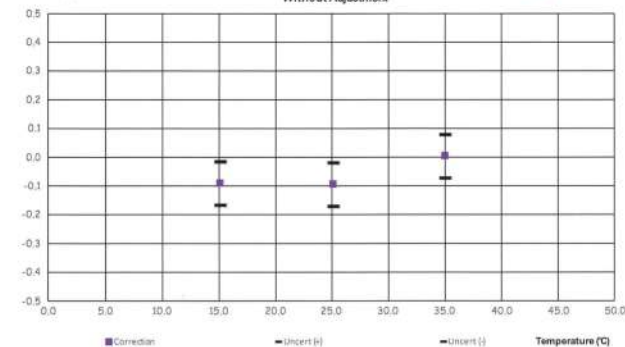

Delivering Growth - in Asia and Beyond.

เอกสารไม่ควบคุม

Calibration Certificate

Certificate No.: 2303560-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomek 41, Sukhumvit Road,
Bangchack, Prakhonong, Bangkok 10260

Page 1 of 5

Equipment: pH Meter
Manufacturer: Mettler Toledo
Model: Seven Compact S220
Serial No.: C113432421
ID No.: UAE.WAT.009/2564
Order No.: 2303560
Operation No.: 2303560-001
Date of Receipt: 23 June 2023
Date of Calibration: 26 June 2023

Calibrated by Mr. Worapob Sooktong
Scientist
Approved by *P. Jenghantit*
(Mr. Pheraphat Tuanjit) (for)
Manager, Division of Calibration Laboratory
Date of Issue: 27 June 2023
Responsible for the Technical Management Team

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-CS-009 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



nfi.nfi

Calibration Report

Certificate No.: 2303560-001-01
Equipment: pH Meter
Resolution: 0.01 pH : 1 mV
Manufacturer: Mettler Toledo
Model: Seven Compact S220
Serial No.: C113432421
Type: Bench top
ID No.: UAE.WAT.009/2564

Page 2 of 5

Date of Calibration: 26 June 2023
Location: Chemical Calibration Laboratory, National Food Institute
Environment Condition: Ambient Temperature: (24.3 ± 1.5) °C
Condition of Equipment: Good Condition
Relative Humidity: (49 ± 3) %

Condition of this Results of Calibration

1. Calibration Method: In house method: W-CC-002 based on direct measurement by using standard voltage calibrator and certified reference material (CRM)

2. Reference Standards / Certified Reference Material

Instruments	Serial / ID No.	Manufacturer	Certificate No.	Due Date
2.1 DC Voltage Calibrator	2709007	Fuke	23E2003	14 June 2024
2.2 Digital Thermometer	2709007	Fuke	CC-650557-01	30 October 2023
2.3 Thermo-Hygro Meter	NFI.BTH003/17	PCWPE	TE 650555-01	21 September 2023
Certified Reference Material	Lot. No.	Manufacturer	Ref. N	Expiry Date
2.4 pH buffer 4.008 (Primary pH buffer Solution)	873608	CPAchem	PH216.L5	16 February 2025
2.5 pH buffer 7.00 (Standard pH buffer Solution)	873612	CPAchem	PH107.L5	16 February 2024
2.6 pH buffer 10.01 (Primary pH buffer Solution)	873611	CPAchem	PH220.L5	16 February 2024
2.7 pH buffer 6.865 (Primary pH buffer Solution)	873609	CPAchem	PH217.L5	16 February 2025

3. This certification is traceable to The International System of Unit (SI Unit)

- 3.1 Instruments No.2.1 through NSC-TIS-TIS 17025 Laboratory Accreditation of Calibration No.0068
- 3.2 Instruments No.2.2 through NSC-TIS-TIS 17025 Laboratory Accreditation of Calibration No.0061
- 3.3 Instruments No.2.3 through NSC-TIS-TIS 17025 Laboratory Accreditation of Calibration No.0061
- 3.4 Certified Reference Material No. 2.4 to 2.6 traceable to Primary measurement method- Harned cell using calibrated thermometer, barometer, and nanovoltmeter. The Standard Solution preparation and certified by CPAchem Ltd is accredited to ISO 17034 and ISO/IEC 17025
- 3.5 Certified Reference Material No.2.7 traceable to BM RefN Hi-13 LotN 25.05.2022; BM RefN Hi-16 LotN 02.06.2022; BM RefN Hi-13 LotN 25.05.2022; BM RefN Hi-16 LotN 02.06.2022; The Standard Solution preparation and certified by CPAchem Ltd is accredited to ISO 17034 and ISO/IEC 17025

4. This certificate was certified only for the instrument we calibrated.

5. This result of calibration was found accurate as shown on date and place of calibration only.

P. Jenghantit
27 June 2023

F-CS-012 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



nfi.nfi

Calibration Report

Certificate No.: 2303560-001-01
Equipment: pH Meter
Resolution: 0.01 pH : 1 mV
Manufacturer: Mettler Toledo
Model: Seven Compact S220
Serial No.: C113432421
Type: Bench top
ID No.: UAE.WAT.009/2564

Date of Calibration: 26 June 2023
Calibration Results: (Manual Temperature Compensation at 25 °C)
Page 3 of 5

1. Calibration of pH Meter

(Manual Temperature Compensation at 25 °C)

Nominal pH	DC Voltage Standard (mV)	Average Indicator Reading		Uncertainty (± mV)	Coverage Factor (k)
		mV	pH		
0	414.121	414	0.00	0.58	2.00
2	295.814	295	2.00	0.58	2.00
4	177.464	177	4.00	0.58	2.00
6	59.160	59	6.00	0.58	2.00
7	0.001	0	7.00	0.58	2.00
8	-59.159	-59	8.00	0.58	2.00
10	-177.461	-177	10.00	0.58	2.00
12	-295.811	-296	12.00	0.58	2.00
14	-414.118	-414	14.00	0.58	2.00

2. Calibration of pH Meter with Electrode (Manual Temperature Compensation at 25 °C)

Equipment: pH Electrode
Type: Combined Electrode
Manufacturer: Mettler Toledo
Model: InLab Expert Pro-ISM
Serial No.: 3114136
ID No.: N/A

Performance of Electrode system (Three-Point Calibration at pH 4, pH 7 and pH 10)

Certified Value (25 °C (pH))	Average Indicator Reading		Relative Slope (%)	Uncertainty (± pH)	Coverage Factor (k)
	pH	mV			
4.008	4.01	177	-	0.0071	2.00
6.865	6.90	9	98.26	0.0074	2.00
10.01	10.01	-168	96.20	0.0065	2.00
6.988	7.02	3	-	0.0093	2.00

P. Jenghantit
27 June 2023

F-CS-012 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



nfi.nfi

Calibration Report

Certificate No.: 2303560-001-01
Equipment: Digital Thermometer with RTD (pH Meter)
Resolution: 0.1 °C
Model: Seven Compact S220
Serial No.: C113432421
ID No.: UAE.WAT.009/2564
Manufacturer: Mettler Toledo

Date of Calibration: 26 June 2023
Page 4 of 5

Location: Chemical Calibration Laboratory, National Food Institute
Environment Condition: Ambient Temperature (24.4 ± 1.0) °C
Relative Humidity (54 ± 2) %

Condition of this results of Calibration:

- 1. Calibration Method: - In house method: W-TE-025 by comparison with standard thermometer.
- The Calibration is determined by comparing with a known temperature from a standard resistance thermometer.
- The temperature scale in use at this laboratory is the International Temperature scale of 1990 (ITS-90).

2. Reference Standard Instrument:

Instrument	Model	Serial No.	Certificate No.	Due Date	Through
HANDHELD THERMOMETER	1523	2933087	PSLT 128265	03-Nov-23	TISTR
Platinum Resistance Thermometer (PRT)	5627A	923972			

Support Equipment: - Low Temperature Bath (ISOCAL-6) Model: Europe-6 Plus Basic, S/N: 3415922

3. This certificate is traceable to International System of Units (SI Units).

4. This certificate was certified only for the instrument we calibrated.

5. This result of calibration was found accurate as shown on date and place of calibration only.

6. Condition of Calibrated item: Good

7. Result of Calibration: ☒ Without adjustment ☐ After adjustment

P. Jenghantit
27 June 2023

F-CS-012 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



nfi.nfi

Calibration Report

Certificate No.: 2303560-001-01
Equipment: Digital Thermometer with RTD (pH Meter)
Resolution: 0.1 °C Model: Seven Compact S220
Serial No.: C113432421 ID No.: UAE.WAT.009/2564
Manufacturer: Mettler Toledo
Date of Calibration: 26 June 2023 Page 5 of 5

Calibration point: 15.0, 25.0 and 35.0 °C
Calibration result:

The probe was immersed in liquid bath or dry bath to a minimum depth of 100 mm.
Description of probe, model: HI11310 S/N: 078743
Dimension of probe: Diameter 12 mm, Length 175 mm.
Sheath material: Plastic

UUC* Reading (°C)	Standard Temperature (°C)	Correction Value (°C)	Uncertainty ± (°C)
15.0	15.003	0.0	0.099
24.9	25.005	0.1	0.099
34.9	35.005	0.1	0.099

Note: - UUC*: Unit Under Calibration

The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor k=2, providing a level of confidence of approximately 95%.

----- End -----

F-CS-012 Revision: 01 Date: 20-04-65

P. Panyachit
27 June 2023

เอกสารไม่ควบคุม



Certificate of Calibration
Equipment: CONDUCTIVITY METER
Model: Lab 955
Serial No. (or ID.): 16300356
Manufacturer: SI Analytics
Electrode Serial No. 16070067
Condition: In Condition
Certificate No.: C24230059
Issued Date: 16 March 2023
Job No.: KSPR2304472
Page: 1 of 2
Model: LF413T Brand: SI Analytics

Customer: United Analyst and Engineering Consultant Company Limited
3 Soi Udomsuk 41 Sukhumvit Road,
Bangkok, Prakanong, Bangkok 10260 Thailand

Environment Condition: Temperature 23 °C ± 2 °C
Humidity 50 %RH ± 15 %RH

Calibration Place: Environment Laboratory, DKSH Technology Limited,
2533 Sukhumvit Road, Bangkok,
Phrakhanong, Bangkok 10260 Thailand

Calibration By: Mr. Atachai Ngamchanat
Calibration Date: 16 March 2023
The Method used: In house method, CAL-WI-49, base on ASTM D 1125-14 and D 5391-14
Traceability: This certificate is traceable to the SI Units maintained by CRM of NIST(SRM) through CPA chem Co., Ltd. (ISO/IEC 17034) Certificate No. 838312, 838313, 838316

(Mr. Atachai Ngamchanat)

Person in charge

(Mr. Nitinun Srihawan)

Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.
บริษัท ดีเคเอส อีเซีย จำกัด
DKSH Technology Limited
2533 สุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
2533 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand
เอกสารไม่ควบคุม

Delivering Growth - in Asia and Beyond.

CAL-FM-C24-09: 12 Sep 2022

Certificate No.: C24230059 Page: 2 of 2

Calibration Results:

Before Adjustment

Standard Conductivity Solution	Unit Under Calibration Reading	Correction	Coverage Factor (k)	Uncertainty (±)
25.000 µS/cm	24.5 µS/cm	0.500 µS/cm	2.00	0.21 µS/cm
1413.0 µS/cm	1403 µS/cm	10.0 µS/cm	2.00	9.0 µS/cm
111.3 mS/cm	108.5 mS/cm	2.80 mS/cm	2.00	0.67 mS/cm

After Adjustment; at 1413 µS/cm

Standard Conductivity Solution	Unit Under Calibration Reading	Correction	Coverage Factor (k)	Uncertainty (±)
25.000 µS/cm	24.8 µS/cm	0.200 µS/cm	2.00	0.21 µS/cm
1413.0 µS/cm	1413 µS/cm	0.0 µS/cm	2.00	9.0 µS/cm
111.3 mS/cm	108.8 mS/cm	2.50 mS/cm	2.00	0.67 mS/cm

The End of Certificate

ใบตรวจสอบสภาพเครื่องวัดสิ่งแวดล้อม

ชนิดเครื่องมือ: CONDUCTIVITY METER รุ่น: Lab 955 เลขที่ใบงาน: KSPR2304472

ตรวจสอบ (รับ)	ตรวจสอบ (ส่ง)	หมายเหตุ
16 Mar 2023	16 Mar 2023	
ปกติ	ปกติ	
ไม่ปกติ	ไม่ปกติ	
General		
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	1. ความสมบูรณ์เครื่อง
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2. ความสะอาด (ช่องใส่ตัวอย่าง, ภายใน-นอกเครื่อง)
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3. สวิตช์ เปิด - ปิด เครื่อง (On-Off Switch)
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	4. ปุ่มกด (Keypad)
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	5. หน้าจอ (Display, Screen Contrast)
Spectrophotometer		
<input type="checkbox"/>	<input type="checkbox"/>	6. แรงดันไฟฟ้า (Battery Backup) >= 2.5 VDC
<input type="checkbox"/>	<input type="checkbox"/>	7. ตัวหมุนเลือกความยาวคลื่น (Wavelength Control)
<input type="checkbox"/>	<input type="checkbox"/>	8. ความยาวคลื่น (Wavelength Check)
<input type="checkbox"/>	<input type="checkbox"/>	9. แหล่งกำเนิดแสง (UV < 3,000 hour)
<input type="checkbox"/>	<input type="checkbox"/>	10. แหล่งกำเนิดแสง (Visible < 5,000 hour)
<input type="checkbox"/>	<input type="checkbox"/>	11. ช่องวัดหลายตัวอย่าง (Carousel Module)
pH Meter and Conductivity Meter		
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	12. อิเล็กโทรด (Electrode and Connection Cable)
<input type="checkbox"/>	<input type="checkbox"/>	13. ระดับสารละลายใน Electrode (Level KCl)
<input type="checkbox"/>	<input type="checkbox"/>	14. ฝาปิดกันปลาย Electrode (Dust Protection Hood)
<input type="checkbox"/>	<input type="checkbox"/>	15. ขาตั้งอิเล็กโทรด (Stand)
Turbidimeter		
<input type="checkbox"/>	<input type="checkbox"/>	16. ค่าความขุ่นที่ต่ำสุด (No Sample)
<input type="checkbox"/>	<input type="checkbox"/>	17. ระดับการส่องสว่างของแสง (>= 2.5 ไม่น้อย 3.0)
Automatic titrator		
<input type="checkbox"/>	<input type="checkbox"/>	18. สภาพ Piston Burettes
<input type="checkbox"/>	<input type="checkbox"/>	19. Function Rinsing and Dosing
<input type="checkbox"/>	<input type="checkbox"/>	20. ระบบท่อสายยางและอุปกรณ์ประกอบ

ข้อแนะนำ: Electrode วัดอุณหภูมิได้ 25.1°C โดย Control Waterbath ที่ 25.0 ± 0.1°C

Mr. Atachai Ngamchanat

Service Engineer



Certificate of Calibration

Cert.No.: 23CH1148
Page.: 1 of 2

Equipment : Turbidity Meter
Manufacturer : Oakton
Model : T100IR
Serial No. : 1120501017
ID. No. : UAE.WAT.056/2563
Condition As-Received: Used Item
Received Date : 13 September 2023
Calibration Date : 14 September 2023
Reference : 2309-0458DSC-1
Submitted by : United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260
Ambient Temperature : (25 ± 2.5) °C
Relative Humidity : (50 ± 20) %
Calibration Procedure : In-house method : CP-CH11
based on direct measurement by
using Formazin standard solution
Calibrated by : Walaik Sirithan
Approved by :
() Sathip Meangmai
() Warakorn Lemgagtrakul
() Ponpan Paipim
Issue Date : 15 September 2023

The Uncertainties are for a confidence probability of approximately 95%.

This certificate may not be reproduced other than in full, except with the prior written approval of the head of Calibration and Testing Equipment Services.

เอกสารไม่ควบคุม

A 0011853



มูลนิธิสถาบันพัฒนาผลิตภัณฑ์อาหาร
ศูนย์บริการห้องปฏิบัติการอุตสาหกรรมอาหาร
Foundation for Industrial Development National Food Institute
Food Industrial Laboratory Service Center



Calibration Certificate

Certificate No.: 2402283-002-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 SOI UDOMSUK 41, SUKHUMVIT ROAD,
Bangchack, Prakhonong, Bangkok 10260

Page 1 of 4

Equipment: Electronic Balance
Manufacturer: METTLER TOLEDO
Model: XSR205DU
Serial No.: C210685394
ID No.: UAE.WAO.010/2565
Order No.: 2402283
Operation No.: 2402283-002
Date of Receipt: 2 April 2024
Date of Calibration: 2 April 2024

Calibrated by Mr.Jerawut Prapawuttipong
Scientist
Approved by
(Mr.Pheraphat Tuanjit)
Manager, Division of Calibration Laboratory
Date of Issue: 9 April 2024
Responsible for the Technical Management Team

The uncertainties are for a confidence probability of approximately 95%

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-CS-009 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม

2008 ๒๕๕๑-๒๕๖๕ ๒๕๖๕-๒๕๖๖ ๒๕๖๖-๒๕๖๗ ๒๕๖๗-๒๕๖๘ ๒๕๖๘-๒๕๖๙ ๒๕๖๙-๒๕๗๐ ๒๕๗๐-๒๕๗๑ ๒๕๗๑-๒๕๗๒ ๒๕๗๒-๒๕๗๓ ๒๕๗๓-๒๕๗๔ ๒๕๗๔-๒๕๗๕ ๒๕๗๕-๒๕๗๖ ๒๕๗๖-๒๕๗๗ ๒๕๗๗-๒๕๗๘ ๒๕๗๘-๒๕๗๙ ๒๕๗๙-๒๕๘๐ ๒๕๘๐-๒๕๘๑ ๒๕๘๑-๒๕๘๒ ๒๕๘๒-๒๕๘๓ ๒๕๘๓-๒๕๘๔ ๒๕๘๔-๒๕๘๕ ๒๕๘๕-๒๕๘๖ ๒๕๘๖-๒๕๘๗ ๒๕๘๗-๒๕๘๘ ๒๕๘๘-๒๕๘๙ ๒๕๘๙-๒๕๙๐ ๒๕๙๐-๒๕๙๑ ๒๕๙๑-๒๕๙๒ ๒๕๙๒-๒๕๙๓ ๒๕๙๓-๒๕๙๔ ๒๕๙๔-๒๕๙๕ ๒๕๙๕-๒๕๙๖ ๒๕๙๖-๒๕๙๗ ๒๕๙๗-๒๕๙๘ ๒๕๙๘-๒๕๙๙ ๒๕๙๙-๒๖๐๐ ๒๖๐๐-๒๖๐๑ ๒๖๐๑-๒๖๐๒ ๒๖๐๒-๒๖๐๓ ๒๖๐๓-๒๖๐๔ ๒๖๐๔-๒๖๐๕ ๒๖๐๕-๒๖๐๖ ๒๖๐๖-๒๖๐๗ ๒๖๐๗-๒๖๐๘ ๒๖๐๘-๒๖๐๙ ๒๖๐๙-๒๖๑๐ ๒๖๑๐-๒๖๑๑ ๒๖๑๑-๒๖๑๒ ๒๖๑๒-๒๖๑๓ ๒๖๑๓-๒๖๑๔ ๒๖๑๔-๒๖๑๕ ๒๖๑๕-๒๖๑๖ ๒๖๑๖-๒๖๑๗ ๒๖๑๗-๒๖๑๘ ๒๖๑๘-๒๖๑๙ ๒๖๑๙-๒๖๒๐ ๒๖๒๐-๒๖๒๑ ๒๖๒๑-๒๖๒๒ ๒๖๒๒-๒๖๒๓ ๒๖๒๓-๒๖๒๔ ๒๖๒๔-๒๖๒๕ ๒๖๒๕-๒๖๒๖ ๒๖๒๖-๒๖๒๗ ๒๖๒๗-๒๖๒๘ ๒๖๒๘-๒๖๒๙ ๒๖๒๙-๒๖๓๐ ๒๖๓๐-๒๖๓๑ ๒๖๓๑-๒๖๓๒ ๒๖๓๒-๒๖๓๓ ๒๖๓๓-๒๖๓๔ ๒๖๓๔-๒๖๓๕ ๒๖๓๕-๒๖๓๖ ๒๖๓๖-๒๖๓๗ ๒๖๓๗-๒๖๓๘ ๒๖๓๘-๒๖๓๙ ๒๖๓๙-๒๖๔๐ ๒๖๔๐-๒๖๔๑ ๒๖๔๑-๒๖๔๒ ๒๖๔๒-๒๖๔๓ ๒๖๔๓-๒๖๔๔ ๒๖๔๔-๒๖๔๕ ๒๖๔๕-๒๖๔๖ ๒๖๔๖-๒๖๔๗ ๒๖๔๗-๒๖๔๘ ๒๖๔๘-๒๖๔๙ ๒๖๔๙-๒๖๕๐ ๒๖๕๐-๒๖๕๑ ๒๖๕๑-๒๖๕๒ ๒๖๕๒-๒๖๕๓ ๒๖๕๓-๒๖๕๔ ๒๖๕๔-๒๖๕๕ ๒๖๕๕-๒๖๕๖ ๒๖๕๖-๒๖๕๗ ๒๖๕๗-๒๖๕๘ ๒๖๕๘-๒๖๕๙ ๒๖๕๙-๒๖๖๐ ๒๖๖๐-๒๖๖๑ ๒๖๖๑-๒๖๖๒ ๒๖๖๒-๒๖๖๓ ๒๖๖๓-๒๖๖๔ ๒๖๖๔-๒๖๖๕ ๒๖๖๕-๒๖๖๖ ๒๖๖๖-๒๖๖๗ ๒๖๖๗-๒๖๖๘ ๒๖๖๘-๒๖๖๙ ๒๖๖๙-๒๖๗๐ ๒๖๗๐-๒๖๗๑ ๒๖๗๑-๒๖๗๒ ๒๖๗๒-๒๖๗๓ ๒๖๗๓-๒๖๗๔ ๒๖๗๔-๒๖๗๕ ๒๖๗๕-๒๖๗๖ ๒๖๗๖-๒๖๗๗ ๒๖๗๗-๒๖๗๘ ๒๖๗๘-๒๖๗๙ ๒๖๗๙-๒๖๘๐ ๒๖๘๐-๒๖๘๑ ๒๖๘๑-๒๖๘๒ ๒๖๘๒-๒๖๘๓ ๒๖๘๓-๒๖๘๔ ๒๖๘๔-๒๖๘๕ ๒๖๘๕-๒๖๘๖ ๒๖๘๖-๒๖๘๗ ๒๖๘๗-๒๖๘๘ ๒๖๘๘-๒๖๘๙ ๒๖๘๙-๒๖๙๐ ๒๖๙๐-๒๖๙๑ ๒๖๙๑-๒๖๙๒ ๒๖๙๒-๒๖๙๓ ๒๖๙๓-๒๖๙๔ ๒๖๙๔-๒๖๙๕ ๒๖๙๕-๒๖๙๖ ๒๖๙๖-๒๖๙๗ ๒๖๙๗-๒๖๙๘ ๒๖๙๘-๒๖๙๙ ๒๖๙๙-๒๗๐๐ ๒๗๐๐-๒๗๐๑ ๒๗๐๑-๒๗๐๒ ๒๗๐๒-๒๗๐๓ ๒๗๐๓-๒๗๐๔ ๒๗๐๔-๒๗๐๕ ๒๗๐๕-๒๗๐๖ ๒๗๐๖-๒๗๐๗ ๒๗๐๗-๒๗๐๘ ๒๗๐๘-๒๗๐๙ ๒๗๐๙-๒๗๑๐ ๒๗๑๐-๒๗๑๑ ๒๗๑๑-๒๗๑๒ ๒๗๑๒-๒๗๑๓ ๒๗๑๓-๒๗๑๔ ๒๗๑๔-๒๗๑๕ ๒๗๑๕-๒๗๑๖ ๒๗๑๖-๒๗๑๗ ๒๗๑๗-๒๗๑๘ ๒๗๑๘-๒๗๑๙ ๒๗๑๙-๒๗๒๐ ๒๗๒๐-๒๗๒๑ ๒๗๒๑-๒๗๒๒ ๒๗๒๒-๒๗๒๓ ๒๗๒๓-๒๗๒๔ ๒๗๒๔-๒๗๒๕ ๒๗๒๕-๒๗๒๖ ๒๗๒๖-๒๗๒๗ ๒๗๒๗-๒๗๒๘ ๒๗๒๘-๒๗๒๙ ๒๗๒๙-๒๗๓๐ ๒๗๓๐-๒๗๓๑ ๒๗๓๑-๒๗๓๒ ๒๗๓๒-๒๗๓๓ ๒๗๓๓-๒๗๓๔ ๒๗๓๔-๒๗๓๕ ๒๗๓๕-๒๗๓๖ ๒๗๓๖-๒๗๓๗ ๒๗๓๗-๒๗๓๘ ๒๗๓๘-๒๗๓๙ ๒๗๓๙-๒๗๔๐ ๒๗๔๐-๒๗๔๑ ๒๗๔๑-๒๗๔๒ ๒๗๔๒-๒๗๔๓ ๒๗๔๓-๒๗๔๔ ๒๗๔๔-๒๗๔๕ ๒๗๔๕-๒๗๔๖ ๒๗๔๖-๒๗๔๗ ๒๗๔๗-๒๗๔๘ ๒๗๔๘-๒๗๔๙ ๒๗๔๙-๒๗๕๐ ๒๗๕๐-๒๗๕๑ ๒๗๕๑-๒๗๕๒ ๒๗๕๒-๒๗๕๓ ๒๗๕๓-๒๗๕๔ ๒๗๕๔-๒๗๕๕ ๒๗๕๕-๒๗๕๖ ๒๗๕๖-๒๗๕๗ ๒๗๕๗-๒๗๕๘ ๒๗๕๘-๒๗๕๙ ๒๗๕๙-๒๗๖๐ ๒๗๖๐-๒๗๖๑ ๒๗๖๑-๒๗๖๒ ๒๗๖๒-๒๗๖๓ ๒๗๖๓-๒๗๖๔ ๒๗๖๔-๒๗๖๕ ๒๗๖๕-๒๗๖๖ ๒๗๖๖-๒๗๖๗ ๒๗๖๗-๒๗๖๘ ๒๗๖๘-๒๗๖๙ ๒๗๖๙-๒๗๗๐ ๒๗๗๐-๒๗๗๑ ๒๗๗๑-๒๗๗๒ ๒๗๗๒-๒๗๗๓ ๒๗๗๓-๒๗๗๔ ๒๗๗๔-๒๗๗๕ ๒๗๗๕-๒๗๗๖ ๒๗๗๖-๒๗๗๗ ๒๗๗๗-๒๗๗๘ ๒๗๗๘-๒๗๗๙ ๒๗๗๙-๒๗๘๐ ๒๗๘๐-๒๗๘๑ ๒๗๘๑-๒๗๘๒ ๒๗๘๒-๒๗๘๓ ๒๗๘๓-๒๗๘๔ ๒๗๘๔-๒๗๘๕ ๒๗๘๕-๒๗๘๖ ๒๗๘๖-๒๗๘๗ ๒๗๘๗-๒๗๘๘ ๒๗๘๘-๒๗๘๙ ๒๗๘๙-๒๗๙๐ ๒๗๙๐-๒๗๙๑ ๒๗๙๑-๒๗๙๒ ๒๗๙๒-๒๗๙๓ ๒๗๙๓-๒๗๙๔ ๒๗๙๔-๒๗๙๕ ๒๗๙๕-๒๗๙๖ ๒๗๙๖-๒๗๙๗ ๒๗๙๗-๒๗๙๘ ๒๗๙๘-๒๗๙๙ ๒๗๙๙-๒๘๐๐ ๒๘๐๐-๒๘๐๑ ๒๘๐๑-๒๘๐๒ ๒๘๐๒-๒๘๐๓ ๒๘๐๓-๒๘๐๔ ๒๘๐๔-๒๘๐๕ ๒๘๐๕-๒๘๐๖ ๒๘๐๖-๒๘๐๗ ๒๘๐๗-๒๘๐๘ ๒๘๐๘-๒๘๐๙ ๒๘๐๙-๒๘๑๐ ๒๘๑๐-๒๘๑๑ ๒๘๑๑-๒๘๑๒ ๒๘๑๒-๒๘๑๓ ๒๘๑๓-๒๘๑๔ ๒๘๑๔-๒๘๑๕ ๒๘๑๕-๒๘๑๖ ๒๘๑๖-๒๘๑๗ ๒๘๑๗-๒๘๑๘ ๒๘๑๘-๒๘๑๙ ๒๘๑๙-๒๘๒๐ ๒๘๒๐-๒๘๒๑ ๒๘๒๑-๒๘๒๒ ๒๘๒๒-๒๘๒๓ ๒๘๒๓-๒๘๒๔ ๒๘๒๔-๒๘๒๕ ๒๘๒๕-๒๘๒๖ ๒๘๒๖-๒๘๒๗ ๒๘๒๗-๒๘๒๘ ๒๘๒๘-๒๘๒๙ ๒๘๒๙-๒๘๓๐ ๒๘๓๐-๒๘๓๑ ๒๘๓๑-๒๘๓๒ ๒๘๓๒-๒๘๓๓ ๒๘๓๓-๒๘๓๔ ๒๘๓๔-๒๘๓๕ ๒๘๓๕-๒๘๓๖ ๒๘๓๖-๒๘๓๗ ๒๘๓๗-๒๘๓๘ ๒๘๓๘-๒๘๓๙ ๒๘๓๙-๒๘๔๐ ๒๘๔๐-๒๘๔๑ ๒๘๔๑-๒๘๔๒ ๒๘๔๒-๒๘๔๓ ๒๘๔๓-๒๘๔๔ ๒๘๔๔-๒๘๔๕ ๒๘๔๕-๒๘๔๖ ๒๘๔๖-๒๘๔๗ ๒๘๔๗-๒๘๔๘ ๒๘๔๘-๒๘๔๙ ๒๘๔๙-๒๘๕๐ ๒๘๕๐-๒๘๕๑ ๒๘๕๑-๒๘๕๒ ๒๘๕๒-๒๘๕๓ ๒๘๕๓-๒๘๕๔ ๒๘๕๔-๒๘๕๕ ๒๘๕๕-๒๘๕๖ ๒๘๕๖-๒๘๕๗ ๒๘๕๗-๒๘๕๘ ๒๘๕๘-๒๘๕๙ ๒๘๕๙-๒๘๖๐ ๒๘๖๐-๒๘๖๑ ๒๘๖๑-๒๘๖๒ ๒๘๖๒-๒๘๖๓ ๒๘๖๓-๒๘๖๔ ๒๘๖๔-๒๘๖๕ ๒๘๖๕-๒๘๖๖ ๒๘๖๖-๒๘๖๗ ๒๘๖๗-๒๘๖๘ ๒๘๖๘-๒๘๖๙ ๒๘๖๙-๒๘๗๐ ๒๘๗๐-๒๘๗๑ ๒๘๗๑-๒๘๗๒ ๒๘๗๒-๒๘๗๓ ๒๘๗๓-๒๘๗๔ ๒๘๗๔-๒๘๗๕ ๒๘๗๕-๒๘๗๖ ๒๘๗๖-๒๘๗๗ ๒๘๗๗-๒๘๗๘ ๒๘๗๘-๒๘๗๙ ๒๘๗๙-๒๘๘๐ ๒๘๘๐-๒๘๘๑ ๒๘๘๑-๒๘๘๒ ๒๘๘๒-๒๘๘๓ ๒๘๘๓-๒๘๘๔ ๒๘๘๔-๒๘๘๕ ๒๘๘๕-๒๘๘๖ ๒๘๘๖-๒๘๘๗ ๒๘๘๗-๒๘๘๘ ๒๘๘๘-๒๘๘๙ ๒๘๘๙-๒๘๙๐ ๒๘๙๐-๒๘๙๑ ๒๘๙๑-๒๘๙๒ ๒๘๙๒-๒๘๙๓ ๒๘๙๓-๒๘๙๔ ๒๘๙๔-๒๘๙๕ ๒๘๙๕-๒๘๙๖ ๒๘๙๖-๒๘๙๗ ๒๘๙๗-๒๘๙๘ ๒๘๙๘-๒๘๙๙ ๒๘๙๙-๒๙๐๐ ๒๙๐๐-๒๙๐๑ ๒๙๐๑-๒๙๐๒ ๒๙๐๒-๒๙๐๓ ๒๙๐๓-๒๙๐๔ ๒๙๐๔-๒๙๐๕ ๒๙๐๕-๒๙๐๖ ๒๙๐๖-๒๙๐๗ ๒๙๐๗-๒๙๐๘ ๒๙๐๘-๒๙๐๙ ๒๙๐๙-๒๙๑๐ ๒๙๑๐-๒๙๑๑ ๒๙๑๑-๒๙๑๒ ๒๙๑๒-๒๙๑๓ ๒๙๑๓-๒๙๑๔ ๒๙๑๔-๒๙๑๕ ๒๙๑๕-๒๙๑๖ ๒๙๑๖-๒๙๑๗ ๒๙๑๗-๒๙๑๘ ๒๙๑๘-๒๙๑๙ ๒๙๑๙-๒๙๒๐ ๒๙๒๐-๒๙๒๑ ๒๙๒๑-๒๙๒๒ ๒๙๒๒-๒๙๒๓ ๒๙๒๓-๒๙๒๔ ๒๙๒๔-๒๙๒๕ ๒๙๒๕-๒๙๒๖ ๒๙๒๖-๒๙๒๗ ๒๙๒๗-๒๙๒๘ ๒๙๒๘-๒๙๒๙ ๒๙๒๙-๒๙๓๐ ๒๙๓๐-๒๙๓๑ ๒๙๓๑-๒๙๓๒ ๒๙๓๒-๒๙๓๓ ๒๙๓๓-๒๙๓๔ ๒๙๓๔-๒๙๓๕ ๒๙๓๕-๒๙๓๖ ๒๙๓๖-๒๙๓๗ ๒๙๓๗-๒๙๓๘ ๒๙๓๘-๒๙๓๙ ๒๙๓๙-๒๙๔๐ ๒๙๔๐-๒๙๔๑ ๒๙๔๑-๒๙๔๒ ๒๙๔๒-๒๙๔๓ ๒๙๔๓-๒๙๔๔ ๒๙๔๔-๒๙๔๕ ๒๙๔๕-๒๙๔๖ ๒๙๔๖-๒๙๔๗ ๒๙๔๗-๒๙๔๘ ๒๙๔๘-๒๙๔๙ ๒๙๔๙-๒๙๕๐ ๒๙๕๐-๒๙๕๑ ๒๙๕๑-๒๙๕๒ ๒๙๕๒-๒๙๕๓ ๒๙๕๓-๒๙๕๔ ๒๙๕๔-๒๙๕๕ ๒๙๕๕-๒๙๕๖ ๒๙๕๖-๒๙๕๗ ๒๙๕๗-๒๙๕๘ ๒๙๕๘-๒๙๕๙ ๒๙๕๙-๒๙๖๐ ๒๙๖๐-๒๙๖๑ ๒๙๖๑-๒๙๖๒ ๒๙๖๒-๒๙๖๓ ๒๙๖๓-๒๙๖๔ ๒๙๖๔-๒๙๖๕ ๒๙๖๕-๒๙๖๖ ๒๙๖๖-๒๙๖๗ ๒๙๖๗-๒๙๖๘ ๒๙๖๘-๒๙๖๙ ๒๙๖๙-๒๙๗๐ ๒๙๗๐-๒๙๗๑ ๒๙๗๑-๒๙๗๒ ๒๙๗๒-๒๙๗๓ ๒๙๗๓-๒๙๗๔ ๒๙๗๔-๒๙๗๕ ๒๙๗๕-๒๙๗๖ ๒๙๗๖-๒๙๗๗ ๒๙๗๗-๒๙๗๘ ๒๙๗๘-๒๙๗๙ ๒๙๗๙-๒๙๘๐ ๒๙๘๐-๒๙๘๑ ๒๙๘๑-๒๙๘๒ ๒๙๘๒-๒๙๘๓ ๒๙๘๓-๒๙๘๔ ๒๙๘๔-๒๙๘๕ ๒๙๘๕-๒๙๘๖ ๒๙๘๖-๒๙๘๗ ๒๙๘๗-๒๙๘๘ ๒๙๘๘-๒๙๘๙ ๒๙๘๙-๒๙๙๐ ๒๙๙๐-๒๙๙๑ ๒๙๙๑-๒๙๙๒ ๒๙๙๒-๒๙๙๓ ๒๙๙๓-๒๙๙๔ ๒๙๙๔-๒๙๙๕ ๒๙๙๕-๒๙๙๖ ๒๙๙๖-๒๙๙๗ ๒๙๙๗-๒๙๙๘ ๒๙๙๘-๒๙๙๙ ๒๙๙๙-๒๖๐๐ ๒๖๐๐-๒๖๐๑ ๒๖๐๑-๒๖๐๒ ๒๖๐๒-๒๖๐๓ ๒๖๐๓-๒๖๐๔ ๒๖๐๔-๒๖๐๕ ๒๖๐๕-๒๖๐๖ ๒๖๐๖-๒๖๐๗ ๒๖๐๗-๒๖๐๘ ๒๖๐๘-๒๖๐๙ ๒๖๐๙-๒๖๑๐ ๒๖๑๐-๒๖๑๑ ๒๖๑๑-๒๖๑๒ ๒๖๑๒-๒๖๑๓ ๒๖๑๓-๒๖๑๔ ๒๖๑๔-๒๖๑๕ ๒๖๑๕-๒๖๑๖ ๒๖๑๖-๒๖๑๗ ๒๖๑๗-๒๖๑๘ ๒๖๑๘-๒๖๑๙ ๒๖๑๙-๒๖๒๐ ๒๖๒๐-๒๖๒๑ ๒๖๒๑-๒๖๒๒ ๒๖๒๒-๒๖๒๓ ๒๖๒๓-๒๖๒๔ ๒๖๒๔-๒๖๒๕ ๒๖๒๕-๒๖๒๖ ๒๖๒๖-๒๖๒๗ ๒๖๒๗-๒๖๒๘ ๒๖๒๘-๒๖๒๙ ๒๖๒๙-๒๖๓๐ ๒๖๓๐-๒๖๓๑ ๒๖๓๑-๒๖๓๒ ๒๖๓๒-๒๖๓๓ ๒๖๓๓-๒๖๓๔ ๒๖๓๔-๒๖๓๕ ๒๖๓๕-๒๖๓๖ ๒๖๓๖-๒๖๓๗ ๒๖๓๗-๒๖๓๘ ๒๖๓๘-๒๖๓๙ ๒๖๓๙-๒๖๔๐ ๒๖๔๐-๒๖๔๑ ๒๖๔๑-๒๖๔๒ ๒๖๔๒-๒๖๔๓ ๒๖๔๓-๒๖๔๔ ๒๖๔๔-๒๖๔๕ ๒๖๔๕-๒๖๔๖ ๒๖๔๖-๒๖๔๗ ๒๖๔๗-๒๖๔๘ ๒๖๔๘-๒๖๔๙ ๒๖๔๙-๒๖๕๐ ๒๖๕๐-๒๖๕๑ ๒๖๕๑-๒๖๕๒ ๒๖๕๒-๒๖๕๓ ๒๖๕๓-๒๖๕๔ ๒๖๕๔-๒๖๕๕ ๒๖๕๕-๒๖๕๖ ๒๖๕๖-๒๖๕๗ ๒๖๕๗-๒๖๕๘ ๒๖๕๘-๒๖๕๙ ๒๖๕๙-๒๖๖๐ ๒๖๖๐-๒๖๖๑ ๒๖๖๑-๒๖๖๒ ๒๖๖๒-๒๖๖๓ ๒๖๖๓-๒๖๖๔ ๒๖๖๔-๒๖๖๕ ๒๖๖๕-๒๖๖๖ ๒๖๖๖-๒๖๖๗ ๒๖๖๗-๒๖๖๘ ๒๖๖๘-๒๖๖๙ ๒๖๖๙-๒๖๗๐ ๒๖๗๐-๒๖๗๑ ๒๖๗๑-๒๖๗๒ ๒๖๗๒-๒๖๗๓ ๒๖๗๓-๒๖๗๔ ๒๖๗๔-๒๖๗๕ ๒๖๗๕-๒๖๗๖ ๒๖๗๖-๒๖๗๗ ๒๖๗๗-๒๖๗๘ ๒๖๗๘-๒๖๗๙ ๒๖๗๙-๒๖๘๐ ๒๖๘๐-๒๖๘๑ ๒๖๘๑-๒๖๘๒ ๒๖๘๒-๒๖๘๓ ๒๖๘๓-๒๖๘๔ ๒๖๘๔-๒๖๘๕ ๒๖๘๕-๒๖๘๖ ๒๖๘๖-๒๖๘๗ ๒๖๘๗-๒๖๘๘ ๒๖๘๘-๒๖๘๙ ๒๖๘๙-๒๖๙๐ ๒๖๙๐-๒๖๙๑ ๒๖๙๑-๒๖๙๒ ๒๖๙๒-๒๖๙๓ ๒๖๙๓-๒๖๙๔ ๒๖๙๔-๒๖๙๕ ๒๖๙๕-๒๖๙๖ ๒๖๙๖-๒๖๙๗ ๒๖๙๗-๒๖๙๘ ๒๖๙๘-๒๖๙๙ ๒๖๙๙-๒๗๐๐ ๒๗๐๐-๒๗๐๑ ๒๗๐๑-๒๗๐๒ ๒๗๐๒-๒๗๐๓ ๒๗๐๓-๒๗๐๔ ๒๗๐๔-๒๗๐๕ ๒๗๐๕-๒๗๐๖ ๒๗๐๖-๒๗๐๗ ๒๗๐๗-๒๗๐๘ ๒๗๐๘-๒๗๐๙ ๒๗๐๙-๒๗๑๐ ๒๗๑๐-๒๗๑๑ ๒๗๑๑-๒๗๑๒ ๒๗๑๒-๒๗๑๓ ๒๗๑๓-๒๗๑๔ ๒๗๑๔-๒๗๑๕ ๒๗๑๕-๒๗๑๖ ๒๗๑๖-๒๗๑๗ ๒๗๑๗-๒๗๑๘ ๒๗๑๘-๒๗๑๙ ๒๗๑๙-๒๗๒๐ ๒๗๒๐-๒๗๒๑ ๒๗๒๑-๒๗๒๒ ๒๗๒๒-๒๗๒๓ ๒๗๒๓-๒๗๒๔ ๒๗๒๔-๒๗๒๕ ๒๗๒๕-๒๗๒๖ ๒๗๒๖-๒๗๒๗ ๒๗๒๗-๒๗๒๘ ๒๗๒๘-๒๗๒๙ ๒๗๒๙-๒๗๓๐ ๒๗๓๐-๒๗๓๑ ๒๗๓๑-๒๗๓๒ ๒๗๓๒-๒๗๓๓ ๒๗๓๓-๒๗๓๔ ๒๗๓๔-๒๗๓๕ ๒๗๓๕-๒๗๓๖ ๒๗๓๖-๒๗๓๗ ๒๗๓๗-๒๗๓๘ ๒๗๓๘-๒๗๓๙ ๒๗๓๙-๒๗๔๐ ๒๗๔๐-๒๗๔๑ ๒๗๔๑-๒๗๔๒ ๒๗๔๒-๒๗๔๓ ๒๗๔๓-๒๗๔๔ ๒๗๔๔-๒๗๔๕ ๒๗๔๕-๒๗๔๖ ๒๗๔๖-๒๗๔๗ ๒๗๔๗-๒๗๔๘ ๒๗๔๘-๒๗๔๙ ๒๗๔๙-๒๗๕๐ ๒๗๕๐-๒๗๕๑ ๒๗๕๑-๒๗๕๒ ๒๗๕๒-๒๗๕๓ ๒๗๕๓-๒๗๕๔ ๒๗๕๔-๒๗๕๕ ๒๗๕๕-๒๗๕๖ ๒๗๕๖-๒๗๕๗ ๒๗๕๗-๒๗๕๘ ๒๗๕๘-๒๗๕๙ ๒๗

Calibration Report

Certificate No.: 2402283-002-01
Equipment: Electronic Balance
Model: XSR2050U
Serial No.: C210685394
Capacity: 220 g
Manufacturer: METTLER TOLEDO
Resolution: 0.00001 g / 0.0001 g
ID No.: UAE.WAO.010/2565

Date of Calibration: 2 April 2024

Page 3 of 4

Calibration Results: (Continued)

Calibration Range: 0 - 80 g

Calibration Adjustment: Internal Calibration

3. Departure from Nominal Value: (Range: 0 - 80 g ; Resolution: 0.00001 g)

Nominal Value (g)	Standard Value (g)	Average Reading (g)	Correction (g)	Uncertainty (± g)	Coverage Factor k
Unload	0.000000	0.00000	0.00000	0.0000086	2.00
0.001	0.001003	0.00101	-0.00001	0.0000089	2.00
0.005	0.005003	0.00500	0.00000	0.0000092	2.00
0.01	0.010003	0.01000	0.00000	0.0000089	2.00
0.05	0.049996	0.05000	0.00000	0.0000096	2.00
0.1	0.100011	0.10000	0.00001	0.000011	2.00
0.5	0.500016	0.50001	0.00001	0.000014	2.00
1	1.000003	1.00002	-0.00002	0.000016	2.00
2	2.000023	2.00001	0.00001	0.000017	2.00
5	5.000017	5.00002	0.00000	0.000020	2.00
10	10.000009	10.00000	0.00001	0.000026	2.00
20	20.000031	20.00000	0.00003	0.000037	2.00
30	30.000040	30.00001	0.00003	0.000050	2.00
50	50.000028	50.00002	0.00001	0.000068	2.00
80	80.000068	80.00002	0.00005	0.00011	2.00

F-CS-012 Revision: 01 Date: 20-04-65

2008 ๒๕๔๘ ถนนสุขุมวิท 35 แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10110
2008 So. 35, Aun Amarn Road, Bang Yi Khan Subdistrict, Bang Phai District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8688 Fax : +66(0) 2422 8545 nfi.co.th



Calibration Certificate

Certificate No.: 2400141-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road,
Bangchack, Prakhnong, Bangkok 10260

Page 1 of 3

Equipment: CHAMBER (Hot Air Oven)

Manufacturer: MEMMERT

Model: UF 55

Serial No.: B216.1666

ID No.: UAE.WAO.027/2559

Order No.: 2400141

Operation No.: 2400141-001

Date of Receipt: 11 October 2023

Date of Calibration: 11 October 2023

Calibrated by Mr. Worapob Sooktong
Scientist

Approved by (Mr. Pheraphat Tuanjit)
Manager, Division of Calibration Laboratory
Responsible for the Technical Management Team

Date of Issue: 16 October 2023

The uncertainties are for a confidence probability of approximately 95 %.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-CS-009 Revision: 01 Date: 20-04-65

2008 ๒๕๔๘ ถนนสุขุมวิท 35 แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10110
2008 So. 35, Aun Amarn Road, Bang Yi Khan Subdistrict, Bang Phai District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8688 Fax : +66(0) 2422 8545 nfi.co.th



Calibration Report

Certificate No.: 2402283-002-01
Equipment: Electronic Balance
Model: XSR2050U
Serial No.: C210685394
Capacity: 220 g
Manufacturer: METTLER TOLEDO
Resolution: 0.00001 g / 0.0001 g
ID No.: UAE.WAO.010/2565

Date of Calibration: 2 April 2024

Page 4 of 4

Calibration Results: (Continued)

Calibration Range: 81 - 200 g

Calibration Adjustment: Internal Calibration

3. Departure from Nominal Value: (Range: 81 - 200 g ; Resolution: 0.0001 g)

Nominal Value (g)	Standard Value (g)	Average Reading (g)	Correction (g)	Uncertainty (± g)	Coverage Factor k
90	90.00010	90.0001	0.0000	0.00015	2.00
100	100.00006	100.0001	0.0000	0.00015	2.00
110	110.00007	110.0001	0.0000	0.00016	2.00
120	120.00009	120.0000	0.0001	0.00017	2.00
130	130.00010	130.0000	0.0001	0.00019	2.00
140	140.00014	140.0000	0.0001	0.00020	2.00
150	150.00009	150.0001	0.0000	0.00020	2.00
160	160.00010	160.0001	0.0000	0.00022	2.00
170	170.00012	170.0001	0.0000	0.00023	2.00
200	200.00016	200.0002	0.0000	0.00028	2.00

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

F-CS-012 Revision: 01 Date: 20-04-65

2008 ๒๕๔๘ ถนนสุขุมวิท 35 แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10110
2008 So. 35, Aun Amarn Road, Bang Yi Khan Subdistrict, Bang Phai District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8688 Fax : +66(0) 2422 8545 nfi.co.th

Calibration Report

Certificate No.: 2400141-001-01
Equipment: CHAMBER (Hot Air Oven)
Model: UF 55
Serial No.: B216.1666
Resolution: 0.1 °C
ID No.: UAE.WAO.027/2559
Manufacturer: MEMMERT

Date of Calibration: 11 October 2023

Page 2 of 3

Location: Laboratory, Floor 2, UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD.
Environment Condition: Ambient Temperature (28 ± 1) °C
Relative Humidity (63 ± 2) %
Line Voltage (228 ± 1) Volt

Condition of this results of Calibration:

- This instrument was calibrated by insert 9 standard thermometer into its chamber and calibration according to W-TE-014 Based on TLAS G-20-1/02-08 (E): Guidelines for Calibration and Checks of Temperature Controlled Enclosures.
 - The temperature scale used was based on ITS - 90.
 - All data show below were final values and the initial data may be obtained upon request.
- Reference Standard Instrument :

Instrument	Model	Serial No./ID No.	Certificate No.	Due Date	Through
Digital Thermometer with sensor	34972A	MY49016894	TE 660380-01	22 April 2024	NATIONAL FOOD INSTITUTE
	RTD	CHP201-209/RTD#201-209			

- This certificate is traceable to International System of Units (SI Units).
- This certificate was certified only for the instrument we calibrated.
- This result of calibration was found accurate as shown on date and place of calibration only.
- Condition of Calibrated item : Good

UUC Description :

Time of Record 1 Hour 9 Minute At 104.0, 140.0 and 180.0 °C
Fresh air Damper - Open Position -
X Close
- Not Available

- Result of Calibration : X Without adjustment After adjustment

F-CS-012 Revision: 01 Date: 20-04-65

2008 ๒๕๔๘ ถนนสุขุมวิท 35 แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10110
2008 So. 35, Aun Amarn Road, Bang Yi Khan Subdistrict, Bang Phai District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8688 Fax : +66(0) 2422 8545 nfi.co.th

Calibration Report

Certificate No.: 2400141-001-01
Equipment: CHAMBER (Hot Air Oven)
Model: UF 55 **Serial No.:** B216.1666
Resolution: 0.1 °C **ID No.:** UAE.WAO.027/2559
Manufacturer: MEMMERT

Date of Calibration: 11 October 2023
Calibration point: 104.0, 140.0 and 180.0 °C

Calibration Condition	Temperature (°C)	Relative Humidity (%)	Line Voltage (Volt)
MIN	28.2	61.4	227.4
MAX	28.3	65.1	229.3

Table 1 : Reporting of Temperature

Calibration point (°C)	Measured Temperature (°C) @ Sensor No. (Sensor No.9 is REF)									Uncertainty ± (°C)
	# 1	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	
104.0	104.05	103.98	104.02	104.08	104.00	104.05	103.99	104.17	104.00	0.53
140.0	140.09	139.99	139.91	140.05	139.99	139.91	139.97	140.26	139.97	0.73
180.0	180.46	180.33	180.25	180.28	180.33	179.96	180.31	180.64	180.16	0.90

Table 2 : Reporting of Characterization Result

UUC* Setting (°C)	UUC* reading (°C)			Stability ± (°C)	Uniformity (°C)	Overall Variation (°C)
	MIN	MAX	Average			
104.0	104.0	104.0	104.0	0.090	0.18	0.38
140.0	140.0	140.1	140.0	0.075	0.28	0.47
180.0	180.0	180.1	180.0	0.13	0.48	0.88

Note The quoted uncertainty include " Stability " and " Loading effect (20% of Temp Uniformity) "
UUC* = Unit Under Calibration
Stability = One-half of the greatest maximum difference of measured temperatures at any one sensors, for at least half an hour after reaching steady state.
Uniformity = The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time.
Overall Variation = The difference of the maximum and minimum measured temperatures throughout observation time.
The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor k= 2, providing a level of confidence of approximately 95 %.

----- End -----

F-CS-012 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



Calibration Certificate

Certificate No.: 2302827-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Phrakhanong, Bangkok 10260

Page 1 of 4

Equipment: Electronic Balance

Manufacturer: METTLER TOLEDO

Model: XSR204

Serial No.: C117635043

ID No.: UAE.WAS.012/2564

Order No.: 2302827

Operation No.: 2302827-001

Date of Receipt: 10 May 2023

Date of Calibration: 10 May 2023

Calibrated by Mr.Manas Somsak **Approved by** (Mr.Pheraphat Tuanjit)
Specialist **Manager, Division of Calibration Laboratory**
Date of Issue: 18 May 2023 **Responsible for the Technical Management Team**

The uncertainties are for a confidence probability of approximately 95%

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-CS-009 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



Calibration Report

Certificate No.: 2302827-001-01
Equipment: Electronic Balance
Model: XSR204
Serial No.: C117635043
Capacity: 220 g
Manufacturer: METTLER TOLEDO
Resolution: 0.0001 g
ID No.: UAE.WAS.012/2564

Date of Calibration: 10 May 2023 **Page 2 of 4**

Environment Condition: Ambient Temperature: 21.4 ± 0.2 °C Relative Humidity: 43.4 ± 0.9 %
Place of Calibration: Balance room (Water Analysis Unit), UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Condition of Equipment: Good Condition

Condition of This Results of Calibration:

1. Calibration Method: NFI Method W-MA-001 In-House Method based on UKAS Lab 14 : 2019
2. Reference Standards:

Reference Standard	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Standard Weight Class E2	1mg to 300g	8505567572	TCS	M23040535	8 April 2024
Instrument	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Thermo-Hygro Meter	608-H1	NFLBTH 015/23	Quality Reborn	QR23-0489	21 February 2024

3. This certification is traceable to SI UNIT
4. This certificate was certified only for the instrument we calibrated.
5. This result of calibration was found accurate as shown on date and place of calibration only.


Calibration Results:

1. Repeatability of Reading:

Nominal Value (g)	Standard Deviation of Reading (g)
100	0.000032
200	0.000032

2. Off-Center Error:

A mass of 100 g was placed and moved to various position on pan.
The balance reading obtained is given in the table.



1	2	3	4	5	6	(Maximum Difference)
(g)	(g)	(g)	(g)	(g)	(g)	(g)
100.0002	100.0002	100.0002	100.0002	100.0003	100.0002	0.0001

F-CS-012 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



Calibration Report

Certificate No.: 2302827-001-01
Equipment: Electronic Balance
Model: XSR204
Serial No.: C117635043
Capacity: 220 g
Manufacturer: METTLER TOLEDO
Resolution: 0.0001 g
ID No.: UAE.WAS.012/2564

Date of Calibration: 10 May 2023 **Page 3 of 4**

Calibration Results: (Continued)

Calibration Range: 0 - 200 g

Calibration Adjustment: Internal Calibration

3. Departure from Nominal Value:

Nominal Value (g)	Standard Value (g)	Average Reading (g)	Correction (g)	Uncertainty (± g)	Coverage Factor k
Unload	0.00000	0.0000	0.0000	0.000085	2.00
0.01	0.01000	0.0100	0.0000	0.000085	2.00
0.02	0.02001	0.0200	0.0000	0.000085	2.00
0.05	0.05000	0.0500	0.0000	0.000085	2.00
0.1	0.10001	0.1000	0.0000	0.000085	2.00
0.2	0.20001	0.2000	0.0000	0.000085	2.00
0.5	0.50002	0.5000	0.0000	0.000085	2.00
1	1.00000	1.0000	0.0000	0.000086	2.00
2	2.00002	2.0000	0.0000	0.000086	2.00
3	3.00003	3.0000	0.0000	0.000087	2.00
5	5.00002	5.0000	0.0000	0.000087	2.00
10	10.00001	10.0000	0.0000	0.000088	2.00
20	20.00003	20.0000	0.0000	0.000092	2.00
30	30.00004	30.0000	0.0000	0.000098	2.00
40	40.00007	40.0000	0.0000	0.00011	2.00
45	45.00009	45.0001	0.0000	0.00013	2.00

F-CS-012 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม



Calibration Report

Certificate No.: 2302827-001-01

Equipment:

Electronic Balance

Model: XSR204

Serial No.: C117635043

Capacity: 220 g

Manufacturer: METTLER TOLEDO

Resolution: 0.0001 g

ID No.: UAE.WAS.012/2564

Date of Calibration: 10 May 2023

Page 4 of 4

Calibration Results: (Continued)

Calibration Range: 0 - 200 g

Calibration Adjustment: Internal Calibration

3. Departure from Nominal Value:

Nominal Value (g)	Standard Value (g)	Average Reading (g)	Correction (g)	Uncertainty (g)	Coverage Factor k
50	50.00003	50.0000	0.0000	0.00011	2.00
55	55.00005	55.0000	0.0000	0.00012	2.00
60	60.00004	60.0000	0.0000	0.00012	2.00
65	65.00005	65.0000	0.0000	0.00013	2.00
70	70.00006	70.0001	-0.0001	0.00013	2.00
75	75.00008	75.0002	-0.0001	0.00013	2.00
80	80.00007	80.0002	-0.0001	0.00014	2.00
85	85.00009	85.0002	-0.0001	0.00014	2.00
90	90.00010	90.0002	-0.0001	0.00015	2.00
100	100.00006	100.0002	-0.0001	0.00016	2.00
120	120.00009	120.0002	-0.0001	0.00018	2.00
150	150.00009	150.0002	-0.0001	0.00021	2.00
200	200.00016	200.0003	-0.0001	0.00028	2.00

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

FCS-012 Revision: 01 Date: 20-04-65

CERTIFICATE OF CALIBRATION

Equipment : COD Test Tube Heater

Meter Model : HI839800-02

Serial No. : H0185001

Tube Heater : 25 Vial Capacity

Accuracy : $\pm 2^{\circ}\text{C}$

Temperature Range : -10°C to 160°C

Temperature of Reaction : 150°C

Ambient Temperature : $(25 \pm 2)^{\circ}\text{C}$

Relative Humidity : $(50 \pm 15)\% \text{ RH}$

Manufacturer : Hanna Instruments

Made in : Romania

Condition As-Received : Used Product

Reference : RE230392

Customer name : United Analyst and Engineering Consultant Co., Ltd.

3 Soi Udomsuk 41, Sukhumvit Rd., Bangchak,
Phrakhanong, Bangkok 10260

Received date : 8 March 2023

Calibrate date : 10 March 2023

Issue date : 20 March 2023

Calibrated Location : Hanna Instruments (Thailand) Ltd.

Calibration Procedure : This calibrator was conducted by using in-house: calibration procedure
CP-04 by using certified reference material.

Mr. Pichit Petthong

Calibrated by : ☐ Mr. Jakkapob Pentisan
☐ Mr. Channarong Soinak

Approved by : Mr. Anan Suwanchaisakul

Authorized Signatory
HANNA
instruments
(Thailand) Limited

This certificate was certified only for the instrument we calibrated.

This result of calibration was found accurate on date and place of calibration only.

** This certificate may not be reproduced other than in full, except with the prior written **

approval of the head of Hanna Instrument (Thailand).

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม

Condition of this calibration result

Reference Standard Instruments:

Instruments	Model	Serial No.	Certificate No.	Traceable
Data Acquisition Switch Unit	34970A	MY44065265	WK2207-065-1	WK Electric Co., Ltd.

Calibration Result:

Measurement Temperature Source Accuracy for COD Reactor

Capacity (Vial)	Nominal Value ($^{\circ}\text{C}$)	Average Value ($^{\circ}\text{C}$)	Uncertainty ($^{\circ}\text{C}$)	Tolerance of UUC ($^{\circ}\text{C}$)	Acceptance Criteria
25 Vial	150.0	150.3	0.59	2	Pass

Figure: Shows the location of the temperature source.

(1A) 149.78 $^{\circ}\text{C}$	(2A) 150.31 $^{\circ}\text{C}$	(3A) 150.63 $^{\circ}\text{C}$	(4A) 149.93 $^{\circ}\text{C}$	(5A) 150.31 $^{\circ}\text{C}$
(1B) 150.35 $^{\circ}\text{C}$	(2B) 150.18 $^{\circ}\text{C}$	(3B) 149.93 $^{\circ}\text{C}$	(4B) 150.18 $^{\circ}\text{C}$	(5B) 150.21 $^{\circ}\text{C}$
(1C) 150.24 $^{\circ}\text{C}$	(2C) 151.10 $^{\circ}\text{C}$	(3C) 150.80 $^{\circ}\text{C}$	(4C) 150.36 $^{\circ}\text{C}$	(5C) 150.86 $^{\circ}\text{C}$
(1D) 150.16 $^{\circ}\text{C}$	(2D) 149.77 $^{\circ}\text{C}$	(3D) 150.22 $^{\circ}\text{C}$	(4D) 150.67 $^{\circ}\text{C}$	(5D) 150.43 $^{\circ}\text{C}$
(1E) 149.94 $^{\circ}\text{C}$	(2E) 150.44 $^{\circ}\text{C}$	(3E) 150.06 $^{\circ}\text{C}$	(4E) 150.63 $^{\circ}\text{C}$	(5E) 149.29 $^{\circ}\text{C}$

Remark: The Acceptance criteria is the error value plus or minus the Measurement Uncertainty, and then Not More than the Tolerance value of UUC, therefore concluded that pass.

The reported uncertainty of measurement was based on standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.

** End of certificate **

เอกสารไม่ควบคุม

Certificate of Calibration

Equipment : BOD Incubator

Manufacturer : Arco

Model : UC4-1320

Serial No. : 13URC4S013201

ID No. : UAE.WAO.015/2561

Submitted by : United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260

Location : Lab Floor 2

Received Order : 10 February 2024

Calibration Date : 10 February 2024

Ambient Temperature : $(28 \pm 10)^{\circ}\text{C}$

Relative Humidity : $(50 \pm 30)\%$

Calibrated by : Tawatchai Pama

Approved by : 
Approved Signatory

() Pornthippa Tameyakul

(x) Unnoppol Harachai

() Suwit Imjai

Issue Date : 19 February 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written

Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services

เอกสารไม่ควบคุม

Customer Service Report

Date:	27/05/23	Report No:	8411
Customer:	UAE	Address:	Bangkok, Thailand
Instrument:	K-T8100	Serial:	91829052
Hours:		Labour:	
Start	07:00		08:00
Finish	08:30		15:00
Travel To Customer	1 hr	Travel From Customer	2 hr

Application	Special	Standard
Normal	Courtesy Visit	Installation
Distributor	PMA Onboarding	Quote
Internal	Warranty	Repair
Digital Service	Sales Support	Remote

PO/Quote Number:	if applicable	
PMA Type	if applicable	Contract No.

Details of Work / Test	Condition / Status
- Wagon Function Test	OK
- Wagon Function Part 1	OK
- Wagon Function Part 2	OK
- Wagon Function Part 3	OK
- Wagon Function Part 4	OK
- Wagon Function Part 5	OK
- Wagon Function Part 6	OK
- Wagon Function Part 7	OK
- Wagon Function Part 8	OK
- Wagon Function Part 9	OK
- Wagon Function Part 10	OK
- Wagon Function Part 11	OK
- Wagon Function Part 12	OK
- Wagon Function Part 13	OK
- Wagon Function Part 14	OK
- Wagon Function Part 15	OK
- Wagon Function Part 16	OK
- Wagon Function Part 17	OK
- Wagon Function Part 18	OK
- Wagon Function Part 19	OK
- Wagon Function Part 20	OK
- Wagon Function Part 21	OK
- Wagon Function Part 22	OK
- Wagon Function Part 23	OK
- Wagon Function Part 24	OK
- Wagon Function Part 25	OK
- Wagon Function Part 26	OK
- Wagon Function Part 27	OK
- Wagon Function Part 28	OK
- Wagon Function Part 29	OK
- Wagon Function Part 30	OK
- Wagon Function Part 31	OK
- Wagon Function Part 32	OK
- Wagon Function Part 33	OK
- Wagon Function Part 34	OK
- Wagon Function Part 35	OK
- Wagon Function Part 36	OK
- Wagon Function Part 37	OK
- Wagon Function Part 38	OK
- Wagon Function Part 39	OK
- Wagon Function Part 40	OK
- Wagon Function Part 41	OK
- Wagon Function Part 42	OK
- Wagon Function Part 43	OK
- Wagon Function Part 44	OK
- Wagon Function Part 45	OK
- Wagon Function Part 46	OK
- Wagon Function Part 47	OK
- Wagon Function Part 48	OK
- Wagon Function Part 49	OK
- Wagon Function Part 50	OK
- Wagon Function Part 51	OK
- Wagon Function Part 52	OK
- Wagon Function Part 53	OK
- Wagon Function Part 54	OK
- Wagon Function Part 55	OK
- Wagon Function Part 56	OK
- Wagon Function Part 57	OK
- Wagon Function Part 58	OK
- Wagon Function Part 59	OK
- Wagon Function Part 60	OK
- Wagon Function Part 61	OK
- Wagon Function Part 62	OK
- Wagon Function Part 63	OK
- Wagon Function Part 64	OK
- Wagon Function Part 65	OK
- Wagon Function Part 66	OK
- Wagon Function Part 67	OK
- Wagon Function Part 68	OK
- Wagon Function Part 69	OK
- Wagon Function Part 70	OK
- Wagon Function Part 71	OK
- Wagon Function Part 72	OK
- Wagon Function Part 73	OK
- Wagon Function Part 74	OK
- Wagon Function Part 75	OK
- Wagon Function Part 76	OK
- Wagon Function Part 77	OK
- Wagon Function Part 78	OK
- Wagon Function Part 79	OK
- Wagon Function Part 80	OK
- Wagon Function Part 81	OK
- Wagon Function Part 82	OK
- Wagon Function Part 83	OK
- Wagon Function Part 84	OK
- Wagon Function Part 85	OK
- Wagon Function Part 86	OK
- Wagon Function Part 87	OK
- Wagon Function Part 88	OK
- Wagon Function Part 89	OK
- Wagon Function Part 90	OK
- Wagon Function Part 91	OK
- Wagon Function Part 92	OK
- Wagon Function Part 93	OK
- Wagon Function Part 94	OK
- Wagon Function Part 95	OK
- Wagon Function Part 96	OK
- Wagon Function Part 97	OK
- Wagon Function Part 98	OK
- Wagon Function Part 99	OK
- Wagon Function Part 100	OK

Part No.	Batch	Description	Qty
50031807	18.07.2022	Fung PM kit - K-T8100/8100 12 Mo	1

I confirm this report is accurate and complete	
Signed FOSS	Signed Customer
Name	Name
Would you be willing to participate in a brief survey in order to tell us how we performed?	

เอกสารไม่ควบคุม

CERTIFICATE OF CALIBRATION

Certificate No. : SP24-018

Page 1 of 5

Customer : United Analyst and Engineering Consultant Co., Ltd. (Head Office)

Address : 3 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Phrakhanong, Bangkok 10260

Location of calibration : Laboratory 315

Equipment : UV-Vis Spectrophotometer

Manufacturer : Agilent Technologies

Model : Cary 60

Serial No. : MY15410009

ID No. : UAE.WAT.020/2558

Received Date : 7 May 2024

Calibration Date : 7 May 2024

Issue Date : 9 May 2024

Condition Instrument : Good

Calibrated by : (Mr. Tanawat Rittidach)

Approved by : (Ms. Chonthicha Sangern)

Technical Manager

Quality Manager

The calibration result is applied only to the above calibrated item and was found accurate as shown on date and place of calibration only.

The measurement capability of the laboratory and its traceability to recognized national standards and to the unit of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the DQE Services Co., Ltd.

เอกสารไม่ควบคุม

REPORT OF CALIBRATION

Certificate No. : SP24-018

Page 2 of 5

Environment Condition : Ambient Temperature 25 ± 5 °C

Relative humidity 55 ± 20 %RH

Calibration method : In-house method CP-01 Based on ASTM E275-08

Certified Reference Materials :

Material	Serial No.	Certificate No.	Due date
Absorbance Standard set	25760	115663	25 October 2025
Absorbance Standard set	25757	115638	25 October 2025
Wavelength Standard set	25806	115657	25 October 2025
Wavelength Standard set	25758	115665	25 October 2025

Traceability : This certification is traceable to the International System of Unit maintained at National -

Institute of Standards and Technology (NIST) through Starna Scientific Limited

Spectral Band Width of UUC : 1.5 nm.

Scan Speed of UUC : 60 nm/min

Scan Interval of UUC : 0.15 nm.

Resolution of UUC : Photometric 0.0001 Abs.

Wavelength 0.1 nm.

เอกสารไม่ควบคุม

REPORT OF CALIBRATION

Certificate No. : SP24-018

Page 3 of 5

Calibration Results : Without adjustment

Photometric Accuracy :

Wavelength (nm.)	CRMs Values (Abs)	UUC Reading (Abs)	Correction (Abs)	Uncertainty (Abs)	Coverage factor
420	0.0000	0.0000	0.0000	0.0028	2.00
	0.5780	0.5747	0.0033	0.0031	2.00
	1.0484	1.0438	0.0046	0.0029	2.00
	2.1876	2.1832	0.0044	0.0080	2.00
440	0.0000	0.0000	0.0000	0.0028	2.00
	0.5595	0.5581	0.0014	0.0034	2.00
	1.0239	1.0231	0.0008	0.0035	2.00
	2.1230	2.1219	0.0011	0.0080	2.00
465	0.0000	0.0000	0.0000	0.0028	2.00
	0.5230	0.5184	0.0046	0.0030	2.00
	0.9633	0.9614	0.0019	0.0029	2.00
	1.9753	1.9731	0.0022	0.0070	2.00
546.1	0.0000	0.0000	0.0000	0.0028	2.00
	0.5181	0.5150	0.0031	0.0031	2.00
	1.0002	0.9964	0.0038	0.0033	2.00
	1.9973	1.9914	0.0059	0.0088	2.00
590	0.0000	0.0000	0.0000	0.0028	2.00
	0.5517	0.5485	0.0032	0.0030	2.00
	1.0803	1.0772	0.0031	0.0030	2.00
	2.0373	2.0293	0.0080	0.0080	2.00
635	0.0000	0.0000	0.0000	0.0028	2.00
	0.5591	0.5565	0.0026	0.0031	2.00
	1.0518	1.0482	0.0036	0.0030	2.00
	1.9274	1.9202	0.0072	0.0079	2.00

เอกสารไม่ควบคุม

DQE Services Co.,Ltd.

32 Soi Ladprao-Wanghin 55, Ladprao-Wanghin Rd., Ladprao, Bangkok 10230

Phone : +66 (0)2 538 2054, Email : dqeservicesinfo@gmail.com

DQE Services

ISO-TIS-17025
CALIBRATION DATA

REPORT OF CALIBRATION

Certificate No. : SP24-018Page 4 of 5

Photometric Accuracy :

Wavelength (nm.)	CRMs Values (Abs)	UUC Reading (Abs)	Correction (Abs)	Uncertainty (Abs)	Coverage factor k
235	0.0000	0.0000	0.0000	0.0050	2.00
	0.7469	0.7435	0.0034	0.0057	2.00
257	0.0000	0.0000	0.0000	0.0050	2.00
	0.8674	0.8639	0.0035	0.0060	2.00
313	0.0000	0.0000	0.0000	0.0050	2.00
	0.2919	0.2907	0.0012	0.0051	2.00
350	0.0000	0.0000	0.0000	0.0050	2.00
	0.6430	0.6402	0.0028	0.0055	2.00

DQE Services Co.,Ltd.

32 Soi Ladprao-Wanghin 55, Ladprao-Wanghin Rd., Ladprao, Bangkok 10230

Phone : +66 (0)2 538 2054, Email : dqeservicesinfo@gmail.com

DQE Services

ISO-TIS-17025
CALIBRATION DATA

REPORT OF CALIBRATION

Certificate No. : SP24-018Page 5 of 5

Wavelength Accuracy :

CRMs Values (nm.)	UUC Reading (nm.)	Correction (nm.)	Uncertainty (nm.)	Coverage factor k
241.72	242.0	-0.28	0.18	2.00
279.45	279.5	-0.05	0.18	2.00
287.81	287.9	-0.09	0.18	2.00
334.06	333.9	0.16	0.18	2.00
360.93	360.5	0.43	0.18	2.00
418.59	418.1	0.49	0.18	2.00
445.94	445.6	0.34	0.18	2.00
453.66	453.3	0.36	0.18	2.00
460.02	459.8	0.22	0.18	2.00
536.59	536.0	0.59	0.18	2.00
637.98	638.7	-0.72	0.18	2.00
431.38	430.8	0.58	0.18	2.00
472.50	472.4	0.10	0.18	2.00
513.47	513.7	-0.23	0.18	2.00
528.88	529.1	-0.22	0.18	2.00
573.17	573.5	-0.33	0.18	2.00
585.35	585.2	0.15	0.20	2.00
684.40	685.1	-0.70	0.18	2.00
740.72	741.4	-0.68	0.20	2.00
748.55	749.1	-0.55	0.18	2.00
807.03	807.3	-0.27	0.18	2.00
879.28	879.3	-0.02	0.18	2.00

Remark : - UUC = Unit Under Calibration

- N/A = Not Available

- The result expanded uncertainty of measurement U is stated as the standard uncertainty of measurement multiplied by the coverage factor k, which for a normal distribution corresponds to a coverage probability of approximately 95%

- * Indicates non TISI accredited

- End of Certificate -

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



LS 45/50B/55 - Preventive Maintenance report

Company Name:	United analyst and Engineering Consultant Co.,Ltd.		
Address:	3 Soi Udomsuk 41, Sukunvit Road, Phrakhanong, Bangkok 10260		
User Name :	K. Pimpun	WO Number:	WO-01624974
Telephone Number :	02-763-2828	Certificate Number :	FLR1001-2023
Customer Support Engineer :	Tanongsak	P.M. Number	1 of 1
PM Performed: (DD-MMM-YYYY)	2-Feb-2023	Next PM Due Date: (DD-MMM-YYYY)	2-Feb-2024

Scope

The purpose of this PM is to ensure the continued functionality of the PerkinElmer Fluorescence Spectrophotometer by inspecting and replacing any worn or damaged parts. This service should only be performed by a trained representative of PerkinElmer.

General Instructions:

The customer must provide the engineer operational data to demonstrate recent instrument performance prior to starting the PM. Always check with the customer before making any changes that may affect the customer's analysis should be signed by an authorized PerkinElmer and customer representative and left with the customer. Update the PM sticker and instrument logbook as required.

Copyright Information

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this publication may be reproduced in any form whatsoever or translated into any language without the prior, written permission of PerkinElmer, Inc. Copyright © 2009 PerkinElmer, Inc.

Trademarks

Registered names, trademarks, etc. used in this document, even when not specifically marked as such, are protected by law. PerkinElmer is a registered trademark of PerkinElmer, Inc. All other trademarks and registered trademarks not owned by PerkinElmer, Inc. or its subsidiaries that are depicted herein are the property of their respective owners. Except as specifically set forth in its terms and conditions of sale, PerkinElmer makes no Warranty of any kind with regard to this document, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. PerkinElmer shall not be liable for incidental or consequential damages in connection with the furnishing or use of this document.

เอกสารไม่ควบคุม

Page 1



Component List

Component Specific Model	Serial #	Software Version	Configuration Notes
LS55	81440	4.00.03	
-	-	-	-
-	-	-	-

Parts Lists

Test standard Used				
Part Number (if applicable)	Description			
C 520-7440	Stanadard Fluorence Intensity Filter			
B050 7805	Sealed Water Cell			
Additional Tools Required for PM				
Part Number (if applicable)	Description	Quantity	Serial #	Calibration Due Date (MM/YY)

เอกสารไม่ควบคุม

Page 2

Procedure Checklist

Use (✓) to check off those steps in the checklist that have been completed.

1. General:

- ☐ Review the instrument performance with the customer and document any recent problems.
- ☐ Perform general inspection of system for cleanliness.

2. Optical checks and Clean:

- ☐ Lamp Alignment/Intensity
- ☐ Sample Compartment and Windows
- ☐ Mirror and Grating Alignment
- ☐ Filter Wheel
- ☐ Cell Holder Alignment

3. Mechanical:

- ☐ Physical inspection – Please write any comments in the additional comments section.
- ☐ Grating Drive Mechanism.
- ☐ Slit Drive Mechanism.
- ☐ Sample Holder

4. Test:

- ☐ Emission Wavelength Accuracy.

Emission Wavelength Accuracy		Actual Value	Validation Criteria
Target Peak (nm)		(nm)	Accuracy Limit +/- (nm)
Target Peak # 1	253.7	254.0	± 1.0 nm
Target Peak # 2	507.3	507.4	± 1.0 nm
Target Peak # 3	626.0	625.8	± 1.0 nm

เอกสารไม่ควบคุม Page 3

- ☐ Excitation Wavelength Accuracy.

Excitation Wavelength Accuracy		Actual Value	Validation Criteria
Target Peak (nm)		(nm)	Accuracy Limit +/- (nm)
Target Peak # 1	253.7	253.2	± 1.0 nm
Target Peak # 2	365.0	365.4	± 1.0 nm
Target Peak # 3	507.3	508.0	± 1.0 nm

- ☐ Emission Slit calibration.

Emission Slit		Actual Value	Validation Criteria
Target Value (nm)		(nm)	Accuracy Limit +/- (nm)
Target Peak # 1	2.5	2.63	± 0.5 nm
Target Peak # 2	5.0	4.75	± 0.5 nm
Target Peak # 3	10.0	9.99	+ 1.0 / - 0.5 nm

- ☐ Excitation Wavelength Repeatability.

Emission Slit		Actual Value	Validation Criteria
Target Value (nm)		(nm)	Accuracy Limit +/- (nm)
Target Peak # 1	2.5	2.57	± 0.5 nm
Target Peak # 2	5.0	5.08	± 0.5 nm
Target Peak # 3	10.0	9.80	+ 1.0 / - 0.5 nm

เอกสารไม่ควบคุม Page 4

- ☐ Water Raman Sensitivity

	Actual Value
Signal to Noise	288 : 1
Drift	0.03

- ☐ Stray Light

	Actual Value
Stray Light at 290nm	2.64
Stray Light at 300nm	0.77

5. Accessory (where applicable):

- ☐ Micro Plate Reader
- ☐ Integrating Sphere
- ☐ Multi Cell Holder
- ☐ Water Jacketed Cell Holder
- ☐ etc.

6. Review:



- ☐ Review with the customer PM work performed.
- ☐ Review with the customer routine maintenance procedures.
- ☐ Discuss recommended customer-supplied materials to have on hand
- ☐ Attach PM sticker.
- ☐ Update Logbook.

เอกสารไม่ควบคุม Page 5

Additional Comments

Additional Comments Regarding the PM
Reference intensity low

Review

The PM checks and if applicable performance tests for LS 45/50B/55 have been completed.	
This LS 45/50B/55 Passes <input checked="" type="checkbox"/> Fails <input type="checkbox"/> the PM.	
Review of Preventive Maintenance:	
Authorized PerkinElmer Representative: 	Date: 2-Feb-23 (DD-MMM-YYYY)
Authorized Customer Representative: 	Date: 2-Feb-23 (DD-MMM-YYYY)

เอกสารไม่ควบคุม Page 6

Agilent 55 240 280 Series Atomic Absorption Spectroscopy Systems

Preventive Maintenance Checklist

Agilent Preventive Maintenance provides factory recommended service for your analytical systems to assure reliable operation and the accuracy of your results.

Delivered by highly trained and certified service engineers using genuine Agilent parts and supplies, Agilent Preventive Maintenance provides everything you need to reduce unplanned downtime and keep your systems operating at their peak. This checklist will be completed at the end of the service and provided to you as a record of the installation.

Note: While non-current production AA instrument and/or accessory models are not covered specifically in this document it can be used as a basic reference.

For more information about Agilent Technologies services please visit our web site using the following URL: <http://www.agilent.com/en-us/services>


Introduction

Customer Information

- Customers should provide all necessary operating supplies upon request of the engineer.
- A customer representative should be available to the engineer while performing the preventive maintenance procedures.
- Any parts, not included in the Parts Lists section of this document, are not part of the recommended Preventive Maintenance service, nor are they included in the price of this service.
- If a system requires the use of extra or special procedures and/or parts for the maintenance service, then these must be ordered separately and charged as a repair, which may incur additional costs.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

Important Customer Web Links

- For more information about Agilent Technologies services, please visit our website using the following URL: <http://www.agilent.com/en-us/products/crosslab-instrument-services/service-repair>
- To access Agilent University, visit <http://www.agilent.com/crosslab/university/> to learn about training options, which include online, classroom and onsite delivery. A training specialist can work directly with you to help determine your best options.
- A useful Agilent Resource Center web page is available, which includes short videos on maintenance, quick lists of consumables for new instruments, and other valuable information. Check out the Resource Page here: <https://www.agilent.com/en-us/agilentresources>
- Need technical support, FAQs, supplies? – visit our Support Home page at <http://www.agilent.com/search/support>
- Get answers. Share insights. Build connections. Join the Agilent Community at <https://community.agilent.com/welcome>

Service Engineer's Responsibilities

- Contact the customer and ensure that all necessary supplies are available before the preventive maintenance visit.
- Confirm the ability of the instrument to deliver continued safe operation as established via the Agilent AA safe operation flow chart. (Refer directly to the AA 55/240/280 Preventive Maintenance Scope of Work to make this decision.)
- Only select those pages that relate to the system or module being serviced.
- Complete empty fields with the relevant information.
- Complete the relevant checkboxes in the checklist using either a "X" or tick mark "✓".
- Check "Section not applicable" check boxes to indicate services/tasks not delivered, as appropriate.
- Complete the Preventive Maintenance service in the order of the tasks listed.
- Complete the Service Review section together with the customer.
- Complete the fields for page numbers at the foot of each selected page.
- Complete the total number of pages field in the Service Completion section.
- Ask the customer to sign the Service Completion section including the customer's and your signature.

This information is subject to change without notice.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

Instrument Maintenance

System Information

☐ Check this box if an instrument configuration report is attached instead of completing the table.


Instrument System Name and ID	
Instrument System Site and Location	UNITED ANALYST AND ENGINEERING CONSULTANT / 2nd Lab FI

List System Component Product Numbers	List the Serial Numbers of each Component
1. G 8432 A	17 016 0001
2.	
3.	
4.	
5.	
6.	
7.	
8.	
9.	

Preparation, Safe operation and Initial performance checks

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

Preventive Maintenance Procedures

FLAME SYSTEM section

☐ Section not applicable

Electronic components

- ☒ Review and confirm instrument configuration data in SVD
- ☒ Confirm power supply voltages using the SVD Power Supply diagnostic
- ☒ For Dual Beam instruments - Confirm RBC frequency using the SVD RBC frequency diagnostic.

Mechanical components

- ☒ Check the burner adjuster controls for complete and free movement. If the burner adjuster needs lubrication, use Molykote 321 or mineral-based molybdenum disulphide grease.
- ☒ Run SVD tests to exercise all motor drives over the full range of their travel:
 - ☒ Monochromator drive
 - ☒ Slit drive
 - ☒ Lamp selector
 - ☐ ABA N/A

Optics components

- ☒ Check that external optical surfaces are clean – Clean or replace as required.
- ☒ Use SVD and perform Mono Wavelength Correction.
- ☒ Use SVD and perform Slit Calibration.
- ☒ Use SVD and perform Grating Squareness Diagnostic.
- ☒ Use SVD and perform Zero Order Offset/Mono Correction.
- ☒ Use SVD and perform Wavelength Repeatability.
- ☒ Physically inspect selected HC lamps (customer to supply per their choice) and measure the % Gain for each lamp. Advise customer if lamps are showing emission degradation due to age.
- ☒ Check that the signal energy of the D2 and HC lamps track properly. Advise customer if their D2 lamp is showing emission degradation due to age.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

Sample Introduction and Atomization

- ☒ Inspect the burner interlock plate to ensure that the interlock pin is secure and correct for the burner type.
- ☒ Clean the burner slot with a clean white card.
- ☒ Check the uniformity of the slot width.
- ☒ Clean the burner if required.
- ☒ Change the burner o-ring.
- ☒ Clean the nebulizer, spray chamber and liquid trap.
- ☒ Change all o-rings and seals in the nebulizer, nebulizer block and spray chamber.
- ☒ Check that the pressure relief bung releases readily.
- ☒ Change o-rings on the fuel and oxidant delivery bars.
- ☒ Leave the liquid trap EMPTY and verify the flame will not ignite in this state.
- ☒ Refill liquid trap and check that overflow drains freely into the drain/waste tube.
- ☒ Check the drain/waste tube for good drainage. It should not have tight bends, kinks or loops and the lower end must be above the liquid level in the waste vessel.
- ☒ Check and clean the igniter electrode.

Gas handling components and safety interlocks

- ☒ Pressure test for leaks.
- ☒ Leak test gasbox internal components and connections.
- ☒ Check safety interlock status and operation using the *SVD interlock monitoring diagnostic*.

Analytical performance for Flame systems

- ☒ Ignite a flame.
- ☒ Check that you can adjust the nebulizer uptake rate from 4 to 6.5 mL per minute.
- ☒ Optimize the instrument ready to perform Cu sensitivity test.
- ☒ Create a manual method to perform a Basic Cu ABS test - "Final Performance Testing"
- ☒ Run a PM completed sensitivity test for a 5 ppm copper sample and record the results in the AA PM Performance test results and measurements table.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

FURNACE SYSTEM section

- ☒ Section not applicable

Electronic components

- ☐ Review and confirm instrument configuration data in SVD
- ☐ Confirm power supply voltages using the *SVD Power Supply diagnostic*.

Mechanical components

- ☐ Run SVD tests to exercise all motor drives over the full range of their travel:
 - ☐ Monochromator drive
 - ☐ Slit drive
 - ☐ Lamp selector

Optics components


- ☐ Check that external optical surfaces are clean – Clean or replace as required.
- ☐ Use SVD and perform *Mono Wavelength Correction*.
- ☐ Use SVD and perform *Slit Calibration*.
- ☐ Use SVD and perform *Grating Squareness Diagnostic*.
- ☐ Use SVD and perform *Zero Order Offset/Mono Correction*.
- ☐ Use SVD and perform *Wavelength Repeatability*.
- ☐ Physically inspect selected HC lamps (customer to supply per their choice) and measure the % Gain for each lamp. Advise customer if lamps are showing emission degradation due to age.

Gas handling, water system and workhead component checks

- ☐ Inspect the GTA workhead gas hoses and connections for leaks.
- ☐ Pressure test for gas leaks.
- ☐ If the cooler system is accessible (stand-alone) check for correct operation and coolant/water level – this includes any temperature and pressure settings plus filter cleaning (air flow and water).
- ☐ Inspect the GTA workhead water hoses and connections for leaks.
- ☐ Check all graphite components and replace if necessary.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

- ☐ Tube
- ☐ Electrodes
- ☐ Shroud

- ☐ Check and clean the end windows on the workhead.
- ☐ Check safety interlock operation.

Analytical performance for Furnace systems

- ☐ Optimize the instrument ready to perform Cu sensitivity test.
- ☐ Run the sensitivity test for a 25 ppb copper sample and record the results in the results table.

PSD autosampler accessory for Furnace systems

- ☒ Section NOT Applicable
- ☐ Check condition of the PSD capillary – replace if necessary.
- ☐ Check condition and operation of PSD syringe – ensure it does not have air locks and bubbles.
- ☐ Change PSD rinse bottle o-ring.
- ☐ Check and clean the rinse vessel.
- ☐ Check the drain tube for good drainage. It should not have tight bends, kinks or loops and the lower end must be above the liquid level in the waste vessel.
- ☐ Ensure that the waste vessel is suitable for use with the furnace system.

Sample introduction pump system (SIPS) accessory

- ☒ Section NOT Applicable
- ☐ Re-torque screws securing the hubs, presser arms and pump rotors.
- ☐ Adjust each roller so that it rotates freely.
- ☐ Wipe clean the pump rotor rollers and pump bands with a dry clean cloth.
- ☐ Ensure that the presser arms and the surfaces near the pump are free from dirt and spills.
- ☐ Remove the pump module rear cover and check for the incursion of liquids and any signs of corrosion.
- ☐ Re-torque the nuts that fasten the motor mounting plates to the chassis.
- ☐ Check clips securing the diluents holder and replace if necessary.
- ☐ Disconnect, clean T-piece, and reassemble the tubing using the following steps.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

- ☐ Remove the T-piece by disconnecting the pump tubes, the pump bands and all other tubing.
- ☐ Place the T-piece in an ultrasonic bath containing strong detergent 1-5% Decon 30 or similar, for approximately 5-10 minutes.
- ☐ Wash the T-piece under a tap with a strong flow of water.
- ☐ Rinse with distilled water through all of the inlets in the reverse direction to normal sample flow.
- ☐ Reassemble.

Sample preparation system (SPS 4) accessory

- ☒ Section NOT Applicable

The Agilent SPS 4 autosampler is designed to need minimal maintenance.

The following maintenance requirements are suggested to maintain the performance of the autosampler.

- ☐ Cleaning the spill tray, rack location mat, end frames and chassis accessories with a damp soft cloth and diluted mild detergent.
- ☐ Cleaning the autosampler cover panels with domestic window cleaner.
- ☐ Checking the X- axis and Z- axis drive belts for cracks, splits, damaged teeth, excessive fraying, color changes or degradation from fumes.
- ☐ Check the X- axis, Theta- axis and Z- axis FFC cables for cracks, incorrect positioning, damaged edge or damaged connectors.

NOTE: The autosampler requires no extra lubrication throughout its lifetime.
For further details refer to the SPS 4 service manual G8410-90050.


Sample preparation system (SPS 3) accessory

- ☒ Section NOT Applicable

- ☐ Check the x-axis and z-axis timing belts – Replace if there is any cracks, splits or color deterioration and belt tension.
- ☐ Check belt tensions - adjust if required
- ☐ Check the lubrication pad for single x-axis shaft. If pad is dry or customer has observed any vibration or erratic movements of the x-axis carriage, add 1 mL of Dow Corning 200 @ Fluid, 200 CS into the well.
- ☐ Check the auto-sampler ability to find tube positions - Calibrate if required.
- ☐ Clean the exterior surfaces of the accessory with soft lint free cloth. This cloth can be dampened with warm water or a mild detergent. Do not use organic solvents or abrasive cleaning agents.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

Vapor generation accessory VGA (hydride generator)

☒ Section NOT Applicable

- ☐ Inspect VGA gas supply hose.
- ☐ Inspect/replace VGA pump tubing.
- ☐ Check low gas pressure interlock setting – adjust if required.
- ☐ Check precision orifice gas flow setting – adjust if required.
- ☐ Check gas regulator pressure to 46 psi (325 kPa) – adjust if required.
- ☐ Clean the exterior surfaces of the accessory with soft lint free cloth. This cloth can be dampened with warm water or a mild detergent. Do not use organic solvents or abrasive cleaning agents.

UltrAA lamp accessory (external)

☒ Section NOT Applicable

- ☐ Check the condition of the power cable.
- ☐ Clean the exterior surfaces of the accessory with soft lint free cloth. This cloth can be dampened with warm water or a mild detergent. Do not use organic solvents or abrasive cleaning agents.

Restore System


- ☒ If you have altered the customer's instrumentation during the course of PM, restore to the original status to allow the customer to conduct their normal activities (e.g., reload the customer's method.)

Guidance

If the PM service is performed prior to a qualification service, then use the qualification procedure as a guide for final instrument set up and checkout.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

Signature Page

Service Review

- ☒ Attach available reports/printouts of all tests to this documentation.
- ☒ Record the Preventive Maintenance service activity in the customer's records/logbook.
- ☒ Update/reset instrument maintenance counters as appropriate.
- ☒ Affix the PM sticker to the system or instrument logbook based on the customer's request.
- ☒ Complete the Service Engineer Comments section if there are additional comments.
- ☒ Review this service, parts replaced, and test results obtained with the customer.
- ☒ If the instrument firmware was updated, record the details of the change in the Service Engineer's Comments box or if necessary, in the customer's IQ records.

Test Results

Test Description		
Flame optics PMT Gain test		
For copper at 324.8 nm, 4 mA, 0.5 nm slit width	< 55 %	44 %
Flame performance test with 5 ppm copper sample		
Air /acetylene, mixing paddle removed	Abs value > 0.5	0.7401 Abs
Air /acetylene, mixing paddle installed, 10 replicates	%RSD < 1.0	0.5 % RSD
Deuterium furnace optics PMT Gain test		
For copper at 324.8 nm, 4 mA, 0.5 nm slit width	< 55 %	N/A
Deuterium furnace performance test with 25 ppb copper sample (324.8 nm)		
Precision %RSD	≤ 4.0%	N/A
Abs value	≥ 0.15	N/A
Zeeman furnace analytical performance: 25 ppb copper sample (327.4 nm)		
Precision %RSD	≤ 4.0%	N/A
Abs value	≥ 0.10	N/A
MSR%	≥ 70 %	N/A

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

AA consumable and parts list table

Part Description		Product/Model # where used	PM supplied or Consumable	Instrument-Type
Test Solution – Cu 5ppm solution	6610030100	50 55 140 240 280	PM supplied	Common
Test Solution - Blank solution	5190-7001	50 55 140 240 280	PM supplied	Common
Copper, 1000 ug/ml, 100ml	5190-8279	50 55 140 240 280	*	Common
Kit, Mk 7 O-rings, aqueous, complete set	9910093400	50 55 140 240 280	PM supplied	Flame
Organic Kit	9910093500	50 55 140 240 280	PM supplied	Flame
Wire Nebulizer Cleaning	9910024700	50 55 140 240 280	consumable	Flame
Tubing-Capillary Std Nebbs	9910024800	50 55 140 240 280	consumable	Flame
Capillary Tube Hvac Neb (3) (organics only)	9910044000	50 55 140 240 280	consumable	Flame
Glass impact beads (5/pk)	9910025700	50 55 140 240 280	consumable	Flame
Teflon impact beads (5/pk) (organics only)	9910053300	50 55 140 240 280	consumable	Flame
Burner cleaning strip (100/pk)	9910053900	50 55 140 240 280	consumable	Flame
Window UV silica – round (right side)	2010082600	50 55 140 240 280	PM supplied	Common
Window UV silica – rectangular (left side)	2010082500	50 55 140 240 280	PM supplied	Common
Pad adhesive window (round)	4910012700	50 55 140 240 280	PM supplied	Common
Pad adhesive window (rectangular)	4910012800	50 55 140 240 280	PM supplied	Common
Electrode kit (1 pr) (D2)	6310003400	GTA120	PM supplied	Furnace
Shroud (D2)	6310003100	GTA120	PM supplied	Furnace
Zeeman electrode kit (1 pr)	6310003500	GTA120	PM supplied	Furnace
Zeeman shroud	6310003600	GTA120	PM supplied	Furnace
O-ring PSD rinse bottle	6910025900	PSD120	PM supplied	Furnace

* For engineers who only service AA instruments 5190-8279 can be used as a cheaper alternative for 6610030100.

Items classified as PM supplied in the above table are included in the standard PM

Those classified as consumable should be provided by the customer or charged to the customer if supplied by the Agilent service engineer.

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

Service Engineer Comments (optional)


If there are any specific points you want to note as part of performing the installation or other items of interest for the customer, please write in this box.

Service Completion

Service request number: 8006371115
 Date service completed: 24 January 2024
 Agilent signature: Woravit T.
 Customer signature: David
 Total number of pages in this document: 13

Revision: 10.00, Issued: November 2021

© Agilent Technologies, Inc. 2021



เอกสารไม่ควบคุม

SVD Results Report



Report ID: Diagnostic Start Time: 1/24/2024 9:41:24 AM Diagnostic End Time: 1/24/2024 10:10:55 AM

Customer: Service Engineer: Worawit T.
Address: Contact Details:

Instrument Configuration

Configuration:

Serial Number: MY13160001 Turret Type: Automatic
Instrument Model: Varian AA140/240/280 Number Of Lamps: 4
Flame Instrument: True Mono Type: Automatic
Furnace Instrument: True Gasbox Type: Y Gas Box
Zeeman Present: False Auto Burner Adjuster: False
Internal Zeeman: False Mains Frequency: 50
Internal UltraAA: False Firmware Version: 2.11
Optics Type: Double Beam Photomultiplier Type: Normal(900nm)
D2 BG Correction Fitted: True PWB Version: 45
Boot Block Version: 1.09

EEPROM Data:

Instrument Run Hours: 62609.832 D2 Run Hours: 49136.000
Zero Wavelength Offset: 30.148 D2 Serial Number: not set
Mono Correction: 0.765 D2 Install Date: 1/1/1970
Flame Hours: 29802.416 D2 Original Intensity: 1.000
D2 Last Intensity: 475.000

Frequency:

Averaging Period: 30.0
Datapoint Count: 20

Upper Limit: 51.00 Highest Measured Frequency: 50.00
Average Frequency: 50.00
Lower Limit: 49.00 Lowest Measured Frequency: 50.00

Result: **Passed**

Report Generated At: 1/24/2024 10:11:18 AM

1

SVD Results Report SVD

เอกสารไม่ควบคุม

Power Supply:

Averaging Period: 30.0

Datapoint Count: 20

	Lower Limit (V)	Actual (V)	Upper Limit (V)	Result:
12.00 V Rail	10.80	12.19	13.20	Passed
-12.00 V Rail	-13.20	-11.90	-10.80	Passed
5.00 V Rail	4.50	5.05	5.50	Passed
310.00 V Rail	279.00	320.00	341.00	Passed

Report Generated At: 1/24/2024 10:11:18 AM

2

SVD Results Report SVD


เอกสารไม่ควบคุม

Optics

Beam Balance:

Lamp Type: Copper
Lamp Socket Used: 3

Peak Selected: 324.80
Lamp Alignment: **Performed**

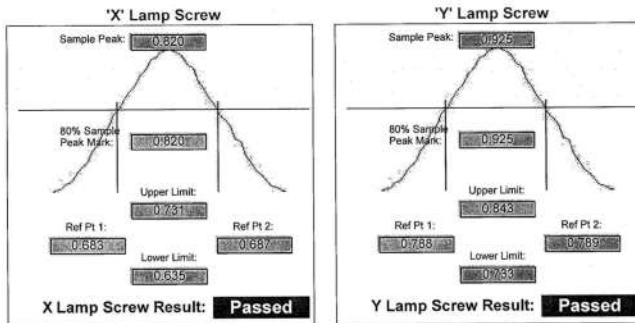

Grating Squareness:

Lamp Element(s): Copper
Lamp Turret Position: 3
Lamp Current(mA): 4.00
Slit Width(nm): 0.5
1st Order Wavelength(nm): 324.80
Lamp Alignment: **Performed**

	Lower Limit (nm)	Actual (nm)	Upper Limit (nm)	Result:
Zero Order	-0.10	0.00	0.10	Passed
First Order	324.45	324.75	325.15	Passed
Second Order	649.23	649.52	649.97	Passed

Report Generated At: 1/24/2024 10:11:18 AM

3

SVD Results Report SVD

เอกสารไม่ควบคุม

Wavelength Repeatability:

Lamp Used: Copper
Peak Used(nm): 324.750
Connected to Socket: 3

Lamp Current(mA): 4
Slit Width(nm): 0.2
Slit Height: Normal

Lamp Alignment: **Performed**

Lower Limit(nm)	324.758	324.888	Upper Limit(nm)
(Approach from Zero Order)			
Sample 1:	324.828	Sample 2:	324.828
Sample 3:	324.828	Sample 4:	324.823
Sample 5:	324.823	Sample 6:	324.823
Sample 7:	324.823	Sample 8:	324.823
Sample 9:	324.823	Sample 10:	324.823

Mean: 324.825

Standard Deviation: 0.002

Result: **Passed**

Report Generated At: 1/24/2024 10:11:18 AM

4

SVD Results Report SVD

เอกสารไม่ควบคุม

Mechanical

Wavelength Drive:

Passed

Slit Drive:

Passed

Turret Drive:

Passed

Auto Burner Adjuster Drive:

Untested

Miscellaneous

Signal Processing Linearity:

Calculate Mode: New Calc Mode

	Lower Limit	Actual	Upper Limit	Result:
S0	114	261	297	Passed
S1	156	165	191	Passed
S2	271	296	332	Passed
S3	474	507	579	Passed
S4	825	918	1008	Passed
S5	1435	1528	1754	Passed
S6	2498	2769	3053	Passed
S7	4347	4752	5313	Passed

Interlocks:

Burner Fitted: Working

Flame Detect: Working

N2O Burner Fitted: Untested

GCU Active: Working

Flame Shield Closed: Working

Oxidant Pressure: Working

Gas Control Fitted: Untested

Oxidant Changeover: Untested

Pressure Release Bung Fitted: Working

Ignition: Working

Liquid Trap Fitted: Working

Auto Lamp Recognition:

Lamp 1: Uncoded Lamp/Not Connected

Lamp 5: Not Supported

Lamp 2: 87 - Silver/Cadmium/Lead/Zinc(UltraA) (Ag/C

Lamp 6: Not Supported

Lamp 3: 14 - Copper (Cu)

Lamp 7: Not Supported

Lamp 4: Uncoded Lamp/Not Connected

Lamp 8: Not Supported

Result: Passed

GTA Temperature Monitoring:

Not Performed

Notes:

PM 24 Jan 2024

Signatures:

Sequential by time report

1/24/2024 11:46 AM

Page 1 of 1

SpectrAA

Analyst

Date Started

Worksheet

Comment

Methods

Computer name

Serial Number:

1/24/2024 11:39 AM GMT: 1/24/2024 4:39 AM

Cu 5 PPM Sense check

Cu

DESKTOP-R9UJF8S

MY13160001

Method: Cu (Flame)

Sample ID	Conc mg/L	%RSD	Mean Abs
CAL ZERO	0.000	55.0	0.0003
Readings			
	0.0002	0.0002	0.0004
			1/24/2024
STANDARD 1	5.000	1.7	0.7419
Readings			
	0.7274	0.7515	0.7468
			1/24/2024

Abs

Linear - Cal. Set 1

Curve Fit

= Linear

Characteristic Conc

= 0.028 mg/L

r

= 1.0000

Calculated Conc

= 0.000 5.000

Residuals

= 0.000 0.000

Abs = 0.14833 x C + 0.00025

Sample 001	4.988	0.7	0.7401
Readings			
	0.7454	0.7399	0.7349
			1/24/2024

Sequential by time report

1/24/2024 11:50 AM

Page 1 of 1

SpectrAA

Analyst

Date Started

Worksheet

Comment

Methods

Computer name

Serial Number:

1/24/2024 11:47 AM GMT: 1/24/2024 4:47 AM

Cu 5 PPM Precision

Cu

DESKTOP-R9UJF8S

MY13160001

Method: Cu (Flame)

Sample ID	Exp Abs	%RSD	Mean Abs
Cu Precision	0.723	0.5	0.7232
Readings			
	0.7221	0.7195	0.7226
	0.7201	0.7213	0.7266
			0.7283
			0.7278
			0.7260
			1/24/2024

Abs

Cu Precision

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist**

Agilent Preventive Maintenance provides factory recommended service for your analytical systems to assure reliable operation and the accuracy of your results. Delivered by highly-trained and certified service engineers using genuine Agilent parts and supplies, Agilent Preventive Maintenance provides everything you need to reduce unplanned downtime and keep your systems operating at their peak.

For more information about Agilent Technologies services please visit our web site using the following URL <http://www.agilent.com/en-us/services/analytical-instrument-services>

Customer Information

- Customers should provide all necessary operating supplies upon request of the engineer.
- For customers using HF applications, the instrument should be returned to its standard sample introduction system.
- A customer representative should be available to the engineer while performing the preventive maintenance procedures.
- Any parts, not included in the Parts Lists section of this document, are not part of the recommended Preventive Maintenance service, nor are they included in the price of this service.
- If a system requires the use of additional or special procedures and/or parts for the instrument service, then these must be ordered separately and charged as a repair, which may incur additional

Service Engineer's Responsibilities

- Only complete/printout pages that relate to the system being serviced.
- Complete empty fields with the relevant information.
- Complete the relevant checkboxes in the checklist using a "X" or tick mark "✓" in the checkbox.
- Complete Not Applicable check boxes to indicate services not delivered, as needed.
- Complete the PM service in the order of the tasks listed.
- Complete the Service Review section together with the customer.

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist****System Information**

Instrument system name and ID	ICP 5110 VDV
Instrument system site and location	UAE / 3rd Floor Laboratory
List system component product numbers	List the serial numbers of each component
1. G 8015 A	1. MY 18030001
2. G 8018 A	2. 1801-01988
3.	3.
4.	4.
5.	5.
6.	6.
7.	7.
8.	8.
9.	9.
10.	10.

ICP-OES Configuration table	Circle the type or write in the type if other
Nebulizer Type	SeaSpray OneNeb other
Spray Chamber	Cyclonic Single Pass Cyclonic Double Pass other
Torch	Radial Dual View other
Injector Diameter	2.4mm 1.8mm 1.4mm 0.8mm other
Injector Material	Quartz Ceramic other

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist****General Preparation**

- Discuss any specific questions or issues with the customer prior to starting.
- Review the instrument logbook.
- Perform general external inspection of system for cleanliness.
- Check for proper installation of safety-related parts, assemblies, sensors etc.
- Check for required firmware/software updates and verify with customers if they would like it installed.
- For HF application systems, if standard sample introduction system was not installed, ask the customer to install it. N/A
- Run Instrument Performance test and record results in Instrument Performance Test Results Table - Pre PM.

Inspect and clean the system

- Look for any obvious external damage or problems.
- Inspect water cooling hoses, gas lines and power cord for excessive wear or damage.
- Perform a general internal inspection of the system for excessive dust accumulation, clean if necessary.
- Inspect sample introduction components and record any required maintenance in the Service Engineer Comments and notify the customer as the required actions required.
- Record the instrument operating conditions in the ICP-OES Status Results Table.
- Replace the polychromator purge filter.
- Replace the radial pre-optics window
- Replace the axial pre-optics window for SVDV and VDV instruments.
- Check exhaust flow for the correct positive extraction at the exhaust duct to insure they meet minimum specifications.
- Replace air inlet dust filter.
- Replace high capacity air inlet dust filter element if installed. N/A
- Remove and clean instrument water inlet filter.

G8481A Cooling water system

- Section NOT Applicable
- Drain cooling fluid and remove any particles from the chiller reservoir
- Remove, clean and reinstall water inlet metal mesh filter.
- Re fill with Polyclear cooling fluid.
- Clean the cooling system Air filter and the condenser by compressed air or vacuum cleaner.

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist****SPS 3 Auto Sampler**

- Section NOT Applicable
- Power cycle the autosampler and verify successful initialization.
- Inspect X and Z axis belts for wear. Replace is necessary.
- Clean X and Z axis slide shafts.
- Using customer's racks and the Agilent software move the sample probe to the 4 outermost corners and rinse port, ensure that the probe is approximately centered in the vial.

SPS 4 Auto Sampler

- Section NOT Applicable
- Clean the spill tray, rack location mat, end frames and chassis with a damp soft cloth and diluted mild detergent.
- Clean the auto sampler cover panels, if cover kit is installed, with domestic window cleaner
- Check the X-axis and Z-axis drive belts for cracks, splits, damaged teeth, excessive fraying, color changes or degradation from fumes.
- Check the X-axis, Theta-axis and Z-axis PFC cables for cracks, incorrect positioning, damaged edges or damaged connectors.
- Pump Tubing Replacement. Replace peristaltic pump tubing. Replace all tubing that goes from the rinse station to the pump and from the pump to the waste/rinse bottles

AVS 4, 6, 7

- Section NOT Applicable
- Replace valve rotor seal
- Check fittings for signs of leaks
- Check tubing including autosampler tubing for kinks or excessive wear
- Check high flow pump for signs of leaks

Instrument Adjustment

- Check position of Zn peak, adjust if required.
- Check Argon Ratio, adjust to specified value if required.
- Perform Detector Calibration.
- Perform Instrument Calibration.
- Run Instrument Performance Test and record results in Instrument Performance Test Results Table - Post PM.
- For systems using ICP Expert version 7.3 and above run the following Instrument tests and record the result in the Instrument Test Results Table
 - Subsystem Communications Test
 - Air Flow

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist**

- ☒ Water Flow
- ☒ Gas Flows
- ☒ RF Generator
- ☒ Camera Test
- ☒ Optics Test
- ☒ Nebulizer Test

Instrument Performance Test Results Table

Note: These measurements do not form part of any specification and are for reference only.

	Pre PM Sensitivity Check		Post PM Sensitivity Check	
	Radial	Axial *	Radial	Axial *
Zn 213.857 nm SRBR	4100.6	8364.0	4275.0	8400.8
Mn 257.610 nm SRBR	11064.7	31842.1	12801.7	30846.2
Al 396.152 nm SBR	7.5	14.9	9.9	16.8
K 766.491 nm SBR	5.1	36.8	6.4	39.7

* Axial result is not applicable for G8016AA, G8012AA Radial View instruments.

Instrument Test Results Table

Note: The Instrument Test results are for systems using ICP Expert version 7.3 and above only.

Instrument Test	Result
Subsystem Communications Test	Pass
Air Flow	Pass
Water Flow	Pass
Gas Flows	Pass
RF Generator	Pass
Camera Test	Pass
Optics Test	Pass
Nebulizer test	Pass

Issued: 3 February 2017, Revision: 1.1

Copyright © 2017
Page 5 of 8

Agilent Technologies

เอกสารไม่ควบคุม

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist**
ICP-OES Status Results Table

Note: These measurements do not form part of any specification and are for reference only.

Measurement	Standby Mode	Plasma On
Mains Voltage	224.540 VAC	227.973 VAC
Mains Current	0.204 A	0.104 A
Instrument Temperature	22.8 °C	22.7 °C
RF Air Flow (sensor speed)	15.0 Hz	13.0 Hz
Plasma Exhaust Temperature	No measurement	26.7 °C
Water Flow Oscillator	No measurement	1.64 L/min
Water Flow Detector	1.06 L/min	1.06 L/min
Water Inlet Temperature	18.0 °C	18.0 °C
Polychromator Temperature	35.0 °C	35.0 °C
CCD Temperature	-39.8 °C	-39.8 °C
Thermal Stabilizer	35.0 °C	35.0 °C
Argon Supply Pressure	677.94 kPa	627.33 kPa
Purge Gas Supply Pressure*1	674.90 kPa	645.40 kPa
Option Gas Supply Pressure*1	N/A kPa	N/A kPa
Nebulizer Flow	No measurement	0.70 L/min
Nebulizer Back Pressure	No measurement	164.63 kPa
Plasma Gas Flow	No measurement	11.92 L/min
Auxiliary Gas Flow	No measurement	1.00 L/min
RF Power	No measurement	1200 W
RF Supply Current	No measurement	8.663 A
RF Supply Voltage	No measurement	184.66 V

*1 If option installed

Issued: 3 February 2017, Revision: 1.1

Copyright © 2017
Page 6 of 8

Agilent Technologies

เอกสารไม่ควบคุม

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist**
ICP-OES Parts List Table

Part description	Part Number	Product / Model # where used	Quantity Consumed
Axial Pre-Optic Window	G8010-68014	G8010A, G8011A, G8014A/G8015A	1
Radial Pre-Optic Window	G8010-68015	All	1
Polyclear Cooling Fluid	G3292-80010	G8481A	
Purge Gas Filter	G8010-60136	All	1
Air inlet filter	G8000-68002	All	1
High Capacity Air Filter	G8010-60189	Optional	
Rotor seal for 6-7 port valve for AVS6/7	G8494-60002	G8494A/G8495	
Rotor seal for 4 port valve for AVS4	G8493-60002	G8493A	
Rinse solution to rinse station 2.5mm id x 1m	G8410-80123	SPS 4	
Barb connector 2.5mm-1.5mm ID	G8410-80124	SPS 4	
PVC waste tubing 8mm od x 5mm id, 2m	G8410-80122	SPS 4	
Additional Parts may be required from engineers stock:			
X axis drive belt	5410047500	SPS 3	
Z axis drive belt	5410047400	SPS 3	
Peristaltic pump tubing, PVC SolvaFlex, 3 bridged,	3710049000	SPS 4	

Restore system

For HF applications, ask the customer to reinstall their sample introduction system.

Leave system in an idle state: on and purging.

Guidance: If the PM service is performed prior to a qualification service, then use the qualification procedure as a guide for final instrument set up and checkout.

Service Review

- ☒ Affix the PM sticker to the system or instrument logbook based on the customer's request.
- ☒ Complete the Service Engineer Comments section below if there are additional comments.

Issued: 3 February 2017, Revision: 1.1

Copyright © 2017
Page 7 of 8

Agilent Technologies

เอกสารไม่ควบคุม

**Agilent 5110 and 5100 ICP-OES
Preventive Maintenance Checklist**

- ☒ Review the service and any test results with the customer.
- ☒ If the Instrument firmware was updated, record the details of the change in the Service Engineer's Comments box below or if necessary, in the customer's IQ records.

Service Engineer Comments (optional)

If there are any specific points you wish to note as part of performing the installation or other items of interest for the customer, please write in this box.

Other Important Customer Web Links

How to get information on your product:

- ☒ Literature Library - <http://www.agilent.com/en-us/products/icp-oes/icp-oes-systems/5110-icp-oes#literature>
- ☒ Need to know more? - <http://www.agilent.com/crosslab/university/>
- ☒ Need technical support, FAQs? - <http://www.agilent.com/en-us/support/landing/icp-oes>
- ☒ Need supplies? - www.agilent.com/chem/supplies

Service Completion

Service request number 600565287 Date service completed 30 Nov 2022

Agilent signature Woravit T. Customer signature Jim

Document part number: G8014-90075

Issued: 3 February 2017, Revision: 1.1

Copyright © 2017
Page 8 of 8

Agilent Technologies

เอกสารไม่ควบคุม

Report Summary

Instrument Model Agilent 5100/5110 VDV ICP-OES
Instrument ID G8011A/G8015A
Instrument Serial Number MY18030001
Software Version 7.3.1.9507
Firmware Version 3442
Tested By Test Before PM
Test Completed On 11/30/2022 9:35:32 AM

Result Summary

Subsystem Communications Test Skipped
Air Flow Test Skipped
Water Flow Test Skipped
Gas Flows Test Skipped
RF Generator Test Skipped
Camera Test Skipped
Optics Test Skipped
Advanced Valve System Test Skipped
Resolution Test Pass
Sensitivity Test Pass
Precision Test Pass

เอกสารไม่ควบคุม

Resolution Test

Pass

Element Wavelength	Specification	Width
N (174.213 nm)	≤ 9.40	6.62
As (188.980 nm)	≤ 8.20	6.20
C (193.027 nm)	≤ 11.50	8.35
Mo (202.032 nm)	≤ 8.20	6.41
Cr (206.158 nm)	≤ 13.40	9.04
Zn (213.857 nm)	≤ 8.70	6.62
Pb (220.353 nm)	≤ 9.50	7.13
Co (228.615 nm)	≤ 17.20	11.71
Ba (230.424 nm)	≤ 9.40	7.21
Mn (257.610 nm)	≤ 13.30	9.50
Mn (260.568 nm)	≤ 20.30	14.33
Cr (267.716 nm)	≤ 11.00	8.14
Cu (324.754 nm)	≤ 25.00	18.98
Cu (327.395 nm)	≤ 14.20	11.24
Sr (338.071 nm)	≤ 33.50	24.47
Ba (455.403 nm)	≤ 44.00	33.88
Sr (460.733 nm)	≤ 36.00	17.22
Ba (493.408 nm)	≤ 36.00	25.48
Ba (614.171 nm)	≤ 42.00	25.47
Ar (675.283 nm)	≤ 74.00	59.82
K (766.491 nm)	≤ 80.00	64.94

เอกสารไม่ควบคุม

Sensitivity Test

Pass

Element Wavelength	Specification	Method	Ratio	Standard	Blank
As (188.980 nm)	≥ 46.0	SRBR	147.7	1156.5	55.5
Se (196.026 nm)	≥ 41.0	SRBR	111.1	1195.3	97.7
Zn (213.857 nm)	≥ 1421.0	SRBR	4100.6	51959.5	159.6
Pb (220.353 nm)	≥ 46.0	SRBR	192.5	2808.6	185.7
Mn (257.610 nm)	≥ 3518.0	SRBR	11064.7	264165.0	567.6
Al (396.152 nm)	≥ 3.4	SBR	7.5	49047.9	5770.5
Ba (493.408 nm)	≥ 34.0	SBR	107.4	1887710.3	17407.5
K (766.491 nm)	≥ 1.8	SBR	5.1	100805.9	16626.4

Element Wavelength	Specification	Method	Ratio	Standard	Blank
As (188.980 nm)	≥ 208.0	SRBR	234.9	3056.4	152.9
Se (196.026 nm)	≥ 159.0	SRBR	218.1	3865.1	271.6
Zn (206.200 nm)	≥ 234.0	SRBR	1306.5	15850.4	144.5
Zn (213.857 nm)	≥ 1743.0	SRBR	8364.0	183037.8	476.4
Cd (214.439 nm)	≥ 4227.0	SRBR	7718.5	143240.2	342.8
Pb (220.353 nm)	≥ 320.0	SRBR	576.3	14465.2	580.4
Mn (257.610 nm)	≥ 10625.0	SRBR	31842.1	1411257.3	1958.9
Cr (267.716 nm)	≥ 1048.0	SRBR	4492.1	183110.6	1632.2
Cu (324.754 nm)	≥ 19.0	SBR	46.2	371487.5	7862.9
Al (396.152 nm)	≥ 6.0	SBR	14.9	278447.4	17552.6
Ba (493.408 nm)	≥ 60.0	SBR	190.6	10061527.3	52519.8
K (766.491 nm)	≥ 24.0	SBR	36.8	1922163.4	50858.1

เอกสารไม่ควบคุม

Precision Test

Pass

Element Wavelength	Specification	Measured Value % RSD
As (188.980 nm)	≤ 2.60	0.82
Se (196.026 nm)	≤ 2.60	0.71
Zn (213.857 nm)	≤ 1.50	0.43
Pb (220.353 nm)	≤ 2.60	0.76
Mn (257.610 nm)	≤ 1.50	0.60
Al (396.152 nm)	≤ 1.50	0.48
Ba (493.408 nm)	≤ 1.50	0.89
K (766.491 nm)	≤ 1.50	0.42

Element Wavelength	Specification	Measured Value % RSD
As (188.980 nm)	≤ 1.50	0.57
Se (196.026 nm)	≤ 1.50	0.76
Zn (206.200 nm)	≤ 1.50	0.61
Zn (213.857 nm)	≤ 1.50	0.51
Cd (214.439 nm)	≤ 1.50	0.55
Pb (220.353 nm)	≤ 1.50	0.52
Mn (257.610 nm)	≤ 1.50	0.54
Cr (267.716 nm)	≤ 1.50	0.54
Cu (324.754 nm)	≤ 1.50	0.69
Al (396.152 nm)	≤ 1.50	0.91
Ba (493.408 nm)	≤ 1.50	0.85
K (766.491 nm)	≤ 1.50	1.22

เอกสารไม่ควบคุม

Report Summary		
Instrument Model	Agilent 5100/5110 VDV ICP-OES	
Instrument ID	G8011A/G8015A	
Instrument Serial Number	MY18030001	
Software Version	7.3.1.9507	
Firmware Version	3442	
Tested By	PM Functional test	
Test Completed On	11/30/2022 11:43:36 AM	
Result Summary		
Subsystem Communications Test		Pass
Air Flow Test		Pass
Water Flow Test		Pass
Gas Flows Test		Pass
RF Generator Test		Pass
Camera Test		Pass
Optics Test		Skipped
Advanced Valve System Test		Skipped
Resolution Test		Skipped
Sensitivity Test		Skipped
Precision Test		Skipped
Subsystem Communications Test		Pass
Air Flow Test		Pass
30% Air Flow (relative speed)	75% Air Flow (relative speed)	
14.00	19.00	
Water Flow Test		Pass
RF Water Flow(L/min)	Camera Water Flow (L/min)	Water Inlet Temperature (°C)
1.44	1.05	18.51

Page 1 of 2

เอกสารไม่ควบคุม

Gas Flows Test			Pass		
Nebulizer Target Flow	Actual Flow	Back Pressure	Auxiliary Target Flow	Actual Flow	Back Pressure
0.70	0.70	163.37	2.00	1.99	108.49
Makeup Target Flow	Actual Flow	Back Pressure	Plasma Target Flow	Actual Flow	Back Pressure
2.00	2.00	112.85	18.00	17.91	23.46
RF Generator Test			Pass		
RF Power Supply Test		Passed			
RF Power Supply (V)		147.437			
RF Oscillator Test		Passed			
RF Oscillator Frequency (MHz)		0.000			
Work Coil Current (A)		45.069			
RF Power Supply Current (A)		1.997			
Camera Test			Pass		
	Integration Time (ms)	Standard Deviation	Status		
Electronic Offset Test	1000	5.305	Passed		
Dark Current Test	6000	0.578	Passed		
Array Test	5	0.024	Passed		
Linearity Test		0.118	Passed		

Page 2 of 2

เอกสารไม่ควบคุม

Report Summary		
Instrument Model	Agilent 5100/5110 VDV ICP-OES	
Instrument ID	G8011A/G8015A	
Instrument Serial Number	MY18030001	
Software Version	7.3.1.9507	
Firmware Version	3442	
Tested By	PM Performance test	
Test Completed On	11/30/2022 12:10:42 PM	
Result Summary		
Subsystem Communications Test	Skipped	
Air Flow Test	Skipped	
Water Flow Test	Skipped	
Gas Flows Test	Skipped	
RF Generator Test	Skipped	
Camera Test	Skipped	
Optics Test	Pass	
Advanced Valve System Test	Skipped	
Resolution Test	Pass	
Sensitivity Test	Pass	
Precision Test	Pass	
Optics Test	Pass	
	Radial	Axial
Intensity	5674608	5823476
Wavelength	737.212	737.212

Page 1 of 4

เอกสารไม่ควบคุม

Resolution Test			Pass		
Element Wavelength	Specification	Width			
N (174.213 nm)	≤ 9.40	6.79			
As (188.980 nm)	≤ 8.20	6.09			
C (193.027 nm)	≤ 11.50	8.29			
Mo (202.032 nm)	≤ 8.20	6.30			
Cr (206.158 nm)	≤ 13.40	9.05			
Zn (213.857 nm)	≤ 8.70	6.77			
Pb (220.353 nm)	≤ 9.50	7.02			
Co (228.615 nm)	≤ 17.20	11.67			
Ba (230.424 nm)	≤ 9.40	7.39			
Mn (257.610 nm)	≤ 13.30	9.48			
Mn (260.568 nm)	≤ 20.30	14.25			
Cr (267.716 nm)	≤ 11.00	7.94			
Cu (324.754 nm)	≤ 25.00	18.99			
Cu (327.395 nm)	≤ 14.20	11.33			
Sr (338.071 nm)	≤ 33.50	24.44			
Ba (455.403 nm)	≤ 44.00	33.86			
Sr (460.733 nm)	≤ 36.00	17.51			
Ba (493.408 nm)	≤ 36.00	25.56			
Ba (614.171 nm)	≤ 42.00	24.96			
Ar (675.283 nm)	≤ 74.00	59.38			
K (766.491 nm)	≤ 80.00	65.63			

Page 2 of 4

เอกสารไม่ควบคุม

Sensitivity Test					Pass
Radial					
Element Wavelength	Specification	Method	Ratio	Standard	Blank
As (188.980 nm)	≥ 46.0	SRBR	147.8	1149.3	54.8
Se (196.026 nm)	≥ 41.0	SRBR	111.6	1222.8	101.0
Zn (213.857 nm)	≥ 1421.0	SRBR	4375.0	52592.3	143.7
Pb (220.353 nm)	≥ 46.0	SRBR	199.8	2744.4	166.5
Mn (257.610 nm)	≥ 3518.0	SRBR	12801.7	285591.3	496.0
Al (396.152 nm)	≥ 3.4	SBR	9.9	52888.6	4873.6
Ba (493.408 nm)	≥ 34.0	SBR	154.6	2287291.6	14698.1
K (766.491 nm)	≥ 1.8	SBR	6.4	106701.6	14350.9
Axial					
Element Wavelength	Specification	Method	Ratio	Standard	Blank
As (188.980 nm)	≥ 208.0	SRBR	242.4	3170.1	154.8
Se (196.026 nm)	≥ 159.0	SRBR	226.1	4134.5	289.3
Zn (206.200 nm)	≥ 234.0	SRBR	1126.6	13782.0	146.5
Zn (213.857 nm)	≥ 1743.0	SRBR	8400.8	177166.3	442.5
Cd (214.439 nm)	≥ 4227.0	SRBR	7001.9	125884.2	321.6
Pb (220.353 nm)	≥ 320.0	SRBR	536.3	12909.3	532.6
Mn (257.610 nm)	≥ 10625.0	SRBR	30846.2	1287989.0	1738.8
Cr (267.716 nm)	≥ 1048.0	SRBR	4396.0	167335.6	1424.4
Cu (324.754 nm)	≥ 19.0	SBR	52.1	373890.7	7033.1
Al (396.152 nm)	≥ 6.0	SBR	16.8	268357.7	15112.4
Ba (493.408 nm)	≥ 60.0	SBR	225.2	10173441.5	44971.7
K (766.491 nm)	≥ 24.0	SBR	39.7	1874136.2	46055.7

Page 3 of 4

เอกสารไม่ควบคุม

analytikjena
An Endress+Hauser Company

Precision Test			Pass
Radial			
Element Wavelength	Specification	Measured Value % RSD	
As (188.980 nm)	≤ 2.60	0.60	
Se (196.026 nm)	≤ 2.60	0.84	
Zn (213.857 nm)	≤ 1.50	0.29	
Pb (220.353 nm)	≤ 2.60	0.59	
Mn (257.610 nm)	≤ 1.50	0.28	
Al (396.152 nm)	≤ 1.50	0.28	
Ba (493.408 nm)	≤ 1.50	0.59	
K (766.491 nm)	≤ 1.50	0.23	
Axial			
Element Wavelength	Specification	Measured Value % RSD	
As (188.980 nm)	≤ 1.50	0.71	
Se (196.026 nm)	≤ 1.50	0.43	
Zn (206.200 nm)	≤ 1.50	0.46	
Zn (213.857 nm)	≤ 1.50	0.37	
Cd (214.439 nm)	≤ 1.50	0.48	
Pb (220.353 nm)	≤ 1.50	0.48	
Mn (257.610 nm)	≤ 1.50	0.74	
Cr (267.716 nm)	≤ 1.50	0.26	
Cu (324.754 nm)	≤ 1.50	0.51	
Al (396.152 nm)	≤ 1.50	0.45	
Ba (493.408 nm)	≤ 1.50	0.81	
K (766.491 nm)	≤ 1.50	0.84	

Page 4 of 4

เอกสารไม่ควบคุม

analytikjena
An Endress+Hauser Company

Serial-No.: K170A0153 Customer-No.: C04-006
Date: 12 February 2024 Carried out by: Mr. Srichai Fak-On

Maintenance with following Operational Qualification (OQ) ☐
(requires a separate OQ protocol)

Company	บริษัท ยูโนเทค แอนนาไลซิส แอนด์ เอ็นจิเนียริงคอนซัลแตนท์ จำกัด
User	คุณกรวิทย์
Department	ห้องปฏิบัติการ (Mercur Analysis)
Street	3 ซอยอุดมสุข 41 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง
Zip Code, City	กรุงเทพมหานคร 10260
Country	ประเทศไทย
Phone	
Fax	
E-mail	

Maintenance Protocol

Atomic Fluorescence Spectrometer
mercur DUO /
mercur DUO plus

เอกสารไม่ควบคุม

Maintenance Protocol mercur DUO mercur DUO plus | update 27.06.2016 Version 2.3 K04c
Analogik Jena AG | Kontakt-Data-Str. 1 | 07740 Jena, Germany

เอกสารไม่ควบคุม

tightness visual check inside the Mercur	<input checked="" type="checkbox"/>
visual check if gold-traps are broken	<input checked="" type="checkbox"/>
visual check if spectrometer is contaminated	<input checked="" type="checkbox"/>
visual check of the fluorescence cell	<input checked="" type="checkbox"/>
visual check of the absorption cell, incl. window	<input checked="" type="checkbox"/>
reactor cleaning	<input checked="" type="checkbox"/>
check pump-hose, if necessary change it	<input checked="" type="checkbox"/>
check swivel drive (SEV)	<input checked="" type="checkbox"/>
check drying-hose, output gas-liquid-separator	<input checked="" type="checkbox"/>
test Bubble-Sensor	<input checked="" type="checkbox"/>
check gas flows	<input checked="" type="checkbox"/>
check volume flows, reagents	<input checked="" type="checkbox"/>
recording stray light values	<input checked="" type="checkbox"/>
measurement with 30 ng/l	<input checked="" type="checkbox"/>

- lubricate the dosing-winding (Teflon-grease-spray)
- clean the dosing cylinder, if necessary exchange it
- lubricate the winding system of the height drive with some drops of oil
- check the toothed belt
- check the position of the mechanical stopper (height: 13mm)
- check the pump rate of mixing pump (<14s AS52, typ.7s/<20s AS52S, typ.10s)
- check the pump rate of washing cup
- check the electrical hose connections for good contact
- check the connectors of the magnetic valves
- check the dosing hose for buckling, if necessary exchange it

Device parameter	nominal value	actual value
visual check general tightness inside the Mercur	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
visual check Goldtraps	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
visual check spectrometer		
Fluorescence cell	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
Absorption cell, incl. window	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
lens	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
Swivel drive (SEV)	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
check pump hoses	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
check hoses and hose connectors	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
check and clean reactor	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
check drying hose output Gas-liquid-seperator	o.k.; <input checked="" type="checkbox"/>	changed: <input type="checkbox"/>
check bubble-sensor	o.k.; <input checked="" type="checkbox"/>	not o.k.; <input type="checkbox"/>
Check gasflow		
Argon pressure valve 4	1.2 – 1.5 bar	1.5 bar
Valve 1	10 Nl/h or 0.166 NL/min	0.166 NL/min
Valve 2	50 Nl/h or 0.833 NL/min	0.833 NL/min
Valve 3	5 Nl/h or 0.083 NL/min	0.083 NL/min
Valve 4	10 Nl/h or 0.166 NL/min	0.166 NL/min
Check liquidflow		
Acid	2.5ml/min ± 1 ml	2.5 ml/min
Red.-agent	2.5ml/min ± 1 ml	2.5 ml/min
Sample	10ml/min ± 2 ml	10 ml/min
Adventitious light - values		
(V)	from file	
100	0	0
200	0	0
300	0	0
350	0	0
400	1	1
450	3	3
500	8	8
550	18	17
575	26	25
600	36	35

Device parameter	nominal value	actual value
Analytical parameters Fluorescence cell		
Conditions.: max.conc.: 10µg/L PMT-voltage:451.....V		
Blank-solution		Int0.0005
without enrichment / FBR 30 ng/L	Int > 0.0015 RSD < 3 %	Int.....0.0027 RSD...1.81%
Conditions.: max.conc.: 1.7µg/L PMT-voltage:444.....V		
Blank-solution		Int.....0.0043
with enrichment / FBR 30 ng/L	Int > 0.008 RSD < 3 %	Int.....0.0171 RSD...1.81%
Fok.- factor (Int ₂ / Int ₁)	> 3.5	6.33
Analytical parameters Absorption cell		
Blank-solution		Ext.0.0004
without enrichment / FBR 100 ng/L	Ext. > 0.0012 RSD < 5 %	Ext.0.0025 RSD.....3.17%
Comments		
# Sensitivity check (Without enrichment / FBR / 100 ng/L)		
Int. Blank = 0.0008		
Int. 100 ng/L = 0.0097		
RSD % = 0.96		

Signature Technician

Signature Customer

Place, Date (DD/MM/YYYY)

Place, Date (DD/MM/YYYY)

Service Report

[illegible]

Mercur

Report file: C:\WinAAS\TMP\2024\Result\WOI\Pro_009
 Program version: 4.7.9.0 Printed on: 12/02/2024 16:11
 Recording started on 12/02/2024 16:00 GMT+7.0
 Operator:
 Laboratory:
 Code:
 Remarks:

Method parameters

Method Without Enr. /FBR/0.10 ng/L_12-02-2024
 Created on 12/02/2024 Time 15:54
 Program ---

Parameters Mercur Technique: Hg fluorescence

Line	253.7 nm		
Lamp type	Hg-LP		
Integr. mode	Peak height	Integr. time	35 s
PMT	464 V		
AZ time	5 s	Peak smoothing	12/5
Delay	0 s		

Working mode	w/o enrich.	System cleaning	Off
FBR technique	on	Wash time acid	10 s
Pump speed	3	Soaking time	20 s
Sample load time	10 s	Gas load time	5 NL/h
Reaction time	6 s		
Waiting time AZ	5 s		
Delay	0 s		
Purge time1	30 s		
Purge time2	15 s	Gas wash time2	10 NL/h

Hg

QC parameters

QC type	Conc. check		
QC check samp. 1	---	QC check samp. 2	---
Conc.	---	Conc.	---
Error limit	---	Error limit	---
Rep. measurement	off	Reaction	flag + continue
QC std.1 no.	1(100.000 µg/L)	QC std.2 no.	3(0.100 µg/L)
QC std.1 limit	± 20.00%	QC std.2 limit	± 20.00%
QC std. act.	flag + continue		
Expect. blank abs.	0.0100± 0.0100	Reaction	flag + continue
QC precision	off	Reaction	off
		QC Recal.factor	Off

Calibration settings

Calib. meth	Standard calib.	Calibr. unit	µg/L
No. standards	1	Conversion fac.	1000
Type of standards	---	Standard prep.	Premixed
		Blank correct.	---
		Recalib. std. no.	---
Output unit	µg/L	Conversion fac.	1000
Calib. stat.	Mean	Meas. cycles	3
		Blind cycles	1
Stock sol. 1	---	Stock sol. 2	---
Stock sol. 3	---	Stock sol. 4	---
Type of cal. curve	linear	Intercept	Zero
Weighted cal.	off	Grubbs stat.	off
Check of cal. curve	no outlier test		

Sample statistics

Stat. mode	Mean	Meas. cycles	3
Confid. level	95.4 %	Blind cycles	1
Grubbs stat.	off		

Calibration standards

Hg

No	Name	State	Pos	Conc./ µg/L	Ints	SD	RSD/%
1	Cal-Zero	(--)	##	0.000	H: 0.000878 A: 0.01998	0.000052 0.001015	6.030 5.081
2	Cal-Std1	(--)	##	100.000	H: 0.009799 A: 0.1316	0.000094 0.000882	0.969 0.670

Mercur

เอกสารไม่ควบคุม

Mercur

เอกสารไม่ควบคุม

Calibration function 1


12/02/2024 16:10 Calibration (Peak height)

Ints=k1+k2*conc

k1=0.000878 k2=0.000089

Recal. factor: ---

Slope	0.00009 Ints/(µg/L)	R2-adjusted	1.0000
sc0	1.00000 µg/L		
Lower limit	0 µg/L	Upper limit	110. µg/L
Detection limit	---	Deter. limit	---

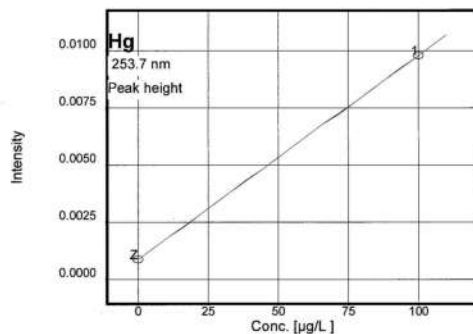**Measurements and events (sorted by time)**

Hg	Without Enr. /FBR/0.10 ng/L_12-02-2024	12/02/2024 16:00
ID	Conc.	Ints BG SD RSD/% Int. type Time
Cal-Zero		0.000939 16:03
		0.000845 16:04
		0.000849 16:05
	0µg/L	0.000878 0.000052940 6.030 16:05
Cal-Std1		0.009896 16:08
		0.009706 16:09
		0.009794 16:10
	100.0µg/L	0.009799 0.000094990 0.969 16:10
Calibration	Calibration function: 01	16:10

Peak plots

Hg



Mercur

เอกสารไม่ควบคุม

Mercur

เอกสารไม่ควบคุม

Mercur

Report file: C:\WinAAS\TMP\2024\Result\WO\Pro_006
 Program version: 4.7.9.0 Printed on: 12/02/2024 14:32
 Recording started on 12/02/2024 14:21 GMT+7.0
 Operator:
 Laboratory:
 Code:
 Remarks:

Method parameters

Method Without Enrichment / FBR / 30 µg/L_PM_12-02-2024
 Created on 12/02/2024 Time 11:09
 Program ---

Parameters Mercur Technique: Hg fluorescence

Line	253.7 nm		
Lamp type	Hg-LP		
Integr. mode	Peak height	Integr. time	35 s
PMT	451 V		
AZ time	5 s	Peak smoothing	12/5
Delay	0 s		
Working mode	w/o enrich.	System cleaning	Off
FBR technique	on	Wash time acid	10 s
Pump speed	3	Soaking time	20 s
Sample load time	12 s	Gas load time	10 NL/h
Reaction time	12 s		
Waiting time AZ	5 s		
Delay	0 s		
Purge time1	30 s		
Purge time2	15 s	Gas wash time2	10 NL/h

Hg**QC parameters**

QC type	Conc. check	
QC check samp. 1	---	QC check samp. 2
Conc.	---	Conc.
Error limit	---	Error limit
Rep. measurement	off	Reaction
QC std.1 no.	1(30.000 ng/L)	QC std.2 no.
QC std.1 limit	± 20.00%	QC std.2 limit
QC std. act.	flag + continue	
Expect. blank abs.	0.0100± 0.0100	Reaction
QC precision	off	QC Recal.factor
		Off

Calibration settings

Calib. meth	Standard calib.	Calibr. unit	ng/L
No. standards	1	Conversion fac.	1000000
Type of standards	---	Standard prep.	Premixed
		Blank correct.	---
		Recalib. std. no.	---
Output unit	µg/L	Conversion fac.	1000
Calib. stat.	Mean	Meas. cycles	3
		Blind cycles	1
Stock sol. 1	---	Stock sol. 2	---
Stock sol. 3	---	Stock sol. 4	---
Type of cal. curve	linear	Intercept	Zero
Weighted cal.	off	Grubbs stat.	off
Check of cal. curve	no outlier test		

Sample statistics

Stat. mode	Mean	Meas. cycles	3
Confid. level	95.4 %	Blind cycles	1
Grubbs stat.	off		

Calibration standards**Hg**

No	Name	State	Pos	Conc./ng/L	Ints	SD	RSD/%
1	Cal-Zero	(--)	##	0.000	H: 0.000587 A: 0.01383	0.000024 0.000359	4.137 2.597
2	Cal-Std1	(--)	##	30.000	H: 0.002754 A: 0.04276	0.000049 0.000186	1.814 0.437

Mercur

เอกสารไม่ควบคุม

Mercur

เอกสารไม่ควบคุม


Calibration function 1**12/02/2024 14:31 Calibration (Peak height)**

Ints=k1+k2*conc

k1=0.000588 k2=0.000072

Recal. factor: ---

Slope	0.00007 Ints/(ng/L)	R2-adjusted	1.0000
sc0	1.00000 ng/L		
Lower limit	0 ng/L	Upper limit	33.0 ng/L
Detection limit	---	Deter. limit	---

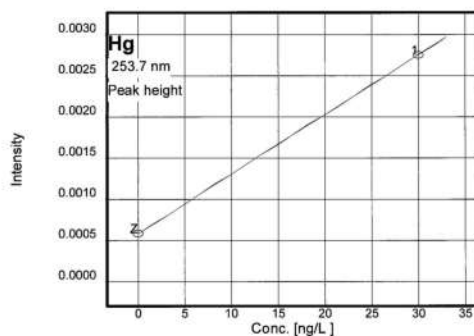**Measurements and events (sorted by time)**

Hg	Without Enrichment / FBR / 30 µg/L_PM_12-02-2024	12/02/2024 14:21
ID	Conc.	Ints BG SD RSD/% Int. type Time
Cal-Zero		0.000586 14:23
		0.000564 14:24
		0.000612 14:25
	0ng/L	0.000587 0.000024310 4.137 14:25
Cal-Std1		0.002810 14:28
		0.002740 14:29
		0.002713 14:30
	30.00ng/L	0.002754 0.000049960 1.814 14:30
Calibration	Calibration function: 01	14:31

Peak plots**Hg**

Mercur

เอกสารไม่ควบคุม

Mercur

เอกสารไม่ควบคุม

Mercur

Report file: C:\WinAAS\TMP\2024\Result\WO\Pro_007
 Program version: 4.7.9.0 Printed on: 12/02/2024 14:55
 Recording started on 12/02/2024 14:41 GMT+7.0
 Operator:
 Laboratory:
 Code:
 Remarks:

Method parameters

Method With Enrichment / FBR / 30 µg/L_PM_12-02-2024
 Created on 12/02/2024 Time 11:37
 Program ---

Parameters Mercur Technique: Hg fluorescence

Line	253.7 nm		
Lamp type	Hg-LP		
Integr. mode	Peak height	Integr. time	20 s
PMT	444 V		
AZ time	5 s	Peak smoothing	12/5
Delay	0 s		

Working mode	Enr. w/o reload.	System cleaning	Off
FBR technique	on	Wash time acid	10 s
Pump speed	3	Soaking time	20 s
Sample load time	10 s	Gas load time	5 NL/h
Reaction time	10 s		
Waiting time AZ	5 s		
Delay	0 s		
Purge time1	20 s		
Purge time2	15 s	Gas wash time2	5 NL/h
Purge time3	10 s	Gas wash time3	10 NL/h
Heat.time coll.1	20 s	Cool. time coll.1	25 s

Hg

QC parameters

QC type	Conc. check		
QC check samp. 1	---	QC check samp. 2	---
Conc.	---	Conc.	---
Error limit	---	Error limit	---
Rep. measurement	off	Reaction	flag + continue
QC std.1 no.	1(30.000 µg/L)	QC std.2 no.	1(30.000 µg/L)
QC std.1 limit	± 50.00%	QC std.2 limit	± 50.00%
QC std. act.	flag + continue		
Expect. blank abs.	0.0100± 0.0100	Reaction	flag + continue
QC precision	off		
		Reaction	off
		QC Recal.factor	Off

Calibration settings

Calib. meth	Standard calib.	Calibr. unit	µg/L
No. standards	1	Conversion fac.	1000
Type of standards	---	Standard prep.	Premixed
		Blank correct.	---
		Recalib. std. no.	---
Output unit	µg/L	Conversion fac.	1000
Calib. stat.	Mean	Meas. cycles	3
		Blind cycles	1
Stock sol. 1	---	Stock sol. 2	---
Stock sol. 3	---	Stock sol. 4	---
Type of cal. curve	linear	Intercept	Zero
Weighted cal.	off	Grubbs stat.	off
Check of cal. curve	no outlier test		

Sample statistics

Stat. mode	off	Meas. cycles	1
Confid. level	95.4 %	Blind cycles	1
Grubbs stat.	---		

Calibration standards

Hg

No	Name	State	Pos	Conc./ µg/L	Ints	SD	RSD/%
1	Cal-Zero	(--)	##	0.000	H: 0.004358 A: 0.01659	0.000018 0.000277	0.417 1.673
2	Cal-Std1	(--)	##	30.000	H: 0.01710 A: 0.06278	0.000152 0.000616	0.889 0.982

Mercur

เอกสารไม่ควบคุม

Mercur

เอกสารไม่ควบคุม

Calibration function 1


12/02/2024 14:55 Calibration (Peak height)

Ints=k1+k2*conc

k1=0.004358 k2=0.000425

Recal. factor: ---


Slope	0.00042 Ints/(µg/L)	R2-adjusted	1.0000
sc0	1.00000 µg/L		
Lower limit	0 µg/L	Upper limit	33.0 µg/L
Detection limit	---	Deter. limit	---

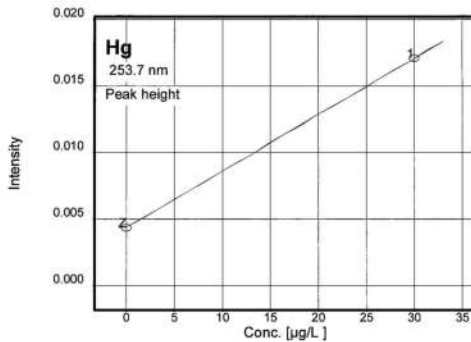**Measurements and events (sorted by time)**

Hg	With Enrichment / FBR / 30 µg/L_PM_12-02-2024	12/02/2024	14:41
ID	Conc.	Ints	BG
Cal-Zero		0.004343	
		0.004378	
		0.004352	
	0µg/L	0.004358	0.000018180 0.417
Cal-Std1		0.01728	
		0.01695	
		0.01708	
	30.00µg/L	0.01710	0.0001520 0.889
Calibration	Calibration function: 01		14:55

Peak plots

Hg



Mercur

เอกสารไม่ควบคุม

Mercur

เอกสารไม่ควบคุม

Mercur

Report file: C:\WinAAS\TMP\2024\Result\WO\Pro_008
Program version: 4.7.9.0 Printed on: 12/02/2024 15:22
Recording started on 12/02/2024 15:10 GMT+7.0
Operator:
Laboratory:
Code:
Remarks:

Method parameters

Method Without enrichment / FBR 100 ng/L PM_12-02-2024
Created on 12/02/2024 Time 11:54
Program ---

Parameters Mercur Technique: Hg absorption

Line	253.7 nm	Integr. time	40 s
Lamp type	Hg-LP		
Integr. mode	Peak height		
PMT	238 V		
AZ time	5 s	Peak smoothing	12/5
Delay	0 s		

Working mode	w/o enrich.	System cleaning	Acid
FBR technique	off	Wash time acid	15 s
Pump speed	4	Soaking time	20 s
Sample load time	8 s	Gas load time	10 NL/h
Reaction time	12 s		
Waiting time AZ	15 s		
Purge time1	40 s		

QC parameters

QC type	Conc. check	QC check samp. 2	---
QC check samp. 1	---	Conc.	---
Conc.	---	Error limit	---
Error limit	---	Reaction	flag + continue
Rep. measurement	off	QC std.2 no.	1(100.00 ng/L)
QC std.1 no.	1(100.00 ng/L)	QC std.2 limit	± 0.00%
QC std.1 limit	± 50.00%		
QC std. act.	flag + continue	Reaction	flag + continue
Expect. blank abs.	0.0100± 0.0100	Reaction	off
QC precision	off	QC Recal.factor	Off

Mercur

เอกสารไม่ควบคุม

Calibration settings

Calibr. meth	Standard calib.	Calibr. unit	ng/L
No. standards	1	Conversion fac.	1000000
Type of standards	---	Standard prep.	Premixed
		Blank correct.	---
		Recalib. std. no.	---
Output unit	µg/L	Conversion fac.	1000
Calib. stat.	Mean	Meas. cycles	3
		Blind cycles	1
Stock sol. 1	---	Stock sol. 2	---
Stock sol. 3	---	Stock sol. 4	---
Type of cal. curve	linear	Intercept	calculated
Weighted cal.	off	Grubbs stat.	off
Check of cal. curve	no outlier test		

Sample statistics

Stat. mode	Mean	Meas. cycles	2
Confid. level	95.4 %	Blind cycles	1
Grubbs stat.	---		

Calibration standards

No	Name	State	Pos	Conc./ ng/L	Abs	SD	RSD/%
1	Cal-Zero	(--)	##	0.00	H: 0.000478 A: 0.005393	0.000331 0.002260	69.26 41.90
2	Cal-Std1	(--)	##	100.00	H: 0.002580 A: 0.034199	0.000081 0.002697	3.171 7.887

Calibration function 1 12/02/2024 15:22 Calibration (Peak height)

Abs=k1+k2*conc


k1=0.000478 k2=0.000021

Recal. factor: ---


Slope	0.00002 Abs/(ng/L)	R2-adjusted	1.0000
sc0	1.00000 ng/L	Charact. conc.	207.402 (ng/L)/1%I
Lower limit	0 ng/L	Upper limit	110. ng/L
Detection limit	---	Deter. limit	---

Mercur

เอกสารไม่ควบคุม

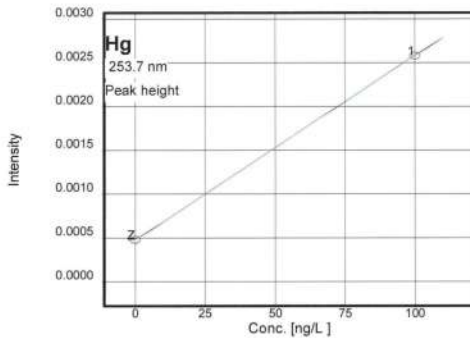**Measurements and events (sorted by time)**

Hg Without enrichment / FBR 100 ng/L PM_12-02-2024 12/02/2024 15:10					
ID	Conc.	Abs	BG	SD	Int. type Time
Cal-Zero	0ng/L	0.000328			PkH 15:13
		0.000248			15:14
		0.000858			15:15
		0.000478	0.00033131	69.26	15:15
Cal-Std1	100.ng/L	0.002638			PkH 15:18
		0.002615			15:19
		0.002487			15:21
		0.002580	0.000081841	3.171	15:21
Calibration	Calibration function: 01				15:22
Peak plots					Hg



Mercur

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



Certificate of Calibration

Cert. No.: 24TM648
Page : 1 of 3

Equipment : Incubator
Manufacturer : Memmert
Model : IPP 260
Serial No. : V615.0187
ID No. : UAE.MIC.003/2559
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : Microbiology Laboratory
Received Order : 01 April 2024
Calibration Date : 01 April 2024
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %

Calibrated by : Man Pattanapongpaiboon

Approved by :

() Ponpan Paipim
(✓) Suwit Imjai
() Kunchit Promprat

Issue Date : 7 April 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3: Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2404-0003OC-1
Procedure Used :-

Cert. No.: 24TM648
Page : 2 of 3

Calibration were conducted using calibration procedure CP-OT02 based on TLAS G-20 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).
The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49023932	23LM122	TPA	26 Jul 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.


Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Close

Environment during calibration		
	Beginning	Finished
Temp. (°C)	24	24
REL.Humid. (%)	54	57
AC Supply (Volt)	221	223



Probe Installation Details :

a = 5.0 cm
b = 5.0 cm
c = 5.0 cm

Dimension of Chamber :

D = 0.50 m
W = 0.64 m
H = 0.80 m
Capacity = 0.26 m³

Position :	Ref. Std. ID No.:
1	19-16RTD-01
2	19-16RTD-02
3	19-16RTD-03
4	19-16RTD-04
5	19-16RTD-05
6	19-16RTD-06
7	21-16RTD-07
8	19-16RTD-08
9 (ref.)	19-16RTD-09

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2404-0003OC-1
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Cert. No.: 24TM648
Page : 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Coverage Factor
35.0	35.0	35.0	0.028	0.13	0.24	2

Calibration Point (°C)	Measured Temperature (°C)									Uncertainty (± °C)
	1	2	3	4	5	6	7	8	9 (ref.)	
35.0	34.908	35.004	34.989	35.099	35.089	35.095	34.921	34.936	35.002	0.30

Average* : The average of 30 values in each position.

Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.

Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.

UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม



Certificate of Calibration

Cert. No.: 24TM651
Page : 1 of 3

Equipment : Incubator
Manufacturer : Memmert
Model : IPP 260
Serial No. : V618.0033
ID No. : UAE.MIC.021/2561
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : Microbiology Laboratory (302)
Received Order : 01 April 2024
Calibration Date : 02 April 2024
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %

Calibrated by : Man Pattanapongpaiboon

Approved by :

() Ponpan Paipim
(✓) Suwit Imjai
() Kunchit Promprat

Issue Date : 7 April 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3: Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2404-0003OC-3

Cert. No.: 24TM651
Page : 2 of 3

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 based on TLAS G-20 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).
The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49023932	23LM122	TPA	26 Jul 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certification is traceable to the International System of Unit.

Remark : TPA : Technology Promotion Association (Thailand - Japan)


Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Close

Environment during calibration		
	Beginning	Finished
Temp. (°C)	25	25
REL Humid. (%)	54	57
AC Supply (Volt)	221	224

Position :	Ref. Std. ID No.:
1	20-16RTD-01
2	20-16RTD-02
3	20-16RTD-03
4	23-16RTD-04
5	22-16RTD-05
6	20-16RTD-06
7	20-16RTD-07
8	22-16RTD-08
9 (ref.)	22-16RTD-09



Probe Installation Details :

	Dimension of Chamber :
a = 5.0 cm	D = 0.50 m
b = 5.0 cm	W = 0.64 m
c = 5.0 cm	H = 0.80 m
	Capacity = 0.26 m ³

เอกสารไม่ควบคุม



Equipment : Incubator
Condition As-Received : Used Item
Reference : 2404-0003OC-3
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Cert. No.: 24TM651
Page : 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Coverage Factor k
22.0	22.0	22.0	0.039	0.22	0.42	2
44.0	44.0	44.0	0.048	0.50	0.90	2

Calibration Point (°C)	Measured Temperature (°C)									Uncertainty (± °C)
	1	2	3	4	5	6	7	8	9 (ref.)	
22.0	22.008	22.034	22.039	22.021	21.746	21.698	21.668	21.668	21.846	0.30
44.0	44.267	44.602	44.293	44.402	44.004	43.961	43.756	44.000	44.205	0.30

Average* : The average of 30 values in each position.

Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.

Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.

Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.

UUC* : Unit Under Calibration

Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

-00-

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert. No.: 24TM29
Page : 1 of 3

Certificate of Calibration

Equipment : Water Bath
Manufacturer : Memmert
Model : WNE 14
Serial No. : L416.0606
ID No. : UAE.MIC.002/2560
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : Microbiology Laboratory
Received Order : 10 February 2024
Calibration Date : 10 February 2024
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %
Calibrated by : Krisda Malee
Approved by :
() Pornthippa Tameyakul
(✓) Unnopphol Harachal
() Suwit Injai
Issue Date : 19 February 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.



Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2402-0232OC-2
Procedure Used :-

Cert. No.: 24TM29
Page : 2 of 3

Calibration were conducted using in-house calibration procedure CP-OT04 Based on ASTM E715 according to direct measurement method with Data Acquisition which connected with Industrial Platinum Resistance Thermometer (IPT) .

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49001451	23LM27	TPA	25 Feb 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certification is traceable to the International System of Unit.


Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Heat transfer medium used : Water

	Environmental		AC Voltage Supply (Volt)
	(°C)	(%R.H.)	
Beginning of Calibration	26	51	220
Finished of Calibration	25	50	221



Front

Position :	Ref. Std. ID No.:
1	N37P301419
2	N37P300732
3	N37P301420
4	N37P301421
5 (ref.)	N37P301425



Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2402-0232OC-2
Result of Calibration : (*) Without Adjustment
Function of UUC* : Temperature Source

Cert. No.: 24TM29
Page : 3 of 3

Calibration point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Average* Standard Reading (°C)					Uncertainty (± °C)
			Position					
			1	2	3	4	5 (ref.)	
44.5	44.4	44.4	44.508	44.469	44.502	44.521	44.527	0.15

Calibration point (°C)	Uniformity (°C)	Stability (± °C)	Coverage Factor k
44.5	0.15	0.074	2

Average* : The average of 30 values in each position.
Uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Stability : One-half of the greatest maximum difference of measured temperature at any one probe.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity.

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-o0o-

4000000



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert. No.: 24TM306/1
Page : 1 of 3

Certificate of Calibration

This Certificate was issued to replace to the Certificate No. 24TM306

Equipment : Water Bath
Manufacturer : Memmert
Model : WNE 14
Serial No. : L416.0614
ID No. : UAE.MIC.020/2561
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : Microbiology Laboratory
Received Order : 10 February 2024
Calibration Date : 10 - 11 February 2024
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %
Calibrated by : Krisda Malee
Approved by :
() Pornthipha Tameyakul
() Unnopphol Harachai
(✓) Suwit Imjai
Issue Date : 12 February 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0064399



Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2402-0232OC-4

Cert. No.: 24TM306/1
Page : 2 of 3

Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-OT04 Based on ASTM E715 according to direct measurement method with Data Acquisition which connected with Industrial Platinum Resistance Thermometer (IPRT).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49001451	23LM27	TPA	25 Feb 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.


Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Heat transfer medium used : Water

	Environmental		AC Voltage Supply
	(°C)	(%R.H.)	(Volt)
Beginning of Calibration	24	52	221
Finished of Calibration	23	54	220



Front

Position :	Ref. Std. ID No.:
1	N37P301419
2	N37P300732
3	N37P301420
4	N37P301421
5(ref.)	N37P301425

4000000

a 1205493



Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2402-0232OC-4
Result of Calibration : (*) Without Adjustment
Function of UUC* : Temperature Source

Cert. No.: 24TM306/1
Page : 3 of 3

Calibration point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Average* Standard Reading (°C)					Uncertainty (± °C)
			Position					
			1	2	3	4	5 (ref.)	
44.5	44.5	44.5	44.516	44.483	44.481	44.505	44.504	0.15
50.0	50.0	50.0	50.062	50.016	50.008	50.035	50.044	0.15

Calibration point (°C)	Uniformity (°C)	Stability (± °C)	Coverage Factor k
44.5	0.090	0.048	2
50.0	0.11	0.058	2

Average* : The average of 30 values in each position.
Uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Stability : One-half of the greatest maximum difference of measured temperature at any one probe.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity.

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-o0o-

4000000

a 1205492

Calibration Certificate

Certificate No.: 2304203-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road,
Bangchack, Prakhonong, Bangkok 10260

Page 1 of 3

Equipment: Autoclave
Manufacturer: ALP
Model: CL-40L
Serial No.: 807298
ID No.: UAE.MIC.019/2560
Order No.: 2304203
Operation No.: 2304203-001
Date of Receipt: 10 August 2023
Date of Calibration: 10 August 2023

Calibrated by Mr. Worapob Sooktong
Scientist
Approved by (Mr. Pheraphat Tuanjit)
Manager, Division of Calibration Laboratory
Responsible for the Technical Management Team
Date of Issue: 15 August 2023

The uncertainties are for a confidence probability of approximately 95 %.
This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

FCS-009 Revision: 01 Date: 20-04-65



Calibration Report

Certificate No.: 2304203-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 807298
Resolution: 1 °C ID No.: UAE.MIC.019/2560
Manufacturer: ALP
Date of Calibration: 10 August 2023

Page 2 of 3

Location: 301, UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Environment Condition: Ambient Temperature (28 ± 1) °C
Relative Humidity (65 ± 2) %
Line Voltage (225 ± 1) Volt

Condition of this results of Calibration:

- This instrument was calibrated by insert 3 standard temperature recorder with RTD into its autoclave and calibration according to W-TE-018 based on BS 2646-1(2021): Autoclaves for sterilization in laboratories Design, construction, safety and performance Specification.
- The temperature scale used was based on ITS - 90.
- All data show below were final values and the initial data may be obtained upon request.
- Reference Standard Instrument :

Instrument	Model	Serial No.	Certificate No.	Due Date	Through
Digital Thermometer with RTD (Data Logger)	HiTemp140-2	S25601	NC-22-11-22-176	9-Nov-23	MADGETECH INC.
	HiTemp140-2	S25602	NC-22-11-22-175	9-Nov-23	MADGETECH INC.
	HiTemp140-2	RS4918	TE 660383-01	8-Apr-24	NATIONAL FOOD INSTITUTE

- This certificate is traceable to International System of Units (SI Units).
- This certificate was certified only for the instrument we calibrated.
- This result of calibration was found accurate as shown on date and place of calibration only.
- This standard does not apply to sterilizers or disinfectors used for medical, dental, pharmaceutical.
- Condition of Calibrated item : Good
UUC Description : Setting program function sterilization : STERILIZE/NORMAL
Time of sterilization 15 Minute At 121 °C
- Result of Calibration : ☒ Without adjustment
☐ After adjustment

FCS-012 Revision: 01 Date: 20-04-65



Calibration Report


Certificate No.: 2304203-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 807298
Resolution: 1 °C ID No.: UAE.MIC.019/2560
Manufacturer: ALP
Date of Calibration: 10 August 2023

Page 3 of 3

Calibration point: 121 °C

Calibration result:

Calibration Condition	Temperature (°C)	Relative Humidity (%)	Line Voltage (Volt)
Min	27.0	63.5	223.3
Max	28.3	67.3	225.9



Standard placement
S25601 = Attached to the top temperature probe, within 20 mm.
S25602 = In the upper half of the chamber.
S25603 = In the chamber dish, within 100 mm.

Table1 : Reporting of Temperature

Calibration Point (°C)	Measured Temperature (°C) @ Sensor No. (Sensor No.2 is REF)			Uncertainty ± (°C)
	Std.# 1	Std.# 2 (Ref)	Std.# 3	
121	121.68	121.70	121.66	0.66

Table 2 : Reporting of Characterization Result

UUC* Setting (°C)	UUC* Reading			MPa	Stability ± (°C)	Uniformity (°C)	Overall Variation (°C)
	Min (°C)	Max (°C)	Average (°C)				
121	121	121	121	0.10	0.11	0.12	0.23

Note

The quoted uncertainty include " Stability " and " Loading effect (20% of Uniformity) "
UUC* = Unit Under Calibration
Stability = One-half of the greatest maximum difference of measured temperatures at any one sensors, for at least half an hour after reaching steady state.
Uniformity = The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time.
Overall Variation = The difference of the maximum and minimum measured temperatures throughout observation time.
The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor k= 2, providing a level of confidence of approximately 95 %.

----- End -----

FCS-012 Revision: 01 Date: 20-04-65



Calibration Certificate

Certificate No.: 2402281-001-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 Soi Udomsuk 41, Sukhumvit Road,
Bangchack, Prakhonong, Bangkok 10260

Page 1 of 3

Equipment: Autoclave
Manufacturer: ALP
Model: CL-40L
Serial No.: 808763
ID No.: UAE.MIC.026/2563
Order No.: 2402281
Operation No.: 2402281-001
Date of Receipt: 2 April 2024
Date of Calibration: 2 April 2024

Calibrated by Mr. Jerawat Prapawuttipong
Scientist
Approved by (Mr. Pheraphat Tuanjit)
Manager, Division of Calibration Laboratory
Responsible for the Technical Management Team
Date of Issue: 9 April 2024

The uncertainties are for a confidence probability of approximately 95 %.
This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

FCS-009 Revision: 01 Date: 20-04-65



Calibration Report

Certificate No.: 2402281-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 808763
Resolution: 0.1 °C ID No.: UAE.MIC.026/2563
Manufacturer: ALP
Date of Calibration: 2 April 2024 Page 2 of 3

Location: LABORATORY, UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Environment Condition: Ambient Temperature (25 ± 1) °C
Relative Humidity (55 ± 7) %
Line Voltage (225 ± 5) Volt

Condition of this results of Calibration:


- This instrument was calibrated by insert 3 standard temperature recorder with RTD into its autoclave and calibration according to W-TE-018 based on BS 2646-1(2021) : Autoclaves for sterilization in laboratories Design, construction, safety and performance Specification.
- The temperature scale used was based on ITS - 90 .
- All data show below were final values and the initial data may be obtained upon request.
- Reference Standard Instrument :

Instrument	Model	Serial No.	Certificate No.	Due Date	Through
Digital Thermometer with RTD (Data Logger)	HiTemp140-2	R54918	TE 660383-01	8 April 2024	NATIONAL FOOD INSTITUTE
	HiTemp140-2	S25601	TE 670033-01	9 November 2024	MADGETECH INC.
	HiTemp140-2	S25602	TE 670034-01	9 November 2024	MADGETECH INC.

- This certificate is traceable to International System of Units (SI Units).
- This certificate was certified only for the instrument we calibrated.
- This result of calibration was found accurate as shown on date and place of calibration only.
- This standard does not apply to sterilizers or disinfectors used for medical, dental, pharmaceutical.
- Condition of Calibrated item : Good
UUC Description : Setting program function sterilization : STERILIZE/NORMAL
Time of sterilization 15 Minute At 115.0 and 121.0 °C
- Result of Calibration : ☒ Without adjustment
☐ After adjustment

F-CS-012 Revision: 01 Date: 20-04-65

2008 35 หมู่ 3 ตำบลบางพลีใหญ่ อำเภอบางพลี จังหวัดสมุทรปราการ 10700
2008 Soi 35, Bang Phli Sub-district, Bang Phli District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8545 Fax : +66(0) 2422 8545



nfi.co.th


Calibration Report

Certificate No.: 2402281-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 808763
Resolution: 0.1 °C ID No.: UAE.MIC.026/2563
Manufacturer: ALP
Date of Calibration: 2 April 2024 Page 3 of 3

Calibration point: 115.0 and 121.0 °C

Calibration result:

Calibration Condition	Temperature (°C)	Relative Humidity (%)	Line Voltage (Volt)
Min	24.4	48.6	220
Max	25.5	62.1	230



Standard at Position
100mm = Attached to the load temperature probe.
within 30 mm.
100mm = In the upper half of the chamber.
100mm = In the chamber door, within 100 mm.

Table 1 : Reporting of Temperature

Calibration Point (°C)	Measured Temperature (°C) @ Sensor No. (Sensor No.2 is REF)				Uncertainty ± (°C)
	Std. # 1	Std. # 2 (Ref)	Std. # 3		
115.0	115.28	115.35	115.38		0.64
121.0	121.28	121.36	121.37		0.64

Table 2 : Reporting of Characterization Result

UUC* Setting (°C)	UUC* Reading				Stability ± (°C)	Uniformity (°C)	Overall Variation (°C)
	Min (°C)	Max (°C)	Average (°C)	MPa			
115.0	115.0	115.1	115.0	0.08	0.19	0.13	0.48
121.0	121.0	121.1	121.0	0.12	0.17	0.10	0.38

Note

The quoted uncertainty include " Stability " and " Loading effect (20% of Uniformity)"
UUC* = Unit Under Calibration
Stability = One-half of the greatest maximum difference of measured temperatures at any one sensors, for at least half an hour after reaching steady state.
Uniformity = The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time.
Overall Variation = The difference of the maximum and minimum measured temperatures throughout observation time.
The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor k= 2, providing a level of confidence of approximately 95 %.

----- End -----

F-CS-012 Revision: 01 Date: 20-04-65

2008 35 หมู่ 3 ตำบลบางพลีใหญ่ อำเภอบางพลี จังหวัดสมุทรปราการ 10700
2008 Soi 35, Bang Phli Sub-district, Bang Phli District, Bangkok 10700, Thailand
Tel : +66(0) 2422 8545 Fax : +66(0) 2422 8545



nfi.co.th



Certificate of Calibration

Equipment: Balance
Model: PX623
Serial No. (or ID.): C236754745 (UAE.MIC.055/2565)
Manufacturer: Ohaus
Condition: In condition
Certificate No.: C01234158
Issued Date: 08 December 2023
Job No.: WO-00011251
Page: 1 of 3
Customer: United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udomsuk 41, Sukhumvit Road, Bangchak Sub-District, Phrakhanong District, Bangkok, THAILAND 10260
Environment Condition: Temperature 25 °C ± 0.5 °C
Humidity 54 %RH ± 1.7 %RH

Calibration Place: United Analyst and Engineering Consultant Co., Ltd. (301 Microbiology Room)
3 Soi Udomsuk 41, Sukhumvit Road, Bangchak Sub-District, Phrakhanong District, Bangkok, THAILAND 10260

Calibration By: Mr. Adisai Maknoi
Calibration Date: 07 December 2023
The Method used: In-house method, CAL-WI-47, based on UKAS Lab 14
Traceability: This certificate is traceable to the SI Units maintained by National Institute of Metrology (NIMT), Thailand through DKSH Technology Co., Ltd. Certificate No. C0222534

(Mr. Adisai Maknoi)
Person in charge

(Mr. Rungrod Jenkitrakulchai)
Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

บริษัท เทคโนโลยี เคช จำกัด
DKSH Technology Limited
2533 สุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
2533 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand

เอกสารไม่ควบคุม

Delivering Growth - In Asia and Beyond.

CAL-FM-C01-14: 12 Sep 2022



Certificate No.: C01234158 Page: 2 of 3

Calibration Results:

Before Adjustment

Eccentric Error: Weight to be 1/3 or 1/2 of Maximum capacity, taken from the center of the pan as a zero reference.

Nominal Test Value	Reference Points (g)				
	A	B	C	D	E
200 (g)	-	0.000	-0.003	0.000	0.001

Repeatability: Determination of the standard deviation of weighing balance., Readability 0.001 (g)

Nominal test value (g)	Standard Deviation
50	0.0006
500	0.0008

Error of indication from nominal or conventional mass value., Readability 0.001 (g)

Nominal Value (g)	Conventional Mass (g)	Displayed Value (g)	Error of Indication (g)	Uncertainty (g)	k
1	1.0000	1.000	0.000	0.0013	2.10
5	5.0001	5.000	0.000	0.0013	2.10
10	10.0001	10.001	0.001	0.0013	2.10
20	20.0000	20.000	0.000	0.0013	2.09
50	50.0001	50.000	0.000	0.0013	2.09
100	100.0001	100.001	0.001	0.0013	2.09
200	200.0004	200.002	0.002	0.0014	2.07
300	300.0005	300.002	0.002	0.0015	2.05
400	400.0006	400.004	0.003	0.0016	2.03
500	500.0006	500.008	0.007	0.0019	2.02
600	600.0007	600.009	0.008	0.0021	2.01

บริษัท เทคโนโลยี เคช จำกัด
DKSH Technology Limited
2533 สุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
2533 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2639 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand


เอกสารไม่ควบคุม

Delivering Growth - In Asia and Beyond.

CAL-FM-C01-14: 12 Sep 2022

After Adjustment

Eccentric Error: Weight to be 1/3 or 1/2 of Maximum capacity, taken from the center of the pan as a zero reference.



Nominal Test Value 200 (g)				
Reference Points (g)				
A	B	C	D	E
-	0.001	-0.002	-0.002	0.001

Repeatability: Determination of the standard deviation of weighing balance., Readability 0.001 (g)

Nominal test value (g)	Standard Deviation
50	0.0006
500	0.0008

Error of Indication from nominal or conventional mass value., Readability 0.001 (g)

Nominal Value (g)	Conventional Mass (g)	Displayed Value (g)	Error of Indication (g)	Uncertainty (g)	k
1	1.0000	1.000	0.000	0.0013	2.10
5	5.0001	5.000	0.000	0.0013	2.10
10	10.0001	10.000	0.000	0.0013	2.10
20	20.0000	20.000	0.000	0.0013	2.10
50	50.0001	50.000	0.000	0.0013	2.10
100	100.0001	100.000	0.000	0.0014	2.09
200	200.0004	200.000	0.000	0.0014	2.07
300	300.0005	300.001	0.001	0.0015	2.05
400	400.0006	400.002	0.001	0.0017	2.04
500	500.0006	500.001	0.000	0.0019	2.02
600	600.0007	600.002	0.001	0.0021	2.01

The End of Certificate

Statements of conformity:

This conformity certificate documents the validity of the following statements of conformity based on the measurement results of corresponding calibration certificate:

The error of indication determined during calibration are under given measurement and environmental conditions and considering the expanded measurement uncertainty (coverage probability 95%) within the specification. The given measurement uncertainty already includes other all effects by according to the standard method, UKAS Lab14. Therefore, those parameters have not been assessed separately.

Tolerance and Decision rules:

Assessment of the conformity of the measurement device are done based on direct comparison of the relevant measurement results with the tolerances and decision rule are prescribed by the customer.

- Decision rule :**
- ☐ Choice A Binary Statement for Simple Acceptance Rule ($w = 0$), Specific Risk < 50% PFA.
 - ☒ Choice B Non-binary statement with guard band ($w = 1$ U), Pass or Fail Specific Risk < 2.5% PFA and Condition Pass or Condition Fail Specific Risk < 50% PFA.
 - ☐ Choice C Customer defined, Customers may define arbitrary multiple of r to have applied as guard band ($w = r$ U).
- ; PFA – Probability of False Accept

Rungrod

(Mr. Rungrod Jenkitrakulchai)

Authorized signatory

Statements of conformity:

Before Adjustment

Readability: 0.001 g

Nominal Value g	Error of indication g	Guard band (w) g	Tolerance (±) g	Conformity
1	0.000	0.0013	0.002	Pass
5	0.000	0.0013	0.010	Pass
10	0.001	0.0013	0.020	Pass
20	0.000	0.0013	0.040	Pass
50	0.000	0.0013	0.100	Pass
100	0.001	0.0013	0.200	Pass
200	0.002	0.0014	0.400	Pass
300	0.002	0.0015	0.600	Pass
400	0.003	0.0016	0.800	Pass
500	0.007	0.0019	1.000	Pass
600	0.008	0.0021	1.200	Pass

The validity of the statements of conformity cannot be guaranteed for different places of use, environmental conditions or improper use.

Statements of conformity:



After Adjustment

Readability: 0.001 g

Nominal Value g	Error of indication g	Guard band (w) g	Tolerance (±) g	Conformity
1	0.000	0.0013	0.002	Pass
5	0.000	0.0013	0.010	Pass
10	0.000	0.0013	0.020	Pass
20	0.000	0.0013	0.040	Pass
50	0.000	0.0013	0.100	Pass
100	0.000	0.0014	0.200	Pass
200	0.000	0.0014	0.400	Pass
300	0.001	0.0015	0.600	Pass
400	0.001	0.0017	0.800	Pass
500	0.000	0.0019	1.000	Pass
600	0.001	0.0021	1.200	Pass

The validity of the statements of conformity cannot be guaranteed for different places of use, environmental conditions or improper use.

The End of Statements of conformity

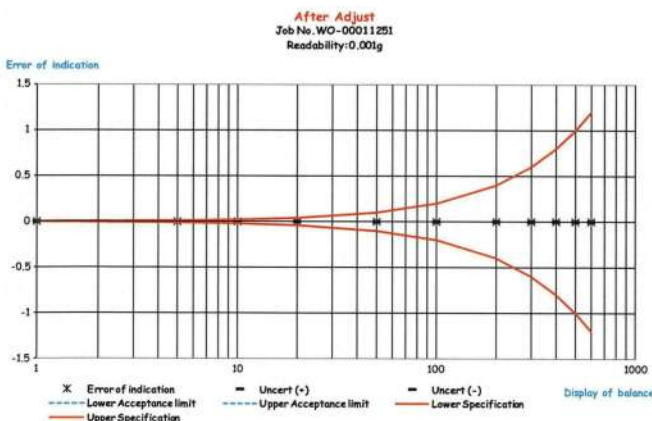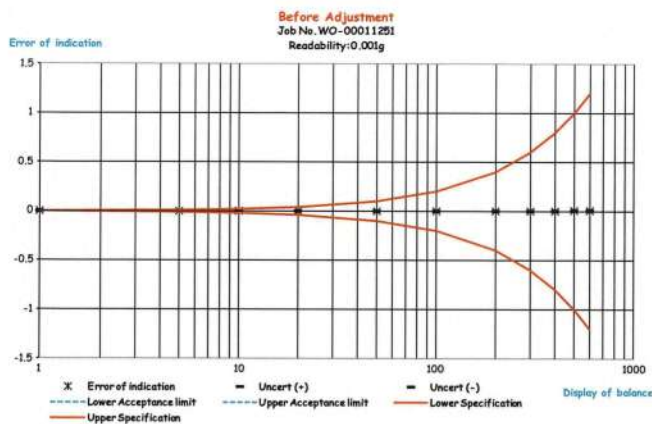

เอกสารไม่ควบคุม

ใบตรวจสอบสภาพเครื่องชั่ง

เลขที่ใบงาน: WO-00011251
ชนิดเครื่องมือ: Balance รุ่น: PX623
หมายเลขเครื่อง: C236754745

ตรวจสอบ (รับ)		รายการตรวจเช็ค	ตรวจสอบ (ส่ง)		หมายเหตุ
07 Dec 2023			07 Dec 2023		
ปกติ	ไม่ปกติ		ปกติ	ไม่ปกติ	
		General			
<input checked="" type="checkbox"/>	<input type="checkbox"/>	1. สายไฟ/Adapter, power supply 220/110V	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	2. ความสมบูรณ์ชุดกระดกกันลม (Cover)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	3. ความสมบูรณ์ชุดของระดับน้ำ	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	4. การปรับระดับของขาตั้งเครื่อง	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	5. การสอบเทียบของน้ำหนัก	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	6. ความสมบูรณ์ของ Display	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	7. การแสดงผลของ Display หลังจากรับน้ำหนัก	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	8. ชุดรองจานชั่ง (Stopper) / pan support	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	9. การทำงานของ Function Internal / External	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	10. ความสะอาดของตัวเครื่องภายนอกและภายใน load cell	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	11. สภาพแวดล้อม ณ สถานที่ตั้งเครื่อง	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

หมายเหตุเพิ่มเติมอื่น ๆ :

Mr. Adisai Maknoi
Service Engineer

บริษัท ดีเคเอส อีซี จำกัด
DKSH Technology Limited
2533 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10280
Phone: +66 2533 7000 Email: info.asia@dksh.com Website: www.dksh.com/scientific-thailand
Delivering Growth - In Asia and Beyond.

เอกสารไม่ควบคุม



Certificate of Calibration

Cert.No.: 23CH1148
Page.: 1 of 2

Equipment : Turbidity Meter
Manufacturer : Oakton
Model : T100IR
Serial No. : 1120501017
ID. No. : UAE.WAT.056/2563
Condition As-Received: Used Item
Received Date : 13 September 2023
Calibration Date : 14 September 2023
Reference : 2309-0458DSC-1
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260
Ambient Temperature : (25 ± 2.5) °C
Relative Humidity : (50 ± 20) %
Calibration Procedure : In-house method : CP-CH11
based on direct measurement by
using Formazin standard solution
Calibrated by : Walalak Sirithan
Approved by :
Approved Signatory
() Sathip Meangmai
() Warakorn Lemgagtrakul
() Ponpan Paipim
Issue Date : 15 September 2023

The Uncertainties are for a confidence probability of approximately 95%.

This certificate may not be reproduced other than in full, except with the prior written approval of the head of Calibration and Testing Equipment Services.

เอกสารไม่ควบคุม

A 0011853



มูลนิธิสถาบันพัฒนาอุตสาหกรรม
ศูนย์บริการห้องปฏิบัติการอุตสาหกรรมอาหาร
Foundation for Industrial Development National Food Institute
Food Industrial Laboratory Service Center



Calibration Certificate

Certificate No.: 2402283-002-01
Client name: UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address: 3 SOI UDOMSUK 41, SUKHUMVIT ROAD,
Bangchack, Prakhonong, Bangkok 10260

Page 1 of 4

Equipment: Electronic Balance
Manufacturer: METTLER TOLEDO
Model: XSR205DU
Serial No.: C210685394
ID No.: UAE.WAO.010/2565
Order No.: 2402283
Operation No.: 2402283-002
Date of Receipt: 2 April 2024
Date of Calibration: 2 April 2024

Calibrated by Mr.Jerawut Prapawuttipong
Scientist
Approved by
(Mr.Pheraphat Tuanjit)
Manager, Division of Calibration Laboratory
Responsible for the Technical Management Team
Date of Issue: 9 April 2024

The uncertainties are for a confidence probability of approximately 95%

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the National Food Institute.

F-CS-009 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม

nfi.co.th



Condition of this calibration result

1. Reference Standard Instruments :

This certification is traceable to the International System of unit (SI unit) through:-
- Technology Promotion Association (Thailand-Japan).

Instruments	Serial No.	ID No.	Certificate No.	Due date
1) Thermo-Hygrograph	1103328	130EC010	23C1361	13 June 2024
2) Electronic Balance	1124013382	140RC006	23MM18	20 Feb 2024

2. Standard Material : The Formazin suspension has been prepared gravimetric from

Material	Manufacturer	Lot No.	Assay
1) Hexamethylenetetramine	HIMEDIA	0000493947	99.65%
2) Hydranizium Sulfate	HIMEDIA	0000522014	99.40%

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration result

Performing five - Formazin suspension standard curve by using 0,20,100,400,800 NTU
Turbidity Meter Serial Number : 1120501017

Standard Formazine suspension (NTU)	UUC* Reading (NTU)	Uncertainty of Measurement (± NTU)	Coverage Factor k
0	0.00	0.0067	2.00
20	20.3	0.39	2.00
100	101	0.76	2.00
400	401	1.5	2.05
800	800	2.1	2.23

Remark - UUC* = Unit Under Calibration
- NTU = Nephelometric Turbidity Units

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-00-

เอกสารไม่ควบคุม

a 1179917



มูลนิธิสถาบันพัฒนาอุตสาหกรรม
ศูนย์บริการห้องปฏิบัติการอุตสาหกรรมอาหาร
Foundation for Industrial Development National Food Institute
Food Industrial Laboratory Service Center



Calibration Report

Certificate No.: 2402283-002-01

Equipment: Electronic Balance
Model: XSR205DU
Serial No.: C210685394
Capacity: 220 g
Manufacturer: METTLER TOLEDO
Resolution: 0.00001 g / 0.0001 g
ID No.: UAE.WAO.010/2565

Page 2 of 4

Date of Calibration: 2 April 2024
Environment Condition: Ambient Temperature: 24.5 ± 0.5 °C Relative Humidity: 47.5 ± 2.5 %
Place of Calibration: Laboratory, UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.

Condition of Equipment: Good Condition

Condition of This Results of Calibration:

1. Calibration Method: NFI Method W-MA-001 In-House Method based on UKAS Lab 14 : 2019

2. Reference Standards:

Reference Standard	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Standard Weight Class E2	1mg to 200g	8505567572	TCS	M23040535	8 April 2024
Instrument	Model	Serial No.	Calibrated By	Certificate No.	Due Date
Thermo-Hygro Meter	608-H1	NFI.BTH 016/23	Quality Reborn	QR24-0343	9 February 2023

3. This certification is traceable to SI UNIT

4. This certificate was certified only for the instrument we calibrated.

5. This result of calibration was found accurate as shown on date and place of calibration only.

Calibration Results:


1. Repeatability of Reading:

Nominal Value (g)	Standard Deviation of Reading (g)
40	0.000042
80	0.000052
100	0.000048
200	0.000048

2. Off-Center Error:

A mass of 100 g was placed and moved to various position on pan.

The balance reading obtained is given in the table.



1	2	3	4	5	6	(Maximum Difference)
(g)	(g)	(g)	(g)	(g)	(g)	(g)
100.000	100.0001	99.9999	99.9999	100.0001	100.0000	0.0001

F-CS-012 Revision: 01 Date: 20-04-65

เอกสารไม่ควบคุม

nfi.co.th

Calibration Report

Certificate No.: 2402281-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 808763
Resolution: 0.1 °C ID No.: UAE.MIC.026/2563
Manufacturer: ALP
Date of Calibration: 2 April 2024 Page 2 of 3

Location: LABORATORY, UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Environment Condition: Ambient Temperature (25 ± 1) °C
Relative Humidity (55 ± 7) %
Line Voltage (225 ± 5) Volt

Condition of this results of Calibration:

- This instrument was calibrated by insert 3 standard temperature recorder with RTD into its autoclave and calibration according to W-TE-018 based on BS 2646-1(2021) : Autoclaves for sterilization in laboratories Design, construction, safety and performance Specification.
- The temperature scale used was based on ITS - 90 .
- All data show below were final values and the initial data may be obtained upon request.

Reference Standard Instrument :

Instrument	Model	Serial No.	Certificate No.	Due Date	Through
Digital Thermometer with RTD (Data Logger)	HiTemp140-2	R54918	TE 660383-01	8 April 2024	NATIONAL FOOD INSTITUTE
	HiTemp140-2	S25601	TE 670033-01	9 November 2024	MADGETECH INC.
	HiTemp140-2	S25602	TE 670034-01	9 November 2024	MADGETECH INC.


- This certificate is traceable to International System of Units (SI Units).
- This certificate was certified only for the instrument we calibrated.
- This result of calibration was found accurate as shown on date and place of calibration only.
- This standard does not apply to sterilizers or disinfectors used for medical, dental, pharmaceutical.
- Condition of Calibrated item : Good

UUC Description : Setting program function sterilization : STERILIZE/NORMAL
Time of sterilization 15 Minute At 115.0 and 121.0 °C

8. Result of Calibration : ☒ Without adjustment
☐ After adjustment

F-CS-012 Revision: 01 Date: 20-04-65

2008 36 หมู่ 3 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10700
2008 36 หมู่ 3 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10700, Thailand
Tel : +66(0) 2428 8668 Fax : +66(0) 2428 8545



นฟิ


Calibration Report

Certificate No.: 2402281-001-01
Equipment: Autoclave
Model: CL-40L Serial No.: 808763
Resolution: 0.1 °C ID No.: UAE.MIC.026/2563
Manufacturer: ALP
Date of Calibration: 2 April 2024 Page 3 of 3

Calibration point: 115.0 and 121.0 °C

Calibration result:

Calibration Condition	Temperature (°C)	Relative Humidity (%)	Line Voltage (Volt)
Min	24.4	48.6	220
Max	25.5	62.1	230



Standard at Process
S001 = Attached to the food temperature probe, within 20 mm.
S002 = In the upper part of the chamber
S003 = In the chamber drain, within 100 mm.

Table 1 : Reporting of Temperature

Calibration Point (°C)	Measured Temperature (°C) @ Sensor No. (Sensor No.2 is REF)			Uncertainty ± (°C)
	Std. # 1	Std. # 2 (Ref)	Std. # 3	
115.0	115.28	115.35	115.38	0.64
121.0	121.28	121.36	121.37	0.64

Table 2 : Reporting of Characterization Result

UUC* Setting (°C)	UUC* Reading				Stability ± (°C)	Uniformity (°C)	Overall Variation (°C)
	Min (°C)	Max (°C)	Average (°C)	MPa			
115.0	115.0	115.1	115.0	0.08	0.19	0.13	0.48
121.0	121.0	121.1	121.0	0.12	0.17	0.10	0.38

Note:

The quoted uncertainty include " Stability " and " Loading effect (20% of Uniformity)" .

UUC* = Unit Under Calibration

Stability = One-half of the greatest maximum difference of measured temperatures at any one sensors, for at least half an hour after reaching steady state.

Uniformity = The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which is observed at the same time.


Overall Variation = The difference of the maximum and minimum measured temperatures throughout observation time.

The report uncertainty of measurement was based on standard uncertainty multiplied by coverage factor k= 2, providing a level of confidence of approximately 95 %.

***** End *****

F-CS-012 Revision: 01 Date: 20-04-65

2008 36 หมู่ 3 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10700
2008 36 หมู่ 3 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10700, Thailand
Tel : +66(0) 2428 8668 Fax : +66(0) 2428 8545



นฟิ



Certificate of Calibration

Equipment: Balance
Model: PX623
Serial No. (or ID.): C236754745 (UAE.MIC.055/2565)
Manufacturer: Ohaus
Condition: In condition
Certificate No.: C01234158
Issued Date: 08 December 2023
Job No.: WO-00011251
Page: 1 of 3

Customer: United Analyst and Engineering Consultant Co., Ltd.
3 Soi Udomsuk 41, Sukhumvit Road, Bangchak Sub-District,
Phrakhanong District, Bangkok, THAILAND 10260

Environment Condition: Temperature 25 °C ± 0.5 °C
Humidity 54 %RH ± 1.7 %RH

Calibration Place: United Analyst and Engineering Consultant Co., Ltd. (301 Microbiology Room)
3 Soi Udomsuk 41, Sukhumvit Road, Bangchak Sub-District,
Phrakhanong District, Bangkok, THAILAND 10260

Calibration By: Mr. Adisai Maknoi

Calibration Date: 07 December 2023

The Method used: In-house method, CAL-WI-47, based on UKAS Lab 14

Traceability: This certificate is traceable to the SI Units maintained by National Institute of Metrology (NIMT), Thailand through DKSH Technology Co., Ltd. Certificate No. C02222534

(Mr. Adisai Maknoi)

Person in charge

Runrod

(Mr. Runrod Jenkitrakulchai)

Authorized signatory

This certificate is issued the units of measurement according to the International System of Units (SI). It provides traceability of measurement to international or national standard or other recognized national standard laboratories.

The measurement uncertainty stated in the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).

These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. The report shall not be reproduced except in full without approval of DKSH Technology Limited.

บริษัท ดีเคเอส อีเซีย จำกัด
DKSH Technology Limited
2533 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
2533 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2638 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand

Delivering Growth - In Asia and Beyond.

เอกสารไม่ควบคุม

CAL-FM-C01-14: 12 Sep 2022






Certificate No.: C01234158

Page: 2 of 3

Calibration Results:

Before Adjustment

Eccentric Error: Weight to be 1/3 or 1/2 of Maximum capacity, taken from the center of the pan as a zero reference.

			Nominal Test Value	200	(g)
Reference Points (g)					
A	B	C	D	E	
-	0.000	-0.003	0.000	0.001	

Repeatability: Determination of the standard deviation of weighing balance., Readability

0.001 (g)

Nominal test value (g)	Standard Deviation
50	0.0006
500	0.0008

Error of Indication from nominal or conventional mass value., Readability

0.001 (g)

Nominal Value (g)	Conventional Mass (g)	Displayed Value (g)	Error of Indication (g)	Uncertainty (g)	k
1	1.0000	1.000	0.000	0.0013	2.10
5	5.0001	5.000	0.000	0.0013	2.10
10	10.0001	10.001	0.001	0.0013	2.10
20	20.0000	20.000	0.000	0.0013	2.09
50	50.0001	50.000	0.000	0.0013	2.09
100	100.0001	100.001	0.001	0.0013	2.09
200	200.0004	200.002	0.002	0.0014	2.07
300	300.0005	300.002	0.002	0.0015	2.05
400	400.0006	400.004	0.003	0.0016	2.03
500	500.0006	500.008	0.007	0.0019	2.02
600	600.0007	600.009	0.008	0.0021	2.01

บริษัท ดีเคเอส อีเซีย จำกัด
DKSH Technology Limited
2533 ถนนสุขุมวิท แขวงคลองเตย เขตคลองเตย กรุงเทพมหานคร 10260
2533 Sukhumvit Road, Bangkok, Phrakhanong, Bangkok 10260
Phone: +66 2638 7000 Email: info.calibration@dksh.com Website: www.dksh.com/scientific-thailand

Delivering Growth - In Asia and Beyond.

เอกสารไม่ควบคุม

CAL-FM-C01-14: 12 Sep 2022

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									
1	Orifice Transfer Standard Calibrator	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀)	Andersen Instruments, Inc.	G25A 1901	Jiranatee Associates Co., Ltd.	COF-002-66	14 Jul 23	13 Jul 24	-
2	U-Tube Manometer	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀)	Dwyer	1221-36-W/M -	Technology Promotion Association (Thailand-Japan)	23P1401	9 May 23	8 May 24	-
3	Air Flow Meter	Particular Matter (PM _{2.5})	Mesa Labs	DeltaCal DC1 158850	Innovative Instrument Co.,Ltd.	23-AFM-187	30 Aug 23	29 Aug 24	-
4	Aneroid Barometer	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀) Particular Matter (PM _{2.5})	Barigo, Germany	-	Technology Promotion Association (Thailand-Japan)	23P1858	2 Jun 23	1 Jun 24	-
5	Dial Thermo-Hygrometer	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀) Particular Matter (PM _{2.5})	Barigo, Germany	-	Technology Promotion Association (Thailand-Japan)	23H1200	6 Jun 23	5 Jun 24	-
6	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM08130002	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
7	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM19050148	UAE Consultant Co.,Ltd.	13112023	13 Nov 23	12 Nov 24	-
8	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM19050149	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
9	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM19050150	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
10	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM22177051	UAE Consultant Co.,Ltd.	21112023	21 Nov 23	20 Nov 24	-
11	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM22387035	UAE Consultant Co.,Ltd.	07112023	7 Nov 23	6 Nov 24	-
12	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM22387039	UAE Consultant Co.,Ltd.	07112023	7 Nov 23	6 Nov 24	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									-
13	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM22387040	UAE Consultant Co.,Ltd.	07112023	7 Nov 23	6 Nov 24	-
14	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Environmental Instrument	42C 42C-67174-356	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
15	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Environmental Instrument	42C 42C-78933-390	UAE Consultant Co.,Ltd.	13112023	13 Nov 23	12 Nov 24	-
16	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i 1182920005	UAE Consultant Co.,Ltd.	13112023	13 Nov 23	12 Nov 24	-
17	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i 1182920006	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
18	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i 1182920009	UAE Consultant Co.,Ltd.	13112023	13 Nov 23	12 Nov 24	-
19	Standard Gases (Mixture)	Nitrogen Dioxide	Airgas	EB0143262 2015PSIG	Airgas an Air Liquide company	E04NI99E15A01D3	21 Jun 21	21 Jun 24	-
20	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i CM22387061	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
21	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i CM22387065	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
22	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i CM22387066	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
23	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1200906875	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
24	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1200906876	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
25	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1201778115	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
26	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1182920012	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
27	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
28	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	42i 1182920016	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									-
29	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1180540065	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
30	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1180540066	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
31	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1180540067	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
32	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i JC1606001758	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
33	Standard Gases (Mixture)	Sulphur Dioxide	Airgas	EB0143262 2015PSIG	Airgas an Air Liquide company	E04NI99E15A01D3	21 Jun 21	21 Jun 24	-
34	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i CM08140003	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
35	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i 1180540068	UAE Consultant Co.,Ltd.	08122023	8 Dec 23	7 Dec 24	-
36	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i 1180540074	UAE Consultant Co.,Ltd.	13122023	13 Nov 23	12 Nov 24	-
37	Carbon Monoxide Analyzer	Carbon Monoxide	Horiba	APMA-370 YRLHTB7G	UAE Consultant Co.,Ltd.	08122023	8 Dec 23	7 Dec 24	-
38	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48C 48C-65506-348	UAE Consultant Co.,Ltd.	08122023	8 Dec 23	7 Dec 24	-
39	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i CM08140004	UAE Consultant Co.,Ltd.	13112023	13 Nov 23	12 Nov 24	-
40	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i 1182920020	UAE Consultant Co.,Ltd.	18122023	18 Dec 23	19 Dec 24	-
41	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48C 48C-62460-355/5	UAE Consultant Co.,Ltd.	08122023	8 Dec 23	7 Dec 24	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									-
42	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48C 48C-62494-335-5	UAE Consultant Co.,Ltd.	08112023	8 Nov 23	7 Nov 24	-
43	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48C 48C-69160-362	UAE Consultant Co.,Ltd.	08112023	8 Nov 23	7 Nov 24	-
44	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48C 48C-73881-375	UAE Consultant Co.,Ltd.	08112023	8 Nov 23	7 Nov 24	-
45	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48C 48C-71185-368	UAE Consultant Co.,Ltd.	18122023	18 Dec 23	17 Dec 24	-
46	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i 1200636467	UAE Consultant Co.,Ltd.	13112023	13 Nov 23	12 Nov 24	-
47	Standard Gases (Mixture)	Carbon Monoxide	Airgas	EB0143262 2015PSIG	Airgas an Air Liquide company	E04NI99E15A01D3	21 Jun 21	21 Jun 24	-
48	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 VUPVTC21	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
49	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 PDXEGXF7	UAE Consultant Co.,Ltd.	21122023	21 Dec 23	20 Dec 24	-
50	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 SSGEJYBJ	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
51	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 VV2FY3R3	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
52	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 T4FG19AN	UAE Consultant Co.,Ltd.	21122023	21 Dec 23	20 Dec 24	-
53	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 HAMEHU5M	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
54	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 RTHK2PDH	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									-
55	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 93JN1MN9	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
56	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 KWWW1R96	UAE Consultant Co.,Ltd.	21122023	21 Dec 23	20 Dec 24	-
57	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 RATFJBXS	UAE Consultant Co.,Ltd.	21122023	21 Dec 23	20 Dec 24	-
58	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 GY21PTED	UAE Consultant Co.,Ltd.	21122023	21 Dec 23	20 Dec 24	-
59	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 GAL13KSE	UAE Consultant Co.,Ltd.	21122023	21 Dec 23	20 Dec 24	-
60	Total Hydrocarbons Analyzer	Hydrocarbons	Thermo Scientific	55i 1182920025	UAE Consultant Co.,Ltd.	25012023	25 Dec 23	24 Dec 24	-
61	Standard Gas	Hydrocarbons	Linde	D824432	Linde	09042013	4 Aug 20	4 Aug 28	-
62	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2111DR0041	Thai Meteorological Department	119/24	13 Mar 24	12 Mar 25	-
63	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2111DR0052	Thai Meteorological Department	098/24	22 Feb 24	21 Feb 25	-
64	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2111DT0058	Thai Meteorological Department	121/24	13 Mar 24	12 Mar 25	-
65	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2112DR0065	Thai Meteorological Department	097/24	22 Feb 24	21 Feb 25	-
66	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2311DR0037	Thai Meteorological Department	123/24	13 Mar 24	12 Mar 25	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									-
67	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2205DT0008	Thai Meteorological Department	122/24	13 Mar 24	12 Mar 25	-
68	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2205DT0105	Thai Meteorological Department	120/24	13 Mar 24	12 Mar 25	-
69	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2205DT0106	Thai Meteorological Department	102/24	27 Feb 24	26 Feb 25	-
70	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2205DT0113	Thai Meteorological Department	390/23	1 Nov 23	31 Oct 24	-
71	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2205DT0114	Thai Meteorological Department	099/24	22 Feb 24	21 Feb 25	-
72	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2205DT0116	Thai Meteorological Department	100/24	22 Feb 24	21 Feb 25	-
73	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2301DR0024	Thai Meteorological Department	096/24	22 Feb 24	21 Feb 25	-
74	Wind Speed/Wind Direction	WS/WD	LSI LASTEM	E-LOG305 20070022	Thai Meteorological Department	284/23	15 Aug 23	14 Aug 24	-
75	Sound Level Calibrator (Acoustic Calibrator)	Calibrate Sound Level Meter	Larson Davis	CAL150 6171	Innovative Instrument Co.,Ltd.	23-ACT-118	4 Aug 23	3 Aug 24	-
76	Sound Level Meter	$L_{Aeq\ 24\ hours}$, $L_{Aeq\ 1\ hour}$, L_{A90} , L_{A10} , L_{A50}	Rion, Japan	NL-62 00130355	Sithiporn Associates Co., Ltd.	ACT23199	27 Jun 23	26 Jun 24	-
77	Sound Level Meter	$L_{Aeq\ 24\ hours}$, $L_{Aeq\ 1\ hour}$, L_{A90} , L_{A10} , L_{A50}	Rion, Japan	NL-62 00130356	Innovative Instrument Co.,Ltd.	CP20230290EA	3 Jul 23	2 Jul 24	-
78	Sound Level Meter	$L_{Aeq\ 24\ hours}$, $L_{Aeq\ 1\ hour}$, L_{A90} , L_{A10} , L_{A50}	Rion, Japan	NL-62 00130357	Innovative Instrument Co.,Ltd.	CP20230291EA	3 Jul 23	2 Jul 24	-
79	Sound Level Meter	$L_{Aeq\ 24\ hours}$, $L_{Aeq\ 1\ hour}$, L_{A90} , L_{A10} , L_{A50}	Larson Davis	LxT2 0005286	Innovative Instrument Co.,Ltd.	23-SLM-227	28 Jun 23	27 Jun 24	-
80	Sound Level Meter	$L_{Aeq\ 24\ hours}$, $L_{Aeq\ 1\ hour}$, L_{A90} , L_{A10} , L_{A50}	Larson Davis	LxT2 0005288	Innovative Instrument Co.,Ltd.	23-SLM187	2 Jun 23	1 Jun 24	-
81	Sound Level Meter	$L_{Aeq\ 24\ hours}$, $L_{Aeq\ 1\ hour}$, L_{A90} , L_{A10} , L_{A50}	Larson Davis	LxT2 0005289	Innovative Instrument Co.,Ltd.	23-SLM-224	28 Jun 23	27 Jun 24	-
82	Sound Level Meter	$L_{Aeq\ 24\ hours}$, $L_{Aeq\ 1\ hour}$, L_{A90} , L_{A10} , L_{A50}	Larson Davis	LxT2 0005293	Innovative Instrument Co.,Ltd.	23-SLM-210	23 Jun 23	22 Jun 24	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									
83	Sound Level Meter	L _{Aeq} 24 hours, L _{Aeq} 1 hour, L _{A90} , L _{A10} , L _{A50}	Larson Davis	LxT2 0005294	Innovative Instrument Co.,Ltd.	23-SLM-222	28 Jun 23	27 Jun 24	
84	Sound Level Meter	L _{Aeq} 24 hours, L _{Aeq} 1 hour, L _{A90} , L _{A10} , L _{A50}	Larson Davis	LxT2 0005296	Innovative Instrument Co.,Ltd.	23-SLM-209	23 Jun 23	22 Jun 24	-
85	Sound Level Meter	L _{Aeq} 24 hours, L _{Aeq} 1 hour, L _{A90} , L _{A10} , L _{A50}	Larson Davis	LxT2 0005305	Innovative Instrument Co.,Ltd.	23-SLM-225	28 Jun 23	27 Jun 24	-
86	Sound Level Meter	L _{Aeq} 24 hours, L _{Aeq} 1 hour, L _{A90} , L _{A10} , L _{A50}	Larson Davis	LxT2 0005339	Innovative Instrument Co.,Ltd.	23-SLM-223	28 Jun 23	27 Jun 24	-
87	Sound Level Meter	L _{Aeq} 24 hours, L _{Aeq} 1 hour, L _{A90} , L _{A10} , L _{A50}	Larson Davis	LxT2 0005341	Innovative Instrument Co.,Ltd.	23-SLM-228	28 Jun 23	27 Jun 24	-
88	Sound Level Meter	L _{Aeq} 24 hours, L _{Aeq} 1 hour, L _{A90} , L _{A10} , L _{A50}	Larson Davis	LxT2 0005342	Innovative Instrument Co.,Ltd.	23-SLM-186	2 Jun 23	1 Jun 24	-
89	Sound Level Meter	L _{Aeq} 24 hours, L _{Aeq} 1 hour, L _{A90} , L _{A10} , L _{A50}	Larson Davis	LxT2 0006616	Innovative Instrument Co.,Ltd.	23-SLM-226	28 Jun 23	27 Jun 24	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Water									
1	pH Meter	pH	YSI	pH100A JC02729	Technology Promotion Association (Thailand-Japan)	23CH1223/1	27 Sep 23	26 Sep 24	-
2	DO Meter	DO	Horiba	LAQUA-DO210 HE1D0008	Technology Promotion Association (Thailand-Japan)	23TW219	27 Sep 23	26 Sep 24	-
3	Conductivity Meter	Conductivity	YSI	Pro30 17A102921	Technology Promotion Association (Thailand-Japan)	23CH1228	28 Sep 23	27 Sep 24	-
4	Turbidity Meter	Turbidity	Thermo Scientific	EUTECH TN-100 2931788	Technology Promotion Association (Thailand-Japan)	24CH443	12 Apr 24	11 Apr 25	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									
1	Orifice Transfer Standard Calibrator	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀)	Andersen Instruments, Inc.	G25A 1901	Jiranatee Associates Co., Ltd.	COF-002-66	14 Jul 23	13 Jul 24	-
2	U-Tube Manometer	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀)	Dwyer	1221-36-W/M -	Technology Promotion Association (Thailand-Japan)	23P1401	9 May 23	8 May 24	-
3	Air Flow Meter	Particular Matter (PM _{2.5})	Mesa Labs	DeltaCal DC1 158850	Innovative Instrument Co.,Ltd.	23-AFM-187	30 Aug 23	29 Aug 24	-
4	Aneroid Barometer	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀) Particular Matter (PM _{2.5})	Barigo, Germany	-	Technology Promotion Association (Thailand-Japan)	23P1858	2 Jun 23	1 Jun 24	-
5	Dial Thermo-Hygrometer	Total Suspended Particulate (TSP) Particulate Matter < 10 µm (PM ₁₀) Particular Matter (PM _{2.5})	Barigo, Germany	-	Technology Promotion Association (Thailand-Japan)	23H1200	6 Jun 23	5 Jun 24	-
6	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM08130002	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
7	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM19050148	UAE Consultant Co.,Ltd.	13112023	13 Nov 23	12 Nov 24	-
8	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM19050149	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
9	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM19050150	UAE Consultant Co.,Ltd.	01112023	1 Nov 23	31 Oct 24	-
10	Nitrogen Dioxide Analyzer	Nitrogen Dioxide	Thermo Scientific	42i CM22177051	UAE Consultant Co.,Ltd.	21112023	21 Nov 23	20 Nov 24	-
11	Standard Gases (Mixture)	Nitrogen Dioxide	Airgas	EB0143262 2015PSIG	Airgas an Air Liquide company	E04N99E15A01D3	21 Jun 21	21 Jun 24	-
12	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i CM22387061	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
13	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i CM22387065	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
14	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i CM22387066	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
Ambient									
15	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1200906875	UAE Consultant Co.,Ltd.	03112023	3 Nov 23	2 Nov 24	-
16	Sulphur Dioxide Analyzer	Sulphur Dioxide	Thermo Scientific	43i 1200906876	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
17	Standard Gases (Mixture)	Sulphur Dioxide	Airgas	EB0143262 2015PSIG	Airgas an Air Liquide company	E04NI99E15A01D3	21 Jun 21	21 Jun 24	-
18	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i CM08140003	UAE Consultant Co.,Ltd.	09112023	9 Nov 23	8 Nov 24	-
19	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i 1180540068	UAE Consultant Co.,Ltd.	08122023	8 Dec 23	7 Dec 24	-
20	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48i 1180540074	UAE Consultant Co.,Ltd.	13122023	13 Nov 23	12 Nov 24	-
21	Carbon Monoxide Analyzer	Carbon Monoxide	Horiba	APMA-370 YRLHTB7G	UAE Consultant Co.,Ltd.	08122023	8 Dec 23	7 Dec 24	-
22	Carbon Monoxide Analyzer	Carbon Monoxide	Thermo	48C 48C-65506-348	UAE Consultant Co.,Ltd.	08122023	8 Dec 23	7 Dec 24	-
23	Standard Gases (Mixture)	Carbon Monoxide	Airgas	EB0143262 2015PSIG	Airgas an Air Liquide company	E04NI99E15A01D3	21 Jun 21	21 Jun 24	-
24	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 VUPVTC21	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
25	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 PDXEGXF7	UAE Consultant Co.,Ltd.	21122023	21 Dec 23	20 Dec 24	-
26	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 SSGEJYBJ	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
27	Total Hydrocarbons Analyzer	Hydrocarbons	HORIBA	APHA-370 VV2FY3R3	UAE Consultant Co.,Ltd.	15122023	15 Dec 23	14 Dec 24	-
28	Total Hydrocarbons Analyzer	Hydrocarbons	Thermo Scientific	55i 1182920025	UAE Consultant Co.,Ltd.	25012023	25 Dec 23	24 Dec 24	-
29	Standard Gas	Hydrocarbons	Linde	D824432	Linde	09042013	4 Aug 20	4 Aug 28	-

List of Instruments Certification for Air & Noise Quality Analysis

No.	Instrument/Equipment	Parameter	Manufacturer	Model/Serial No.	Calibrator	Certification No.	Date of Calibration	Due date of Calibration	Remark
30	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2111DR0041	Thai Meteorological Department	119/24	13 Mar 24	12 Mar 25	
Ambient									-
31	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2111DR0052	Thai Meteorological Department	098/24	22 Feb 24	21 Feb 25	-
32	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2111DT0058	Thai Meteorological Department	121/24	13 Mar 24	12 Mar 25	-
33	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2112DR0065	Thai Meteorological Department	097/24	22 Feb 24	21 Feb 25	-
34	Wind Speed/Wind Direction	WS/WD	Scarlet Tech Ltd.	WL-21 2311DR0037	Thai Meteorological Department	123/24	13 Mar 24	12 Mar 25	-
Water									-
1	pH Meter	pH	YSI	pH100A JC02729	Technology Promotion Association (Thailand-Japan)	23CH1223/1	27 Sep 23	26 Sep 24	-
2	DO Meter	DO	Horiba	LAQUA-DO210 HE1D0008	Technology Promotion Association (Thailand-Japan)	23TW219	27 Sep 23	26 Sep 24	-
3	Conductivity Meter	Conductivity	YSI	Pro30 17A102921	Technology Promotion Association (Thailand-Japan)	23CH1228	28 Sep 23	27 Sep 24	-
4	Turbidity Meter	Turbidity	Thermo Scientific	EUTECH TN-100 2931788	Technology Promotion Association (Thailand-Japan)	24CH443	12 Apr 24	11 Apr 25	-
5	Salinity Meter	Salinity	YSI	Pro 30 23A104806	Technology Promotion Association (Thailand-Japan)	23CH883	17 Jul 23	16 Jul 24	-



Cert.No.: 23CH529
Page.: 2 of 3

Condition of this calibration result

1. Reference Standard Instrument :-

Instrument	Serial No.	ID No.	Cert. No.	Due Date
1) Document Process Calibrator	54030049	130RC116	22E2769	24 Aug 2023
2) Ref. Standard Thermometer	4982054	110RC044	2211306	27 Oct 2023

This certification is traceable to the International System of Unit maintained at:-

- Traceable to National Institute of Metrology (Thailand), NIMT

2. Certified Reference Materials : The measurement results are traceable to SI through CPA chem Ltd.,
ANSI-ASQ National Accreditation Board, Accredited No. AR-1835

Buffer Solution	Manufacturer	Lot No.	Exp. date
pH 4.008	CPA chem	863832	28 Dec 2024
pH 6.987	CPA chem	826589	09 July 2023
pH 10.010	CPA chem	863835	28 Dec 2023

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration Results

Function : mV Measurement

Performing standard curve by Fluke at pH (4,7)(7,10)

Unit Under Calibration	Nominal Value	Standard Voltage Input	Actual Reading		Uncertainty of Measurement (\pm mV)	Coverage factor k
	pH	mV	mV	pH		
pH Meter S/N.: JC04740	4.00	177.48	177	4.01	0.58	2.00
	7.00	0.00	0	7.00	0.58	2.00
	7.00	0.00	0	7.00	0.58	2.00
	10.00	-177.48	-177	10.01	0.58	2.00



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert.No.: 23CH529
Page.: 1 of 3

Certificate of Calibration

Equipment : pH Meter
Manufacturer : EcoSense
Model : pH100A
Serial No. : JC04740
ID No. : UAE.EFM.062/2566(EFM,pH.05/66)
Condition As-Received: Used Item
Received Date : 26 April 2023
Calibration Date : 27-28 April 2023
Reference : 2304-0707WSC-7
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260
Ambient Temperature : (25 \pm 2.5) °C
Relative Humidity : (50 \pm 15) %
Calibration Procedure : In - house method :
- CP-CH5 by direct measurement with standard
voltage calibrator and direct measurement with
certified reference material (CRM)
- CP-CH8 by comparison with standard thermometer

Calibrated by : Warakorn Lerngagtrakul

Approved by :
Approved Signatory

(☒) Malee Butkruea
(☐) Saithip Meangmai
(☐) Warakorn Lerngagtrakul

Issue Date : 9 May 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Mar 18, 2023

Equipment : Gas Analyzer (NO₂) Model : 42C
Manufacturer : Thermo Electron Corporation Serial Number : 42C-0508011076

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024


Dilutor Detail

Manufacturer : Thermo Scientific
Model : 1461
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.5	0.50	0.50
Level 3	40.00%	200.0	200.7	0.35	0.35
Level 4	60.00%	300.0	300.8	0.27	0.27
Level 5	80.00%	400.0	400.0	0.00	0.00
Remark : Measuring Range	500.0 ppb		Average Difference (%)		0.22

:Acceptable Limit $\pm 5\%$

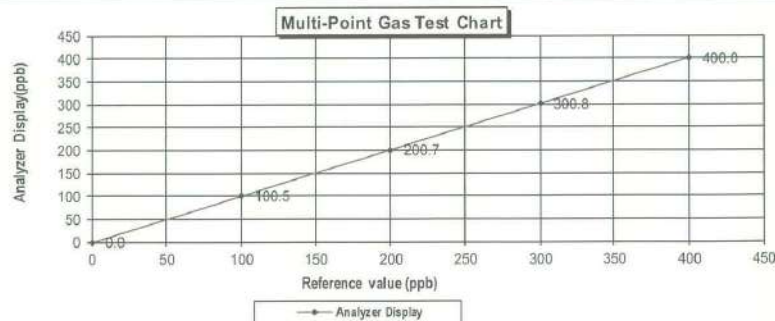

Calculate by

Aphivat K.
18/3/23

Approve by

Patirorn N.
18/Mar/2023



Cert.No.: 23CH529

Page.: 3 of 3

Calibration Results

Function : pH Measurement

Performing three buffers standard curve by using buffer nominal pH (4,7)(7,10)

Unit Under Calibration	Standard pH Buffer Solution	Actual pH Reading	Actual mV Reading (mV)	Uncertainty of pH measurement (\pm)	Coverage factor k
pH Electrode S/N.:230308SIA605377	4.008	4.01	173	0.0071	2.00
	6.987	7.00	-1	0.011	2.00
	6.987	6.99	0	0.011	2.00
	10.010	10.01	-178	0.011	2.07

Function : Temperature Measurement

(*) Without adjustment

This equipment was connected with Temperature Probe;

- Model : -
- Serial No. : 230308SIA605377
Dimension of probe;
- Length : 110 mm
- Diameter : 12 mm
- Immersion Depth : 100 mm

Calibration Point (°C)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of measurement (\pm °C)	Coverage factor k
25.0	25.003	25.0	-0.003	0.13	2.00
30.0	30.001	30.0	-0.001	0.13	2.00
35.0	35.003	35.0	-0.003	0.13	2.00

Remark : - UUC* = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-o0o-

Malu



Cert. No.: 23H1200
Page.: 2 of 2

Result of Calibration:- Before Adjustment
Function: Humidity Measurement

Reference Temperature (°C)	Standard Humidity (%R.H.)	UUC* Reading (%R.H.)	Error (%R.H.)	Uncertainty of Measurement (±%R.H.)
25.0	40.1	48	7.9	1.6
25.0	60.0	63	3.0	1.7
25.0	80.0	76	-4.0	1.9

Result of Calibration:- After Adjustment
Function: Humidity Measurement

Reference Temperature (°C)	Standard Humidity (%R.H.)	UUC* Reading (%R.H.)	Error (%R.H.)	Uncertainty of Measurement (±%R.H.)
25.0	40.1	44	3.9	1.6
25.0	60.0	60	0.0	1.7
25.0	80.0	75	-5.0	1.9

Result of Calibration:- Without Adjustment
Function: Temperature Measurement

Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of Measurement (±°C)
19.987	20.0	0.013	0.72
30.016	30.0	-0.016	0.72
39.944	39.5	-0.444	0.72

UUC* : Unit Under Calibration

The reported uncertainty of measurement was base on standard uncertainty multiplied by coverage factor $k = 2.00$, providing confidence level approximately 95%.

-o0o-

Signature

เอกสารไม่ควบคุม
a 1165295



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



Certificate of Calibration

Certificate No.: 23H1200
Page: 1 of 2

Equipment : Dial Thermo-Hygrometer
Manufacturer: Barigo
Model : -
Serial No.: -
ID No.: UAE.ANV.130/2550

Condition As-Received: Used Item

Received Date: 26 May 2023

Calibration Date: 30 May 2023
to 06 June 2023

Reference: 2305-0919WSC

Ambient Temperature: (25 ± 3) °C

Relative Humidity: (50 ± 20) %

Submitted by: United Analyst and Engineering Consultant Co.,Ltd.

81 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260

Procedure used: Calibration were conducted using in-house calibration procedure CP-H02 according to comparison with standard chilled mirror sensor for humidity measurement function and comparison with standard temperature probe for temperature measurement function into humidity / temperature chamber.

Condition of this result of calibration

1.Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Hygro-M2 Dew Point Monitor	5112	2360195	20703	02 Aug 2023
2) Handheld Thermometer With Sensor	1523	3240076	231305	15 Mar 2024

2.The certificate is valid only to the item calibrated on date and place of calibration.

3.This Certification is traceable to the International System of Unit maintained through:-

-National Institute of Standards and Technology (NIST) , The United States of America

-Technology Promotion Association (Thailand-Japan), NSC-ONSC Accredited No. Calibration 0008

Calibrated by : Somchai Dumwor
Issue Date : 07 June 2023

Approved Signatory :

☒ Chakrit Waewwanjua
☐ Pornthippa Tameyakul
☐ Viporn Tantiyawutti

เอกสารไม่ควบคุม
B 0316274



Cert.No.: 23P1858

Page: 2 of 2

Result of calibration:- Without adjustmentRange: 960 hPa to 1030 hPaFunction:- Absolute Pressure MeasurementScale Interval: 1 hPa (The Fifth Estimate)Increasing Pressure

Applied Pressure (hPa)	959.93	970.47	981.93	991.32	1002.29	1011.64	1021.14	1032.30
UUC* Indication (hPa)	960.0	970.0	980.0	990.0	1000.0	1010.0	1020.0	1030.0
Error (hPa)	0.07	-0.47	-1.93	-1.32	-2.29	-1.64	-1.14	-2.30

Decreasing Pressure

Applied Pressure (hPa)	1032.30	1021.44	1011.67	1002.36	992.35	981.94	970.49	959.94
UUC* Indication (hPa)	1030.0	1020.0	1010.0	1000.0	990.0	980.0	970.0	960.0
Error (hPa)	-2.30	-1.44	-1.67	-2.36	-2.35	-1.94	-0.49	0.06

The uncertainty of measurement was ± 0.30 hPa

* UUC = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-000-

Attapol P.

เอกสารไม่ควบคุม
a 1165506

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



Certificate of Calibration

Certificate No. : 23P1858

Page : 1 of 2

Equipment : Aneroid Barometer

Manufacturer: Barigo

Model : -

Serial No.: -

ID No.: UAE.ANV.124/2550

Condition As-Received: Used Item

Received Date: 26 May 2023

Calibration Date: 02 June 2023

Reference: 2305-0919WSC

Submitted by: United Analyst and Engineering Consultant Co., Ltd.

Ambient Temperature: (23 ± 2) °CRelative Humidity: (50 ± 15) %

Atmospheric Pressure: 1007 mbar

81 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260

Procedure used: The calibration was conducted by direct comparison method against Pressure Measuring Instruments Standard according to in-house calibration procedure CP-P10, using " DKD-R 6-1 ; Calibration of Pressure Gauges, Edition 03/2014 " as a guidelines.

Condition of this result of calibration

1.Reference standards instruments :

<u>Instrument</u>	<u>Model</u>	<u>Serial No.</u>	<u>Certificate No.</u>	<u>Due Date</u>
1) Standard Barometer	DPI142	1422505046	MP-0094-23	03 May 2024
2.This instrument was installed in vertical orientation and center of the dial was used as the reference level.				
3.This result of calibration was made on requested at the point specified by customer.				
4.This result of calibration instrument was in absolute pressure.				
5.This instrument was used clean air as pressure media.				
6.The certificate is valid only to the item calibrated on date and place of calibration.				
7.This Certification is traceable to the International System of Unit maintained through:-				
-National Institute of Metrology Thailand (NIMT)				

Calibrated by : Suksan Khankaew
Issue Date : 08 June 2023

Approved Signatory : Attapol P.
[] Phalinee Prabpaipal
[] Sura Suwannasri
[x] Attapol Panurach

เอกสารไม่ควบคุม
B 0316958



Certificate No : 23-AFM-203
Request No : Req-2023-1919

Result of Calibration :

Temperature (°C)	Pressure (kPa)	STD (l/min)	UUC (l/min)	Error (l/min)	Uncertainty (l/min)
24.90	100.64	14.58	14.50	-0.08	0.20
24.90	100.64	15.06	15.00	-0.06	0.21
25.00	100.63	15.90	15.80	-0.10	0.22
24.90	100.63	16.78	16.67	-0.11	0.23
24.90	100.63	18.46	18.30	-0.16	0.26

Note STD : Standard UUC : Unit Under Calibration
- UUC Reference Condition : At 25.0 °C, 101.3 kPa, Air
- Flow Rate was corrected for non-standard operating condition by using equation :

$$Q_{meas} = Q_{ref} \times \frac{P_{ref}}{P_{meas}} \times \frac{T_{meas}}{T_{ref}}$$

where Q = Flow Rate P = Absolute Pressure T = Absolute Temperature
Meas = Measurement Condition ref = Standard Condition

* Indicates non accredited

End of Certificate



Certificate of Calibration

Customer : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Name :
Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok 10260

Certificate No : 23-AFM-203
Request No : Req-2023-1919

Unit Under Calibration Details

Measurement Item : Air Flow Meter
Manufacturer : BGI
Model : Delta Cal DC1
Serial Number : 159822
ID : UAE.EFM.039/2561
Location of Calibration : LAB 4 AIR VELOCITY METER
Sensor Model : -
Sensor Serial Number : -

Calibration Environment and Details

Temperature : 23 °C ± 3 °C
Humidity : 55 %RH ± 20 %RH
Barometric Pressure : 1013 hPa ± 10 hPa
Received Date : 7 September 2023
Calibration Date : 27 September 2023
Calibration Procedure : In-house method CP-AFM-01 by Comparison technique with Standard Primary Flow Calibrator

Reference Standard	Model	Serial Number	Traceble	Due Calibration
Air Flow Meter	Gilibrator 3 Standard flow	19031011003	Sensidyne	12 July 2024
Air Flow Meter	Gilibrator 3 High flow	18501012012	Sensidyne	12 July 2024
Temperature meter	GT 11	08000057	Qreborn	27 February 2024
Pressure meter	CPG2400	41000KDU/651882	TPA	7 November 2023

Traceability :
This Certificate is traceable to SI Unit through Sensidyne A2LA Accreditation No. 3943.01
Note :

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibration By :
Mr. Noppadon Luangart
Service Calibration Engineer

Approved By :
Mr. Pacit Mathavorn
Calibration Engineer Supervisor
Issue Date : 27 September 2023

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



Calibration Note

UUC Adjustment : Not Adjust

Certificate No : 23-TPM-461

Request No : Req-2023-1919

Page : 2/2

Result of Calibration :

UUC Sensor	Standard Temperature (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
Ta	20.033	20.0	0.0	0.13
	25.033	25.0	0.0	0.13
	30.033	30.1	- 0.1	0.13
	35.034	35.1	- 0.1	0.13
	40.040	40.0	0.0	0.13
	45.039	45.0	0.0	0.13
	50.043	50.0	0.0	0.13
Tf	20.033	20.0	0.0	0.13
	25.033	25.0	0.0	0.13
	30.033	30.1	- 0.1	0.13
	35.034	35.2	- 0.2	0.13
	40.040	40.2	- 0.2	0.13
	45.039	45.2	- 0.2	0.13
	50.043	50.2	- 0.2	0.13

End of Certificate

Calibrated By :

Mr. Sittichok Jimpukdeesakul



Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING
CONSULTANT CO., LTD.

Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong,
Bangkok 10260

Certificate No : 23-TPM-461

Request No : Req-2023-1919

Page : 1/2

Unit Under Calibration Details

Calibration Parameter : Temperature

Instrument Name : Air Flow meter

Manufacturer : BGI

Model : Delta Cal DC1

Serial Number : 159822

Resolution : 0.1 °C

ID Number : UAE.EFM.039/2561

Range Calibration : 20 °C to 50 °C

Type of Sensor : RTD

Sensor Diameter (mm) : 3

Calibration Position (mm) : 45

Intrument Status : Used

Calibration Environment and Details

Temperature : 23 °C ± 3 °C

Humidity : 55 %RH ± 15 %RH

Received Date : 7 September 2023

Calibrated Date : 27 September 2023

Calibration Procedure : In-house method CP-TPM-01 by Comparison with Standard Thermometer.

Reference Standard : Digital Thermometer with Sensor, Manufacturer: GINGO/GINGO, Model: GT11/ RTD100, SN: 08000057, ID: 02-TPM Which was calibrated on 27 Febuary 2023, Calibration Certificate No. : QR23-0494

Traceability : This Certificate is traceable to SI Unit through Quality Reborn Co., Ltd., NSC-ONSC Accreditation No.: Calibration 0292

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k=2$, providing a level of confidence approximately 95 %.

Approved By :

Mr. Noppadon Luangart
Technical Manager

Issue Date : 27 September 2023



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3 : EQUIPMENT CALIBRATION AND TESTING SERVICES

534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250

TEL. 0-2717-3000 FAX. 0-2719-9484

Cert.No.: 23TW261

Page.: 1 of 2

Certificate of Testing

Equipment : DO Meter
Manufacturer : Horiba
Model : LAQUA-DO210
Serial No. : HE0G0015
ID No. : UAE.EFM.085/2564(EFM.DO.04/64)
Received Date : 13 December 2023
Test Date : 14 December 2023
Reference : 2312-0278WSC-1
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260
Laboratory Condition : Temperature (25 ± 5) °C
Humidity (50 ± 20) %
Test Procedure : In - house method : CP-CH9
by Comparison Technique with Azide Modification Method

Tested by : Walalak Sirithean

Approved by :

Saithip
Approved Signatory

- (✓) Saithip Meangmai
() Warakorn Lerngagrakul
() Ponpan Paipim

Issue Date : 18 December 2023



United Analyst and Engineering Consultant Co., Ltd.

3 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Phrakhanong, Bangkok 10260

Tel. 0 2763 2828 Fax 0 2763 2800 www.uaconsultant.com E-mail: uae@uaconsultant.com

MULTI-POINT GAS TEST REPORT

Test Date : Mar 16, 2023

Equipment : Gas Analyzer (NO₂) **Model :** 42C
Manufacturer : Thermo Electron Corporation **Serial Number :** 0517512000

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024


Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppb)		Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.7	0.70	0.70	0.70
Level 3	40.00%	200.0	200.3	0.30	0.15	0.15
Level 4	60.00%	300.0	300.9	0.90	0.30	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.23
			:Acceptable Limit ± 5%			

Multi-Point Gas Test Chart

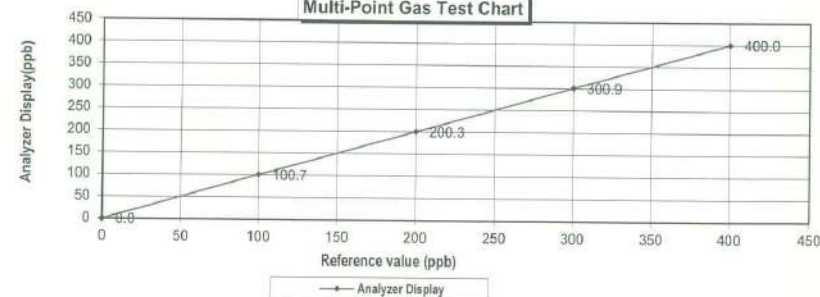

Calculate by

Aphivat K.
16 / 3 / 66

Approve by

Warakorn u
16 / Mar / 2023




TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert. No.: 23LM201
Page.: 1 of 2

Certificate of Calibration

Equipment : DO Meter with Sensor
Manufacturer : Horiba
Model : LAQUA-DO210
Serial No. : HE0G0015
ID No. : UAE.EFM.085/2564 (EFM.DO.04/64)
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : TPA On Site Calibration Laboratory
Received Order : 13 December 2023
Calibrated Date : 15 December 2023
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %
AC Line Voltage : (220 ± 22) V
Calibrated by : Suwit Imjai
Approved by : 
Approved Signatory
☐ Ponthippa Tameyakul
☒ Ponpan Paipim
☐ Tawatchai Pama
Issue Date : 18 December 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.



Cert.No.: 23TW261
Page.: 2 of 2

Condition of this result of calibration

1. Reference Standard Instruments :

This certification is traceable to the International System of Unit through the reference standards
laboratory of Industrial Calibration Center, Technology Promotion Association (Thailand-Japan).

Instruments	Serial No.	ID No.	Certificate No.	Due Date
1) Burette	-	130BU10	23CG1172	22 Mar 2025
2) Balance	1124013382	140RC006	23MM18	20 Feb 2024

2. Standard Material :-

Material	Manufacturer	Lot.No.	Assay
Sodium Thiosulfate pentahydrate	Merck	AM1763316	100.2%

Result : Dissolved Oxygen Meter Adjustment With Air 100 %
Dissolved Oxygen Probe No.: 9K0E0162

Titration Method (Azide Modification Method) (mg/L)	DO Meter Reading (mg/L)	Standard Deviation (mg/L)
8.16	8.16	0.0045

This report was certified only for the instrument we tested. It is allowable to use for study
the system efficiency, The environmental impact control and present to organization it may concerned
Intend to use for advertising and referral purpose is prohibited. This report may not be reproduced
other in full, without written approval of the laboratory

-o0o-

Sathip

เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert.No.: 23CH429
Page.: 1 of 3

Certificate of Calibration

Equipment : Conductivity Meter
Manufacturer : Horiba
Model : LAQUA-EC210
Serial No. : HC9L0011
ID No. : UAE.EFM.009/2563(EFM.SCT.03/63)
Condition As-Received: Used Item
Received Date : 28 March 2023
Calibration Date : 29 March 2023
Reference : 2303-0999WSC-3
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road, Bangchak,
Phrakhanong, Bangkok 10260
Ambient Temperature : (25 ± 2.5) °C
Relative Humidity : (50 ± 15) %
Calibration Procedure: In -house method :
- CP-CH6 by direct measurement
with certified reference material (CRM)
- CP-CH8 by comparison with standard thermometer

Calibrated by : Walalak Sirithean

Approved by :


Approved Signatory

- (✓) Malee Butkruea
() Saithip Meangmai
() Warakorn Lernagatrakul

Issue Date : 31 March 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.



Equipment : DO Meter with Sensor
Condition As-Received : Used Item
Reference : 2312-0278WSC-2
Procedure Used :-

Cert. No.: 23LM201
Page.: 2 of 2

Calibration were conducted using in-house calibration procedure CP-OT01 according to comparison with Industrial Platinum Resistance Thermometer (IPRT) into Temperature Bath.
The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Digital Thermometer	3240076	231305	TPA	15 Mar 2024
2. This certificate is valid only to the item calibrated on date and place of calibration.				
3. This certification is traceable to the International System of Unit.				

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function : Temperature measurement.

This instrument was connected with temperature sensor, ID No.: 9K0E0162

Calibration Point (°C)	Immersion Depth (mm)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty (± °C)	Coverage Factor k
25.0	60	24.997	25.0	0.003	0.16	2.00
30.0	60	29.995	30.0	0.005	0.16	2.00
35.0	60	34.997	35.0	0.003	0.16	2.00

UUC* : Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-



เอกสารไม่ควบคุม

เอกสารไม่ควบคุม



Cert.No.: 23CH429

Page.: 3 of 3

Calibration Results**Function : Temperature Measurement****(*) Without adjustment**

This equipment was connected with Temperature Probe;

- Model : 9383
- Serial No. : 9B9F0045

Dimension of probe;

- Length : 110 mm
- Diameter : 16 mm
- Immersion Depth : 100 mm

Calibration Point (°C)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of Measurement (± °C)	Coverage factor k
25.0	25.001	25.0	-0.001	0.13	2.00
30.0	29.999	30.0	0.001	0.13	2.00
35.0	34.999	35.0	0.001	0.13	2.00

Remark : - UUC* = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k , providing a level of confidence of approximately 95 %.

-o0o-

Malu

เอกสารนี้ควบคุม



Cert.No.: 23CH429

Page.: 2 of 3

Condition of this result of calibration

1. Reference Standard Instrument :-

Instrument	Serial No.	ID No.	Certificate No.	Due date
1) Thermometer	9549224	130RC003	221484	17 Apr 2023
2) Ref. Std. Thermometer	4982054	110RC044	2211306	27 Oct 2023

This certification is traceable to the International System of Unit maintained at:-

- Traceable to National Institute of Metrology (Thailand), NIMT

2. Certified Reference Materials :-

- Conductivity calibration solution, CPA chem Ltd., The measurement results are traceable to SI through CPA chem Ltd., ANSI-ASQ National Accreditation Board, Accredited No. AR-1835

Conductivity Solution	Manufacturer	Lot No.	Exp. date
1413.0 μ S/cm	CPA Chem	826595	09 July 2023
12.880 mS/cm	CPA Chem	823329	20 June 2023

- Control Conductivity calibration solution temperature by Water bath (25 \pm 0.1) °C

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration results**Function : Conductivity Measurement****(*) After Adjustment at 1413.0 μ S/cm****Conductivity Electrode Serial No.: 9B9F0045**

Standard Conductivity Solution	Before Adjustment UUC* Reading	After Adjustment UUC* Reading	Uncertainty of Measurement (±)	Coverage factor k
1413.0 μ S/cm	1104 μ S/cm	1414 μ S/cm	9.2 μ S/cm	2.00
12.880 mS/cm	9.88 mS/cm	12.67 mS/cm	0.086 mS/cm	2.00

Remark : - UUC* = Unit Under Calibration

Malu

เอกสารนี้ควบคุม

MEASUREMENT RESULTS:

The Orifice gas flow device was calibrated by direct comparison method with the Standard Rotary Displacement Meter (Roots Meter). The Humid air was used as a medium in the system. The standard conditions are 25°C (298.15 K) and 760 mmHg for standard temperature and standard pressure respectively.

Table 1: The results of Q Standard calibration data

Plate	Flow rate m^3/min	Pressure [Pa] mmHg	Temperature [Ta] °C	Temperature [Tm] °C	Δp_{meter} mmHg	$\Delta p_{Orifice}$ inH ₂ O	γ	Standard Flow [Q_s] m^3/min
1	0.697	754.265	24.640	23.960	55.399	1.699	1.299	0.643
2	1.000	754.236	24.950	24.350	62.172	3.444	1.849	0.913
3	1.118	754.323	24.730	24.210	41.925	4.582	2.133	1.051
4	1.169	754.212	24.640	24.160	31.045	5.150	2.262	1.116
5	1.416	754.175	24.480	24.210	30.117	7.629	2.754	1.353

Slope (m): 2.04804
Intercept (b): -0.01939
Correlation coefficient (r): 0.99982
Uncertainty (k=2): 0.011 m^3/min

Table 2: The results of Q actual calibration data

Plate	Flow rate m^3/min	Pressure [Pa] mmHg	Temperature [Ta] °C	Temperature [Tm] °C	Δp_{meter} mmHg	$\Delta p_{Orifice}$ inH ₂ O	γ	Standard Flow [Q_s] m^3/min
1	0.697	754.265	24.640	23.960	55.399	1.699	0.819	0.647
2	1.000	754.236	24.950	24.350	62.172	3.444	1.167	0.919
3	1.118	754.323	24.730	24.210	41.925	4.582	1.345	1.058
4	1.169	754.212	24.640	24.160	31.045	5.150	1.426	1.123
5	1.416	754.175	24.480	24.210	30.117	7.629	1.735	1.361

Slope (m): 1.28277
Intercept (b): -0.01223
Correlation coefficient (r): 0.99982
Uncertainty (k=2): 0.012 m^3/min

End of Certificate of Calibration



เอกสารไม่ควบคุม

CERTIFICATE OF CALIBRATION

Certificate No. : CL-003-65

Page 1 of 2 Pages

MEASUREMENT ITEM : Top Load Orifice
MANUFACTURER : Tisch Environmental, Inc.
MODEL/TYPE : TE-S025A
SERIAL NUMBER : 3383
ID NUMBER : UAE.EFM.063/2560
CONDITION AS-RECEIVED : Used item
CUSTOMER : United Analyst and Engineering Consultant Co.,Ltd.
81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Phrakhanong,
Bangkok 10260

RECEIVED DATE : 15 Jul 2022
MEASUREMENT DATE : 25 Jul 2022
ISSUE DATE : 26 Jul 2022

ENVIRONMENTAL CONDITIONS:

Ambient condition in the laboratory are as follow:

Temperature : 23.0 ± 3.0 °C
Relative Humidity : 55.0 ± 15.0 %RH
Atmospheric Pressure : 1010 ± 10 hPa

CALIBRATION CONDITION:

Preconditioning : 24 hours at ambient conditions.
Measurement Condition : The average values during measurement are 24.8 °C and 55.1 %RH.

TABULATION OF RESULTS:

The table on next page give the measured values.

Calibration procedure:
The Orifice gas flow device was calibrated against Standard Rotary Displacement Meter (Roots Meter) Model G65/IMC/W2-dp. The WI-CL-004 was used as a calibration guideline.

Traceability:
This certificate provides a traceability of The measurement to recognized the national standards, and to realization of the international system of units (SI) through the VSL (National Metrology Institute of Netherlands) via Certificate number: G2211901

Uncertainty of Measurement:
The reported uncertainty of measurement is based on the standard uncertainty multiplied by a coverage factor k=2. Which for a normal distribution corresponds to a coverage probability of approximately 95%. The standard uncertainty has been determined in accordance with the GUM "Evaluation of measurement data - Guide to the expression of uncertainty in measurement"

Calibrated by:
☐ Mr. Sorawit Thachalad
☒ Miss Jitraporn Lertsomphol



Approved signatory:
Mr. Parinya Booncharoen
Calibration Department Manager

เอกสารไม่ควบคุม



Cert.No.: 23P1401
Page: 2 of 2

Result of calibration:- Without adjustment

Function:- Pressure Measurement

Increasing Pressure

Range : 0 inH₂O to 36 inH₂O

Scale Interval : 0.1 inH₂O (The Fifth Estimate)

UUC Indication				
Applied Pressure	High-port side	Low-port side	ΔP	Error
(inH ₂ O)	(inH ₂ O)	(inH ₂ O)	(inH ₂ O)	(inH ₂ O)
0.00	0.00	0.00	0.00	0.00
2.00	1.00	-0.98	1.98	-0.02
4.00	2.00	-1.98	3.98	-0.02
6.00	3.00	-2.98	5.98	-0.02
8.00	4.00	-3.98	7.98	-0.02
10.00	5.00	-4.98	9.98	-0.02
12.00	6.00	-6.00	12.00	0.00
14.00	7.00	-7.00	14.00	0.00
16.00	8.00	-8.00	16.00	0.00
18.00	9.00	-9.00	18.00	0.00
20.00	10.00	-10.00	20.00	0.00
22.00	11.00	-11.00	22.00	0.00
24.00	12.02	-12.00	24.02	0.02
26.00	13.02	-13.00	26.02	0.02
28.00	14.02	-14.00	28.02	0.02
30.00	15.04	-15.00	30.04	0.04
32.00	16.04	-16.00	32.04	0.04
34.00	17.02	-17.00	34.02	0.02
35.80	18.00	-17.96	35.96	0.16

The uncertainty of measurement was ± 0.11 inH₂O

* UUC = Unit Under Calibration

* ΔP = High-port side - Low-port side

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-o0o-

Attapol P.

เอกสารไม่ควบคุม
a 1160340



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484

Certificate of Calibration

Certificate No. : 23P1401
Page : 1 of 2

Equipment : U-Tube Manometer

Manufacturer: Dwyer

Model : 1221-36-W/M

Serial No.: -

ID No.: UAE.EFM.022/2560

Condition As-Received: Used Item

Received Date: 26 April 2023

Calibration Date: 09 May 2023

Reference: 2304-0703WSC

Ambient Temperature: (23 \pm 2) °C

Relative Humidity: (50 \pm 15) %

Atmospheric Pressure: 1010 mbar

Submitted by: United Analyst and Engineering Consultant Co.,Ltd.

81 Soi Udomsuk 41, Sukhumvit Road, Bangchak,
Phrakhanong, Bangkok 10260

Procedure used: The calibration was conducted by direct comparison method against Pressure Measuring Instruments Standard according to in-house calibration procedure CP-P04, using " DKD-R 6-1 ; Calibration of Pressure Gauges, Edition 03/2014 " as a guidelines.

Condition of this result of calibration

1.Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Pressure Calibrator	PC106P	1189	MP-0137-22	24 Aug 2023

2.This result of calibration was made on requested at the point specified by customer.

3.Scale and conversion factor is 1 kPa = 4.0146293 inH₂O

4.This instrument was used clean air and oil as pressure media.

5.This instrument was calibrated by applied pressure to high-port (+) side and low-port (-) side open to atmospheric pressure.

6.This instrument was installed in vertical orientation and top of the pressure port was used as the reference level.

7.The certificate is valid only to the item calibrated on date and place of calibration.

8.This Certification is traceable to the International System of Unit maintained through:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by : Suwit Aussarree

Issue Date : 11 May 2023

Approved Signatory :

Attapol P.
[] Phalinee Prabpaipal
[] Sura Suwannasri
[x] Attapol Panurach


เอกสารไม่ควบคุม
B 0314241

MULTI-POINT GAS TEST REPORT			
Equipment	Gas Analyzer (NO ₂)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387037

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	0.9	0.9	0.90	0.90	0.90	5
Level 2	100.0	100.4	100.4	0.40	0.40	0.40	5
Level 3	200.0	200.2	200.2	0.20	0.10	0.10	5
Level 4	300.0	301.3	301.3	1.30	0.43	0.43	5
Level 5	400.0	401.5	401.5	1.50	0.38	0.38	5
	R	Slope	Intercept	Average		0.44	5
NOx	1.000	1.002	0.440	Criteria		5.00	10
NO	1.000	1.002	0.440				

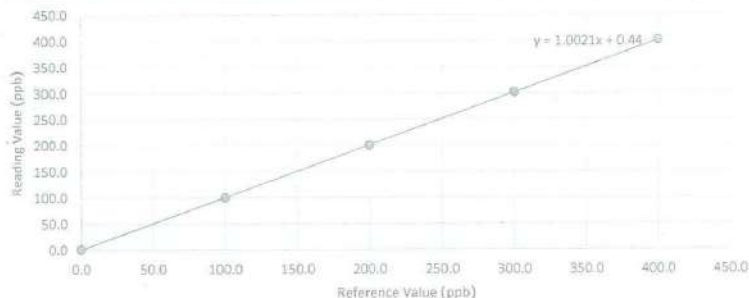

NO ₂ Multi-Point Calibration							
Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₃	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	99.1	452.7	353.6	5
2	450.0	200.0	200.0	200.2	447.8	247.6	5
3	450.0	300.0	300.0	301.5	451.8	150.3	5
4	450.0	400.0	400.0	400.8	449.1	48.3	5
Slope	1.006	Intercept	-1.200	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NOx _{adj}	Convert NO ₂	%Convert	Avg	Criteria
1	450.0	352.4	451.3	98.9	98.9	99.8	96-104
2	450.0	246.6	446.4	199.8	99.9		
3	450.0	149.5	450.4	300.9	100.3		
4	450.0	47.8	447.7	400.0	100.0		

Calibrate by Sirichai Gungon
 Calibration Date 17/2/66

Approve by P. Norn N.
 Approved Date 2 July 2023

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Feb 15, 2023


Equipment :	Gas Analyzer (NO ₂)	Model :	42i
Manufacturer :	Thermo Scientific	Serial Number :	CM19050151

Standard Gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	PPM	Manufacturer : Thermo Scientific
Nitric Oxide (NO)	45.94	PPM	Model : 146i
Methane (CH ₄)	-	PPM	Serial Number : 1180540071
Carbon Monoxide (CO)	984.8		
Cylinder No. :	EB0143262		
Expiration Date :	Jun 21, 2024		

Multi-point gas test data

	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.9	0.90	0.89
Level 3	40.00%	200.0	201.1	1.10	0.55
Level 4	60.00%	300.0	300.9	0.90	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00
Remark : Measuring Range	500.0 ppb		Average Difference (%)		0.35
:Acceptable Limit ± 5%					

Multi-Point Gas Test Chart

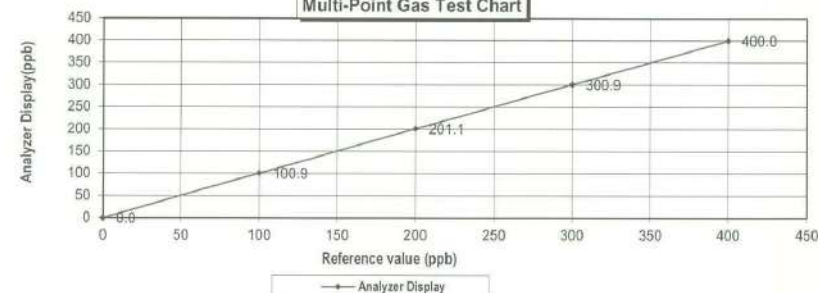

Calculate by Sirichai Gungon
 15/2/66

Approve by P. Norn N.
 15/2/2023

เอกสารไม่ควบคุม


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (NO2)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387035

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	1.5	1.5	1.50	1.50	1.50	5
Level 2	100.0	99.3	99.3	-0.70	-0.70	0.70	5
Level 3	200.0	202.0	202.0	2.00	1.00	1.00	5
Level 4	300.0	301.0	301.0	1.00	0.33	0.33	5
Level 5	400.0	399.7	399.7	-0.30	-0.08	0.08	5
	R	Slope	Intercept	Average		0.72	5
NOx	1.000	0.998	1.080	Criteria		5.00	10
NO	1.000	0.998	1.080				

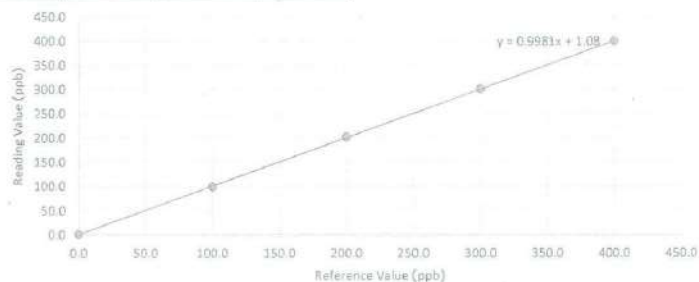

NO2 Multi-Point Calibration

Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₂	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	99.8	450.5	350.7	5
2	450.0	200.0	200.0	199	449.1	250.1	5
3	450.0	300.0	300.0	300.6	450	149.4	5
4	450.0	400.0	400.0	398.4	448.7	50.3	5
Slope	0.997	Intercept	0.100	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NOx _{adj}	Convert NO ₂	%Convert	Avg	Criteria
1	450.0	350.3	450.3	100.0	100.0	100.0	96-104
2	450.0	249.5	448.9	199.4	99.7		
3	450.0	148.6	449.8	301.2	100.4		
4	450.0	49.3	448.5	399.2	99.8		

Calibrate by Sirichai Gamgan
Calibration Date 2/7/66

Approve by
Approved Date

Pattana N.
2 July 2023

เอกสารไม่ควบคุม


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (NO2)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387036

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	1.5	1.5	1.50	1.50	1.50	5
Level 2	100.0	100.3	100.3	0.30	0.30	0.30	5
Level 3	200.0	200.9	200.9	0.90	0.45	0.45	5
Level 4	300.0	301.0	301.0	1.00	0.33	0.33	5
Level 5	400.0	402.2	402.2	2.20	0.55	0.55	5
	R	Slope	Intercept	Average		0.63	5
NOx	1.000	1.002	0.760	Criteria		5.00	10
NO	1.000	1.002	0.760				

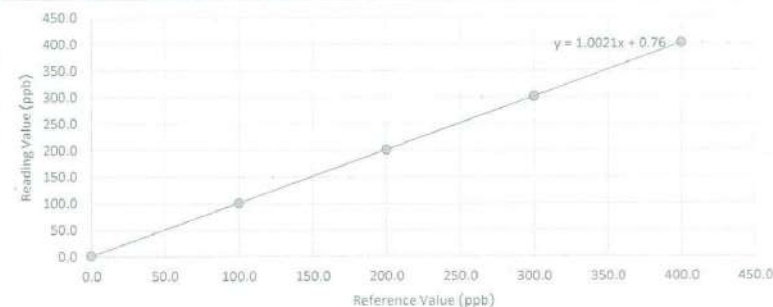

NO2 Multi-Point Calibration

Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₂	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	100.7	453.2	352.5	5
2	450.0	200.0	200.0	198.2	447.8	249.6	5
3	450.0	300.0	300.0	302.1	447.3	145.2	5
4	450.0	400.0	400.0	396.4	447.3	50.9	5
Slope	0.991	Intercept	1.600	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NOx _{adj}	Convert NO ₂	%Convert	Avg	Criteria
1	450.0	351.0	451.5	100.5	100.5	99.7	96-104
2	450.0	248.3	446.1	197.8	98.9		
3	450.0	144.1	445.6	301.5	100.5		
4	450.0	50.0	445.6	395.6	98.9		

Calibrate by Sirichai Gamgan
Calibration Date 2/7/66

Approve by
Approved Date

Pattana N.
2 July 2023


เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT			
Equipment	Gas Analyzer (NO ₂)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387038

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration							
----------------------------------	--	--	--	--	--	--	--

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	0.2	0.2	0.20	0.20	0.20	5
Level 2	100.0	100.3	100.3	0.30	0.30	0.30	5
Level 3	200.0	200.2	200.2	0.20	0.10	0.10	5
Level 4	300.0	301.5	301.5	1.50	0.50	0.50	5
Level 5	400.0	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.22	5
NOx	1.000	1.001	0.280	Criteria		5.00	10
NO	1.000	1.001	0.280				

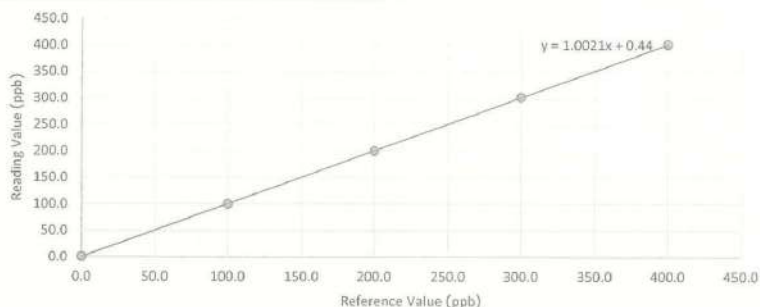

NO2 Multi-Point Calibration							
Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₃	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	100.3	447.8	347.5	5
2	450.0	200.0	200.0	201.6	446.9	245.3	5
3	450.0	300.0	300.0	298.2	449.1	150.9	5
4	450.0	400.0	400.0	397.2	449.6	52.4	5
Slope	0.987	Intercept	2.500	R	1.000		
	Ref. NO	Read. NO ₂ adj	Read. NO _x adj	Convert NO ₂	%Convert	Avg	Criteria
1	450.0	346.9	447.2	100.2	100.2	99.9	96-104
2	450.0	244.8	446.3	201.4	100.7		
3	450.0	150.5	448.5	298.0	99.3		
4	450.0	52.1	449.0	396.9	99.2		

Calibrate by Aphivat
Calibration Date 2/7/66

Approve by Pethorn U.
Approved Date 2 July 2023

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Jan 16, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM19050150

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024


Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.5	0.50	0.50	0.50
Level 3	40.00%	200.0	200.6	0.60	0.30	0.30
Level 4	60.00%	300.0	300.7	0.70	0.23	0.23
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb	Average Difference (%)			0.21

Multi-Point Gas Test Chart

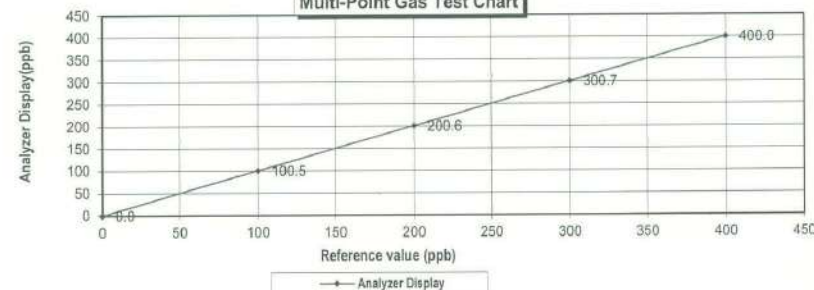

Calculate by Aphivat U.
16/01/66

Approve by Pethorn U.
16, Jan, 2023

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Jan 11, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM08130002

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.6	0.60	0.60	0.60
Level 3	40.00%	200.0	200.4	0.40	0.20	0.20
Level 4	60.00%	300.0	300.9	0.90	0.30	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb	Average Difference (%)			0.22

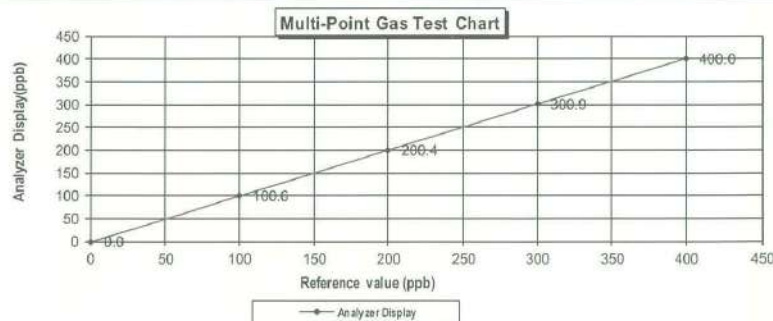

Calculate by

Sirchai Samgou
11/1/23

Approve by

Pakorn K.
11/Jan/2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 20, 2023

Equipment : Gas Analyzer (NO₂) Model : 42C
Manufacturer : Thermo Electron Corporation Serial Number : 0517512001

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.2	1.20	1.19	1.19
Level 3	40.00%	200.0	200.7	0.70	0.35	0.35
Level 4	60.00%	300.0	301.1	1.10	0.37	0.37
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.38

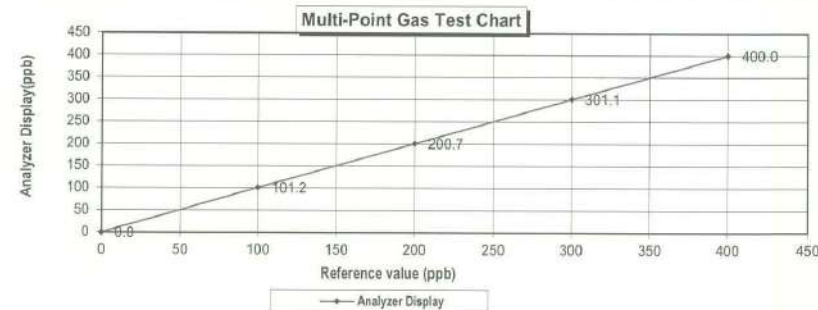

Calculate by

Aphivat K.
20/4/23

Approve by

Pakorn K.
20/4/23

MULTI-POINT GAS TEST REPORT

Test Date : Jan 9, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM19050149

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.8	0.80	0.79	0.79
Level 3	40.00%	200.0	201.2	1.20	0.60	0.60
Level 4	60.00%	300.0	300.7	0.70	0.23	0.23
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb	Average Difference (%)			0.32

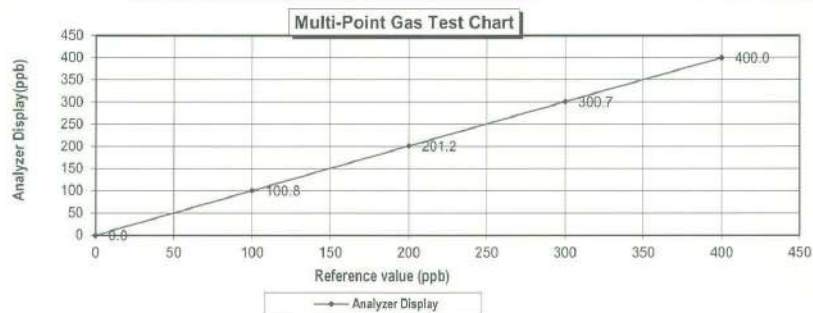

Calculate by

Sirichai Samgan
9.1.2023

Approve by

Patikorn W
9.1.2023

MULTI-POINT GAS TEST REPORT

Test Date : Feb 15, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM19050148

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.2	0.20	0.20	0.20
Level 3	40.00%	200.0	201.0	1.00	0.50	0.50
Level 4	60.00%	300.0	300.9	0.90	0.30	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.20

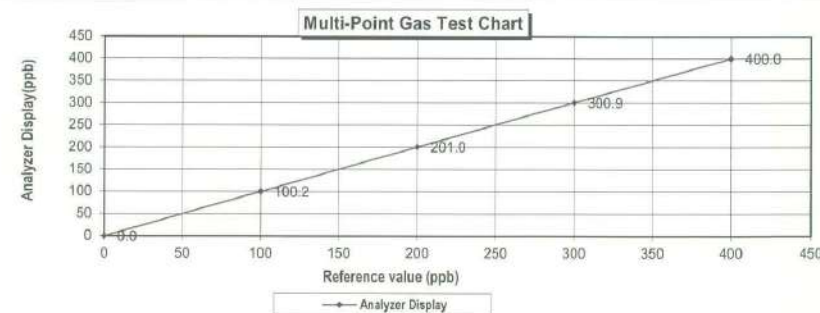

Calculate by

Sirichai Samgan
15.2.2023

Approve by

Patikorn W
15.2.2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 4, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Electron Corporation Serial Number : 0517512002

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	102.5	2.50	2.44	2.44
Level 3	40.00%	200.0	201.6	1.60	0.79	0.79
Level 4	60.00%	300.0	301.9	1.90	0.63	0.63
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb	Average Difference (%)		0.77	

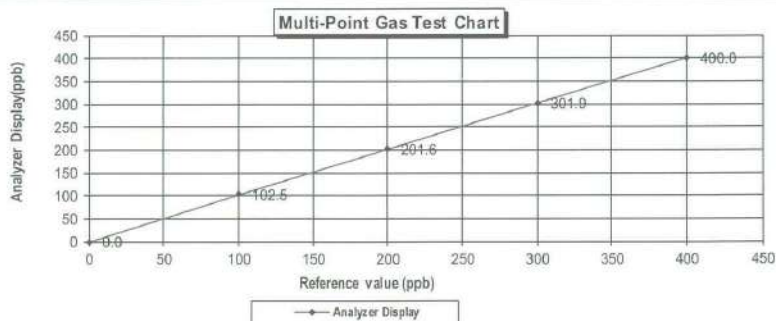

Calculate by

Aphiwat K.
4, 4, 2023

Approve by

Patthana K.
4, Apr, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 19, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Electron Corporation Serial Number : 0517512003

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.8	1.80	1.77	1.77
Level 3	40.00%	200.0	201.5	1.50	0.74	0.74
Level 4	60.00%	300.0	301.9	1.90	0.63	0.63
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.63

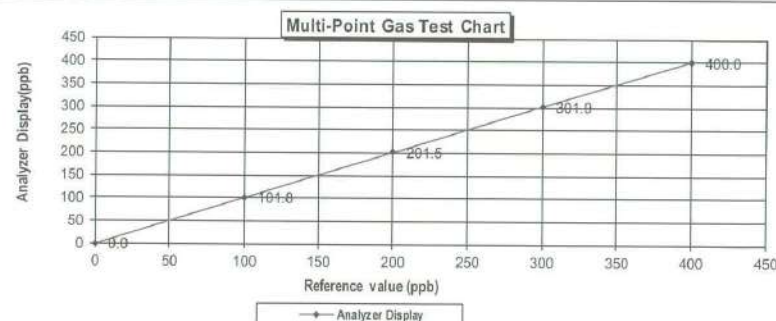

Calculate by

Aphiwat K.
19, 4, 2023

Approve by

Patthana K.
19, Apr, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 25, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Environmental Instruments Serial Number : 43C-76465-383

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.5	1.50	1.48	1.48
Level 3	40.00%	200.0	201.7	1.70	0.84	0.84
Level 4	60.00%	300.0	301.3	1.30	0.43	0.43
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb	Average Difference (%)		0.55	

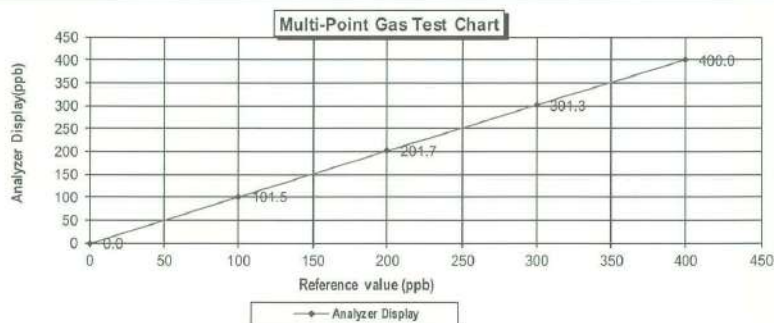

Calculate by

Aphiwat K.

25. 4. 23

Approve by

Phrakhanong

25. Apr. 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 7, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Environmental Instruments Serial Number : 43C-65007-345

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	102.2	2.20	2.15	2.15
Level 3	40.00%	200.0	201.7	1.70	0.84	0.84
Level 4	60.00%	300.0	301.5	1.50	0.50	0.50
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.70

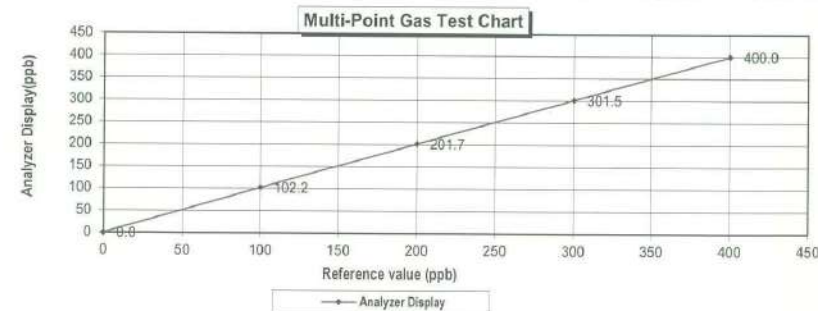

Calculate by

Aphiwat K.

7. 4. 23

Approve by

Phrakhanong

7. Apr. 2023

MULTI-POINT GAS TEST REPORT

Test Date : Mar 7, 2023

Equipment : Gas Analyzer (SO₂) Model : 43i
Manufacturer : Thermo SCIENTIFIC Serial Number : CM22387062

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071


Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.2	0.20	0.20
Level 3	40.00%	200.0	200.8	0.80	0.40
Level 4	60.00%	300.0	300.7	0.70	0.23
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

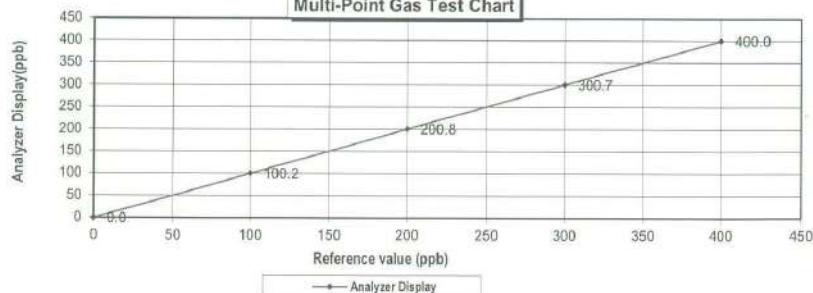

Calculate by

Aphivat K.
7 / 3 / 2023

Approve by

Patana u
7 / Mar / 2023

MULTI-POINT GAS TEST REPORT

Test Date : May 3, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Environmental Instruments Serial Number : 43C-62236-334

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071


Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.7	1.70	1.67
Level 3	40.00%	200.0	201.3	1.30	0.65
Level 4	60.00%	300.0	301.9	1.90	0.63
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

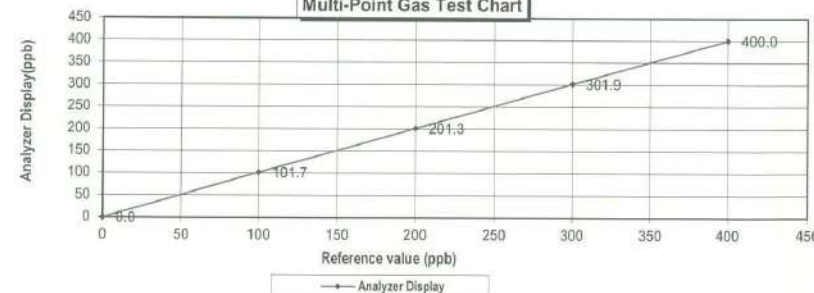

Calculate by

Aphivat K.
3 / 5 / 2023

Approve by

Patana u
3 / May / 2023

CERTIFICATE OF ANALYSIS

Grade of Product: EPA Protocol

Part Number: E04NI99E15A01D3 Reference Number: 122-402135167-1
Cylinder Number: EB0143262 Cylinder Volume: 144.4 CF
Laboratory: 124 - Durham (SAP) - NC Cylinder Pressure: 2015 PSIG
PGVP Number: B22021 Valve Outlet: 660
Gas Code: CO,NO,NOX,SO2,BALN Certification Date: Jun 21, 2021

Expiration Date: Jun 21, 2024

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted.

Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS					
Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	45.00 PPM	45.98 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
NITRIC OXIDE	45.00 PPM	45.94 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
SULFUR DIOXIDE	45.00 PPM	44.88 PPM	G1	+/- 1.0% NIST Traceable	06/14/2021, 06/21/2021
CARBON MONOXIDE	1000 PPM	984.8 PPM	G1	+/- 0.7% NIST Traceable	06/14/2021
NITROGEN	Balance				

CALIBRATION STANDARDS					
Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	20061120	CC708068	49.82 PPM NITRIC OXIDE/NITROGEN	+/- 1.0%	Feb 02, 2025
PRM	12386	D685025	9.91 PPM NITROGEN DIOXIDE/AIR	+/- 2.0%	Feb 20, 2020
GMIS	401423838102	CC505581	4.348 PPM NITROGEN DIOXIDE/NITROGEN	+/- 2.1	Feb 18, 2023
NTRM	16011043	CC473277	49.02 PPM SULFUR DIOXIDE/NITROGEN	+/- 0.8%	Jun 17, 2022
NTRM	14080119	CC434277	990.9 PPM CARBON MONOXIDE/NITROGEN	+/- 0.6%	Nov 15, 2025

The SRM, PRM or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT		
Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Nicolet 6700 AHR0801333 CO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO2	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 SO2	FTIR	Jun 03, 2021

Triad Data Available Upon Request

NOTES: PO #5221002807

GROSS WT: 28.40kg

NET WT: 4.73kg



The analytical test results reported on this certificate relate only to the cylinder number specified above. This concludes the test report.

[Signature]

Approved for Release



CERT 3082.01


เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT			
Equipment	Gas Analyzer (NO2)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387039

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	0.5	0.5	0.50	0.50	0.50	5
Level 2	100.0	100.4	100.4	0.40	0.40	0.40	5
Level 3	200.0	200.5	200.5	0.50	0.25	0.25	5
Level 4	300.0	301.8	301.8	1.80	0.60	0.60	5
Level 5	400.0	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.35	5
NOx	1.000	1.000	0.560	Criteria		5.00	10
NO	1.000	1.000	0.560				

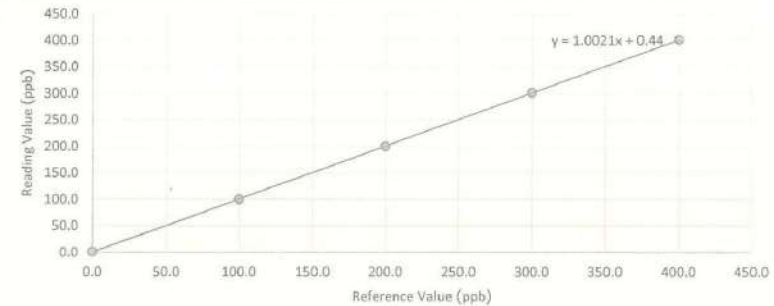

NO2 Multi-Point Calibration							
Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₂	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	100	449.1	349.1	5
2	450.0	200.0	200.0	198.6	447.3	248.7	5
3	450.0	300.0	300.0	297.3	450	152.7	5
4	450.0	400.0	400.0	398	448.7	50.7	5
Slope	0.993	Intercept	0.300	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NOx _{adj}	Convert NO ₂	% Convert	Avg	Criteria
1	450.0	348.4	448.4	100.0	100.0	99.4	96-104
2	450.0	248.0	446.6	198.5	99.3		
3	450.0	152.1	449.3	297.2	99.1		
4	450.0	50.1	448.0	397.8	99.5		

Calibrate by Aphivat
Calibration Date 2/7/16

Approve by Poltorn N.
Approved Date 2 July 2023

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Apr 7, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
 Manufacturer : Thermo Electron Corporation Serial Number : 43C-0611116459

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8
 Cylinder No. : EB0143262
 Expiration Date : Jun 24, 2024

Dilutor Detail


Manufacturer : Thermo SCIENTIFIC
 Model : 146i
 Serial Number : 1180540071

Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.9	1.90	1.86
Level 3	40.00%	200.0	201.5	1.50	0.74
Level 4	60.00%	300.0	301.7	1.70	0.56
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb
 :Acceptable Limit $\pm 5\%$

Average Difference (%) 0.63

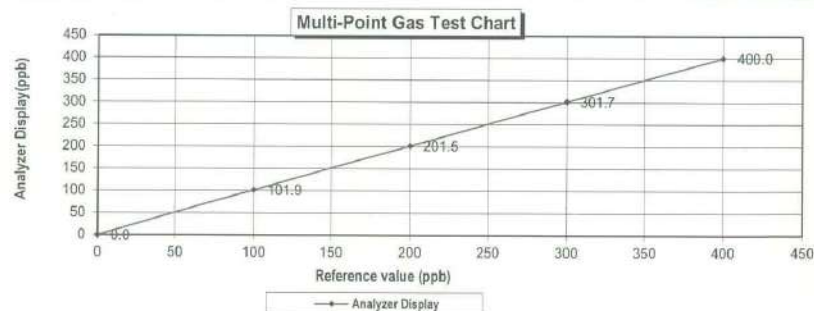

Calculate by

Aphiwat K.

7, 4, 2023

Approve by

Phanor W.

7, Apr, 2023

MULTI-POINT GAS TEST REPORT

Test Date : May 3, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
 Manufacturer : Thermo Electron Corporation Serial Number : 43C-0607415779

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8
 Cylinder No. : EB0143262
 Expiration Date : Jun 24, 2024

Dilutor Detail


Manufacturer : Thermo SCIENTIFIC
 Model : 146i
 Serial Number : 1180540071

Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.3	1.30	1.28
Level 3	40.00%	200.0	201.1	1.10	0.55
Level 4	60.00%	300.0	301.5	1.50	0.50
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb
 :Acceptable Limit $\pm 5\%$

Average Difference (%) 0.47

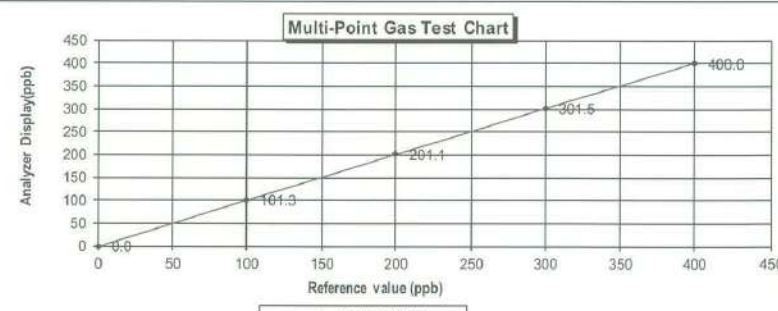

Calculate by

Aphiwat K.

3, 5, 2023

Approve by

Phanor W.

3, May, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Mar 14, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : 1180540069


Standard Gas Concentration			Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	PPM	Manufacturer :	Thermo Scientific
Nitric Oxide (NO)	45.94	PPM	Model :	146i
Methane (CH ₄)	-	PPM	Serial Number :	1180540071
Carbon Monoxide (CO)	984.8	PPM		
Cylinder No. :	EB0143262			
Expiration Date :	Jun 20, 2024			

Multi-point gas test data

	Reference Value (ppm)		Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.0	0.0	0.0
Level 2	20.00%	10.0	10.7	0.7	6.5	6.5
Level 3	40.00%	20.0	20.5	0.5	2.4	2.4
Level 4	60.00%	30.0	30.8	0.8	2.6	2.6
Level 5	80.00%	40.0	40.0	0.0	0.0	0.0
Remark : Measuring Range			50.0 ppm	Average Difference (%)		2.32

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

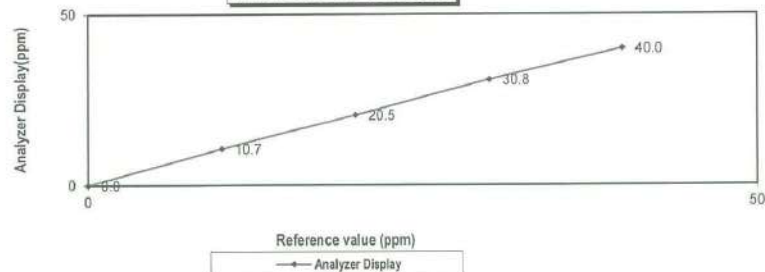

Calculate by

Achirawat

14 / 03 / 2023

Approve by

Phakhan W

14 / Mar / 2023

MULTI-POINT GAS TEST REPORT

Test Date : Dec 8, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : 1180540068


Standard Gas Concentration			Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	PPM	Manufacturer :	Thermo Scientific
Nitric Oxide (NO)	45.94	PPM	Model :	146i
Methane (CH ₄)	-	PPM	Serial Number :	1180540071
Carbon Monoxide (CO)	984.8	PPM		
Cylinder No. :	EB0143262			
Expiration Date :	Jun 20, 2024			

Multi-point gas test data

	Reference Value (ppm)		Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.7	0.7	0.7	0.7
Level 2	20.00%	10.0	10.8	0.8	7.4	7.4
Level 3	40.00%	20.0	20.7	0.7	3.4	3.4
Level 4	60.00%	30.0	30.6	0.6	2.0	2.0
Level 5	80.00%	40.0	40.0	0.0	0.0	0.0
Remark : Measuring Range			50.0 ppm	Average Difference (%)		2.69

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

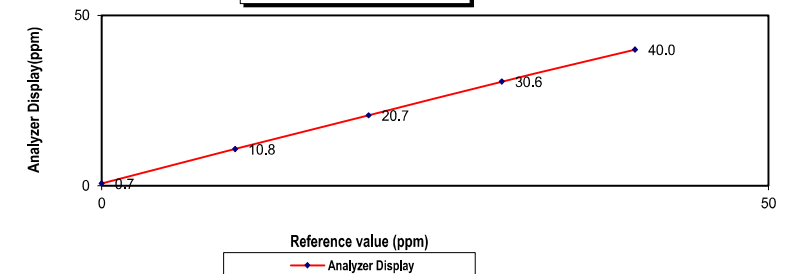

Calculate by

Prachai C

8 / 12 / 2023

Approve by

Phakhan W

8 / Dec / 2023

CERTIFICATE OF ANALYSIS

Grade of Product: EPA Protocol

Part Number: E04NI99E15A01D3 Reference Number: 122-402135167-1
Cylinder Number: EB0143262 Cylinder Volume: 144.4 CF
Laboratory: 124 - Durham (SAP) - NC Cylinder Pressure: 2015 PSIG
PGVP Number: B22021 Valve Outlet: 660
Gas Code: CO,NO,NOX,SO2,BALN Certification Date: Jun 21, 2021

Expiration Date: Jun 21, 2024

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted.

Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS					
Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	45.00 PPM	45.98 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
NITRIC OXIDE	45.00 PPM	45.94 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
SULFUR DIOXIDE	45.00 PPM	44.88 PPM	G1	+/- 1.0% NIST Traceable	06/14/2021, 06/21/2021
CARBON MONOXIDE	1000 PPM	984.8 PPM	G1	+/- 0.7% NIST Traceable	06/14/2021
NITROGEN	Balance				

CALIBRATION STANDARDS					
Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	20061120	CC708068	49.82 PPM NITRIC OXIDE/NITROGEN	+/- 1.0%	Feb 02, 2025
PRM	12386	D685025	9.91 PPM NITROGEN DIOXIDE/AIR	+/- 2.0%	Feb 20, 2020
GMIS	401423838102	CC505581	4.348 PPM NITROGEN DIOXIDE/NITROGEN	+/- 2.1	Feb 18, 2023
NTRM	16011043	CC473277	49.02 PPM SULFUR DIOXIDE/NITROGEN	+/- 0.8%	Jun 17, 2022
NTRM	14080119	CC434277	990.9 PPM CARBON MONOXIDE/NITROGEN	+/- 0.6%	Nov 15, 2025

The SRM, PRM or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT		
Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Nicolet 6700 AHR0801333 CO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO2	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 SO2	FTIR	Jun 03, 2021

Triad Data Available Upon Request

NOTES: PO #5221002807

GROSS WT: 28.40kg

NET WT: 4.73kg



The analytical test results reported on this certificate relate only to the cylinder number specified above. This concludes the test report.

[Signature]

Approved for Release



CERT 3082.01

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Nov 9, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : CM08140003

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071


Multi-point gas test data

	Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.0	0.0
Level 2	20.00%	10.0	10.5	0.5	4.8
Level 3	40.00%	20.0	20.7	0.7	3.4
Level 4	60.00%	30.0	30.5	0.5	1.6
Level 5	80.00%	40.0	40.6	0.6	1.5

Remark : Measuring Range 50.0 ppm

Average Difference (%) 2.25

:Acceptable Limit $\pm 5\%$

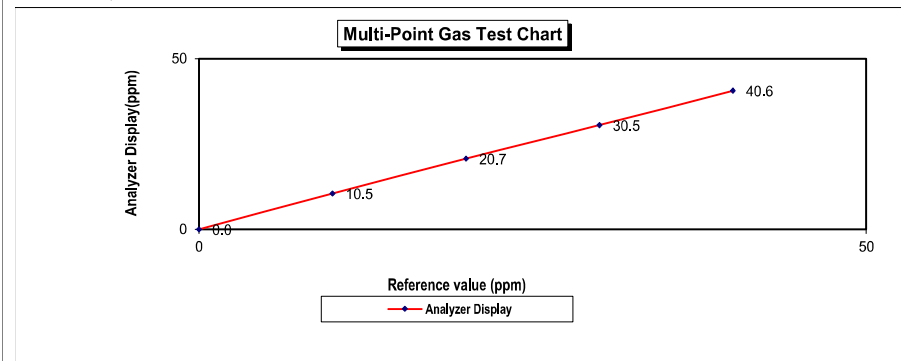

Calculate by
[Signature]
8 / 11 / 2023

Approve by
[Signature]
8 / Nov / 2023

MULTI-POINT GAS TEST REPORT

Test Date : Dec 8, 2023

Equipment : Gas Analyzer (CO) Model : APMA-370
Manufacturer : HORIBA Serial Number : YRLHTB7G

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.6	0.6	0.6	0.6
Level 2	20.00%	10.0	10.7	0.7	6.5	6.5
Level 3	40.00%	20.0	20.9	0.9	4.3	4.3
Level 4	60.00%	30.0	30.6	0.6	2.0	2.0
Level 5	80.00%	40.0	40.0	0.0	0.0	0.0
Remark : Measuring Range		50.0 ppm	Average Difference (%)			2.68

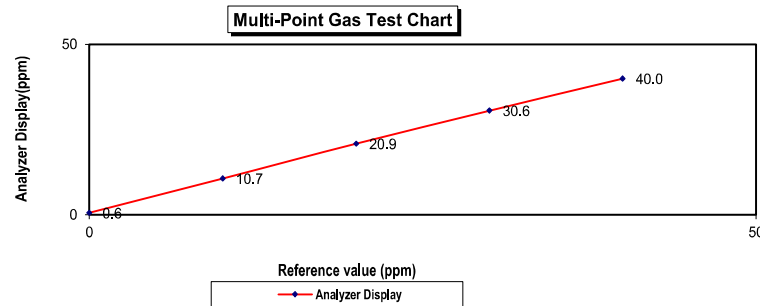

Calculate by

.....8...../.....12...../.....2023

Approve by

.....8...../.....Dec...../.....2023..

MULTI-POINT GAS TEST REPORT

Test Date : Feb 27, 2023

Equipment : Gas Analyzer (SO₂) Model : 43i
Manufacturer : Thermo SCIENTIFIC Serial Number : 1200906876

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.5	0.50	0.50	0.50
Level 3	40.00%	200.0	201.3	1.30	0.65	0.65
Level 4	60.00%	300.0	300.8	0.80	0.27	0.27
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb	Average Difference (%)			0.28

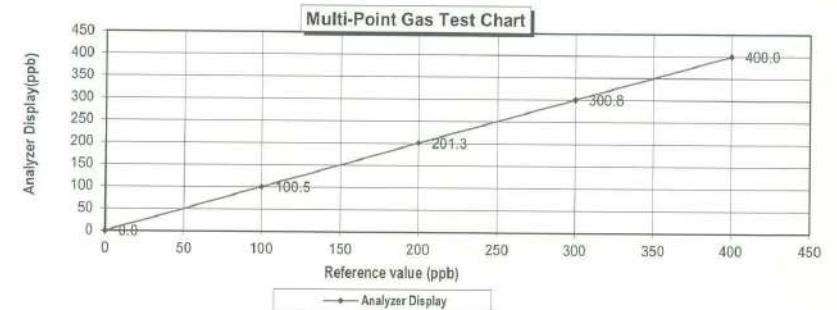

Calculate by

.....27...../.....2...../.....2023

Approve by

.....27...../.....Feb...../.....2023


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (SO ₂)	Model	43i
Manufacturer	Thermo Scientific	Serial Number	CM22387064

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

SO₂ Multi-Point Calibration

Point	%	Ref. Value (ppb)	Read. SO ₂ (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	Zero	0.0	1.0	1.00	1.00	1.00	5
Level 2	20	100.0	100.2	0.20	0.20	0.20	5
Level 3	40	200.0	200.3	0.30	0.15	0.15	5
Level 4	60	300.0	300.7	0.70	0.23	0.23	5
Level 5	80	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.32	5
	1.000	0.999	0.740	Criteria		5.00	10

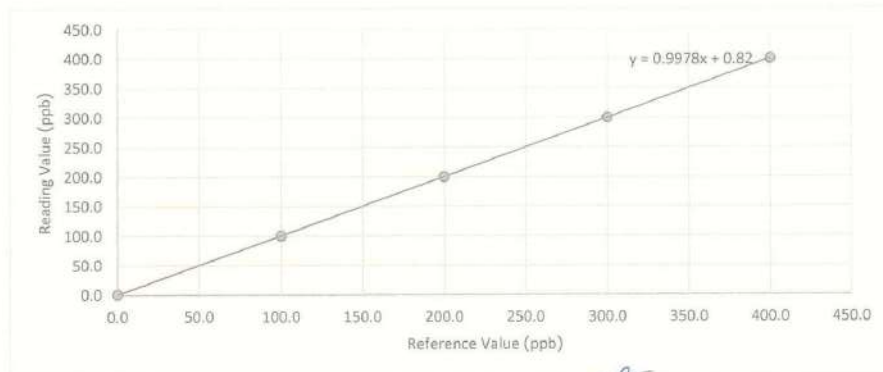

Calibrate by **Aphiwat**
Calibration Date **7/8/66**

Approve by **Pattanan W.**
Approved Date **8 Aug 2023**

เอกสารไม่ควบคุม


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (SO ₂)	Model	43i
Manufacturer	Thermo Scientific	Serial Number	CM22387063

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

SO₂ Multi-Point Calibration

Point	%	Ref. Value (ppb)	Read. SO ₂ (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	Zero	0.0	1.0	1.00	1.00	1.00	5
Level 2	20	100.0	100.4	0.40	0.40	0.40	5
Level 3	40	200.0	200.3	0.30	0.15	0.15	5
Level 4	60	300.0	300.2	0.20	0.07	0.07	5
Level 5	80	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.32	5
	1.000	0.998	0.820	Criteria		5.00	10

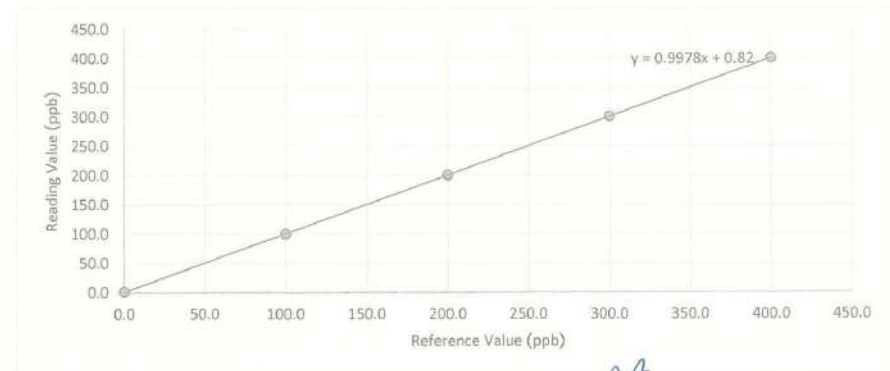

Calibrate by **Aphiwat**
Calibration Date **7/8/66**

Approve by **Pattanan W.**
Approved Date **8 Aug 2023**

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Mar 7, 2023

Equipment : Gas Analyzer (SO₂) Model : 43i
Manufacturer : Thermo SCIENTIFIC Serial Number : 1200906874

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.1	1.10	1.09	1.09
Level 3	40.00%	200.0	200.6	0.60	0.30	0.30
Level 4	60.00%	300.0	300.5	0.50	0.17	0.17
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb	Average Difference (%)			0.31

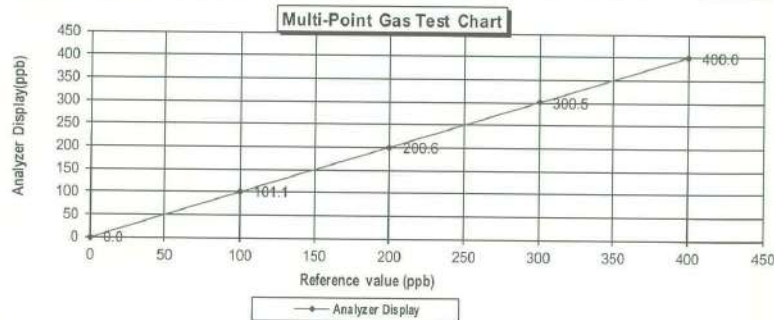

Calculate by

Sinichai Sangsri
7/3/23

Approve by

Pattana U
7 Mar 2023


MULTI-POINT GAS TEST REPORT

Equipment : Gas Analyzer (SO₂) Model : 43i
Manufacturer : Thermo Scientific Serial Number : CM22387067

Std. gas Concentration
Sulphur Dioxide (SO₂) 44.68
Nitric Oxide (NO) 45.94
Carbon Monoxide (CO) 984.8
Cylinder No. : EB01432
Dilutor Detail
Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071
Expiration Date : June 21, 2024

SO2 Multi-Point Calibration

Point	%	Ref. Value (ppb)	Read. SO2 (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	Zero	0.0	1.0	1.00	1.00	1.00	5
Level 2	20	100.0	100.4	0.40	0.40	0.40	5
Level 3	40	200.0	201.3	1.30	0.65	0.65	5
Level 4	60	300.0	301.7	1.70	0.57	0.57	5
Level 5	80	400.0	400.0	0.00	0.00	0.00	5
R		Slope	Intercept	Average		0.52	5
		1.000	0.999	1.020	Criteria	5.00	10

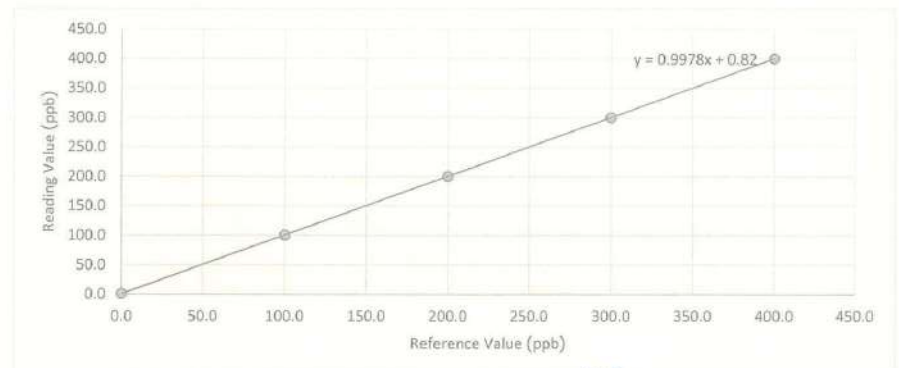

Calibrate by Aphiwat
Calibration Date 7/8/23

Approve by *Pattana U*
Approved Date 8 Aug 2023

MULTI-POINT GAS TEST REPORT
Test Date : Dec 15, 2023

Equipment : Hydrocarbon Analyzer **Model :** APHA-370
Manufacturer : HORIBA **Serial Number :** 93JN1MN9

Standard Gas Concentration


Sulphur Dioxide (SO₂) - PPM
Nitric Oxide (NO) - PPM
Methane (CH₄) 39.8 PPM
Carbon Monoxide (CO) - PPM
Cylinder No. : D824432
Expiration Date : Aug 4, 2028

Dilutor Detail

Manufacturer :
Model :
Serial Number :

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	0.35	0.35	0.35	0.35
Level 2	80.00%	40.00	39.50	-0.50	-1.27	1.27
Remark : Measuring Range 50.00 ppm			Average Difference (%)			0.81

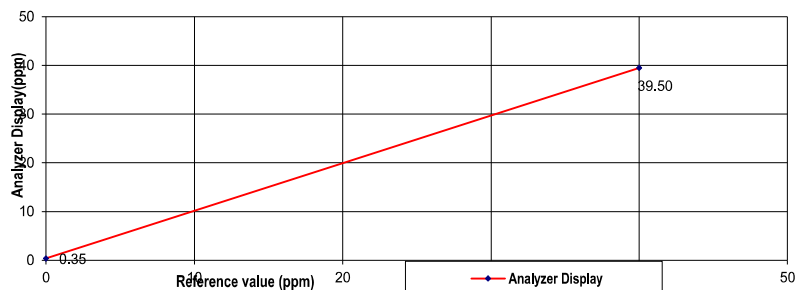:Acceptable Limit $\pm 5\%$
Multi-Point Gas Test Chart

Calculate by
Gichai C.

15/12/2023

Approve by
Phon U.

16/Dec/2023

MULTI-POINT GAS TEST REPORT
Test Date : Dec 21, 2023

Equipment : Hydrocarbon Analyzer **Model :** APHA-370
Manufacturer : HORIBA **Serial Number :** KWWV1R96

Standard Gas Concentration


Sulphur Dioxide (SO₂) - PPM
Nitric Oxide (NO) - PPM
Methane (CH₄) 39.8 PPM
Carbon Monoxide (CO) - PPM
Cylinder No. : D824432
Expiration Date : Aug 4, 2028

Dilutor Detail

Manufacturer :
Model :
Serial Number :

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	0.40	0.40	0.40	0.40
Level 2	80.00%	40.00	39.40	-0.60	-1.52	1.52
Remark : Measuring Range 50.00 ppm			Average Difference (%)			0.96

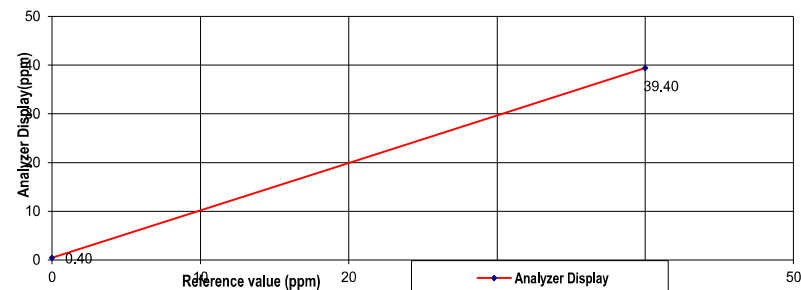:Acceptable Limit $\pm 5\%$
Multi-Point Gas Test Chart

Calculate by
Gichai C.

21/12/2023

Approve by
Phon U.

22/Dec/2023

MULTI-POINT GAS TEST REPORT
Test Date : Dec 15,2023

Equipment : Hydrocarbon Analyzer

Model : APHA-370

Manufacturer : HORIBA

Serial Number : HAMEHU5M

Standard Gas Concentration

Sulphur Dioxide (SO₂) - PPM
Nitric Oxide (NO) - PPM
Methane (CH₄) 39.8 PPM
Carbon Monoxide (CO) - PPM
Cylinder No. : D824432
Expiration Date : Aug 4,2028


Dilutor Detail

Manufacturer :
Model :
Serial Number :

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	0.30	0.30	0.30	0.30
Level 2	80.00%	40.00	39.50	-0.50	-1.27	1.27
Remark : Measuring Range 50.00 ppm			Average Difference (%)			0.78

:Acceptable Limit \pm 5%

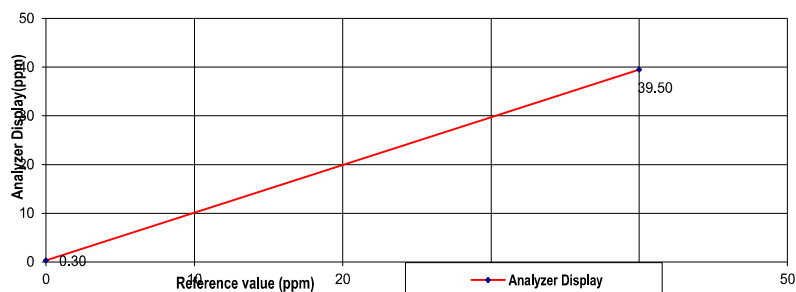Multi-Point Gas Test Chart

Calculate by
Signature

.....15...../.....12...../.....2023..

Approve by
Signature

.....15...../.....Dec...../.....2023..

MULTI-POINT GAS TEST REPORT
Test Date : Dec 15,2023

Equipment : Hydrocarbon Analyzer

Model : APHA-370

Manufacturer : HORIBA

Serial Number : 93JN1MN9

Standard Gas Concentration

Sulphur Dioxide (SO₂) - PPM
Nitric Oxide (NO) - PPM
Methane (CH₄) 39.8 PPM
Carbon Monoxide (CO) - PPM
Cylinder No. : D824432
Expiration Date : Aug 4,2028


Dilutor Detail

Manufacturer :
Model :
Serial Number :

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	0.35	0.35	0.35	0.35
Level 2	80.00%	40.00	39.50	-0.50	-1.27	1.27
Remark : Measuring Range 50.00 ppm			Average Difference (%)			0.81

:Acceptable Limit \pm 5%

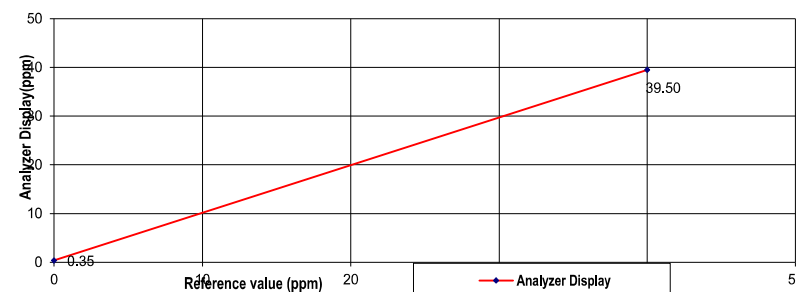Multi-Point Gas Test Chart

Calculate by
Signature

.....15...../.....12...../.....2023..

Approve by
Signature

.....15...../.....Dec...../.....2023..

MULTI-POINT GAS TEST REPORT

Test Date : Jan 22, 2020

Equipment : Hydrocarbon Analyzer Model : APHA-370
Manufacturer : HORIBA Serial Number : 93JN1MN9

Standard Gas Concentration

Sulphur Dioxide (SO₂) 45.23 PPM
Nitric Oxide (NO) 45.55 PPM
Methane (CH₄) 504.6 PPM
Carbon Monoxide (CO) 5003 PPM
Cylinder No. : CC112620
Expiration Date : Jun 15, 2020

Dilutor Detail


Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	0.40	0.40	0.40
Level 2	20.00%	2.00	2.50	20.00	20.00
Level 3	40.00%	4.00	4.60	13.04	13.04
Level 4	60.00%	6.00	6.50	7.69	7.69
Level 5	80.00%	8.00	8.40	4.76	4.76
Remark : Measuring Range	10.00 ppm		Average Difference (%)	9.18	

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

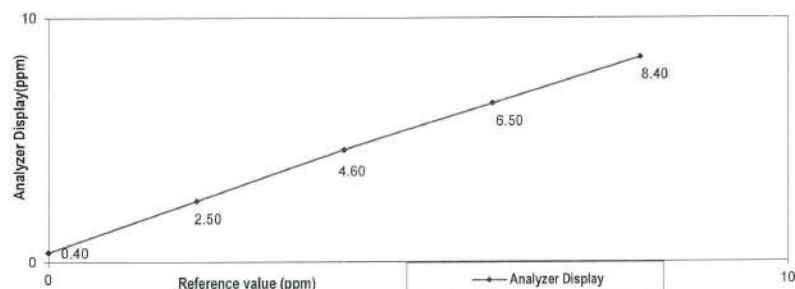

Calculate by

22/01/69

Approve by

22/Jan/2020

MULTI-POINT GAS TEST REPORT

Test Date : June 2, 2021

Equipment : Hydrocarbon Analyzer Model : APHA-370
Manufacturer : HORIBA Serial Number : RTHK2PDH

Standard Gas Concentration

Sulphur Dioxide (SO₂) - PPM
Nitric Oxide (NO) - PPM
Methane (CH₄) 39.8 PPM
Carbon Monoxide (CO) - PPM
Cylinder No. : D824432
Expiration Date : Aug 4, 2028

Dilutor Detail


Manufacturer :
Model :
Serial Number :

Multi-point gas test data

	Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	1.58	1.58	1.58
Level 2	80.00%	40.00	38.71	-3.33	3.33
Remark : Measuring Range	50.00 ppm		Average Difference (%)	2.46	

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

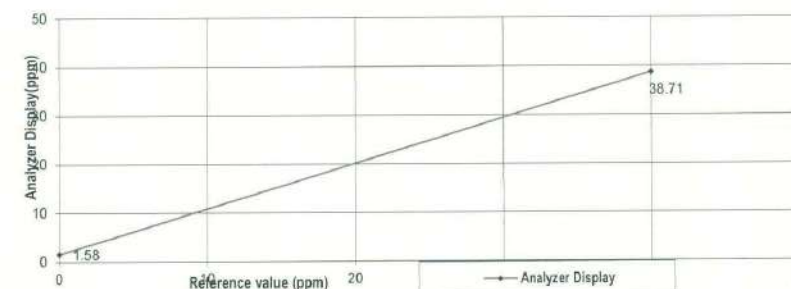

Calculate by

2/June/2021

Approve by

2/June/2021

CERTIFICATE OF ANALYSIS

Grade of Product: EPA Protocol

Part Number: E04NI99E15A01D3 Reference Number: 122-402135167-1
Cylinder Number: EB0143262 Cylinder Volume: 144.4 CF
Laboratory: 124 - Durham (SAP) - NC Cylinder Pressure: 2015 PSIG
PGVP Number: B22021 Valve Outlet: 660
Gas Code: CO,NO,NOX,SO2,BALN Certification Date: Jun 21, 2021

Expiration Date: Jun 21, 2024

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted.

Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS					
Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	45.00 PPM	45.98 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
NITRIC OXIDE	45.00 PPM	45.94 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
SULFUR DIOXIDE	45.00 PPM	44.88 PPM	G1	+/- 1.0% NIST Traceable	06/14/2021, 06/21/2021
CARBON MONOXIDE	1000 PPM	984.8 PPM	G1	+/- 0.7% NIST Traceable	06/14/2021
NITROGEN	Balance				

CALIBRATION STANDARDS					
Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	20061120	CC708068	49.82 PPM NITRIC OXIDE/NITROGEN	+/- 1.0%	Feb 02, 2025
PRM	12386	D685025	9.91 PPM NITROGEN DIOXIDE/AIR	+/- 2.0%	Feb 20, 2020
GMIS	401423838102	CC505581	4.348 PPM NITROGEN DIOXIDE/NITROGEN	+/- 2.1	Feb 18, 2023
NTRM	16011043	CC473277	49.02 PPM SULFUR DIOXIDE/NITROGEN	+/- 0.8%	Jun 17, 2022
NTRM	14080119	CC434277	990.9 PPM CARBON MONOXIDE/NITROGEN	+/-0.6%	Nov 15, 2025

The SRM, PRM or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT		
Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Nicolet 6700 AHR0801333 CO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO2	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 SO2	FTIR	Jun 03, 2021

Triad Data Available Upon Request

NOTES: PO #5221002807

GROSS WT: 28.40kg

NET WT: 4.73kg



The analytical test results reported on this certificate relate only to the cylinder number specified above. This concludes the test report.

[Signature]

Approved for Release



CERT 3082.01

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Nov 13, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : CM08140004

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071


Multi-point gas test data

	Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.8	0.8	0.8
Level 2	20.00%	10.0	10.7	0.7	6.5
Level 3	40.00%	20.0	20.9	0.9	4.3
Level 4	60.00%	30.0	30.7	0.7	2.3
Level 5	80.00%	40.0	40.0	0.0	0.0

Remark : Measuring Range 50.0 ppm

Average Difference (%) 2.79

:Acceptable Limit $\pm 5\%$

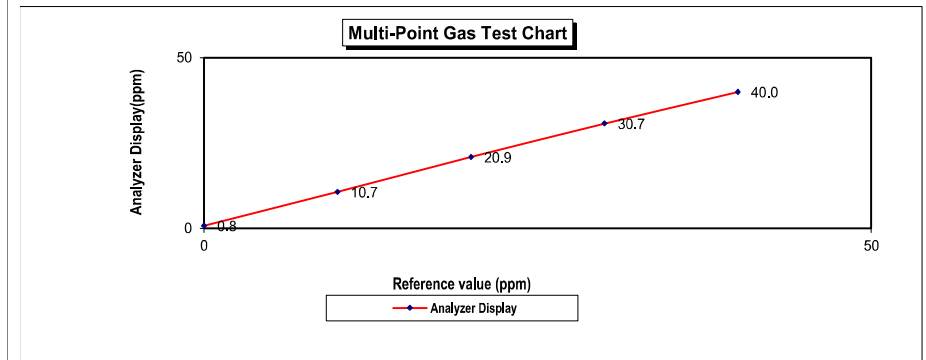

Calculate by

[Signature]
13 / 11 / 2023

Approve by

[Signature]
13 / Nov / 2023



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 2 of 5

Standard Ultrasonic Anemometer m/sec	HOOK GAGE NO. 1425			TESTED ANEMOMETER	
	Pressure inches H ₂ O	Vacuum inches H ₂ O	Velocity m/sec	Velocity m/sec	Correction m/sec
1.00	-	-	-	1.0	0.00
3.02	-	-	-	3.0	0.02
5.00	-	-	-	5.0	0.00
7.04	-	-	-	7.0	0.04
9.02	-	-	-	9.0	0.02
11.02	-	-	-	10.9	0.12
13.01	-	-	-	13.1	-0.09
15.01	-	-	-	15.0	0.01
17.02	-	-	-	17.0	0.02
20.02	-	-	-	20.1	-0.08

Wind Aloft Plotting Board.	
U.S. DEPARTMENT OF COMMERCE WEATHER BUREAU	
WIND DIRECTION	TESTED WIND DIRECTION
0	0
90	90
180	180
270	270

Calibrated by :

Watcharapol Subwat

Mr. Watcharapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

Calibration Certificate

Issued by : Calibration & Test Section : Meteorological Instruments Bureau

Date of Issue : 10 April, 2023

Certification No. 178/23

Page : 1 of 5

Object : WIRELESS ANEMOMETER

Manufacturer : SCARLET

Type : WIRELESS RECEIVER : WL-21

WIND SENSOR : WL-21

Mfg Code : WIRELESS RECEIVER : 2111DR0052

WIND SENSOR : 2111DT0052

Customer : United Analyst and Engineering Consultant Co., Ltd.

81 Soi Udomsuk 41, Sukhumvit Road,

Bangchak, Prakanong, Bangkok 10260.

Calibration Condition : Temperature 25.1 °C Barometric Pressure 1006.9 hPa

NATIONAL STANDARD WIND TUNNEL : Thermal Anemometer 642 S/N 91563

: HOOK GAGE NO 1425 : Wind Aloft Plotting Board

N.I.S.T. Test Reference Number 731/241460

: Ultrasonic Anemometer Model DA-650-3TV (sensor TR-90AH)

Serial Number 110730029 (sensor 120629586)

JAPAN QUALITY ASSURANCE ORGANIZATION

STANDARD THERMOMETER : Theodor Friedrich : Dry No. 8390/94 Wet No. 8389/94

: testo, testo 645 Serial No. 02848057 : Thermoschneider No. 918802

STANDARD BAROMETER : Digital Barometer Vaisala Type PTB220 No. V1220015

: Digital Barometer Vaisala Type PTB330 No. K1320001

Calibrated by :

Watcharapol Subwat

Mr. Watcharapol Subwat

Mechanical Engineer

Signed :

Pisood Promsut

Mr. Pisood Promsut

(Authorized Signatory)

for the Chief

Sub-Standard Instrument



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 4 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
759.94	760	-0.06
760.13	760	0.13
760.67	761	-0.33
760.73	761	-0.27
757.28	757	0.28
757.34	757	0.34
757.52	758	-0.48
757.79	758	-0.21
758.10	758	0.10
758.16	758	0.16
758.66	759	-0.34
758.47	758	0.47
758.56	758	0.56
758.75	759	-0.25
758.98	759	-0.02
759.36	759	0.36
756.54	757	-0.46
756.66	757	-0.34
757.00	757	0.00
757.15	757	0.15

Average

0.04

Calibrated by :

Watchapol

Mr. Watchapol Subwat

Mechanical Engineer



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 3 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
1013.17	1013	0.17
1013.43	1014	-0.57
1014.15	1014	0.15
1014.22	1014	0.22
1009.63	1009	0.63
1009.71	1010	-0.29
1009.95	1010	-0.05
1010.31	1010	0.31
1010.72	1011	-0.28
1010.80	1011	-0.20
1011.47	1011	0.47
1011.21	1011	0.21
1011.33	1011	0.33
1011.59	1012	-0.41
1011.89	1012	-0.11
1012.40	1012	0.40
1008.64	1009	-0.36
1008.80	1009	-0.20
1009.25	1009	0.25
1009.45	1009	0.45

Average

0.06

Calibrated by :

Watchapol

Mr. Watchapol Subwat

Mechanical Engineer



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 5 of 5

Standard Temp. °C	Temperature Sensor Reading	
	Reading °C	Correction °C
45.15	45.3	-0.15
31.05	31.1	-0.05
15.32	15.5	-0.18

Calibrated by :

Watcharapol

Mr. Watcharapol Subwat

Mechanical Engineer



เอกสารไม่ควบคุม



Certificate of Calibration

WL-21 Wireless Anemometer

Scarlet Tech Ltd. hereby certifies that the WL-21 wireless anemometer listed below was thoroughly calibrated, tested and inspected following the standard calibration procedure (st-wl-21) and is within manufacturer's specification at the time when the calibration is done.

Client: Envir Service Co., Ltd.

Serial No.: 2111DT0058

Calibration Date: 2022/3/25

Calibration Expiry Date: 2023/3/24

The Result of Calibration

Velocity				
Measured Value (m/s)	Actual Value (m/s)	Deviation	Tolerance	Result
1.0	1.0	0.0	0.9 - 1.1	Pass
2.0	1.9	0.1	1.8 - 2.2	Pass
5.0	5.0	0.0	4.7 - 5.3	Pass
7.0	7.2	0.2	6.0 - 8.0	Pass
10.0	9.8	0.2	9.5 - 10.5	Pass
20.0	20.0	0	19.0 - 21.0	Pass

Wind Direction				
Measured Value	Actual Value	Deviation	Tolerance	Result
45°	47	2	42 - 48	Pass
135°	135	0	132 - 138	Pass
225°	224	1	222 - 228	Pass
315°	315	0	312 - 318	Pass
0°	359	1	357 - 3	Pass

Inspection Room Temp	Actual Value	Deviation	Tolerance	Result
24.2°C	24.5	0.3	23.2-25.2	Pass

Atmospheric Pressure Inspection	Actual Value	Deviation	Tolerance	Result
998	1000	2	994-1002	Pass

Environment conditions :

Air temperature: 22 °C

Relative humidity: 62 %

Static pressure: 102.2 kPa

Performed by:

Jim Lim

Certified by
Head of Engineering department

This certificate may not be published or reproduced, except in full, unless obtaining permission in writing form from Scarlet Tech Ltd.
4F-3, No. 347, 2nd Sec., Heping E. Rd., Daan Dist. Taipei City 106, Taiwan

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 177/23

10 April, 2023

Page : 2 of 5

Standard	HOOK GAGE NO. 1425			TESTED ANEMOMETER	
	Pressure	Vacuum	Velocity	Velocity	Correction
m/sec	inches H2O	inches H2O	m/sec	m/sec	m/sec
1.00	-	-	-	1.0	0.00
3.02	-	-	-	3.0	0.02
5.00	-	-	-	4.9	0.10
7.04	-	-	-	6.9	0.14
9.02	-	-	-	9.0	0.02
11.02	-	-	-	11.0	0.02
13.01	-	-	-	13.1	-0.09
15.01	-	-	-	15.0	0.01
17.02	-	-	-	17.0	0.02
20.02	-	-	-	20.0	0.02

Wind Aloft Plotting Board.	
U.S. DEPARTMENT OF COMMERCE WEATHER BUREAU	
WIND DIRECTION	TESTED WIND DIRECTION
0	0
90	90
180	180
270	270

Calibrated by:

Hatcharapol

Mr. Watcharapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

Calibration Certificate

Issued by: Calibration & Test Section : Meteorological Instruments Bureau

Date of Issue 10 April, 2023

Certification No. 177/23

Page : 1 of 5

Object : WIRELESS ANEMOMETER

Manufacturer : SCARLET

Type : WIRELESS RECEIVER : WL-21

WIND SENSOR : WL-21

Mfg Code : WIRELESS RECEIVER : 2112DR0065

WIND SENSOR : 2112DT0065

Customer : United Analyst and Engineering Consultant Co.,Ltd.

81 Soi Udomsuk 41, Sukhumvit Road,

Bangchak, Prakanong, Bangkok 10260.

Calibration Condition : Temperature 25.1 °C Barometric Pressure 1007.2 hPa

NATIONAL STANDARD WIND TUNNEL : Thermal Anemometer 642 S/N 91563

: HOOK GAGE NO 1425

: Wind Aloft Plotting Board

N.I.S.T. Test Reference Number 731/241460

: Ultrasonic Anemometer

Model DA-650-3TV (sensor TR-90AH)

Serial Number 110730029 (sensor 120629586)

JAPAN QUALITY ASSURANCE ORGANIZATION

STANDARD THERMOMETER

: Theodor Friedrich : Dry No.8390/94 Wet No. 8389/94

: testo, testo 645 Serial No. 02848057

: Thermoschneider No.918802

STANDARD BAROMETER

: Digital Barometer Vaisala Type PTB220 No. V1220015

: Digital Barometer Vaisala Type PTB330 No. K4320001

Calibrated by:

Hatcharapol

Signed:

Mr. Pisod Promsat

Mr. Watcharapol Subwat

Mechanical Engineer

Mr. Pisod Promsat

Mechanical Engineer

(Authorized Signatory)

for the Chief

Sub-Standard Instrument



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 177/23

10 April, 2023

Page : 4 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
759.94	760	-0.06
760.13	760	0.13
760.67	761	-0.33
760.73	761	-0.27
757.28	757	0.28
757.34	757	0.34
757.52	758	-0.48
757.79	758	-0.21
758.10	758	0.10
758.16	758	0.16
758.66	759	-0.34
758.47	759	-0.53
758.56	759	-0.44
758.75	759	-0.25
758.98	759	-0.02
759.36	759	0.36
756.54	756	0.54
756.66	757	-0.34
757.00	757	0.00
757.15	757	0.15

Average

-0.06

Calibrated by :

Wacharapol

Mr. Wacharapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 177/23

10 April, 2023

Page : 3 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
1013.17	1013	0.17
1013.43	1014	-0.57
1014.15	1014	0.15
1014.22	1014	0.22
1009.63	1010	-0.37
1009.71	1010	-0.29
1009.95	1010	-0.05
1010.31	1010	0.31
1010.72	1011	-0.28
1010.80	1011	-0.20
1011.47	1011	0.47
1011.21	1011	0.21
1011.33	1011	0.33
1011.59	1011	0.59
1011.89	1012	-0.11
1012.40	1012	0.40
1008.64	1009	-0.36
1008.80	1009	-0.20
1009.25	1009	0.25
1009.45	1010	-0.55

Average

0.01

Calibrated by :

Wacharapol

Mr. Wacharapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau

เอกสารไม่ควบคุม



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER

MANUFACTURER : INSTANTEL

MODEL / TYPE : 721A2501/721A2901

SERIAL NO. : UM12393/UM12393

CLID. NO. : 251801351

JOB CONTROL NO. : 230221019601

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 21 February 2023

DATE OF ISSUED : 24 February 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Suwit Phuanbusabong
Calibration Engineer



Approved By : Mongkol Yotsoontorn
Authorized Signatory
24 February 2023

This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23019601

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

10 April, 2023

Certification No. 177/23

Page : 5 of 5

Standard Temp. °C	Temperature Sensor Reading	
	Reading °C	Correction °C
45.15	45.2	-0.05
31.05	31.0	0.05
15.32	15.4	-0.08

Calibrated by : Watcharapol Subwat
Mr. Watcharapol Subwat
Mechanical Engineer



เอกสารไม่ควบคุม

CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(g)	(frequency)		(g)	(g)	(g)	± (% of rdg.)
0.3	50 Hz	peak	0.300	0.305	-0.005	1.9
0.4	50 Hz		0.400	0.408	-0.008	1.9
0.5	50 Hz		0.500	0.511	-0.011	1.3
0.6	50 Hz		0.600	0.618	-0.018	1.3
0.7	50 Hz		0.700	0.721	-0.021	1.3
0.3	100 Hz	peak	0.300	0.304	-0.004	1.9
0.4	100 Hz		0.400	0.407	-0.007	1.9
0.5	100 Hz		0.500	0.509	-0.009	1.3
0.6	100 Hz		0.600	0.613	-0.013	1.3
0.7	100 Hz		0.700	0.719	-0.019	1.3

2. VELOCITY RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm/s)	(frequency)		(mm/s)	(mm/s)	(mm/s)	± (% of rdg.)
3	50 Hz	peak	3.000	3.041	-0.041	1.8
4	50 Hz		4.000	4.055	-0.055	1.8
5	50 Hz		5.000	5.067	-0.067	1.8
6	50 Hz		6.000	6.079	-0.079	1.8
7	50 Hz		7.000	7.089	-0.089	1.8
3	100 Hz	peak	3.000	3.039	-0.039	1.8
4	100 Hz		4.000	4.048	-0.048	1.8
5	100 Hz		5.000	5.055	-0.055	1.8
6	100 Hz		6.000	6.068	-0.068	1.8
7	100 Hz		7.000	7.080	-0.080	1.8

Certificate No. Q23019601

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A2901
SERIAL NO. : UM12393/UM12393
DATE OF CALIBRATION : 22 February 2023

ENVIRONMENT CONDITIONS :

Temperature : (23 ± 2) °C Relative Humidity : (55 ± 15) %RH

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, High Resolution Programmable Timer/Counter, Accelerometer and Measuring Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

- Digital Multimeter, Wavetek Model 1281 S/N. 29320.
- High Resolution Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.
- Accelerometer with Measuring Amplifier, Bruel & Kjaer Model 8305, 2525 S/N. 397018, 2434988.

TRACEABILITY :

- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 05-0207/21, Due Date 31 May 2023.
- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0001/22, Due Date 22 February 2023.
- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0009-22, Due Date 22 June 2023.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2.00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %. It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23019601

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration

Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD. Certificate No : 22-ACT-105
 Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok Request No : Req-2022-0229
 10260

Unit Under Calibration Details

Measurement item : Sound Level Meter Microphone Class : 2
 Manufacturer : LARSON DAVIS Microphone Model : 375A04
 Model : LxT2 Microphone S/N : 329350
 Serial Number : 0005396 Preamplifier Model : PRMLxT2C
 ID : UAE.EFM.033/2564 Preamplifier S/N : 073812
 Resolution : 0.1 dB Instrument Status : Used

Calibration Environment and Details

Temperature : 23 °C ± 2 °C
 Humidity : 50 %RH ± 20 %RH
 Barometric Pressure : 1013 hPa ± 10 hPa
 Received Date : 31 January 2022
 Calibrated Date : 11 February 2022
 Calibration Procedure : In-house method CP-SLM-01 based on IEC 61672-3 : 2013 Electroacoustics - Sound level meters - Part 3: Periodic tests
 Location of Calibration : Lab Acoustic

Reference Standard

Instrument	Brand	Model	SN.	Due calibration	Traceability
Standard Microphone	GRAS	40AN	188273	15 September 2022	GRAS
Multifrequency Calibrator	Quest	Quest-cal	EFA000234	14 June 2022	TSI
Audio Generator	Svantek	Svan401	131	18 October 2022	WK Electric

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibrated By : Mr. Noppadon Luangart
 Calibration Officer

Approved By : Mr. Pacit Mathavorn
 Calibration Engineer Supervisor
 Issue Date : 11 February 2022

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd

FM-708-SLM-01 Rev.0 Issue date 01/07/15

เอกสารไม่ควบคุม

CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
*0.03	50 Hz	peak	0.030	0.030	0.000	2.1
*0.04	50 Hz		0.040	0.040	0.000	1.7
*0.05	50 Hz		0.050	0.050	0.000	1.5
*0.06	50 Hz		0.060	0.061	-0.001	1.3
*0.07	50 Hz		0.070	0.071	-0.001	1.2
0.03	100 Hz	peak	0.030	0.030	0.000	2.1
0.04	100 Hz		0.040	0.040	0.000	1.7
0.05	100 Hz		0.050	0.050	0.000	1.5
0.06	100 Hz		0.060	0.061	-0.001	1.3
0.07	100 Hz		0.070	0.071	-0.001	1.2

Note. * means Calibrations marked " Not ANAB Accredited " in this Certificate have been included for completeness.

The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 008 Page 1 of 58

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23019601

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration

Certificate No : 22-ACT-105
Request No : Req-2022-0229

5. Electrical signal test of frequency weightings, Weighting network response with relative to 1 kHz

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance
FAST / 37-139	Weighting Response curve				Limit
STD Setting	A (dB)	C (dB)	Z (dB)	(± dB)	(± dB)
63 Hz	-0.2	0.0	0.0	0.2	2.0
125 Hz	-0.1	0.0	0.0		1.5
250 Hz	-0.1	0.0	0.0		1.5
500 Hz	-0.1	0.0	0.0		1.5
1000 Hz	0.0	0.0	0.0		1.0
2000 Hz	0.0	0.1	0.0		2.0
4000 Hz	0.0	0.0	0.0		3.0
8000 Hz	0.0	0.0	0.0		5.0
16000 Hz	-0.1	-0.1	-0.1		+5 _s -INF.

6. Frequency and time weightings at 1kHz

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
	REF	UUC	ERR		
FAST / 37-139	(dB)	(dB)	(dB)	0.2	0.2
UUC Weighting					
A	114.00	114.0	0.0		
C	114.00	114.0	0.0		
Z	114.00	114.0	0.0		0.2

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
	REF	UUC	ERR		
37-139 / A	(dB)	(dB)	(dB)	0.2	0.1
UUC Time Response					
Fast	114.00	114.0	0.0		
Slow	114.00	114.0	0.0		
Leq	114.00	114.0	0.0		0.1

Certificate No : 22-ACT-105
Request No : Req-2022-0229

1. Indication at the calibration check frequency

UUC Setting	Nominal Level (dB)	Before Adjust		Adjust		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
		UUC (dB)	ERR (dB)	UUC (dB)	ERR (dB)		
FAST / A / 37-139							
Calibrator Setting							
1000 Hz 114.00 dB	113.85	113.9	+0.05	113.9	0.05	0.20	0.3

Note : Absolute sensitivity was established by the use of Sound Calibrator Brand SVANTEK, Model SV 35A, SN.58079

2. Self-generated noise, Microphone installed

UUC Setting	Measured (dB)	UNCERTAINTY (± dB)
FAST / 37-139		
UUC Weighting		
A	27.8	0.10

3. Self-generated noise, Microphone replaced by the electrical input signal device

UUC Setting	Measured (dB)	UNCERTAINTY (± dB)
FAST / 37-139		
UUC Weighting		
A	27.8	0.10
C	27.3	0.10
Z	33.1	0.10

4. Acoustic signal test of frequency weightings (Without Windscreen)

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance Limit
	Weighting Response curve				
FAST / 37-139	A	C	Z	(± dB)	(± dB)
STD Setting	(dB)	(dB)	(dB)		
125 Hz	0.1	0.1	0.2	0.50	2.0
1000 Hz	0.0	0.0	0.0	0.60	1.0
4000 Hz	0.6	0.5	0.6	0.60	3.0
8000 Hz	0.1	0.0	0.2	0.70	5.0

Certificate No : 22-ACT-105
Request No : Req-2022-0229

9. Level linearity including the level range control

UUC Setting	STD	Measured		UNCERTAINTY	Acceptance
FAST / A	REF	UUC	ERR		Limit
UUC Range	(dB)	(dB)	(dB)	(± dB)	(± dB)
37-139	43.2	42.8	-0.4	0.3	1.1
	114	114.0	0.0		1.1

10. Tone burst response

UUC Setting	STD	Anticipated	Measured		UNCERTAINTY	Acceptance
A / 37-139	Toneburst	Ref	UUC	ERR		Limit
UUC Time Response	(ms)	(dB)	(dB)	(dB)	(± dB)	(± dB)
Fast	200	135.0	134.9	-0.1	0.3	1.0
	2	118.0	117.6	-0.4		+1.0, -2.5
	0.25	109.0	108.7	-0.3		+1.5, -5.0
Slow	200	128.6	128.5	-0.1		1.0
	2	109.0	108.9	-0.1		+1.0, -5.0
SEL	200	129.0	129.0	0.0		1.0
	2	109.0	108.9	-0.1		+1.0, -2.5
	0.25	100.0	100.0	0.0		+1.5, -5.0

11. Peak C Sound level

UUC Setting	Anticipated	Measured		UNCERTAINTY	Acceptance
FAST / C / 95-142		REF	UUC		ERR
STD Setting	(dB)	(dB)	(dB)	(± dB)	(± dB)
Complete cycle	137.4	136.7	-0.70	0.2	3.0
Positive half cycle	136.4	136.2	-0.20		2.0
Negative half cycle	136.4	136.2	-0.20		2.0

Certificate No : 22-ACT-105
Request No : Req-2022-0229

7. Long Term Stability

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A / 37-139	UUC		
STD Setting	(dB)		
Initial	114.0		
Final	114.0		
Deviated	0.0	0.1	0.3

8. Level linearity on the reference level range

UUC Setting	Anticipated	Deviation		UNCERTAINTY	Acceptance
FAST / A / 37-139	REF	UUC	ERR		Limit
STD dB	(dB)	(dB)	(dB)	(± dB)	(± dB)
139.00	139	139.0	0.0	0.3	1.1
134.00	134	134.0	0.0		1.1
129.00	129	129.0	0.0		1.1
124.00	124	124.0	0.0		1.1
119.00	119	119.0	0.0		1.1
114.00	114	114.0	0.0		1.1
109.00	109	109.0	0.0		1.1
104.00	104	104.0	0.0		1.1
99.00	99	99.0	0.0		1.1
94.00	94	93.9	-0.1		1.1
89.00	89	88.9	-0.1		1.1
84.00	84	83.9	-0.1		1.1
79.00	79	78.9	-0.1		1.1
74.00	74	73.9	-0.1		1.1
69.00	69	68.9	-0.1		1.1
64.00	64	63.9	-0.1		1.1
59.00	59	58.9	-0.1		1.1
54.00	54	53.9	-0.1		1.1
49.00	49	48.9	-0.1		1.1
44.00	44	44.0	0.0		1.1
39.00	39	39.2	0.2		1.1
38.00	38	38.3	0.3		1.1

Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD. Certificate No : 22-ACT-249
 Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok Request No : Req-2022-0629
 10260

Unit Under Calibration Details

Measurement item : Sound Level Meter Microphone Class : 2
 Manufacturer : LARSON DAVIS Microphone Model : 375A04
 Model : LxT2 Microphone S/N : 329356
 Serial Number : 0005304 Preamplifier Model : PRMLxT2B
 ID : UAE.EFM.115/2562 Preamplifier S/N : 056099
 Resolution : 0.1 dB Instrument Status : Used

Calibration Environment and Details


Temperature : 23 °C ± 2 °C
 Humidity : 50 %RH ± 20 %RH
 Barometric Pressure : 1013 hPa ± 10 hPa
 Received Date : 23 March 2022
 Calibrated Date : 1 April 2022
 Calibration Procedure : In-house method CP-SLM-01 based on IEC 61672-3 : 2013 Electroacoustics - Sound level meters - Part 3: Periodic tests
 Location of Calibration : Lab Acoustic


Reference Standard

Instrument	Brand	Model	SN.	Due calibration	Traceability
Standard Microphone	GRAS	40AN	188273	15 September 2022	GRAS
Multifrequency Calibrator	Quest	Quest-cal	EFA000234	14 June 2022	TSI
Audio Generator	Svante	Svan401	131	18 October 2022	WK Electric

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibrated By : 
 Mr. Noppadon Luangart
 Calibration Officer

Approved By : 
 Mr. Pacit Mathavorn
 Calibration Engineer Supervisor
 Issue Date : 1 April 2022

Certificate No : 22-ACT-105

Request No : Req-2022-0229

12. Overload indication

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit
FAST / A / 37-139	UUC		Limit
STD Setting	(dB)	(± dB)	(± dB)
Positive one-half cycle	141.7		
Negative one-half cycle	141.8		
Deviated	-0.1	0.2	1.5

13. High Level Stability

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit
FAST / A / 37-139	UUC		Limit
STD Setting	(dB)	(± dB)	(± dB)
Initial	138.0		
Final	138.0		
Deviated	0.0	0.1	0.3

End of Certificate

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

5. Electrical signal test of frequency weightings, Weighting network response with relative to 1 kHz

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance
FAST / 37-139	Weighting Response curve				
STD Setting	A (dB)	C (dB)	Z (dB)	(± dB)	(± dB)
63 Hz	-0.1	-0.1	-0.1	0.2	2.0
125 Hz	-0.1	0.0	0.0		1.5
250 Hz	0.0	0.0	0.0		1.5
500 Hz	0.0	0.0	0.0		1.5
1000 Hz	0.0	0.0	0.0		1.0
2000 Hz	0.0	0.0	0.0		2.0
4000 Hz	0.0	0.0	0.0		3.0
8000 Hz	-0.1	-0.1	0.0		5.0
16000 Hz	-0.1	-0.1	-0.1		+5, -INF

6. Frequency and time weightings at 1kHz

UUC Setting	STD	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / 37-139	REF	UUC	ERR		
UUC Weighting	(dB)	(dB)	(dB)	0.2	0.2
A	114.00	114.0	0.0		
C	114.00	114.1	0.1		
Z	114.00	114.1	0.1		

UUC Setting	STD	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
37-139 / A	REF	UUC	ERR		
UUC Time Response	(dB)	(dB)	(dB)	0.2	0.1
Fast	114.00	114.0	0.0		
Slow	114.00	114.0	0.0		
Leq	114.00	114.0	0.0		

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

1. Indication at the calibration check frequency

UUC Setting	Nominal	Before Adjust		Adjust		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A / 37-139	Level	UUC	ERR	UUC	ERR		
Calibrator Setting	(dB)	(dB)	(dB)	(dB)	(dB)	0.20	0.3
1000 Hz 114.00 dB	113.85	113.8	-0.05	113.9	0.05		

Note : Absolute sensitivity was established by the use of Sound Calibrator Brand SVANTEK, Model SV 35A, SN.58079

2. Self-generated noise, Microphone installed

UUC Setting	Measured	UNCERTAINTY (\pm dB)
FAST / 37-139		
UUC Weighting	(dB)	(\pm dB)
A	24.7	0.10

3. Self-generated noise, Microphone replaced by the electrical input signal device

UUC Setting	Measured	UNCERTAINTY (\pm dB)
FAST / 37-139		
UUC Weighting	(dB)	(\pm dB)
A	24.1	0.10
C	23.5	0.10
Z	27.8	0.10

4. Acoustic signal test of frequency weightings (Without Windscreen)

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance Limit
	Weighting Response curve				
	FAST / 37-139	A	C	Z	(± dB)
STD Setting	(dB)	(dB)	(dB)		
125 Hz	0.1	0.1	0.1	0.50	2.0
1000 Hz	0.0	0.0	0.0	0.60	1.0
4000 Hz	0.4	0.3	0.3	0.60	3.0
8000 Hz	-0.2	-0.3	-0.1	0.70	5.0

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

9. Level linearity including the level range control

UUC Setting	STD	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A	REF	UUC	ERR		
UUC Range	(dB)	(dB)	(dB)		
37-139	43.9	44.1	0.2	0.3	1.1
	114	114.0	0.0		1.1

10. Tone burst response

UUC Setting	STD	Anticipated	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
A / 37-139	Toneburst	Ref	UUC	ERR		
UUC Time Response	(ms)	(dB)	(dB)	(dB)		
Fast	200	135.0	135.0	0.0	0.3	1.0
	2	118.0	117.8	-0.2		+1.0, -2.5
	0.25	109.0	108.8	-0.2		+1.5, -5.0
Slow	200	128.6	128.5	-0.1		1.0
	2	109.0	108.9	-0.1		+1.0, -5.0
SEL	200	129.0	129.0	0.0		1.0
	2	109.0	108.9	-0.1		+1.0, -2.5
	0.25	100.0	99.9	-0.1		+1.5, -5.0

11. Peak C Sound level

UUC Setting	Anticipated	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / C / 95-142	REF	UUC	ERR		
STD Setting	(dB)	(dB)	(dB)		
Complete cycle	137.4	136.9	-0.50	0.2	3.0
Positive half cycle	136.4	136.2	-0.20		2.0
Negative half cycle	136.4	136.2	-0.20		2.0

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

7. Long Term Stability

UUC Setting	Measured	UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A / 37-139	UUC		
STD Setting	(dB)		
Initial	114.0		
Final	114.0		
Deviated	0.0	0.1	0.3

8. Level linearity on the reference level range

UUC Setting	Anticipated	Deviation		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A / 37-139	REF	UUC	ERR		
STD dB	(dB)	(dB)	(dB)		
139.00	139	139.0	0.0	0.3	1.1
134.00	134	134.0	0.0		1.1
129.00	129	129.0	0.0		1.1
124.00	124	124.0	0.0		1.1
119.00	119	119.0	0.0		1.1
114.00	114	114.0	0.0		1.1
109.00	109	109.0	0.0		1.1
104.00	104	104.0	0.0		1.1
99.00	99	98.9	-0.1		1.1
94.00	94	94.0	0.0		1.1
89.00	89	89.0	0.0		1.1
84.00	84	84.0	0.0		1.1
79.00	79	79.0	0.0		1.1
74.00	74	74.0	0.0		1.1
69.00	69	69.0	0.0		1.1
64.00	64	64.0	0.0		1.1
59.00	59	59.0	0.0		1.1
54.00	54	54.0	0.0		1.1
49.00	49	49.0	0.0		1.1
44.00	44	44.1	0.1		1.1
39.00	39	39.3	0.3		1.1
38.00	38	38.4	0.4		1.1

SITHIPORN ASSOCIATES CO.,LTD. CALIBRATION LABORATORY

451-451/1 Sirinthorn Rd.,Bangbunru, Bangplud Bangkok 10700 THAILAND.
Tel.0-2435-8800 Fax.0-2433-1679 e-mail:cal-center@sithiporn.com http://www.sithiporn.com



Cert. No. : ACL22082
Pages : 1 of 8

Calibration Certificate

Equipment : SOUND LEVEL METER
Manufacturer : LARSON DAVIS
Model : LxT2/ Microphone 375B02 / Preamplifier PRML x T2B
Serial No.: 0005289 / 011732 / 056076
ID No.: -

Condition As Found : GOOD

Customer : UNITED ANALYST AND ENGINEERING CONSULTANT (UAE)
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK SUB-DISTRICT,
PHRAKHANONG DISTRICT, BANGKOK 10260
THAILAND.

Location : -
Ambient Temperature : (23.0 \pm 3) °C
Pressure : (101.3 \pm 3) kPa
Relative Humidity : (50.0 \pm 20) %

Received Date : 18 JANUARY 2022
Calibration Date : 26 JANUARY 2022
Date of Issue : 28 JANUARY 2022

Calibrated by : Nathakorn Pisutpaisan

Approved by :

T. Petchurai
(Thanakul Petchurai)

This certificate is issued in accordance with the requirements of ISO/IEC 17025 standard, may not be reproduced other than in full, except with the prior written approval of the head of Calibration Laboratory.

เอกสารไม่ควบคุม

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAE0,
AMPHOE BANG PHI SAMUT PRAKARN PROVINCE 10540 THAILAND
TEL: (6690-2116-5860-1 FAX: (6690-2116-7140



Certificate No : 22-ACT-249

Request No : Req-2022-0629

12. Overload indication

UUC Setting	Measured	UNCERTAINTY	Acceptance
FAST / A / 37-139	UUC		Limit
STD Setting	(dB)	(\pm dB)	(\pm dB)
Positive one-half cycle	142.9		
Negative one-half cycle	142.7		
Deviated	0.2	0.2	1.5

13. High Level Stability

UUC Setting	Measured	UNCERTAINTY	Acceptance
FAST / A / 37-139	UUC		Limit
STD Setting	(dB)	(\pm dB)	(\pm dB)
Initial	138.0		
Final	138.0		
Deviated	0.0	0.1	0.3

End of Certificate

เอกสารไม่ควบคุม

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 3 of 8

Summary of Measurement Result :

Parameter	Pass	Fail	Uncertainty (dB)	Maximum-permitted uncertainty of measurement (dB)
1. Absolute sensitivity	✓	-	0.2	N/A
2. Self-generated noise	✓	-	0.2	N/A
3. Acoustical signal tests of frequency weightings				
125 Hz	✓	-	0.3	0.6
1000 Hz	✓	-	0.3	0.6
8000 Hz	✓	-	0.3	0.7
4. Electrical signal tests of frequency weightings				
For 10 Hz to 4 kHz	✓	-	0.3	0.6
For > 4 kHz to 10 kHz	✓	-	0.3	0.7
For > 10 kHz to 20 kHz	✓	-	0.3	1.0
5. Frequency and time weightings at 1 kHz	✓	-	0.2	0.2
6. Long - term stability	✓	-	0.1	0.1
7. Level linearity on the reference level range	✓	-	0.2	0.3
8. Level linearity including the level range control	✓	-	0.2	0.3
9. Tone burst response	✓	-	0.2	0.3
10. Peak C sound level	✓	-	0.2	0.35
11. Overload indication	✓	-	0.2	0.25
12. High level stability	✓	-	0.1	0.1

เอกสารไม่ควบคุม

T. Petch

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 2 of 8

Calibration Procedure : CP-AC-02

Calibration Method :

This equipment was calibrated by based on IEC-61672-3 (2013) Standard for sound level meter (SLM).
The SLM had tests to Acoustical and Electrical signal tests of frequency weighting with Anechoic chamber and Reference Standard Instruments.
For tests results of each items were made by observation of each Instruments display and also with SLM's display.

Condition of this result of calibration :

1. Reference Standard Instruments :

Instrument	Model	Serial No.	Cert. No.	Due Date
Waveform Generator	33210A	MY48017076	EF-0012-21	10-Feb-22
Waveform Generator	33511B	MY52302742	EF-0011-21	10-Feb-22
Digital Multimeter	33461A	MY53220104	EEL.BP. 05/0264	10-Feb-22
Digital Multimeter	33461A	MY53220076	EEL.BP. 03/0264	08-Feb-22
Digital Multimeter	34461A	MY60024273	1-15180725251-1	15-Sep-22
Programmable Attenuator	MAT-1070	62100114	1500-07774E	08-Mar-22
Condenser Microphone	4180	2977900	AA-1008-21	05-Feb-22
Measuring Amplifier	NA-42KAI	34560495	AA-3003-21	16-Feb-22

2. This result of calibration was found accurate as shown on date and place of calibration for this calibrated item only.

3. This certificate is traceable to the international system of unit maintained at :

3.1 National Institute of Metrology (Thailand).

3.2 Thailand Institute of Scientific and Technological Research (TISTR).

เอกสารไม่ควบคุม

T. Petch

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 5 of 8

4. Electrical signal tests of frequency weightings

Weighting network response with relative to 1 kHz.

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
63	0.0	0.0	0.0	±2.0
125	0.0	0.1	0.0	±1.5
250	0.0	0.0	0.0	±1.5
500	0.0	0.0	0.0	±1.5
1000	0.0	0.0	0.0	±1.0
2000	0.0	0.1	0.0	±2.0
4000	0.0	-0.1	0.0	±3.0
8000	0.0	0.1	0.0	±5.0
16000	-0.1	0.1	0.1	±5.0(-∞)

5. Frequency and time weightings at 1 kHz

5.1 Frequency weightings at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	0.0	-
C - weight	94.0	0.0	± 0.2
Flat	94.0	0.0	± 0.2

5.2 Time weighting at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	94.0	0.0	-
Slow	94.0	0.0	± 0.1
Leq	94.0	0.0	± 0.1

6. Long - term stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	94.0	0.0	± 0.3

เอกสารไม่ควบคุม

7. Retch.

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 4 of 8

Result of calibration :

1. Absolute sensitivity

Reference Acoustic Signal (dB)	Measured Value (dB)	Deviation (dB)	Acceptance Limit (dB)
93.9 (93.96)	94.0	0.0	±0.3

2. Self-generated noise

2.1 Normal test

Measured Value (dB)
29.6

2.2 The microphone of the sound level meter was replaced by electrical signal input device.

Frequency Weighting	Measured value (dB)
A - weight	29.4
C - weight	29.1
Flat	34.8

3. Acoustical signal tests of frequency weightings

Meter free-field acoustic response at a level of 84 dB

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
125	-0.1	0.2	0.2	± 1.5
1000	-0.2	-0.2	-0.2	± 1.0
8000	2.6	2.6	2.6	±5.0

เอกสารไม่ควบคุม

7. Retch.

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 7 of 8

8. Level linearity including the level range control

Range	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
140	94.0	94.0	0.0	±0.5

9. Tone burst response

Time Weighting	Tone burst duration, Tb (ms)	Cycle	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	0.25	1	108.0	107.8	-0.2	1.5 ; -5.0
	2	8	117.0	116.7	-0.3	1.0 ; -2.5
	200	800	134.0	133.9	-0.1	±1.0
Slow	2	8	108.0	107.8	-0.2	1.5 ; -5.0
	200	800	127.6	127.6	0.0	±1.0
SEL	0.25	1	N/A	N/A	N/A	1.5 ; -5.0
	2	8	N/A	N/A	N/A	1.0 ; -2.5
	200	800	N/A	N/A	N/A	±1.0

10. Peak C sound level

Number of cycle in test signal	Anticipated Value (dB)	Measured Value, L _{peak} (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
One	136.4	135.8	-0.6	±3.0

Number of cycle in test signal	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
Positive half cycle	135.4	135.4	0.0	±2.0
Negative half cycle	135.4	135.4	0.0	±2.0

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 6 of 8

7. Level linearity on the reference level range

Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
135.0	135.0	0.0	± 1.1
134.0	134.0	0.0	± 1.1
133.0	133.0	0.0	± 1.1
132.0	132.0	0.0	± 1.1
131.0	131.0	0.0	± 1.1
129.0	129.0	0.0	± 1.1
124.0	124.0	0.0	± 1.1
119.0	119.0	0.0	± 1.1
114.0	114.0	0.0	± 1.1
109.0	109.0	0.0	± 1.1
104.0	104.0	0.0	± 1.1
99.0	99.0	0.0	± 1.1
94.0	94.0	0.0	± 1.1
89.0	89.0	0.0	± 1.1
84.0	84.0	0.0	± 1.1
79.0	79.0	0.0	± 1.1
74.0	74.0	0.0	± 1.1
69.0	69.0	0.0	± 1.1
64.0	64.0	0.0	± 1.1
59.0	59.0	0.0	± 1.1
54.0	54.0	0.0	± 1.1
49.0	49.0	0.0	± 1.1
44.0	44.0	0.0	± 1.1
39.0	39.0	0.0	± 1.1

SITHIPORN ASSOCIATES CO.,LTD. CALIBRATION LABORATORY

451-451/1 Sirinthorn Rd.,Bangbunru, Bangplud Bangkok 10700 THAILAND.
Tel.0-2435-8800 Fax.0-2433-1679 e-mail:cal-center@sithiporn.com http://www.sithiporn.com



Cert. No. : ACL22081
Pages : 1 of 8

Calibration Certificate

Equipment : SOUND LEVEL METER
Manufacturer : LARSON DAVIS
Model : LxT2/ Microphone 375B02 / Preamplifier PRML x T2B
Serial No.: 0005286 / 011740 / 056087
ID No.: -

Condition As Found : GOOD

Customer : UNITED ANALYST AND ENGINEERING CONSULTANT (UAE)
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK SUB-DISTRICT,
PHRAKHANONG DISTRICT, BANGKOK 10260
THAILAND.

Location : -
Ambient Temperature : (23.0 ± 3) °C
Pressure : (101.3 ± 3) kPa
Relative Humidity : (50.0 ± 20) %

Received Date : 18 JANUARY 2022
Calibration Date : 26 JANUARY 2022
Date of Issue : 28 JANUARY 2022

Calibrated by : Nathakorn Pisutpaisan

Approved by :

T. Petchurai
(Thanakul Petchurai)

This certificate is issued in accordance with the requirements of ISO/IEC 17025 standard, may not be reproduced other than in full, except with the prior written approval of the head of Calibration Laboratory.

เอกสารไม่ควบคุม

SITHIPORN ASSOCIATES CO.,LTD. CALIBRATION LABORATORY

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 8 of 8

11. Overload indication

Measured value (dB)		Deviated Value	Acceptance Limits
Positive one-half cycle	Negative one-half cycle	(dB)	(dB)
89.2	89.4	0.2	±1.5

12. High level stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	137.0	137.0	0.0	±0.3

The reported uncertainty is based on a standard uncertainty multiplied by coverage factor $k = 2$ or any value following calculation, providing a level of confidence of approximately 95 %

End of Calibration Certificate

เอกสารไม่ควบคุม

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 3 of 8

Summary of Measurement Result :

Parameter	Pass	Fail	Uncertainty (dB)	Maximum-permitted uncertainty of measurement (dB)
1. Absolute sensitivity	✓	-	0.2	N/A
2. Self-generated noise	✓	-	0.2	N/A
3. Acoustical signal tests of frequency weightings				
125 Hz	✓	-	0.3	0.6
1000 Hz	✓	-	0.3	0.6
8000 Hz	✓	-	0.3	0.7
4. Electrical signal tests of frequency weightings				
For 10 Hz to 4 kHz	✓	-	0.3	0.6
For > 4 kHz to 10 kHz	✓	-	0.3	0.7
For > 10 kHz to 20 kHz	✓	-	0.3	1.0
5. Frequency and time weightings at 1 kHz	✓	-	0.2	0.2
6. Long - term stability	✓	-	0.1	0.1
7. Level linearity on the reference level range	✓	-	0.2	0.3
8. Level linearity including the level range control	✓	-	0.2	0.3
9. Tone burst response	✓	-	0.2	0.3
10. Peak C sound level	✓	-	0.2	0.35
11. Overload indication	✓	-	0.2	0.25
12. High level stability	✓	-	0.1	0.1

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 2 of 8

Calibration Procedure : CP-AC-02

Calibration Method :

This equipment was calibrated by based on IEC-61672-3 (2013) Standard for sound level meter (SLM).
The SLM had tests to Acoustical and Electrical signal tests of frequency weighting with Anechoic chamber and Reference Standard Instruments.
For tests results of each items were made by observation of each Instruments display and also with SLM's display.

Condition of this result of calibration :

1. Reference Standard Instruments :

Instrument	Model	Serial No.	Cert. No.	Due Date
Waveform Generator	33210A	MY48017076	EF-0012-21	10-Feb-22
Waveform Generator	33511B	MY52302742	EF-0011-21	10-Feb-22
Digital Multimeter	33461A	MY53220104	EEL.BP. 05/0264	10-Feb-22
Digital Multimeter	33461A	MY53220076	EEL.BP. 03/0264	08-Feb-22
Digital Multimeter	34461A	MY60024273	1-15180725251-1	15-Sep-22
Programmable Attenuator	MAT-1070	62100114	1500-07774E	08-Mar-22
Condenser Microphone	4180	2977900	AA-1008-21	05-Feb-22
Measuring Amplifier	NA-42KAI	34560495	AA-3003-21	16-Feb-22

2. This result of calibration was found accurate as shown on date and place of calibration for this calibrated item only.

3. This certificate is traceable to the international system of unit maintained at :

- 3.1 National Institute of Metrology (Thailand).
- 3.2 Thailand Institute of Scientific and Technological Research (TISTR).

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 5 of 8

4. Electrical signal tests of frequency weightings

Weighting network response with relative to 1 kHz.

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
63	0.0	0.0	0.0	±2.0
125	0.0	0.0	0.0	±1.5
250	0.0	0.0	0.0	±1.5
500	0.0	0.0	0.0	±1.5
1000	0.0	0.0	0.0	±1.0
2000	0.0	0.1	0.0	±2.0
4000	0.0	0.0	0.0	±3.0
8000	0.0	0.0	0.0	±5.0
16000	-0.1	0.0	0.1	±5.0(-∞)

5. Frequency and time weightings at 1 kHz

5.1 Frequency weightings at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	0.0	-
C - weight	94.0	0.0	± 0.2
Flat	94.0	0.0	± 0.2

5.2 Time weighting at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	94.0	0.0	-
Slow	94.0	0.0	± 0.1
Leq	94.0	0.0	± 0.1

6. Long - term stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	94.0	0.0	± 0.3

เอกสารไม่ควบคุม

T. Retch

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 4 of 8

Result of calibration :

1. Absolute sensitivity

Reference Acoustic Signal (dB)	Measured Value (dB)	Deviation (dB)	Acceptance Limit (dB)
93.9 (93.96)	94.0	0.0	±0.3

2. Self-generated noise

2.1 Normal test

Measured Value (dB)
31.0

2.2 The microphone of the sound level meter was replaced by electrical signal input device.

Frequency Weighting	Measured value (dB)
A - weight	30.8
C - weight	30.6
Flat	36.8

3. Acoustical signal tests of frequency weightings

Meter free-field acoustic response at a level of 84 dB

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
125	-0.1	0.1	0.0	± 1.5
1000	-0.2	-0.2	-0.2	± 1.0
8000	3.1	3.2	3.2	±5.0

เอกสารไม่ควบคุม

T. Retch

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 7 of 8

8. Level linearity including the level range control

Range	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
140	94.0	94.0	0.0	±0.5

9. Tone burst response

Time Weighting	Tone burst duration, Tb (ms)	Cycle	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	0.25	1	108.0	107.8	-0.2	1.5 ; -5.0
	2	8	117.0	116.7	-0.3	1.0 ; -2.5
	200	800	134.0	133.9	-0.1	±1.0
Slow	2	8	108.0	107.8	-0.2	1.5 ; -5.0
	200	800	127.6	127.5	-0.1	±1.0
SEL	0.25	1	N/A	N/A	N/A	1.5 ; -5.0
	2	8	N/A	N/A	N/A	1.0 ; -2.5
	200	800	N/A	N/A	N/A	±1.0

10. Peak C sound level

Number of cycle in test signal	Anticipated Value (dB)	Measured Value, L _{peak} (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
One	136.4	135.7	-0.7	±3.0

Number of cycle in test signal	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
Positive half cycle	135.4	135.2	-0.2	±2.0
Negative half cycle	135.4	135.2	-0.2	±2.0

เอกสารไม่ควบคุม

T. Reth.

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 6 of 8

7. Level linearity on the reference level range

Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
135.0	135.1	0.1	± 1.1
134.0	134.1	0.1	± 1.1
133.0	133.1	0.1	± 1.1
132.0	132.1	0.1	± 1.1
131.0	131.1	0.1	± 1.1
129.0	129.1	0.1	± 1.1
124.0	124.1	0.1	± 1.1
119.0	119.1	0.1	± 1.1
114.0	114.1	0.1	± 1.1
109.0	109.1	0.1	± 1.1
104.0	104.1	0.1	± 1.1
99.0	99.0	0.0	± 1.1
94.0	94.0	0.0	± 1.1
89.0	89.0	0.0	± 1.1
84.0	84.0	0.0	± 1.1
79.0	79.0	0.0	± 1.1
74.0	74.0	0.0	± 1.1
69.0	69.0	0.0	± 1.1
64.0	64.0	0.0	± 1.1
59.0	59.0	0.0	± 1.1
54.0	54.0	0.0	± 1.1
49.0	49.1	0.1	± 1.1
44.0	44.2	0.2	± 1.1
39.0	39.6	0.6	± 1.1

เอกสารไม่ควบคุม

T. Reth.



Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING
CONSULTANT CO.,LTD.
Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak,
Prakanong, Bangkok 10260

Certificate No : 23-ACT-118

Request No : Req-2023-1547

Unit Under Calibration Details

Measurement item : Acoustic Calibrator Class : 2
Manufacturer : LARSON DAVIS Range : 94 , 114 dB / 1000 Hz
Model : CAL150 Instrument Status : Used
Serial Number : 6171
ID : UAE.EFM.117/2562

Calibration Environment and Details

Temperature : (23 ±2 °C)
Humidity : (50 ± 20 %RH)
Barometric Pressure : (1013 ±10.0 hPa)
Received Date : 21 July 2023
Calibration Date : 4 August 2023
Location of Calibration : LAB 1 Acoustic
Calibration Procedure : In-house method CP-ACT-02 based on IEC 60942:2017 Electroacoustics - Sound calibrators

Reference Standard	Model	Serial Number	Traceable	Due Calibration
Sound Calibrator	SV 35A	58079	EEL	31 May 2024
THD Multimeter	2015	1047765	NIMT	31 January 2024

Traceability : This certificate provides traceability of measurement to recognized national standard, and to the realization of the international System of Units (SI).

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k=2$, providing a level of confidence approximately 95 %.

Calibrated By : me
Mr. Noppadon Luangart
Service Calibration Engineer

Approved By : พ.ศ. ๒๕๖๓
Mr. Pacit Mathavorn
Calibration Engineer Supervisor

Issue Date : 4 August 2023

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 8 of 8

11. Overload indication

Measured value (dB)		Deviated Value	Acceptance Limits
Positive one-half cycle	Negative one-half cycle	(dB)	(dB)
89.2	89.4	0.2	±1.5

12. High level stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	137.0	137.0	0.0	±0.3

The reported uncertainty is based on a standard uncertainty multiplied by coverage factor $k = 2$ or any value following calculation, providing a level of confidence of approximately 95 %

End of Calibration Certificate



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A2901
SERIAL NO. : UM11356/UM11356
CLID. NO. : 251701398
JOB CONTROL NO. : 231019117017

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 19 October 2023

DATE OF ISSUED : 25 October 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Suwit Phuanbusabong
Calibration Engineer

Approved By : Mongkol Yotsoontorn
Authorized Signatory
25 October 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23117017

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration

INNOVATIVE INSTRUMENT CALIBRATION LAB

INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE

7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAE0.

AMPHOE BANG PHU SAMUT PRAKAN PROVINCE 10540 THAILAND

TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140



Page 2 of 2

Certificate No : 23-ACT-118

Request No : Req-2023-1547

Sound pressure level

Calibration Results : Without Adjustment

Calibration Range (dB)	Without Adjustment (dB)		Adjustment (dB)		Uncertainty (± dB)	Acceptance limit Class 2 (± dB)
	Measured	Error	Measured	Error		
94 dB / 1000 Hz	94.14	0.14	-	-	0.13	0.40
114 dB / 1000 Hz	114.15	0.15	-	-	0.13	0.40

Frequency of Sound pressure level

Calibration Range (Hz)	Without Adjustment		Adjustment		Uncertainty (± %)	Acceptance limit Class 2 (± %)
	Measured (Hz)	Error (%)	Measured (Hz)	Error (%)		
94 dB / 1000 Hz	1000.00	0.00	-	-	0.01	1.7
114 dB / 1000 Hz	1000.00	0.00	-	-	0.01	1.7

Total Harmonic Distortion plus Noise of Sound pressure level (THD+N %)

Calibration Range (Hz)	Without Adjustment	Adjustment	Uncertainty (± %)	Acceptance limit Class 2 (± %)
	Measured (%)	Measured (%)		
94 dB / 1000 Hz	0.04	-	0.40	3.0
114 dB / 1000 Hz	0.20	-	0.40	3.0

Note :

- Acceptance limit was IEC60942:2017 Class I
- The calibration results exclude the calibrator pressure correction
- The calibration results exclude the microphone volume correction

End of Calibration

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

เอกสารไม่ควบคุม

FM-708-ACT-02 REV.00 Issue Date 02/07/19



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading (g)	DUC Reading (g)	Correction (g)	Uncertainty ± (% of rdg.)
(g)	(frequency)					
0.3	50 Hz	peak	0.300	0.305	-0.005	1.9
0.4	50 Hz		0.400	0.406	-0.006	1.9
0.5	50 Hz		0.500	0.507	-0.007	1.9
0.6	50 Hz		0.600	0.608	-0.008	1.9
0.7	50 Hz		0.700	0.709	-0.009	1.9
0.3	100 Hz	peak	0.300	0.306	-0.006	1.9
0.4	100 Hz		0.400	0.407	-0.007	1.9
0.5	100 Hz		0.500	0.507	-0.007	1.9
0.6	100 Hz		0.600	0.608	-0.008	1.9
0.7	100 Hz		0.700	0.710	-0.010	1.9

2. VELOCITY RESULT

Test point		Mode	STD Reading (mm/s)	DUC Reading (mm/s)	Correction (mm/s)	Uncertainty ± (% of rdg.)
(mm/s)	(frequency)					
3	50 Hz	peak	3.000	3.048	-0.048	1.9
4	50 Hz		4.000	4.059	-0.059	1.9
5	50 Hz		5.000	5.067	-0.067	1.9
6	50 Hz		6.000	6.072	-0.072	1.9
7	50 Hz		7.000	7.091	-0.091	1.9
3	100 Hz	peak	3.000	3.049	-0.049	1.9
4	100 Hz		4.000	4.051	-0.051	1.9
5	100 Hz		5.000	5.069	-0.069	1.9
6	100 Hz		6.000	6.082	-0.082	1.9
7	100 Hz		7.000	7.098	-0.098	1.9

Certificate No. Q23117017

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A2901
SERIAL NO. : UM11356/UM11356
DATE OF CALIBRATION : 20 October 2023

ENVIRONMENT CONDITIONS :

Temperature : $(23 \pm 2) ^\circ\text{C}$ Relative Humidity : $(55 \pm 15) \% \text{RH}$

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, Programmable Timer/Counter and Vibration Calibrator Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

- Vibration Calibrator, The Modal Shop Model 9110D S/N. 11424.
- Digital Multimeter, Hewlett Packard Model 34401A S/N. 3146A75935.
- Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.

TRACEABILITY :

- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0030-23, Due Date 26 June 2024.
- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. EE-0136-22, Due Date 11 November 2023.
- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0043/23, Due Date 12 April 2024.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2,00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23117017

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration



Page : 1/6.

Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD. Certificate No : 22-ACT-035
Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok Request No : Req-2022-0094
10260

Unit Under Calibration Details

Measurement item : Sound Level Meter Microphone Class : 2
Manufacturer : LARSON DAVIS Microphone Model : 375A04
Model : LX22 Microphone S/N : 328675
Serial Number : 0005398 Preamplifier Model : PRMLxT2C
ID : UAE.EFM.035/2564 Preamplifier S/N : 073793
Resolution : 0.1 dB Instrument Status : Used

Calibration Environment and Details

Temperature : 23 °C ± 2 °C
Humidity : 50 %RH ± 20 %RH
Barometric Pressure : 1013 hPa ± 10 hPa
Received Date : 14 January 2022
Calibrated Date : 21 January 2022
Calibration Procedure : In-house method CP-SLM-01 based on IEC 61672-3 : 2013 Electroacoustics - Sound level meters - Part 3: Periodic tests
Location of Calibration : Lab Acoustic

Reference Standard

Instrument	Brand	Model	SN.	Due calibration	Traceability
Standard Microphone	GRAS	40AN	188273	15 September 2022	GRAS
Multifrequency Calibrator	Quest	Quest-cal	EFA000234	14 June 2022	TSI
Audio Generator	Svantek	Svan401	131	18 October 2022	WK Electric

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibrated By : me
Mr. Noppidon Luangart
Calibration Officer

Approved By : นางสาว
Mr. Pacit Mathavorn
Calibration Engineer Supervisor
Issue Date : 21 January 2022



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
0.03	50 Hz	peak	0.030	0.030	0.000	2.7
0.04	50 Hz		0.040	0.040	0.000	2.4
0.05	50 Hz		0.050	0.050	0.000	2.2
0.06	50 Hz		0.060	0.061	-0.001	2.1
0.07	50 Hz		0.070	0.071	-0.001	2.1
0.03	100 Hz	peak	0.030	0.030	0.000	2.7
0.04	100 Hz		0.040	0.040	0.000	2.4
0.05	100 Hz		0.050	0.050	0.000	2.2
0.06	100 Hz		0.060	0.061	-0.001	2.1
0.07	100 Hz		0.070	0.071	-0.001	2.1

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 009 Page 1,2 of 59

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23117017

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration

Certificate No : 22-ACT-035
 Request No : Req-2022-0094

5. Electrical signal test of frequency weightings, Weighting network response with relative to 1 kHz

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance
FAST / 37-139	Weighting Responce curve				
STD Setting	A (dB)	C (dB)	Z (dB)	(± dB)	(± dB)
63 Hz	-0.2	-0.1	-0.1	0.2	2.0
125 Hz	-0.1	0.0	-0.1		1.5
250 Hz	-0.1	0.0	-0.1		1.5
500 Hz	-0.1	0.0	-0.1		1.5
1000 Hz	0.0	0.0	0.0		1.0
2000 Hz	0.0	0.0	0.0		2.0
4000 Hz	0.0	0.0	0.0		3.0
8000 Hz	-0.1	-0.1	0.0		5
16000 Hz	-0.1	-0.1	-0.1		+5, -INF.

6. Frequency and time weightings at 1kHz

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / 37-139	REF	UUC	ERR		
UUC Weighting	(dB)	(dB)	(dB)	0.2	(± dB)
A	114.00	114.0	0.0		
C	114.00	114.0	0.0		
Z	114.00	114.0	0.0		

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
37-139 / A	REF	UUC	ERR		
UUC Time Response	(dB)	(dB)	(dB)	0.2	(± dB)
Fast	114.00	114.0	0.0		
Slow	114.00	114.0	0.0		
Leq	114.00	114.0	0.0		

Certificate No : 22-ACT-035
 Request No : Req-2022-0094

1. Indication at the calibration check frequency

UUC Setting	Nominal	Before Adjust		Adjust		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A / 37-139	Level	UUC	ERR	UUC	ERR		
Calibrator Setting	(dB)	(dB)	(dB)	(dB)	(dB)	0.20	0.3
1000 Hz 114.00 dB	113.85	114.0	+0.15	113.9	0.05		

Note : Absolute sensitivity was established by the use of Sound Calibrator Brand SVANTEK, Model SV 35A, SN.58079

2. Self-generated noise, Microphone installed

UUC Setting	Measured	UNCERTAINTY
FAST / 37-139	(dB)	(± dB)
UUC Weighting	(dB)	(± dB)
A	28.1	0.10

3. Self-generated noise, Microphone replaced by the electrical input signal device

UUC Setting	Measured	UNCERTAINTY
FAST / 37-139	(dB)	(± dB)
UUC Weighting	(dB)	(± dB)
A	27.9	0.10
C	27.3	0.10
Z	31.9	0.10

4. Acoustic signal test of frequency weightings (Without Windscreen)

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance Limit
	Weighting Response curve				
FAST / 37-139	A	C	Z	(± dB)	(± dB)
STD Setting	(dB)	(dB)	(dB)		
125 Hz	0.0	0.0	0.0	0.50	2.0
1000 Hz	0.0	0.0	0.0	0.60	1.0
4000 Hz	0.4	0.3	0.3	0.60	3.0
8000 Hz	-0.1	-0.2	-0.1	0.70	5.0



Certificate No : 22-ACT-035
 Request No : Req-2022-0094

9. Level linearity including the level range control

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A	REF	UUC	ERR		
UUC Range	(dB)	(dB)	(dB)		
37-139	43.2	43.4	0.2	0.3	1.1
	114	114.0	0.0		1.1

10. Tone burst response

UUC Setting	STD	Anticipated	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
A / 37-139	Toneburst	Ref	UUC	ERR		
UUC Time Response	(ms)	(dB)	(dB)	(dB)		
Fast	200	135.0	135.0	0.0	0.3	1
	2	118.0	117.9	-0.1		+1.0, -2.5
	0.25	109.0	108.7	-0.3		+1.5, -5.0
Slow	200	128.6	128.5	-0.1		1
	2	109.0	108.9	-0.1		+1.0, -5.0
SEL	200	129.0	129.0	0.0		1
	2	109.0	109.1	+0.1		+1.0, -2.5
	0.25	100.0	99.9	-0.1		+1.5, -5.0

11. Peak C Sound level

UUC Setting	Anticipated	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / C / 95-142	REF	UUC	ERR		
STD Setting	(dB)	(dB)	(dB)		
Complete cycle	137.4	136.8	-0.60	0.2	3.0
Positive half cycle	136.4	136.1	-0.30		2.0
Negative half cycle	136.4	136.1	-0.30		2.0



Certificate No : 22-ACT-035
 Request No : Req-2022-0094

7. Long Term Stability

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A / 37-139	UUC		
STD Setting	(dB)		
Initial	114.0	0.1	0.3
Final	114.0		
Deviated	0.0		

8. Level linearity on the reference level range

UUC Setting	Anticipated	Deviation		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A / 37-139	REF	UUC	ERR		
STD dB	(dB)	(dB)	(dB)		
139.00	139	139.0	0.0	0.3	1.1
134.00	134	134.0	0.0		1.1
129.00	129	129.0	0.0		1.1
124.00	124	124.0	0.0		1.1
119.00	119	119.0	0.0		1.1
114.00	114	114.0	0.0		1.1
109.00	109	109.0	0.0		1.1
104.00	104	104.0	0.0		1.1
99.00	99	99.0	0.0		1.1
94.00	94	93.9	-0.1		1.1
89.00	89	88.9	-0.1		1.1
84.00	84	83.9	-0.1		1.1
79.00	79	78.9	-0.1		1.1
74.00	74	73.9	-0.1		1.1
69.00	69	69.0	0.0		1.1
64.00	64	63.9	-0.1		1.1
59.00	59	59.0	0.0		1.1
54.00	54	54.0	0.0		1.1
49.00	49	49.0	0.0		0.8
44.00	44	44.1	0.1		1.1
39.00	39	39.3	0.3		1.1
38.00	38	38.3	0.3		1.1
37.00	37	37.5	0.5		1.1

Certificate Of Analysis
Special Gases Mixture

Customer Details

Name: United Analyst & Engineering Co., Ltd.
Address: 3 Soi Udomsuk 41, Sukhumvit Rd., Bang Chak, Khet Phra Khanong, Bangkok 10260
Customer Tag No.:

Certificate Details

Number: 3384/20 Date of Issue: 4-Aug-2020 Expiry date: 4-Aug-2028
Material Details
Production Order: 90161442 Material Code: 400400-AL-34 Cylinder No.: D824432
Gas content: 6.60 M³ Filling pressure: 137.0 bar Valve: CGA 590 BRASS
Cylinder Owner: LINDE Cylinder Material: Aluminum Cylinder Size: 50 L

Laboratory Report

Analytical Result

Component	Normal Concentration	Analysis Result ¹	Uncertainty ²	Method of Analysis ³	Assay Date
Methane In Air	40.0 ppm	39.8 ppm	± 1% relative	(6) I-PB-352	4-Aug-2020

Reference Standard used in Assay

Reference Standard	Cylinder number	Concentration	Expiry date
Methane In Nitrogen	2559995G	49.29 ± 0.39 ppm	4-Oct-2020

Analytical Instruments used in Assay

Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
FTIR Spectrometers Nicolet iS50	FTIR-CH4	4-Aug-2020

Recommend usage condition

Minimum utilization: 5% of actual content or before expiry date whichever comes first.
Storage condition: Keep in well ventilation and secure area.

Comments

When reordering, please quote the material number.

Note:

- All results expressed in this report are on mole/mole basis, unless otherwise specified. The Assay of this Standard has been performed in accordance with the EPA Traceability Protocol EPA-600/R-12/531 for the Assay and Certification of Gaseous Calibration Standards using procedure G1.
- The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%. The measurement of this material is traceable to the SI through the reference gas standard which is traceable to Swiss National Standard of Mass or other recognised national metrology institutes.
- (1) Gas Chromatography, (2) Paramagnetic Oxygen Analyzer, (3) Electrochemical Oxygen Analyzer, (4) Electrochemical Moisture Analyzer, (5) Total Hydrocarbon Analyzer, (6) Other - Specified

Page 1 of 1

This report shall not be reproduced except in full

บริษัท ลินด์ (ประเทศไทย) จำกัด (มหาชน)

เลขที่ใบอนุญาต 0175700078

ถ. 15 แขวงคลองเตย 2/3 หมู่ 14 แขวงบางนาแถม แขวง 6.5 แขวงบางนา

บางนา เขต บางนา กรุงเทพมหานคร 10540 โทรศัพท์ (66) 2338-6100 โทรสาร (66) 2338-6333

โรงงานผลิตก๊าซ : 105 หมู่ 5 ตำบลบึงเมือง อำเภอเมือง จังหวัดบุรีรัมย์ 24180

โทรศัพท์ (66) 38.570-479-93

โทรสาร (66) 38.570-323

Sukanya Parinyasontorn

Signatory for and on behalf of Linde (Thailand) Co., Ltd.

PB-002/T006

Linde (Thailand) Public Company Limited 8/1, 01 October 2019

15th Floor, Bangna Tower A, 2/3 Moo 14, Bangna Trad KM. 6.5 Road, Bangnae

Bangnae, Samutprakan 10540, Tel (66) 2338-6100 Fax (66) 2338-6333

Wellgrow Plant: 105 Moo 5, 1 Bangnamak, A. Bangpakong, Chachoengsao 24180

Thailand, Tel (66) 38.570-479-93

Fax (66) 38.570-323

INNOVATIVE INSTRUMENT CALIBRATION LAB

INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE

7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAE0,

AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND

TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140



Page : 6/6

Certificate No : 22-ACT-035

Request No : Req-2022-0094

12. Overload indication

UUC Setting	Measured	UNCERTAINTY	Acceptance
FAST / A / 37-139	UUC		Limit
STD Setting	(dB)	(± dB)	(± dB)
Positive one-half cycle	142.3		
Negative one-half cycle	142.0		
Deviated	0.3	0.2	1.5

13. High Level Stability

UUC Setting	Measured	UNCERTAINTY	Acceptance
FAST / A / 37-139	UUC		Limit
STD Setting	(dB)	(± dB)	(± dB)
Initial	138.0		
Final	138.0		
Deviated	0.0	0.1	0.3

End of Certificate

เอกสารไม่ควบคุม

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Instrument Manufacturer Co., Ltd.

เอกสารไม่ควบคุม

Printed on 22/01/2022, revision date 01/07/19



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11229/UM11229
DATE OF CALIBRATION : 20 October 2023

ENVIRONMENT CONDITIONS :

Temperature : $(23 \pm 2) ^\circ\text{C}$ Relative Humidity : $(55 \pm 15) \% \text{RH}$

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, Programmable Timer/Counter and Vibration Calibrator
Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

1. Vibration Calibrator, The Modal Shop Model 9110D S/N. 11424.
2. Digital Multimeter, Hewlett Packard Model 34401A S/N. 3146A75935.
3. Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.

TRACEABILITY :

1. The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand)
Certificate No. AV-0030-23, Due Date 26 June 2024.
2. The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand)
Certificate No. EE-0136-22, Due Date 11 November 2023.
3. The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd.
Certificate No. 07-0043/23, Due Date 12 April 2024.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied
by the coverage factor $k=2,00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23117022

F3-011-04/01-12

page 2 of 4



เอกสารไม่ควบคุม

@clccalibration

CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11229/UM11229
CLID. NO. : 251701314
JOB CONTROL NO. : 231019117022

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 19 October 2023

DATE OF ISSUED : 25 October 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Suwit Phuanbusabong
Calibration Engineer

Approved By :

Mongkol Yotsoontorn
Authorized Signatory
25 October 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to
the International System of Units (SI)

Certificate No. Q23117022

F3-011-04/01-12

page 1 of 4



เอกสารไม่ควบคุม

@clccalibration

CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
0.03	50 Hz	peak	0.030	0.030	0.000	2.7
0.04	50 Hz		0.040	0.040	0.000	2.4
0.05	50 Hz		0.050	0.050	0.000	2.2
0.06	50 Hz		0.060	0.061	-0.001	2.1
0.07	50 Hz		0.070	0.071	-0.001	2.1
0.03	100 Hz	peak	0.030	0.030	0.000	2.7
0.04	100 Hz		0.040	0.040	0.000	2.4
0.05	100 Hz		0.050	0.050	0.000	2.2
0.06	100 Hz		0.060	0.061	-0.001	2.1
0.07	100 Hz		0.070	0.071	-0.001	2.1

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 009 Page 1,2 of 59

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23117022

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration

CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(g)	(frequency)		(g)	(g)	(g)	± (% of rdg.)
0.3	50 Hz	peak	0.300	0.306	-0.006	1.9
0.4	50 Hz		0.400	0.407	-0.007	1.9
0.5	50 Hz		0.500	0.508	-0.008	1.9
0.6	50 Hz		0.600	0.609	-0.009	1.9
0.7	50 Hz		0.700	0.709	-0.009	1.9
0.3	100 Hz	peak	0.300	0.302	-0.002	1.9
0.4	100 Hz		0.400	0.403	-0.003	1.9
0.5	100 Hz		0.500	0.504	-0.004	1.9
0.6	100 Hz		0.600	0.605	-0.005	1.9
0.7	100 Hz		0.700	0.706	-0.006	1.9

2. VELOCITY RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm/s)	(frequency)		(mm/s)	(mm/s)	(mm/s)	± (% of rdg.)
3	50 Hz	peak	3.000	3.023	-0.023	1.9
4	50 Hz		4.000	4.036	-0.036	1.9
5	50 Hz		5.000	5.044	-0.044	1.9
6	50 Hz		6.000	6.061	-0.061	1.9
7	50 Hz		7.000	7.076	-0.076	1.9
3	100 Hz	peak	3.000	3.029	-0.029	1.9
4	100 Hz		4.000	4.035	-0.035	1.9
5	100 Hz		5.000	5.042	-0.042	1.9
6	100 Hz		6.000	6.055	-0.055	1.9
7	100 Hz		7.000	7.068	-0.068	1.9

Certificate No. Q23117022

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A3301
SERIAL NO. : UM11230/UM11230
DATE OF CALIBRATION : 20 October 2023

ENVIRONMENT CONDITIONS :

Temperature : $(23 \pm 2) ^\circ\text{C}$ Relative Humidity : $(55 \pm 15) \% \text{RH}$

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, Programmable Timer/Counter and Vibration Calibrator
Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

1. Vibration Calibrator, The Modal Shop Model 9110D S/N. 11424.
2. Digital Multimeter, Hewlett Packard Model 34401A S/N. 3146A75935.
3. Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.

TRACEABILITY :

1. The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand)
Certificate No. AV-0030-23, Due Date 26 June 2024.
2. The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand)
Certificate No. EE-0136-22, Due Date 11 November 2023.
3. The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd.
Certificate No. 07-0043/23, Due Date 12 April 2024.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied
by the coverage factor $k = 2,00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23117018

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration

CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A3301
SERIAL NO. : UM11230/UM11230
CLID. NO. : 251701315
JOB CONTROL NO. : 231019117018

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 19 October 2023

DATE OF ISSUED : 25 October 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Suwit Phuanbusabong
Calibration Engineer

Approved By :

Mongkol Yotsoontorn
Authorized Signatory
25 October 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to
the International System of Units (SI)

Certificate No. Q23117018

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration

CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading (mm)	DUC Reading (mm)	Correction (mm)	Uncertainty ± (% of rdg.)
(mm)	(frequency)					
0.03	50 Hz	peak	0.030	0.030	0.000	2.7
0.04	50 Hz		0.040	0.040	0.000	2.4
0.05	50 Hz		0.050	0.050	0.000	2.2
0.06	50 Hz		0.060	0.060	0.000	2.1
0.07	50 Hz		0.070	0.071	-0.001	2.1
0.03	100 Hz	peak	0.030	0.030	0.000	2.7
0.04	100 Hz		0.040	0.040	0.000	2.4
0.05	100 Hz		0.050	0.050	0.000	2.2
0.06	100 Hz		0.060	0.061	-0.001	2.1
0.07	100 Hz		0.070	0.071	-0.001	2.1

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 009 Page 1,2 of 59

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23117018

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration

CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading (g)	DUC Reading (g)	Correction (g)	Uncertainty ± (% of rdg.)
(g)	(frequency)					
0.3	50 Hz	peak	0.300	0.302	-0.002	1.9
0.4	50 Hz		0.400	0.402	-0.002	1.9
0.5	50 Hz		0.500	0.503	-0.003	1.9
0.6	50 Hz		0.600	0.603	-0.003	1.9
0.7	50 Hz		0.700	0.704	-0.004	1.9
0.3	100 Hz	peak	0.300	0.303	-0.003	1.9
0.4	100 Hz		0.400	0.404	-0.004	1.9
0.5	100 Hz		0.500	0.504	-0.004	1.9
0.6	100 Hz		0.600	0.605	-0.005	1.9
0.7	100 Hz		0.700	0.706	-0.006	1.9

2. VELOCITY RESULT

Test point		Mode	STD Reading (mm/s)	DUC Reading (mm/s)	Correction (mm/s)	Uncertainty ± (% of rdg.)
(mm/s)	(frequency)					
3	50 Hz	peak	3.000	3.033	-0.033	1.9
4	50 Hz		4.000	4.045	-0.045	1.9
5	50 Hz		5.000	5.057	-0.057	1.9
6	50 Hz		6.000	6.066	-0.066	1.9
7	50 Hz		7.000	7.081	-0.081	1.9
3	100 Hz	peak	3.000	3.039	-0.039	1.9
4	100 Hz		4.000	4.046	-0.046	1.9
5	100 Hz		5.000	5.055	-0.055	1.9
6	100 Hz		6.000	6.067	-0.067	1.9
7	100 Hz		7.000	7.079	-0.079	1.9

Certificate No. Q23117018

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11355/UM11355
DATE OF CALIBRATION : 22 February 2023

ENVIRONMENT CONDITIONS :

Temperature : $(23 \pm 2) ^\circ\text{C}$ Relative Humidity : $(55 \pm 15) \% \text{RH}$

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.

The calibration was performed by using Digital Multimeter, High Resolution Programmable Timer/Counter,

Accelerometer and Measuring Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

1. Digital Multimeter, Wavetek Model 1281 S/N. 29320.
2. High Resolution Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.
3. Accelerometer with Measuring Amplifier, Bruel & Kjaer Model 8305, 2525 S/N. 397018, 2434988.

TRACEABILITY :

1. The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 05-0207/21, Due Date 31 May 2023.
2. The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0001/22, Due Date 22 February 2023.
3. The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0009-22, Due Date 22 June 2023.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2,00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23019604

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration

CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11355/UM11355
CLID. NO. : 252000637
JOB CONTROL NO. : 230221019604

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.

81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 21 February 2023

DATE OF ISSUED : 24 February 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Suwit Phuanbusabong

Calibration Engineer



Approved By :

Mongkol Yotsoontorn

Authorized Signatory

24 February 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23019604

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration

CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading (mm)	DUC Reading (mm)	Correction (mm)	Uncertainty ± (% of rdg.)
(mm)	(frequency)					
*0.03	50 Hz	peak	0.030	0.030	0.000	2.1
*0.04	50 Hz		0.040	0.040	0.000	1.7
*0.05	50 Hz		0.050	0.050	0.000	1.5
*0.06	50 Hz		0.060	0.060	0.000	1.3
*0.07	50 Hz		0.070	0.069	+0.001	1.2
0.03	100 Hz	peak	0.030	0.030	0.000	2.1
0.04	100 Hz		0.040	0.040	0.000	1.7
0.05	100 Hz		0.050	0.050	0.000	1.5
0.06	100 Hz		0.060	0.059	+0.001	1.3
0.07	100 Hz		0.070	0.069	+0.001	1.2

Note: * means Calibrations marked " Not ANAB Accredited " in this Certificate have been included for completeness.

The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 008 Page 1 of 58

This report is valid for the above stated instrument/s only.

End of Certificate

CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading (g)	DUC Reading (g)	Correction (g)	Uncertainty ± (% of rdg.)
(g)	(frequency)					
0.3	50 Hz	peak	0.300	0.299	+0.001	1.9
0.4	50 Hz		0.400	0.398	+0.002	1.9
0.5	50 Hz		0.500	0.498	+0.002	1.3
0.6	50 Hz		0.600	0.597	+0.003	1.3
0.7	50 Hz		0.700	0.697	+0.003	1.3
0.3	100 Hz	peak	0.300	0.300	0.000	1.9
0.4	100 Hz		0.400	0.399	+0.001	1.9
0.5	100 Hz		0.500	0.499	+0.001	1.3
0.6	100 Hz		0.600	0.598	+0.002	1.3
0.7	100 Hz		0.700	0.698	+0.002	1.3

2. VELOCITY RESULT

Test point		Mode	STD Reading (mm/s)	DUC Reading (mm/s)	Correction (mm/s)	Uncertainty ± (% of rdg.)
(mm/s)	(frequency)					
3	50 Hz	peak	3.000	3.010	-0.010	1.8
4	50 Hz		4.000	4.016	-0.016	1.8
5	50 Hz		5.000	5.019	-0.019	1.8
6	50 Hz		6.000	6.024	-0.024	1.8
7	50 Hz		7.000	7.031	-0.031	1.8
3	100 Hz	peak	3.000	3.009	-0.009	1.8
4	100 Hz		4.000	4.011	-0.011	1.8
5	100 Hz		5.000	5.017	-0.017	1.8
6	100 Hz		6.000	6.023	-0.023	1.8
7	100 Hz		7.000	7.028	-0.028	1.8

Certificate No. Q23019604

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม

Certificate No. Q23019604

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration



Cert.No.: 23TW261
Page.: 2 of 2

Condition of this result of calibration

1. Reference Standard Instruments :

This certification is traceable to the International System of Unit through the reference standards laboratory of Industrial Calibration Center, Technology Promotion Association (Thailand-Japan).

Instruments	Serial No.	ID No.	Certificate No.	Due Date
1) Burette	-	130BU10	23CG1172	22 Mar 2025
2) Balance	1124013382	140RC006	23MM18	20 Feb 2024

2. Standard Material :-

Material	Manufacturer	Lot.No.	Assay
Sodium Thiosulfate pentahydrate	Merck	AM1763316	100.2%

Result : Dissolved Oxygen Meter Adjustment With Air 100 %
Dissolved Oxygen Probe No.: 9K0E0162

Titration Method (Azide Modification Method) (mg/L)	DO Meter Reading (mg/L)	Standard Deviation (mg/L)
8.16	8.16	0.0045

This report was certified only for the instrument we tested. It is allowable to use for study the system efficiency, The environmental impact control and present to organization it may concerned. Intend to use for advertising and referral purpose is prohibited. This report may not be reproduced other in full, without written approval of the laboratory

-o0o-

Saithip

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3 : EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000 FAX. 0-2719-9484

Cert.No.: 23TW261
Page.: 1 of 2

Certificate of Testing

Equipment : DO Meter
Manufacturer : Horiba
Model : LAQUA-DO210
Serial No. : HE0G0015
ID No. : UAE.EFM.085/2564(EFM.DO.04/64)
Received Date : 13 December 2023
Test Date : 14 December 2023
Reference : 2312-0278WSC-1
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260
Laboratory Condition : Temperature (25 ± 5) °C
Humidity (50 ± 20) %
Test Procedure : In - house method : CP-CH9
by Comparison Technique with Azide Modification Method
Tested by : Walalak Sirithean
Approved by : 
Approved Signatory
(✓) Saithip Meangmai
() Warakorn Lerngagtrakul
() Ponpan Paipim
Issue Date : 18 December 2023

เอกสารไม่ควบคุม



Equipment : DO Meter with Sensor
Condition As-Received : Used Item
Reference : 2312-0278WSC-2

Cert. No.: 23LM201
Page.: 2 of 2

Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-OT01 according to comparison with Industrial Platinum Resistance Thermometer (IPRT) into Temperature Bath.

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Digital Thermometer	3240076	231305	TPA	15 Mar 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certification is traceable to the International System of Unit.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function : Temperature measurement.

This instrument was connected with temperature sensor, ID No.: 9K0E0162

Calibration Point (°C)	Immersion Depth (mm)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty (± °C)	Coverage Factor k
25.0	60	24.997	25.0	0.003	0.16	2.00
30.0	60	29.995	30.0	0.005	0.16	2.00
35.0	60	34.997	35.0	0.003	0.16	2.00

UUC* : Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

R2

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert. No.: 23LM201
Page.: 1 of 2

Certificate of Calibration

Equipment : DO Meter with Sensor
Manufacturer : Horiba
Model : LAQUA-DO210
Serial No. : HE0G0015
ID No. : UAE.EFM.085/2564 (EFM.DO.04/64)
Submitted by : United Analyst and Engineering Consultant Co.,Ltd.
3 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong,
Bangkok 10260
Location : TPA On Site Calibration Laboratory
Received Order : 13 December 2023
Calibrated Date : 15 December 2023
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %
AC Line Voltage : (220 ± 22) V
Calibrated by : Suwit Imjai
Approved by : 
Approved Signatory
() Ponthippa Tameyakul
(✓) Ponpan Paipim
() Tawatchai Pama
Issue Date : 18 December 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม



Cert.No.: 23CH429

Page.: 2 of 3

Condition of this result of calibration

1. Reference Standard Instrument :-

Instrument	Serial No.	ID No.	Certificate No.	Due date
1) Thermometer	9549224	130RC003	221484	17 Apr 2023
2) Ref. Std. Thermometer	4982054	110RC044	2211306	27 Oct 2023

This certification is traceable to the International System of Unit maintained at:-

- Traceable to National Institute of Metrology (Thailand), NIMT

2. Certified Reference Materials :-

- Conductivity calibration solution, CPA chem Ltd., The measurement results are traceable to SI through CPA chem Ltd., ANSI-ASQ National Accreditation Board, Accredited No. AR-1835

Conductivity Solution	Manufacturer	Lot No.	Exp. date
1413.0 μ S/cm	CPA Chem	826595	09 July 2023
12.880 mS/cm	CPA Chem	823329	20 June 2023

- Control Conductivity calibration solution temperature by Water bath (25 \pm 0.1) $^{\circ}$ C

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration results**Function : Conductivity Measurement**(*) After Adjustment at 1413.0 μ S/cm

Conductivity Electrode Serial No.: 9B9F0045

Standard Conductivity Solution	Before Adjustment UUC* Reading	After Adjustment UUC* Reading	Uncertainty of Measurement (\pm)	Coverage factor k
1413.0 μ S/cm	1104 μ S/cm	1414 μ S/cm	9.2 μ S/cm	2.00
12.880 mS/cm	9.88 mS/cm	12.67 mS/cm	0.086 mS/cm	2.00

Remark - UUC* = Unit Under Calibration

Malee

เอกสารไม่ควบคุม



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)

CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES

534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250

TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert.No.: 23CH429

Page.: 1 of 3

Certificate of Calibration

Equipment :	Conductivity Meter
Manufacturer :	Horiba
Model :	LAQUA-EC210
Serial No. :	HC9L0011
ID No. :	UAE.EFM.009/2563(EFM.SCT.03/63)
Condition As-Received:	Used Item
Received Date :	28 March 2023
Calibration Date :	29 March 2023
Reference :	2303-0999WSC-3
Submitted by :	United Analyst and Engineering Consultant Co.,Ltd. 3 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Phrakhanong, Bangkok 10260
Ambient Temperature :	(25 \pm 2.5) $^{\circ}$ C
Relative Humidity :	(50 \pm 15) %
Calibration Procedure:	In -house method : - CP-CH6 by direct measurement with certified reference material (CRM) - CP-CH8 by comparison with standard thermometer

Calibrated by : Walalak Sirithean

Approved by :

Malee

Approved Signatory

- (☒) Malee Butkruea
() Saithip Meangmai
() Warakorn Lerngagtrakul

Issue Date : 31 March 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

เอกสารไม่ควบคุม

CERTIFICATE OF CALIBRATION

Certificate No. : CL-003-65

Page 1 of 2 Pages

MEASUREMENT ITEM : Top Load Orifice
MANUFACTURER : Tisch Environmental, Inc.
MODEL/TYPE : TE-5025A
SERIAL NUMBER : 3383
ID NUMBER : UAE.EFM.063/2560
CONDITION AS-RECEIVED : Used Item
CUSTOMER : United Analyst and Engineering Consultant Co.,Ltd.
81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Phrakhanong,
Bangkok 10260

RECEIVED DATE : 15 Jul 2022
MEASUREMENT DATE : 25 Jul 2022
ISSUE DATE : 26 Jul 2022

ENVIRONMENTAL CONDITIONS:

Ambient condition in the laboratory are as follow:

Temperature : 23.0 ± 3.0 °C
Relative Humidity : 55.0 ± 15.0 %RH
Atmospheric Pressure : 1010 ± 10 hPa

CALIBRATION CONDITION:

Preconditioning : 24 hours at ambient conditions.
Measurement Condition : The average values during measurement are 24.8 °C and 55.1 %RH.

TABULATION OF RESULTS:

The table on next page give the measured values.

Calibration procedure:

The Orifice gas flow device was calibrated against Standard Rotary Displacement Meter (Roots Meter) Model G65/IMC/W2-dp. The WI-CL-004 was used as a calibration guideline.

Traceability:

This certificate provides a traceability of The measurement to recognized the national standards, and to realization of the international system of units (SI) through the VSL (National Metrology Institute of Netherlands) via Certificate number: G2211901

Uncertainty of Measurement:

The reported uncertainty of measurement is based on the standard uncertainty multiplied by a coverage factor k=2. Which for a normal distribution corresponds to a coverage probability of approximately 95%. The standard uncertainty has been determined in accordance with the GUM 'Evaluation of measurement data - Guide to the expression of uncertainty in measurement'

Calibrated by:

☐ Mr. Sorawit Thachalad
☒ Miss Jittaporn Lertsomphol



Approved signatory:

[Signature]

Mr. Parinya Booncharoen
Calibration Department Manager



Cert.No.: 23CH429

Page.: 3 of 3

Calibration Results

Function : Temperature Measurement

(*) Without adjustment

This equipment was connected with Temperature Probe;

- Model : 9383
- Serial No. : 9B9F0045

Dimension of probe;

- Length : 110 mm
- Diameter : 16 mm
- Immersion Depth : 100 mm

Calibration Point (°C)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of Measurement (± °C)	Coverage factor k
25.0	25.001	25.0	-0.001	0.13	2.00
30.0	29.999	30.0	0.001	0.13	2.00
35.0	34.999	35.0	0.001	0.13	2.00

Remark : - UUC* = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k, providing a level of confidence of approximately 95 %.

-o0o-



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484

Certificate of Calibration

Certificate No. : 23P1401
Page : 1 of 2

Equipment : U-Tube Manometer
Manufacturer: Dwyer
Model : 1221-36-W/M
Serial No.: -
ID No.: UAE.EFM.022/2560

This certificate may not be reproduced other than in full,
except with the prior written approval of the head of
Corporate Services 3: Equipment Calibration and Testing Services.

Condition As-Received: Used Item

Received Date: 26 April 2023

Calibration Date: 09 May 2023

Reference: 2304-0703WSC
Ambient Temperature: (23 ± 2) °C
Relative Humidity: (50 ± 15) %
Atmospheric Pressure: 1010 mbar

Submitted by: United Analyst and Engineering Consultant Co.,Ltd.
81 Soi Udomsuk 41, Sukhumvit Road, Bangchak,
Phrakhanong, Bangkok 10260

Procedure used: The calibration was conducted by direct comparison method against Pressure Measuring Instruments Standard according to in-house calibration procedure CP-P04, using * DKD-R 6-1 ; Calibration of Pressure Gauges, Edition 03/2014 " as a guidelines.

Condition of this result of calibration

1.Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Pressure Calibrator	PC106P	1189	MP-0137-22	24 Aug 2023

2.This result of calibration was made on requested at the point specified by customer.

3.Scale and conversion factor is 1 kPa = 4.0146293 inH₂O

4.This instrument was used clean air and oil as pressure media.

5.This instrument was calibrated by applied pressure to high-port (+) side and low-port (-) side open to atmospheric pressure.

6.This instrument was installed in vertical orientation and top of the pressure port was used as the reference level.

7.The certificate is valid only to the item calibrated on date and place of calibration.

8.This Certification is traceable to the International System of Unit maintained through:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by : Suwit Aussarree
Issue Date : 11 May 2023

Approved Signatory : Attapol P.
[] Phalinee Prabpaipal
[] Sura Suwannasri
✓ Attapol Panurach

เอกสารไม่ควบคุม
B 0314241



JIRANATEE ASSOCIATES CO.,LTD.

Continuation of Certificate of Calibration Number CL-003-65

Page 2 of 2 Pages

MEASUREMENT RESULTS:

The Orifice gas flow device was calibrated by direct comparison method with the Standard Rotary Displacement Meter (Roots Meter). The Humid air was used as a medium in the system. The standard conditions are 25°C (298.15 K) and 760 mmHg for standard temperature and standard pressure respectively.

Table 1: The results of Q Standard calibration data

Plate	Flow rate m ³ /min	Pressure [Pa] mmHg	Temperature [Ta] °C	Temperature [Tm] °C	Δp_meter mmHg	Δp_Orifice inH ₂ O	γ	Standard Flow [Q _s] m ³ /min
1	0.697	754.265	24.640	23.960	55.399	1.699	1.299	0.643
2	1.000	754.236	24.950	24.350	62.172	3.444	1.849	0.913
3	1.118	754.323	24.730	24.210	41.925	4.582	2.133	1.051
4	1.169	754.212	24.640	24.160	31.045	5.150	2.262	1.116
5	1.416	754.175	24.480	24.210	30.117	7.629	2.754	1.353

Slope (m): 2.04804
Intercept (b): -0.01939
Correlation coefficient (r): 0.99982
Uncertainty (k=2): 0.011 m³/min

Table 2: The results of Q actual calibration data

Plate	Flow rate m ³ /min	Pressure [Pa] mmHg	Temperature [Ta] °C	Temperature [Tm] °C	Δp_meter mmHg	Δp_Orifice inH ₂ O	γ	Standard Flow [Q _s] m ³ /min
1	0.697	754.265	24.640	23.960	55.399	1.699	0.819	0.647
2	1.000	754.236	24.950	24.350	62.172	3.444	1.167	0.919
3	1.118	754.323	24.730	24.210	41.925	4.582	1.345	1.058
4	1.169	754.212	24.640	24.160	31.045	5.150	1.426	1.123
5	1.416	754.175	24.480	24.210	30.117	7.629	1.735	1.361

Slope (m): 1.28277
Intercept (b): -0.01223
Correlation coefficient (r): 0.99982
Uncertainty (k=2): 0.012 m³/min

End of Certificate of Calibration



เอกสารไม่ควบคุม

Certificate of Calibration

Customer
Name : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok 10260

Certificate No : 23-AFM-203
Request No : Req-2023-1919

Unit Under Calibration Details

Measurement Item : Air Flow Meter
Manufacturer : BGI
Model : Delta Cal DC1
Serial Number : 159822
ID : UAE.EFM.039/2561

Sensor Model : -
Sensor Serial Number : -

Location of Calibration : LAB 4 AIR VELOCITY METER

Calibration Environment and Details

Temperature : 23 °C ± 3 °C
Humidity : 55 %RH ± 20 %RH
Barometric Pressure : 1013 hPa ± 10 hPa
Received Date : 7 September 2023
Calibration Date : 27 September 2023

Calibration Procedure : In-house method CP-AFM-01 by Comparison technique with Standard Primary Flow Calibrator


Reference Standard	Model	Serial Number	Traceble	Due Calibration
Air Flow Meter	Gilibrator 3 Standard flow	19031011003	Sensidyne	12 July 2024
Air Flow Meter	Gilibrator 3 High flow	18501012012	Sensidyne	12 July 2024
Temperature meter	GT 11	08000057	Qrebom	27 February 2024
Pressure meter	CPG2400	41000KDU/651882	TPA	7 November 2023


Traceability :

This Certificate is traceable to SI Unit through Sensidyne A2LA Accreditation No. 3943.01

Note :

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibration By : 
Mr. Noppadon Luangart
Service Calibration Engineer

Approved By : 
Mr. Pacit Mathavorn
Calibration Engineer Supervisor
Issue Date : 27 September 2023



Cert.No.: 23P1401
Page: 2 of 2

Result of calibration:- Without adjustment

Range : 0 inH₂O to 36 inH₂O

Function:- Pressure Measurement

Scale Interval : 0.1 inH₂O (The Fifth Estimate)

Increasing Pressure

UUC Indication				
Applied Pressure	High-port side	Low-port side	ΔP	Error
(inH ₂ O)	(inH ₂ O)	(inH ₂ O)	(inH ₂ O)	(inH ₂ O)
0.00	0.00	0.00	0.00	0.00
2.00	1.00	-0.98	1.98	-0.02
4.00	2.00	-1.98	3.98	-0.02
6.00	3.00	-2.98	5.98	-0.02
8.00	4.00	-3.98	7.98	-0.02
10.00	5.00	-4.98	9.98	-0.02
12.00	6.00	-6.00	12.00	0.00
14.00	7.00	-7.00	14.00	0.00
16.00	8.00	-8.00	16.00	0.00
18.00	9.00	-9.00	18.00	0.00
20.00	10.00	-10.00	20.00	0.00
22.00	11.00	-11.00	22.00	0.00
24.00	12.02	-12.00	24.02	0.02
26.00	13.02	-13.00	26.02	0.02
28.00	14.02	-14.00	28.02	0.02
30.00	15.04	-15.00	30.04	0.04
32.00	16.04	-16.00	32.04	0.04
34.00	17.02	-17.00	34.02	0.02
35.80	18.00	-17.96	35.96	0.16

The uncertainty of measurement was ± 0.11 inH₂O

* UUC = Unit Under Calibration

* ΔP = High-port side - Low-port side

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม

Attapol P.
เอกสารไม่ควบคุม
a 1160340



Certificate of Calibration

Customer
Name : UNITED ANALYST AND ENGINEERING
CONSULTANT CO., LTD.
Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong,
Bangkok 10260

Certificate No : 23-TPM-461
Request No : Req-2023-1919
Page : 1/2

Unit Under Calibration Details

Calibration Parameter : Temperature
Instrument Name : Air Flow meter
Manufacturer : BGI
Model : Delta Cal DC1
Serial Number : 159822
Resolution : 0.1 °C
ID Number : UAE.EFM.039/2561

Range Calibration : 20 °C to 50 °C
Type of Sensor : RTD
Sensor Diameter (mm) : 3
Calibration Position (mm) : 45
Instrument Status : Used

Calibration Environment and Details

Temperature : 23 °C ± 3 °C
Humidity : 55 %RH ± 15 %RH
Received Date : 7 September 2023
Calibrated Date : 27 September 2023
Calibration Procedure : In-house method CP-TPM-01 by Comparison with Standard Thermometer.

Reference Standard : Digital Thermometer with Sensor, Manufacturer: GINGO/GINGO, Model: GT11/ RTD100, SN:
08000057, ID: 02-TPM Which was calibrated on 27 Febuary 2023, Calibration Certificate No. : QR23-
0494

Traceability : This Certificate is traceable to SI Unit through Quality Reborn Co., Ltd., NSC-ONSC Accreditation No.:
Calibration 0292.

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k=2$, providing a level of confidence approximately 95 %.

Approved By :
Mr. Noppadon Luangart
Technical Manager
Issue Date : 27 September 2023



Certificate No : 23-AFM-203

Request No : Req-2023-1919

Result of Calibration :

Temperature (°C)	Pressure (kPa)	STD (l/min)	UUC (l/min)	Error (l/min)	Uncertainty (l/min)
24.90	100.64	14.58	14.50	-0.08	0.20
24.90	100.64	15.06	15.00	-0.06	0.21
25.00	100.63	15.90	15.80	-0.10	0.22
24.90	100.63	16.78	16.67	-0.11	0.23
24.90	100.63	18.46	18.30	-0.16	0.26

Note STD : Standard UUC : Unit Under Calibration
- UUC Reference Condition : At 25.0 °C, 101.3 kPa, Air
- Flow Rate was corrected for non-standard operating condition by using equation :

$$Q_{\text{meas}} = Q_{\text{ref}} \times \frac{P_{\text{ref}}}{P_{\text{meas}}} \times \frac{T_{\text{meas}}}{T_{\text{ref}}}$$

where Q = Flow Rate P = Absolute Pressure T = Absolute Temperature
Meas = Measurement Condition ref = Standard Condition

* Indicates non accredited

End of Certificate



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



Certificate of Calibration

Certificate No. : 23P1858
Page : 1 of 2

Equipment : Aneroid Barometer
Manufacturer: Barigo
Model : -
Serial No.: -
ID No.: UAE.ANV.124/2550

Condition As-Received: Used Item

Received Date: 26 May 2023

Calibration Date: 02 June 2023

Reference: 2305-0919WSC

Submitted by: United Analyst and Engineering Consultant Co.,Ltd.

Ambient Temperature: (23 ± 2) °C

Relative Humidity: (50 ± 15) %

Atmospheric Pressure: 1007 mbar

81 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260

Procedure used: The calibration was conducted by direct comparison method against Pressure Measuring Instruments Standard according to in-house calibration procedure CP-P10, using " DKD-R 6-1 ; Calibration of Pressure Gauges, Edition 03/2014 " as a guidelines.

Condition of this result of calibration

1.Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Standard Barometer	DPI142	1422505046	MP-0094-23	03 May 2024

2.This instrument was installed in vertical orientation and center of the dial was used as the reference level.

3.This result of calibration was made on requested at the point specified by customer.

4.This result of calibration instrument was in absolute pressure.

5.This instrument was used clean air as pressure media.

6.The certificate is valid only to the item calibrated on date and place of calibration.

7.This Certification is traceable to the International System of Unit maintained through:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by: Suksan Khankaew
Issue Date: 08 June 2023

Approved Signatory : Attapol P.
[] Phalinee Prabpaipal
[] Sura Suwannasri
[x] Attapol Panurach

เอกสารไม่ควบคุม
B 0316958

INNOVATIVE INSTRUMENT CALIBRATION LAB

INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE

7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAE0,

AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND

TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140



Calibration Note

UUC Adjustment : Not Adjust

Certificate No : 23-TPM-461

Request No : Req-2023-1919

Page : 2/2

Result of Calibration :

UUC Sensor	Standard Temperature (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
Ta	20.033	20.0	0.0	0.13
	25.033	25.0	0.0	0.13
	30.033	30.1	- 0.1	0.13
	35.034	35.1	- 0.1	0.13
	40.040	40.0	0.0	0.13
	45.039	45.0	0.0	0.13
	50.043	50.0	0.0	0.13
Tf	20.033	20.0	0.0	0.13
	25.033	25.0	0.0	0.13
	30.033	30.1	- 0.1	0.13
	35.034	35.2	- 0.2	0.13
	40.040	40.2	- 0.2	0.13
	45.039	45.2	- 0.2	0.13
	50.043	50.2	- 0.2	0.13

End of Certificate

Calibrated By :

Mr. Sittichok Jirapukdeesakul

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Issuing Authority.

FM-708-TPM-01 Rev.01 Issue date 13/02/20



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484



Certificate of Calibration

Certificate No. : 23H1200
Page : 1 of 2

Equipment : Dial Thermo-Hygrometer
Manufacturer: Barigo
Model : -
Serial No.: -
ID No.: UAE.ANV.130/2550

Condition As-Received: Used Item

Received Date: 26 May 2023

Calibration Date: 30 May 2023
to 06 June 2023

Reference: 2305-0919WSC

Ambient Temperature: (25 ± 3) °C

Relative Humidity: (50 ± 20) %

Submitted by: United Analyst and Engineering Consultant Co.,Ltd.

81 Soi Udomsuk 41, Sukhumvit Road,
Bangchak, Phrakhanong, Bangkok 10260

Procedure used: Calibration were conducted using in-house calibration procedure CP-H02 according to comparison with standard chilled mirror sensor for humidity measurement function and comparison with standard temperature probe for temperature measurement function into humidity / temperature chamber.

Condition of this result of calibration

1.Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Hygro-M2 Dew Point Monitor	5112	2360195	20703	02 Aug 2023
2) Handheld Thermometer With Sensor	1523	3240076	231305	15 Mar 2024

2.The certificate is valid only to the item calibrated on date and place of calibration.

3.This Certification is traceable to the International System of Unit maintained through:-

- National Institute of Standards and Technology (NIST) , The United States of America
- Technology Promotion Association (Thailand-Japan), NSC-ONSC Accredited No. Calibration 0008

Calibrated by : Somchai Dumwor
Issue Date : 07 June 2023

Approved Signatory :

- ☒ Chakrit Waewwanjua
☐ Pornthippa Tameyakul
☐ Viporn Tantiyawutti

เอกสารไม่ควบคุม
B 0316274



Cert.No.: 23P1858
Page: 2 of 2

Result of calibration:- Without adjustment

Range : 960 hPa to 1030 hPa

Function:- Absolute Pressure Measurement

Scale Interval : 1 hPa (The Fifth Estimate)

Increasing Pressure

Applied Pressure (hPa)	959.93	970.47	981.93	991.32	1002.29	1011.64	1021.14	1032.30
UUC* Indication (hPa)	960.0	970.0	980.0	990.0	1000.0	1010.0	1020.0	1030.0
Error (hPa)	0.07	-0.47	-1.93	-1.32	-2.29	-1.64	-1.14	-2.30

Decreasing Pressure

Applied Pressure (hPa)	1032.30	1021.44	1011.67	1002.36	992.35	981.94	970.49	959.94
UUC* Indication (hPa)	1030.0	1020.0	1010.0	1000.0	990.0	980.0	970.0	960.0
Error (hPa)	-2.30	-1.44	-1.67	-2.36	-2.35	-1.94	-0.49	0.06

The uncertainty of measurement was ± 0.30 hPa

* UUC = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-o0o-

เอกสารไม่ควบคุม
a 1165506

MULTI-POINT GAS TEST REPORT

Test Date : Mar 18, 2023

Equipment : Gas Analyzer (NO₂) Model : 42C
Manufacturer : Thermo Electron Corporation Serial Number : 42C-0508011076

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 1461
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.5	0.50	0.50	0.50
Level 3	40.00%	200.0	200.7	0.70	0.35	0.35
Level 4	60.00%	300.0	300.8	0.80	0.27	0.27
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb		Average Difference (%)		0.22

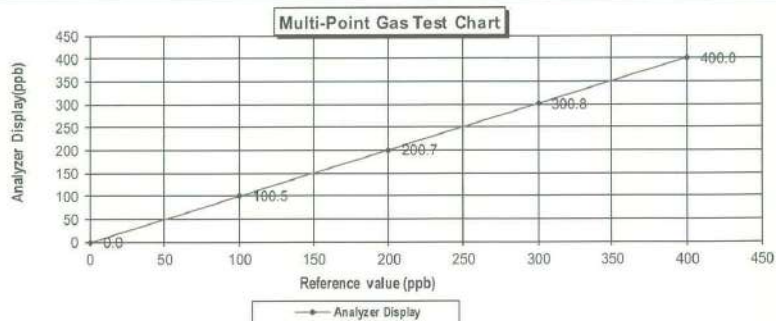

Calculate by

Aphivat K.
18/3/23

Approve by

Patirorn N.
18/Mar/2023



Cert. No.: 23H1200

Page.: 2 of 2

Result of Calibration:-

Function:

Before Adjustment

Humidity Measurement

Reference Temperature (°C)	Standard Humidity (%R.H.)	UUC* Reading (%R.H.)	Error (%R.H.)	Uncertainty of Measurement (±%R.H.)
25.0	40.1	48	7.9	1.6
25.0	60.0	63	3.0	1.7
25.0	80.0	76	-4.0	1.9

Result of Calibration:-

Function:

After Adjustment

Humidity Measurement

Reference Temperature (°C)	Standard Humidity (%R.H.)	UUC* Reading (%R.H.)	Error (%R.H.)	Uncertainty of Measurement (±%R.H.)
25.0	40.1	44	3.9	1.6
25.0	60.0	60	0.0	1.7
25.0	80.0	75	-5.0	1.9

Result of Calibration:-

Function:

Without Adjustment

Temperature Measurement

Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of Measurement (±°C)
19.987	20.0	0.013	0.72
30.016	30.0	-0.016	0.72
39.944	39.5	-0.444	0.72

UUC* : Unit Under Calibration

The reported uncertainty of measurement was base on standard uncertainty multiplied by coverage factor $k = 2.00$, providing confidence level approximately 95%.

-o0o-

Amf

MULTI-POINT GAS TEST REPORT

Test Date : Apr 20,2023

Equipment : Gas Analyzer (NO₂) Model : 42C
 Manufacturer : Thermo Electron Corporation Serial Number : 0517512001

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8
 Cylinder No. : EB0143262
 Expiration Date : Jun 21,2024

Dilutor Detail

Manufacturer : Thermo Scientific
 Model : 146i
 Serial Number : 1180540071


Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.2	1.20	1.19
Level 3	40.00%	200.0	200.7	0.70	0.35
Level 4	60.00%	300.0	301.1	1.10	0.37
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

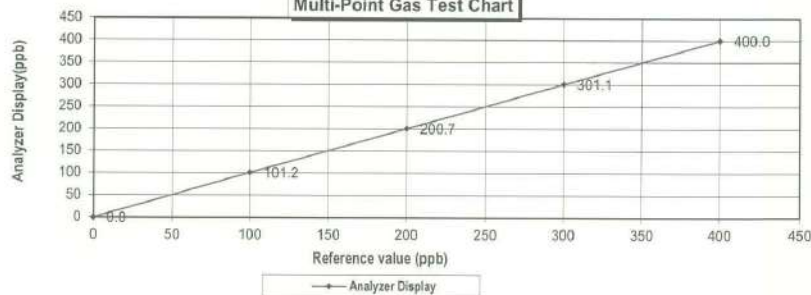

Calculate by

Aphivat K.
 20 / 4 / 66

Approve by

Patiporn U
 20 / 4 / 2023

MULTI-POINT GAS TEST REPORT

Test Date : Mar 16,2023

Equipment : Gas Analyzer (NO₂) Model : 42C
 Manufacturer : Thermo Electron Corporation Serial Number : 0517512000

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8
 Cylinder No. : EB0143262
 Expiration Date : Jun 21,2024

Dilutor Detail

Manufacturer : Thermo Scientific
 Model : 146i
 Serial Number : 1180540071


Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.7	0.70	0.70
Level 3	40.00%	200.0	200.3	0.30	0.15
Level 4	60.00%	300.0	300.9	0.90	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

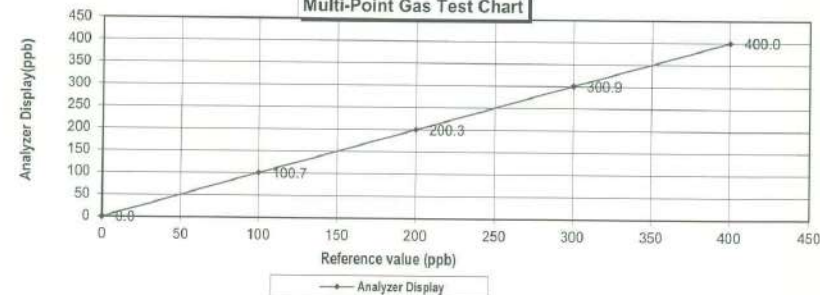

Calculate by

Aphivat K.
 16 / 3 / 66

Approve by

Patiporn U
 16 / Mar / 2023

MULTI-POINT GAS TEST REPORT

Test Date : Feb 15, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM19050148

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.2	0.20	0.20
Level 3	40.00%	200.0	201.0	1.00	0.50
Level 4	60.00%	300.0	300.9	0.90	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00


Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Average Difference (%)

0.20

Multi-Point Gas Test Chart

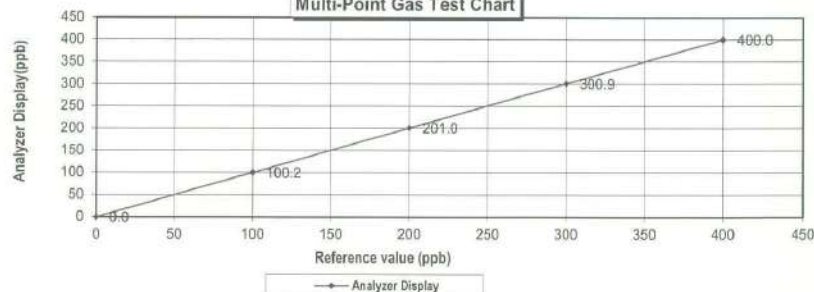

Calculate by

Sirichai Samgou
15.2.66

Approve by

Petkorn W
15. Feb. 2023

MULTI-POINT GAS TEST REPORT

Test Date : Jan 11, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM08130002

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.6	0.60	0.60
Level 3	40.00%	200.0	200.4	0.40	0.20
Level 4	60.00%	300.0	300.9	0.90	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00


Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Average Difference (%)

0.22

Multi-Point Gas Test Chart

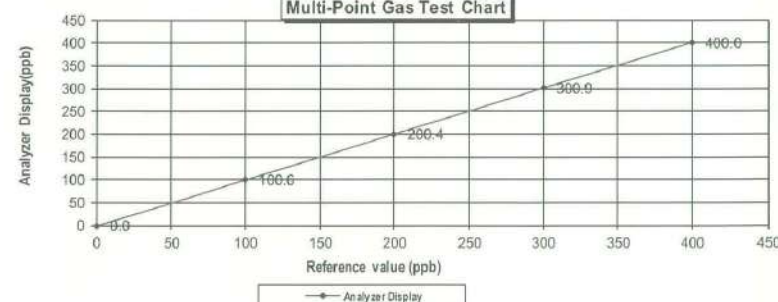

Calculate by

Sirichai Samgou
11.1.66

Approve by

Petkorn W
11. Jan. 2023

MULTI-POINT GAS TEST REPORT

Test Date : Jan 16, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM19050150

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppb)		Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.5	0.50	0.50	0.50
Level 3	40.00%	200.0	200.6	0.60	0.30	0.30
Level 4	60.00%	300.0	300.7	0.70	0.23	0.23
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.21
				:Acceptable Limit ± 5%		

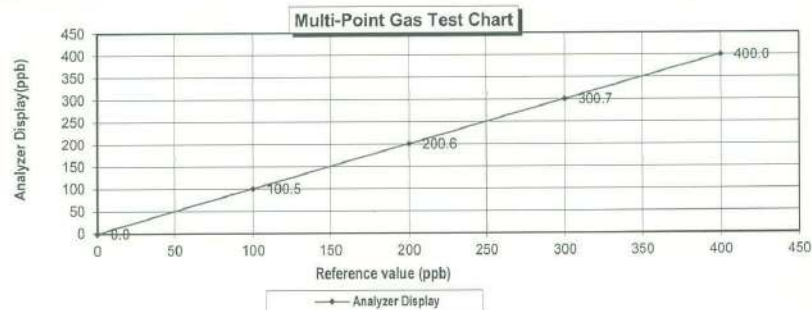

Calculate by

Apinwat u.
16.01.66

Approve by

Wattana n.
16, Jan, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Jan 9, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
Manufacturer : Thermo Scientific Serial Number : CM19050149

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 21, 2024

Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppb)		Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.8	0.80	0.79	0.79
Level 3	40.00%	200.0	201.2	1.20	0.60	0.60
Level 4	60.00%	300.0	300.7	0.70	0.23	0.23
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.32
				:Acceptable Limit ± 5%		

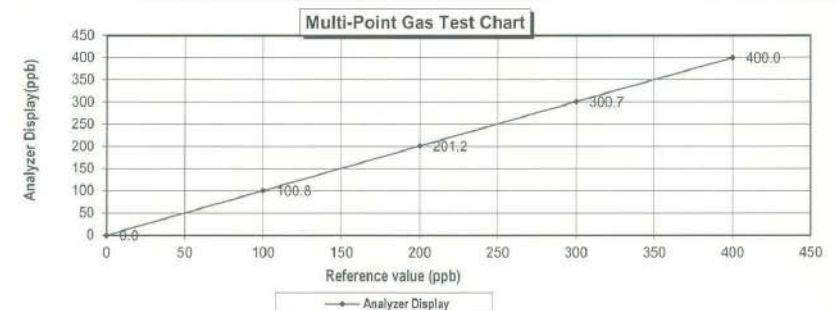

Calculate by

Siichan Sangsri
9.1.66

Approve by

Wattana n.
9, Jan, 2023


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (NO ₂)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387035

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	1.5	1.5	1.50	1.50	1.50	5
Level 2	100.0	99.3	99.3	-0.70	-0.70	0.70	5
Level 3	200.0	202.0	202.0	2.00	1.00	1.00	5
Level 4	300.0	301.0	301.0	1.00	0.33	0.33	5
Level 5	400.0	399.7	399.7	-0.30	-0.08	0.08	5
	R	Slope	Intercept	Average		0.72	5
NOx	1.000	0.998	1.080	Criteria		5.00	10
NO	1.000	0.998	1.080				

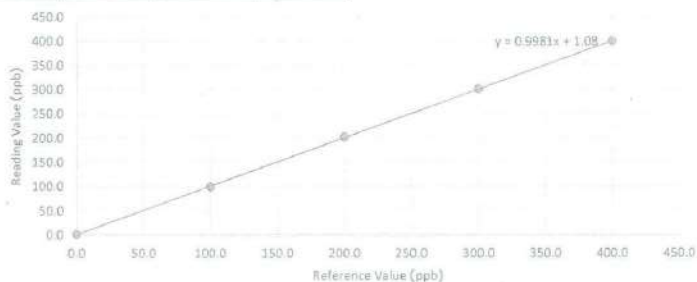

NO2 Multi-Point Calibration

Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₂	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	99.8	450.5	350.7	5
2	450.0	200.0	200.0	199	449.1	250.1	5
3	450.0	300.0	300.0	300.6	450	149.4	5
4	450.0	400.0	400.0	398.4	448.7	50.3	5
Slope	0.997	Intercept	0.100	R	1.000		
	Ref. NO	Read. NO ₂ adj	Read. NOx _{adj}	Convert NO ₂	%Convert	Avg	Criteria
1	450.0	350.3	450.3	100.0	100.0	100.0	96-104
2	450.0	249.5	448.9	199.4	99.7		
3	450.0	148.6	449.8	301.2	100.4		
4	450.0	49.3	448.5	399.2	99.8		

Calibrate by *Sirichai Gungjai*
 Calibration Date *2/7/66*

Approve by
 Approved Date

Petirorn n.
2 July 2023

MULTI-POINT GAS TEST REPORT

Test Date : Feb 15, 2023

Equipment : Gas Analyzer (NO₂) Model : 42i
 Manufacturer : Thermo Scientific Serial Number : CM19050151

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8
 Cylinder No. : EB0143262
 Expiration Date : Jun 21, 2024


Dilutor Detail

Manufacturer : Thermo Scientific
 Model : 146i
 Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.9	0.90	0.89
Level 3	40.00%	200.0	201.1	1.10	0.55
Level 4	60.00%	300.0	300.9	0.90	0.30
Level 5	80.00%	400.0	400.0	0.00	0.00
Remark : Measuring Range	500.0 ppb		Average Difference (%)		0.35
:Acceptable Limit ± 5%					

Multi-Point Gas Test Chart

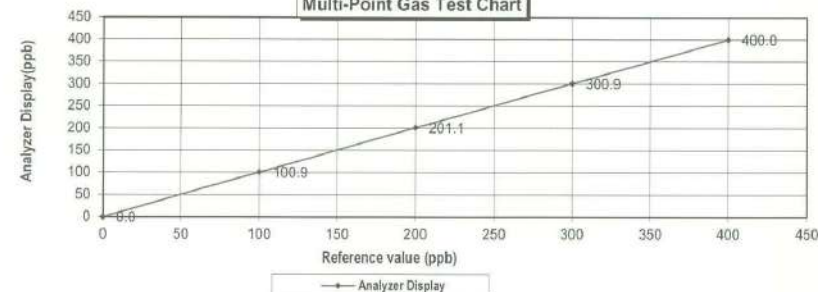

Calculate by
Sirichai Gungjai
15 Feb 2023


Approve by
Petirorn n.
15 Feb 2023

MULTI-POINT GAS TEST REPORT			
Equipment	Gas Analyzer (NO2)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387037

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	0.9	0.9	0.90	0.90	0.90	5
Level 2	100.0	100.4	100.4	0.40	0.40	0.40	5
Level 3	200.0	200.2	200.2	0.20	0.10	0.10	5
Level 4	300.0	301.3	301.3	1.30	0.43	0.43	5
Level 5	400.0	401.5	401.5	1.50	0.38	0.38	5
	R	Slope	Intercept	Average		0.44	5
NOx	1.000	1.002	0.440	Criteria		5.00	10
NO	1.000	1.002	0.440				

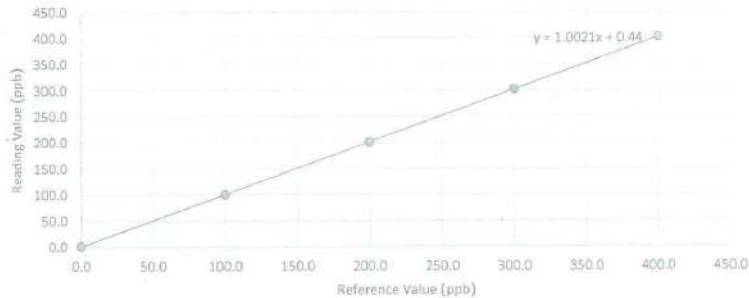

NO2 Multi-Point Calibration							
Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₃	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	99.1	452.7	353.6	5
2	450.0	200.0	200.0	200.2	447.8	247.6	5
3	450.0	300.0	300.0	301.5	451.8	150.3	5
4	450.0	400.0	400.0	400.8	449.1	48.3	5
Slope	1.006	Intercept	-1.200	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NOx _{adj}	Convert NO ₂	%Convert	Avg	Criteria
1	450.0	352.4	451.3	98.9	98.9	99.8	96-104
2	450.0	246.6	446.4	199.8	99.9		
3	450.0	149.5	450.4	300.9	100.3		
4	450.0	47.8	447.7	400.0	100.0		

Calibrate by Sirichai Gamgan
Calibration Date 24/7/66

Approve by P. K. N.
Approved Date 2 July 2023


เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT			
Equipment	Gas Analyzer (NO2)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387036

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	1.5	1.5	1.50	1.50	1.50	5
Level 2	100.0	100.3	100.3	0.30	0.30	0.30	5
Level 3	200.0	200.9	200.9	0.90	0.45	0.45	5
Level 4	300.0	301.0	301.0	1.00	0.33	0.33	5
Level 5	400.0	402.2	402.2	2.20	0.55	0.55	5
	R	Slope	Intercept	Average		0.63	5
NOx	1.000	1.002	0.760	Criteria		5.00	10
NO	1.000	1.002	0.760				

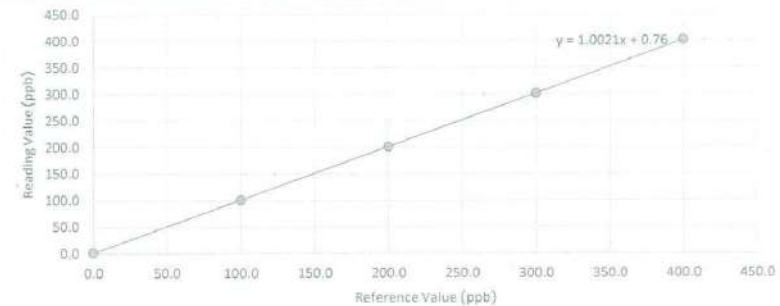

NO2 Multi-Point Calibration							
Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₃	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	100.7	453.2	352.5	5
2	450.0	200.0	200.0	198.2	447.8	249.6	5
3	450.0	300.0	300.0	302.1	447.3	145.2	5
4	450.0	400.0	400.0	396.4	447.3	50.9	5
Slope	0.991	Intercept	1.600	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NOx _{adj}	Convert NO ₂	%Convert	Avg	Criteria
1	450.0	351.0	451.5	100.5	100.5	99.7	96-104
2	450.0	248.3	446.1	197.8	98.9		
3	450.0	144.1	445.6	301.5	100.5		
4	450.0	50.0	445.6	395.6	98.9		

Calibrate by Sirichai Gamgan
Calibration Date 24/7/66

Approve by P. K. N.
Approved Date 2 July 2023


เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT			
Equipment	Gas Analyzer (NO ₂)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387039

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	0.5	0.5	0.50	0.50	0.50	5
Level 2	100.0	100.4	100.4	0.40	0.40	0.40	5
Level 3	200.0	200.5	200.5	0.50	0.25	0.25	5
Level 4	300.0	301.8	301.8	1.80	0.60	0.60	5
Level 5	400.0	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.35	5
NOx	1.000	1.000	0.560	Criteria		5.00	10
NO	1.000	1.000	0.560				

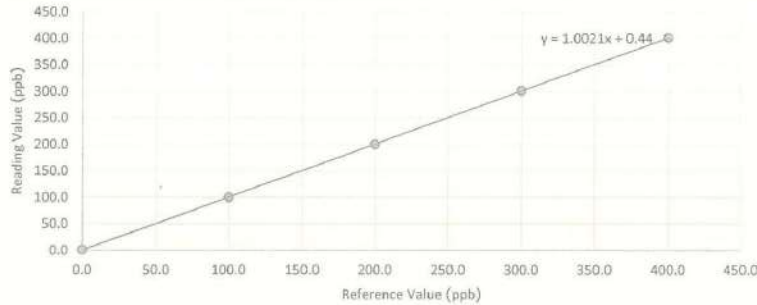

NO₂ Multi-Point Calibration

Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₂	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	100	449.1	349.1	5
2	450.0	200.0	200.0	198.6	447.3	248.7	5
3	450.0	300.0	300.0	297.3	450	152.7	5
4	450.0	400.0	400.0	398	448.7	50.7	5
Slope	0.993	Intercept	0.300	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NO _{x,adj}	Convert NO ₂	% Convert	Avg	Criteria
1	450.0	348.4	448.4	100.0	100.0	99.4	96-104
2	450.0	248.0	446.6	198.5	99.3		
3	450.0	152.1	449.3	297.2	99.1		
4	450.0	50.1	448.0	397.8	99.5		

Calibrate by Aphiwat
Calibration Date 2/7/16

Approve by Polthorn N.
Approved Date 2 July 2023


เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT			
Equipment	Gas Analyzer (NO ₂)	Model	42i
Manufacturer	Thermo Scientific	Serial Number	CM22387038

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

NOx & NO Multi-Point Calibration

Point	Ref. Value (ppb)	Read. NOx (ppb)	Read. NO (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	0.0	0.2	0.2	0.20	0.20	0.20	5
Level 2	100.0	100.3	100.3	0.30	0.30	0.30	5
Level 3	200.0	200.2	200.2	0.20	0.10	0.10	5
Level 4	300.0	301.5	301.5	1.50	0.50	0.50	5
Level 5	400.0	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.22	5
NOx	1.000	1.001	0.280	Criteria		5.00	10
NO	1.000	1.001	0.280				

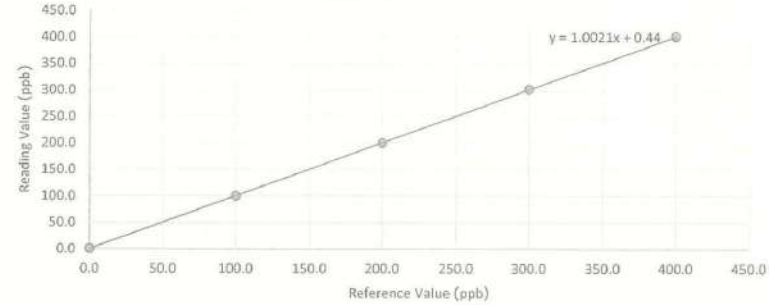

NO₂ Multi-Point Calibration

Point	Cal. Setting			Analyzer Reading			
	Ref. NO	O ₂	NO ₂ Cal	Read. NO ₂	Read. NOx	Read. NO	Res. Time (min.)
1	450.0	100.0	100.0	100.3	447.8	347.5	5
2	450.0	200.0	200.0	201.6	446.9	245.3	5
3	450.0	300.0	300.0	298.2	449.1	150.9	5
4	450.0	400.0	400.0	397.2	449.6	52.4	5
Slope	0.987	Intercept	2.500	R	1.000		
	Ref. NO	Read. NO _{adj}	Read. NO _{x,adj}	Convert NO ₂	% Convert	Avg	Criteria
1	450.0	346.9	447.2	100.2	100.2	99.9	96-104
2	450.0	244.8	446.3	201.4	100.7		
3	450.0	150.5	448.5	298.0	99.3		
4	450.0	52.1	449.0	396.9	99.2		

Calibrate by Aphiwat
Calibration Date 2/7/16

Approve by Polthorn N.
Approved Date 2 July 2023

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : May 3, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Electron Corporation Serial Number : 43C-0607415779

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.3	1.30	1.28
Level 3	40.00%	200.0	201.1	1.10	0.55
Level 4	60.00%	300.0	301.5	1.50	0.50
Level 5	80.00%	400.0	400.0	0.00	0.00
Remark : Measuring Range 500.0 ppb			Average Difference (%)		0.47
:Acceptable Limit $\pm 5\%$					

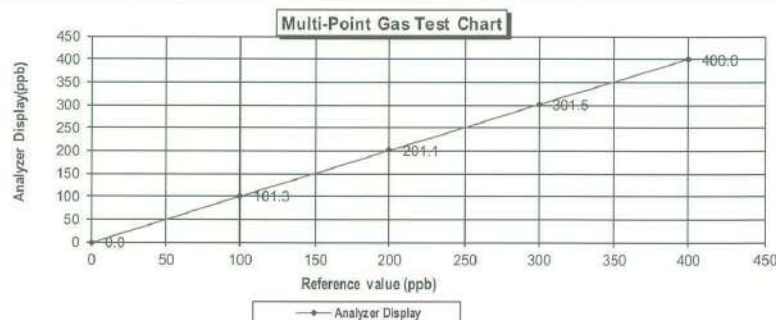

Calculate by

Aphiwat K.
3, 5, 86

Approve by

3, May, 2023

CERTIFICATE OF ANALYSIS

Grade of Product: EPA Protocol

Part Number: E04NI99E15A01D3 Reference Number: 122-402135167-1
Cylinder Number: EB0143262 Cylinder Volume: 144.4 CF
Laboratory: 124 - Durham (SAP) - NC Cylinder Pressure: 2015 PSIG
PGVP Number: B22021 Valve Outlet: 660
Gas Code: CO,NO,NOX,SO₂,BALN Certification Date: Jun 21, 2021

Expiration Date: Jun 21, 2024

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted.

Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS					
Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	45.00 PPM	45.98 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
NITRIC OXIDE	45.00 PPM	45.94 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
SULFUR DIOXIDE	45.00 PPM	44.88 PPM	G1	+/- 1.0% NIST Traceable	06/14/2021, 06/21/2021
CARBON MONOXIDE	1000 PPM	984.8 PPM	G1	+/- 0.7% NIST Traceable	06/14/2021
NITROGEN	Balance				

CALIBRATION STANDARDS					
Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	20061120	CC708068	49.82 PPM NITRIC OXIDE/NITROGEN	+/- 1.0%	Feb 02, 2025
PRM	12386	D685025	9.91 PPM NITROGEN DIOXIDE/AIR	+/- 2.0%	Feb 20, 2020
GMIS	401423838102	CC505581	4.348 PPM NITROGEN DIOXIDE/NITROGEN	+/- 2.1	Feb 18, 2023
NTRM	16011043	CC473277	49.02 PPM SULFUR DIOXIDE/NITROGEN	+/- 0.8%	Jun 17, 2022
NTRM	14080119	CC434277	990.9 PPM CARBON MONOXIDE/NITROGEN	+/-0.6%	Nov 15, 2025
The SRM, PRM or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.					

ANALYTICAL EQUIPMENT		
Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Nicolet 6700 AHR0801333 CO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO2	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 SO2	FTIR	Jun 03, 2021

Triad Data Available Upon Request

NOTES: PO #5221002807

GROSS WT: 28.40kg

NET WT: 4.73kg



The analytical test results reported on this certificate relate only to the cylinder number specified above. This concludes the test report.

[Signature]

Approved for Release



CERT 3082.01

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : May 3, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
 Manufacturer : Thermo Environmental Instruments Serial Number : 43C-62236-334

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8
 Cylinder No. : EB0143262
 Expiration Date : Jun 24, 2024

Dilutor Detail


Manufacturer : Thermo SCIENTIFIC
 Model : 146i
 Serial Number : 1180540071

Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.7	1.70	1.67
Level 3	40.00%	200.0	201.3	1.30	0.65
Level 4	60.00%	300.0	301.9	1.90	0.63
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb
 :Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

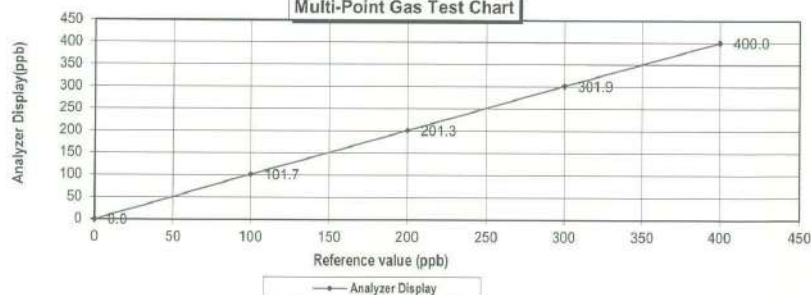

Calculate by

Aphiwat K.
 3, May, 2023

Approve by

Phan W.
 3, May, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 7, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
 Manufacturer : Thermo Electron Corporation Serial Number : 43C-0611116459

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8
 Cylinder No. : EB0143262
 Expiration Date : Jun 24, 2024

Dilutor Detail


Manufacturer : Thermo SCIENTIFIC
 Model : 146i
 Serial Number : 1180540071

Multi-point gas test data

Level	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.9	1.90	1.86
Level 3	40.00%	200.0	201.5	1.50	0.74
Level 4	60.00%	300.0	301.7	1.70	0.56
Level 5	80.00%	400.0	400.0	0.00	0.00

Remark : Measuring Range 500.0 ppb
 :Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

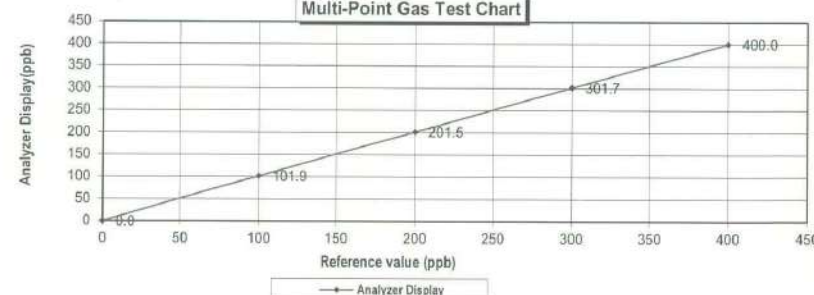

Calculate by

Aphiwat K.
 7, Apr, 2023

Approve by

Phan W.
 7, Apr, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 7, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Environmental Instruments Serial Number : 43C-65007-345

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	102.2	2.20	2.15	2.15
Level 3	40.00%	200.0	201.7	1.70	0.84	0.84
Level 4	60.00%	300.0	301.5	1.50	0.50	0.50
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.70

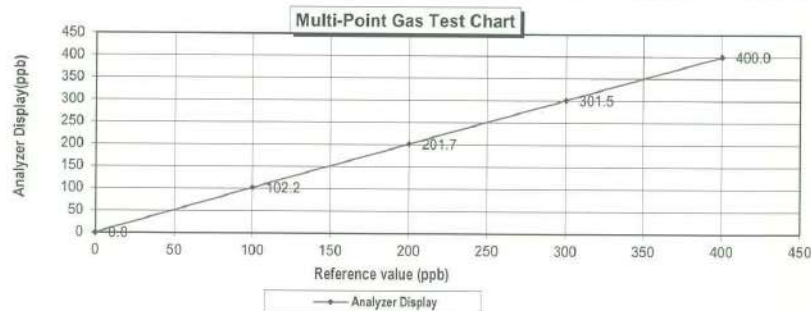

Calculate by

Aphiwat K.

7 / 4 / 66

Approve by

Phrakhanong

7 / Apr, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 25, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
Manufacturer : Thermo Environmental Instruments Serial Number : 43C-76465-383

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero		0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.5	1.50	1.48	1.48
Level 3	40.00%	200.0	201.7	1.70	0.84	0.84
Level 4	60.00%	300.0	301.3	1.30	0.43	0.43
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range		500.0 ppb		Average Difference (%)		0.55

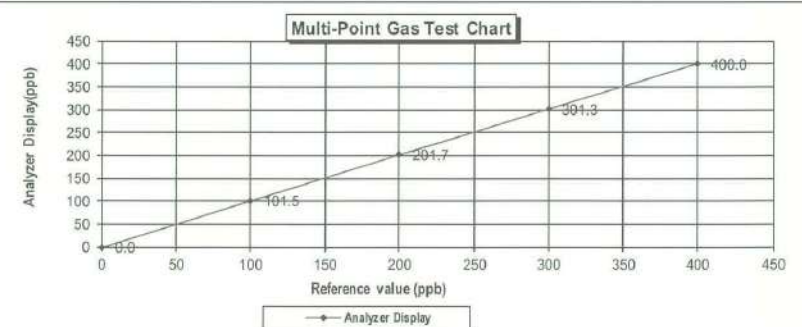

Calculate by

Aphiwat K.

25 / 4 / 66

Approve by

Phrakhanong

25 / Apr, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 19, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
 Manufacturer : Thermo Electron Corporation Serial Number : 0517512003

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8 PPM
 Cylinder No. : EB0143262
 Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
 Model : 146i
 Serial Number : 1180540071


Multi-point gas test data

	Reference Value (ppb)		Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.8	1.80	1.77	1.77
Level 3	40.00%	200.0	201.5	1.50	0.74	0.74
Level 4	60.00%	300.0	301.9	1.90	0.63	0.63
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00

Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Average Difference (%) 0.63

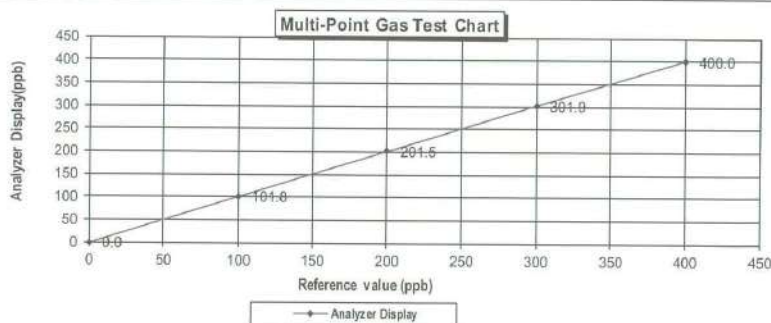

Calculate by

Aphiwat K.

19, 4, 2023

Approve by

Patirong

19, Apr, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Apr 4, 2023

Equipment : Gas Analyzer (SO₂) Model : 43C
 Manufacturer : Thermo Electron Corporation Serial Number : 0517512002

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
 Nitric Oxide (NO) 45.94 PPM
 Methane (CH₄) - PPM
 Carbon Monoxide (CO) 984.8 PPM
 Cylinder No. : EB0143262
 Expiration Date : Jun 24, 2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
 Model : 146i
 Serial Number : 1180540071


Multi-point gas test data

	Reference Value (ppb)		Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	102.5	2.50	2.44	2.44
Level 3	40.00%	200.0	201.6	1.60	0.79	0.79
Level 4	60.00%	300.0	301.9	1.90	0.63	0.63
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00

Remark : Measuring Range 500.0 ppb

:Acceptable Limit $\pm 5\%$

Average Difference (%) 0.77

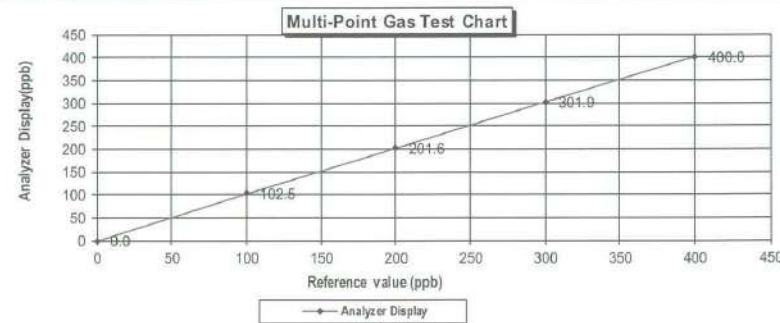

Calculate by

Aphiwat K.

4, 4, 2023

Approve by

Patirong

4, Apr, 2023


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (SO ₂)	Model	43i
Manufacturer	Thermo Scientific	Serial Number	CM22387062

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

SO₂ Multi-Point Calibration

Point	%	Ref. Value (ppb)	Read. SO ₂ (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	Zero	0.0	1.0	1.00	1.00	1.00	5
Level 2	20	100.0	100.4	0.40	0.40	0.40	5
Level 3	40	200.0	200.3	0.30	0.15	0.15	5
Level 4	60	300.0	300.2	0.20	0.07	0.07	5
Level 5	80	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.32	5
	1.000	0.998	0.820	Criteria		5.00	10

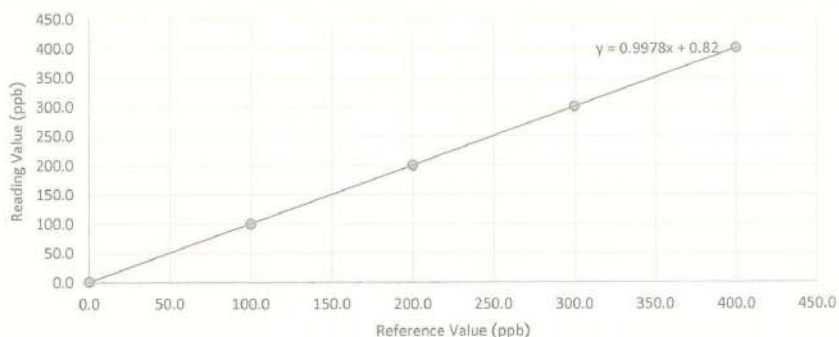

Calibrate by Aphiwat
Calibration Date 7/8/22

Approve by P. Pichon u.
Approved Date 8 Aug 2023

MULTI-POINT GAS TEST REPORT

Test Date : Mar 7, 2023

Equipment : Gas Analyzer (SO₂) Model : 43i
Manufacturer : Thermo SCIENTIFIC Serial Number : CM22387062

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8
Cylinder No. : EB0143262
Expiration Date : Jun 24, 2024


Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppb)	Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.2	0.20	0.20
Level 3	40.00%	200.0	200.8	0.80	0.40
Level 4	60.00%	300.0	300.7	0.70	0.23
Level 5	80.00%	400.0	400.0	0.00	0.00
Remark : Measuring Range	500.0 ppb		Average Difference (%)		0.17
	:Acceptable Limit $\pm 5\%$				

Multi-Point Gas Test Chart

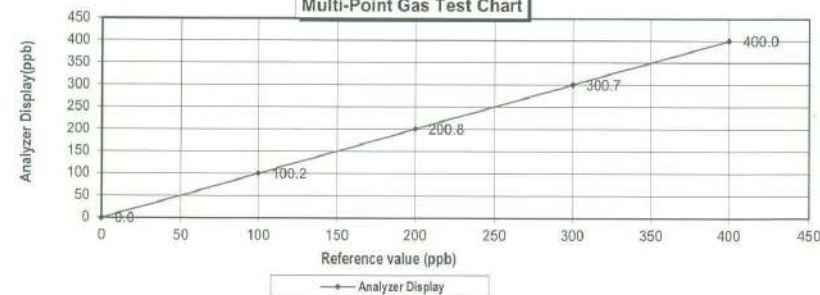

Calculate by

Aphiwat K.
7/8/22

Approve by

P. Pichon u.
7/8/22


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (SO ₂)	Model	43i
Manufacturer	Thermo Scientific	Serial Number	CM22387067

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

SO2 Multi-Point Calibration

Point	%	Ref. Value (ppb)	Read. SO ₂ (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	Zero	0.0	1.0	1.00	1.00	1.00	5
Level 2	20	100.0	100.4	0.40	0.40	0.40	5
Level 3	40	200.0	201.3	1.30	0.65	0.65	5
Level 4	60	300.0	301.7	1.70	0.57	0.57	5
Level 5	80	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.52	5
	1.000	0.999	1.020	Criteria		5.00	10

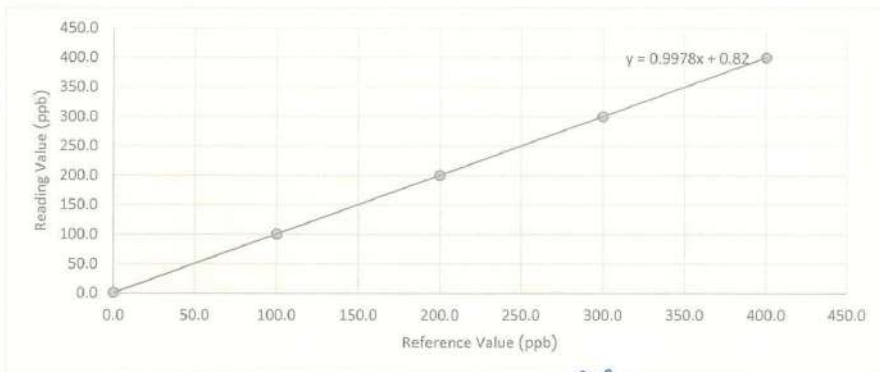

Calibrate by **Aphiwat**
Calibration Date **7/8/66**

Approve by **Pattanan N.**
Approved Date **8 Aug 2023**

เอกสารไม่ควบคุม


MULTI-POINT GAS TEST REPORT

Equipment	Gas Analyzer (SO ₂)	Model	43i
Manufacturer	Thermo Scientific	Serial Number	CM22387064

Std. gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	44.68	Manufacturer	Thermo Scientific
Nitric Oxide (NO)	45.94	Model	146i
Carbon Monoxide (CO)	984.8	Serial Number	1180540071
Cylinder No.	EB01432	Expiration Date	June 21, 2024

SO2 Multi-Point Calibration

Point	%	Ref. Value (ppb)	Read. SO ₂ (ppb)	Difference Error	Percent Error	[% Error]	Res. Time (min.)
Level 1	Zero	0.0	1.0	1.00	1.00	1.00	5
Level 2	20	100.0	100.2	0.20	0.20	0.20	5
Level 3	40	200.0	200.3	0.30	0.15	0.15	5
Level 4	60	300.0	300.7	0.70	0.23	0.23	5
Level 5	80	400.0	400.0	0.00	0.00	0.00	5
	R	Slope	Intercept	Average		0.32	5
	1.000	0.999	0.740	Criteria		5.00	10

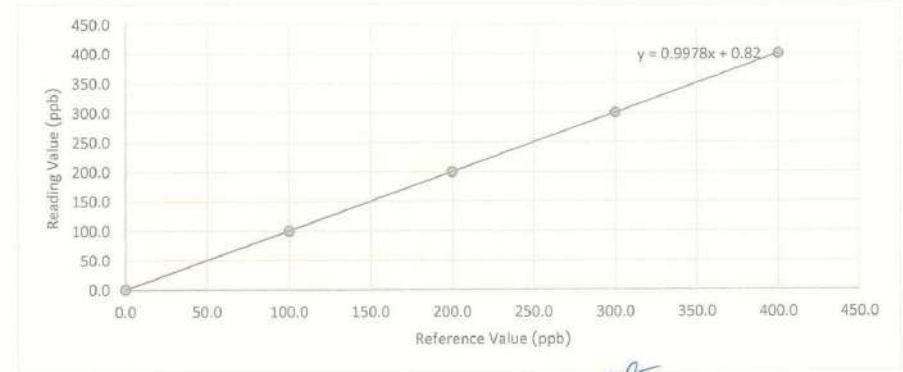

Calibrate by **Aphiwat**
Calibration Date **7/8/66**

Approve by **Pattanan N.**
Approved Date **8 Aug 2023**

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Feb 27,2023

Equipment : Gas Analyzer (SO₂) Model : 43i
Manufacturer : Thermo SCIENTIFIC Serial Number : 1200906876

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 24,2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	100.5	0.50	0.50	0.50
Level 3	40.00%	200.0	201.3	1.30	0.65	0.65
Level 4	60.00%	300.0	300.8	0.80	0.27	0.27
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.28

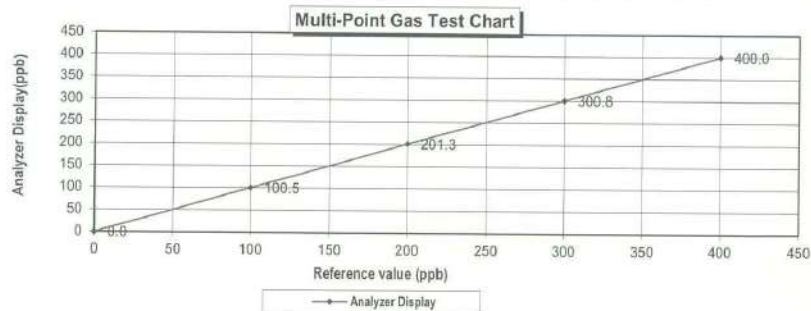

Calculate by

Sirichai Yomgarn
27/2/23

Approve by

Pak Norn U
27/ Feb, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Mar 7,2023

Equipment : Gas Analyzer (SO₂) Model : 43i
Manufacturer : Thermo SCIENTIFIC Serial Number : 1200906874

Standard Gas Concentration


Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 24,2024

Dilutor Detail

Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppb)			Analyzer Display (ppb)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.00	0.00	0.00
Level 2	20.00%	100.0	101.1	1.10	1.09	1.09
Level 3	40.00%	200.0	200.6	0.60	0.30	0.30
Level 4	60.00%	300.0	300.5	0.50	0.17	0.17
Level 5	80.00%	400.0	400.0	0.00	0.00	0.00
Remark : Measuring Range			500.0 ppb	Average Difference (%)		0.31

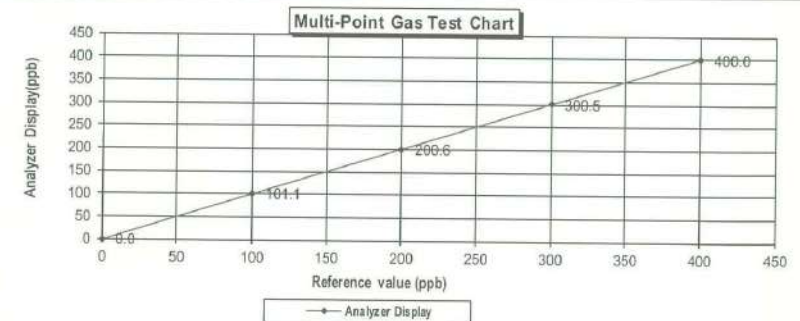

Calculate by

Sirichai Yomgarn
7/3/23

Approve by

Pak Norn U
7/ Mar, 2023

MULTI-POINT GAS TEST REPORT

Test Date : Nov 9, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : CM08140003

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024


Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.0	0.0	0.0
Level 2	20.00%	10.0	10.5	0.5	4.8	4.8
Level 3	40.00%	20.0	20.7	0.7	3.4	3.4
Level 4	60.00%	30.0	30.5	0.5	1.6	1.6
Level 5	80.00%	40.0	40.6	0.6	1.5	1.5
Remark : Measuring Range		50.0 ppm	Average Difference (%)			2.25

Multi-Point Gas Test Chart

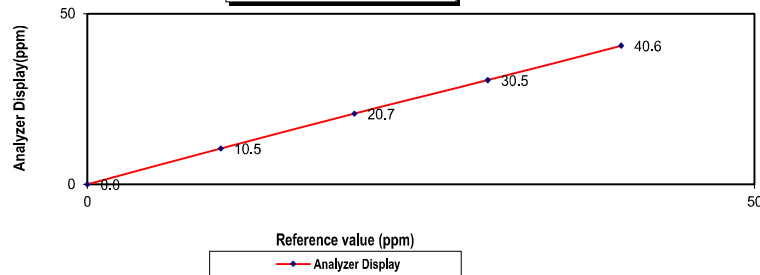

Calculate by

8 / 11 / 2023

Approve by

8 / Nov / 2023

CERTIFICATE OF ANALYSIS

Grade of Product: EPA Protocol

Part Number: E04N199E15A01D3 Reference Number: 122-402135167-1
Cylinder Number: EB0143262 Cylinder Volume: 144.4 CF
Laboratory: 124 - Durham (SAP) - NC Cylinder Pressure: 2015 PSIG
PGVP Number: B22021 Valve Outlet: 660
Gas Code: CO,NO,NOX,SO₂,BALN Certification Date: Jun 21, 2021

Expiration Date: Jun 21, 2024

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted.

Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS

Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	45.00 PPM	45.98 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
NITRIC OXIDE	45.00 PPM	45.94 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
SULFUR DIOXIDE	45.00 PPM	44.88 PPM	G1	+/- 1.0% NIST Traceable	06/14/2021, 06/21/2021
CARBON MONOXIDE	1000 PPM	984.8 PPM	G1	+/- 0.7% NIST Traceable	06/14/2021
NITROGEN	Balance				

CALIBRATION STANDARDS

Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	20061120	CC708068	49.82 PPM NITRIC OXIDE/NITROGEN	+/- 1.0%	Feb 02, 2025
PRM	12386	D685025	9.91 PPM NITROGEN DIOXIDE/AIR	+/- 2.0%	Feb 20, 2020
GMIS	401423838102	CC505581	4.348 PPM NITROGEN DIOXIDE/NITROGEN	+/- 2.1	Feb 18, 2023
NTRM	16011043	CC473277	49.02 PPM SULFUR DIOXIDE/NITROGEN	+/- 0.8%	Jun 17, 2022
NTRM	14080119	CC434277	990.9 PPM CARBON MONOXIDE/NITROGEN	+/- 0.6%	Nov 15, 2025

The SRM, PRM or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT

Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Nicolet 6700 AHR0801333 CO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO2	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 SO2	FTIR	Jun 03, 2021

Triad Data Available Upon Request

NOTES: PO #5221002807

GROSS WT: 28.40kg

NET WT: 4.73kg



The analytical test results reported on this certificate relate only to the cylinder number specified above. This concludes the test report.

Approved for Release



CERT 3082.01

เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : Mar 14, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : 1180540069

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024

Dilutor Detail


Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppm)		Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.0	0.0	0.0	0.0
Level 2	20.00%	10.0	10.7	0.7	6.5	6.5
Level 3	40.00%	20.0	20.5	0.5	2.4	2.4
Level 4	60.00%	30.0	30.8	0.8	2.6	2.6
Level 5	80.00%	40.0	40.0	0.0	0.0	0.0
Remark : Measuring Range 50.0 ppm				Average Difference (%)		2.32

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

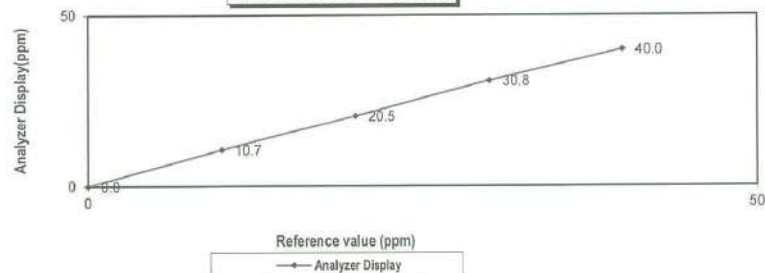

Calculate by

Achirawat

14 / 03 / 2023

Approve by

Phakorn W

14 / Mar / 2023

MULTI-POINT GAS TEST REPORT

Test Date : Dec 8, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : 1180540068

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024

Dilutor Detail


Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

	Reference Value (ppm)		Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.7	0.7	0.7	0.7
Level 2	20.00%	10.0	10.8	0.8	7.4	7.4
Level 3	40.00%	20.0	20.7	0.7	3.4	3.4
Level 4	60.00%	30.0	30.6	0.6	2.0	2.0
Level 5	80.00%	40.0	40.0	0.0	0.0	0.0
Remark : Measuring Range 50.0 ppm				Average Difference (%)		2.69

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

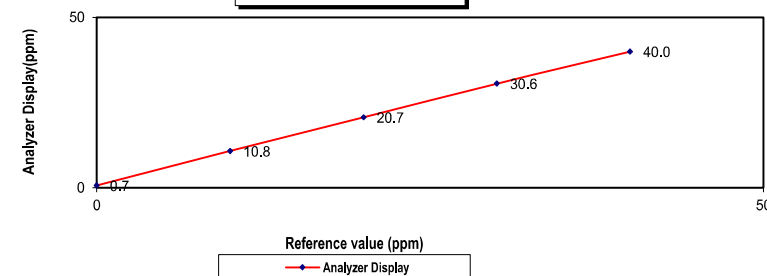

Calculate by

Prachai C

8 / 12 / 2023

Approve by

Phakorn W

8 / Dec / 2023

MULTI-POINT GAS TEST REPORT

Test Date : Nov 13, 2023

Equipment : Gas Analyzer (CO) Model : 48i
Manufacturer : Thermo Scientific Serial Number : CM08140004

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024


Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.8	0.8	0.8	0.8
Level 2	20.00%	10.0	10.7	0.7	6.5	6.5
Level 3	40.00%	20.0	20.9	0.9	4.3	4.3
Level 4	60.00%	30.0	30.7	0.7	2.3	2.3
Level 5	80.00%	40.0	40.0	0.0	0.0	0.0
Remark : Measuring Range		50.0 ppm	Average Difference (%)			2.79

Multi-Point Gas Test Chart

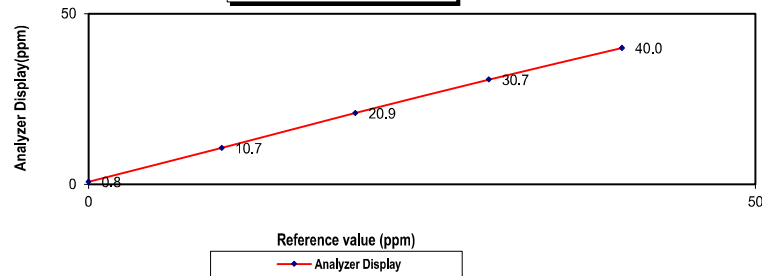

Calculate by

13 / 11 / 2023

Approve by

13 / Nov / 2023

MULTI-POINT GAS TEST REPORT

Test Date : Dec 8, 2023

Equipment : Gas Analyzer (CO) Model : APMA-370
Manufacturer : HORIBA Serial Number : YRLHTB7G

Standard Gas Concentration

Sulphur Dioxide (SO₂) 44.68 PPM
Nitric Oxide (NO) 45.94 PPM
Methane (CH₄) - PPM
Carbon Monoxide (CO) 984.8 PPM
Cylinder No. : EB0143262
Expiration Date : Jun 20, 2024


Dilutor Detail

Manufacturer : Thermo Scientific
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.0	0.6	0.6	0.6	0.6
Level 2	20.00%	10.0	10.7	0.7	6.5	6.5
Level 3	40.00%	20.0	20.9	0.9	4.3	4.3
Level 4	60.00%	30.0	30.6	0.6	2.0	2.0
Level 5	80.00%	40.0	40.0	0.0	0.0	0.0
Remark : Measuring Range		50.0 ppm	Average Difference (%)			2.68

Multi-Point Gas Test Chart

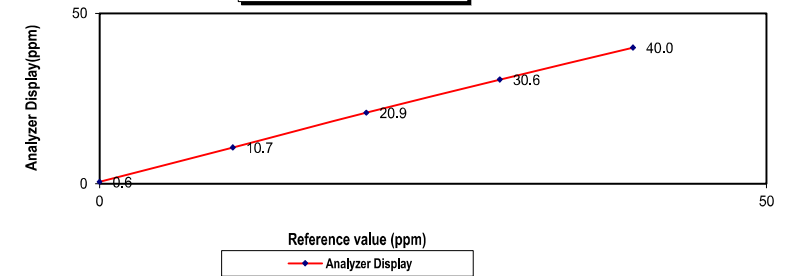

Calculate by

8 / 12 / 2023

Approve by

8 / Dec / 2023



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

Calibration Certificate

Issued by : Calibration & Test Section : Meteorological Instruments Bureau

Date of Issue : 10 April, 2023

Certification No. 178/23

Page : 1 of 5

Object : WIRELESS ANEMOMETER

Manufacturer : SCARLET

Type : WIRELESS RECEIVER : WL-21

WIND SENSOR : WL-21

Mfg Code : WIRELESS RECEIVER : 2111DR0052

WIND SENSOR : 2111DT0052

Customer : United Analyst and Engineering Consultant Co., Ltd.

81 Soi Udomsuk 41, Sukhumvit Road,

Bangchak, Prakanong, Bangkok 10260.

Calibration Condition : Temperature 25.1 °C Barometric Pressure 1006.9 hPa

NATIONAL STANDARD WIND TUNNEL : Thermal Anemometer 642 S/N 91563

: HOOK GAGE NO 1425 : Wind Aloft Plotting Board

N.I.S.T. Test Reference Number 731/241460

: Ultrasonic Anemometer Model DA-650-3TV (sensor TR-90AH)

Serial Number 110730029 (sensor 120629586)

JAPAN QUALITY ASSURANCE ORGANIZATION

STANDARD THERMOMETER : Theodor Friedrich : Dry No. 8390/94 Wet No. 8389/94

: testo, testo 645 Serial No. 02848057 : Thermoschneider No. 918802

STANDARD BAROMETER : Digital Barometer Vaisala Type PTB220 No. V1220015

: Digital Barometer Vaisala Type PTB330 No. K1320001

Calibrated by :

Handwritten signature

Signed :

Mr. Pisood Promsut

(Authorized Signatory)

for the Chief

Sub-Standard Instrument

Mr. Watcharapol Subwat

Mechanical Engineer

Airgas
an Air Liquide company

Airgas Specialty Gases
Airgas USA, LLC
630 United Drive
Durham, NC 27713
Airgas.com

CERTIFICATE OF ANALYSIS

Grade of Product: EPA Protocol

Part Number: E04NI99E15A01D3 Reference Number: 122-402135167-1
Cylinder Number: EB0143262 Cylinder Volume: 144.4 CF
Laboratory: 124 - Durham (SAP) - NC Cylinder Pressure: 2015 PSIG
PGVP Number: B22021 Valve Outlet: 660
Gas Code: CO,NO,NOX,SO2,BALN Certification Date: Jun 21, 2021

Expiration Date: Jun 21, 2024

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted.

Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS					
Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	45.00 PPM	45.98 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
NITRIC OXIDE	45.00 PPM	45.94 PPM	G1	+/- 1.4% NIST Traceable	06/14/2021, 06/21/2021
SULFUR DIOXIDE	45.00 PPM	44.88 PPM	G1	+/- 1.0% NIST Traceable	06/14/2021, 06/21/2021
CARBON MONOXIDE	1000 PPM	984.8 PPM	G1	+/- 0.7% NIST Traceable	06/14/2021
NITROGEN	Balance				

CALIBRATION STANDARDS					
Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	20061120	CC708068	49.82 PPM NITRIC OXIDE/NITROGEN	+/- 1.0%	Feb 02, 2025
PRM	12386	D685025	9.91 PPM NITROGEN DIOXIDE/AIR	+/- 2.0%	Feb 20, 2020
GMIS	401423838102	CC505581	4.348 PPM NITROGEN DIOXIDE/NITROGEN	+/- 2.1	Feb 18, 2023
NTRM	16011043	CC473277	49.02 PPM SULFUR DIOXIDE/NITROGEN	+/- 0.8%	Jun 17, 2022
NTRM	14080119	CC434277	990.9 PPM CARBON MONOXIDE/NITROGEN	+/- 0.6%	Nov 15, 2025

The SRM, PRM or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT		
Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Nicolet 6700 AHR0801333 CO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 NO2	FTIR	Jun 03, 2021
Nicolet 6700 AHR0801333 SO2	FTIR	Jun 03, 2021

Triad Data Available Upon Request

NOTES: PO #5221002807

GROSS WT: 28.40kg

NET WT: 4.73kg



The analytical test results reported on this certificate relate only to the cylinder number specified above. This concludes the test report.

Handwritten signature

Approved for Release



CERT 3082.01

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 3 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
1013.17	1013	0.17
1013.43	1014	-0.57
1014.15	1014	0.15
1014.22	1014	0.22
1009.63	1009	0.63
1009.71	1010	-0.29
1009.95	1010	-0.05
1010.31	1010	0.31
1010.72	1011	-0.28
1010.80	1011	-0.20
1011.47	1011	0.47
1011.21	1011	0.21
1011.33	1011	0.33
1011.59	1012	-0.41
1011.89	1012	-0.11
1012.40	1012	0.40
1008.64	1009	-0.36
1008.80	1009	-0.20
1009.25	1009	0.25
1009.45	1009	0.45

Average

0.06

Calibrated by:

Watcharapol Subwat

Mr. Watcharapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 2 of 5

Standard	HOOK GAGE NO. 1425			TESTED ANEMOMETER	
	Pressure	Vacuum	Velocity	Velocity	Correction
	m/sec	inches H2O	inches H2O	m/sec	m/sec
1.00	-	-	-	1.0	0.00
3.02	-	-	-	3.0	0.02
5.00	-	-	-	5.0	0.00
7.04	-	-	-	7.0	0.04
9.02	-	-	-	9.0	0.02
11.02	-	-	-	10.9	0.12
13.01	-	-	-	13.1	-0.09
15.01	-	-	-	15.0	0.01
17.02	-	-	-	17.0	0.02
20.02	-	-	-	20.1	-0.08

Wind Aloft Plotting Board.	
U.S. DEPARTMENT OF COMMERCE WEATHER BUREAU	
WIND DIRECTION	TESTED WIND DIRECTION
0	0
90	90
180	180
270	270

Calibrated by:

Watcharapol Subwat

Mr. Watcharapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 5 of 5

Standard Temp. °C	Temperature Sensor Reading	
	Reading	Correction
	°C	°C
45.15	45.3	-0.15
31.05	31.1	-0.05
15.32	15.5	-0.18

Calibrated by :

Watcharapol

Mr. Watcharapol Subwat

Mechanical Engineer



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 178/23

10 April, 2023

Page : 4 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
759.94	760	-0.06
760.13	760	0.13
760.67	761	-0.33
760.73	761	-0.27
757.28	757	0.28
757.34	757	0.34
757.52	758	-0.48
757.79	758	-0.21
758.10	758	0.10
758.16	758	0.16
758.66	759	-0.34
758.47	758	0.47
758.56	758	0.56
758.75	759	-0.25
758.98	759	-0.02
759.36	759	0.36
756.54	757	-0.46
756.66	757	-0.34
757.00	757	0.00
757.15	757	0.15

Average

0.04

Calibrated by :

Watcharapol

Mr. Watcharapol Subwat

Mechanical Engineer



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

Calibration Certificate

Issued by : Calibration & Test Section : Meteorological Instruments Bureau

Date of Issue : 10 April, 2023

Certification No. 177/23

Page : 1 of 5

Object : WIRELESS ANEMOMETER

Manufacturer : SCARLET

Type : WIRELESS RECEIVER : WL-21

WIND SENSOR : WL-21

Mfg Code : WIRELESS RECEIVER : 2112DR0065

WIND SENSOR : 2112DT0065

Customer : United Analyst and Engineering Consultant Co.,Ltd.

81 Soi Udomsuk 41, Sukhumvit Road,

Bangchak, Prakanong, Bangkok 10260.

Calibration Condition : Temperature 25.1 °C Barometric Pressure 1007.2 hPa

NATIONAL STANDARD WIND TUNNEL : Thermal Anemometer 642 S/N 91563

: HOOK GAGE NO 1425 : Wind Aloft Plotting Board

N.I.S.T. Test Reference Number 731/241460

: Ultrasonic Anemometer Model DA-650-3TV (sensor TR-90AH)

Serial Number 110730029 (sensor 120629586)

JAPAN QUALITY ASSURANCE ORGANIZATION

STANDARD THERMOMETER : Theodor Friedrich : Dry No.8390/94 Wet No. 8389/94

: testo, testo 645 Serial No. 02848057 : Thermoschneider No.918802

STANDARD BAROMETER : Digital Barometer Vaisala Type PTB220 No. V1220015

: Digital Barometer Vaisala Type PTB330 No. K4320001

Calibrated by :

Handwritten signature

Signed :

Handwritten signature

Mr. Watcharapol Subwat

Mr. Pisoot Promsut

Mechanical Engineer

(Authorised Signatory)

for the Chief

Sub-Standard Instrument

เอกสารไม่ควบคุม



SCARLET | TECH

Certificate of Calibration

WL-21 Wireless Anemometer

Scarlet Tech Ltd. hereby certifies that the WL-21 wireless anemometer listed below was thoroughly calibrated, tested and inspected following the standard calibration procedure (st-wl-21) and is within manufacturer's specification at the time when the calibration is done.

Client: Envir Service Co., Ltd.

Serial No.: 2111DT0058

Calibration Date: 2022/3/25

Calibration Expiry Date: 2023/3/24

The Result of Calibration

Velocity				
Measured Value (m/s)	Actual Value (m/s)	Deviation	Tolerance	Result
1.0	1.0	0.0	0.9 - 1.1	Pass
2.0	1.9	0.1	1.8 - 2.2	Pass
5.0	5.0	0.0	4.7 - 5.3	Pass
7.0	7.2	0.2	6.0 - 8.0	Pass
10.0	9.8	0.2	9.5 - 10.5	Pass
20.0	20.0	0	19.0 - 21.0	Pass

Wind Direction				
Measured Value	Actual Value	Deviation	Tolerance	Result
45°	47	2	42 - 48	Pass
135°	135	0	132 - 138	Pass
225°	224	1	222 - 228	Pass
315°	315	0	312 - 318	Pass
0°	359	1	357 - 3	Pass

Inspection Room Temp	Actual Value	Deviation	Tolerance	Result
24.2°C	24.5	0.3	23.2-25.2	Pass

Atmospheric Pressure Inspection	Actual Value	Deviation	Tolerance	Result
998	1000	2	994-1002	Pass

Environment conditions :

Air temperature: 22 °C

Relative humidity: 62 %

Static pressure: 102.2 kPa

Performed by:

Jim Lim

Certified by
Head of Engineering department

This certificate may not be published or reproduced, except in full, unless obtaining permission in writing form from Scarlet Tech Ltd.
4F-3, No. 347, 2nd Sec., Heping E. Rd., Daan Dist. Taipei City 106, Taiwan

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

The Result of Calibration

Certification No. 177/23

10 April, 2023

Page : 3 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
1013.17	1013	0.17
1013.43	1014	-0.57
1014.15	1014	0.15
1014.22	1014	0.22
1009.63	1010	-0.37
1009.71	1010	-0.29
1009.95	1010	-0.05
1010.31	1010	0.31
1010.72	1011	-0.28
1010.80	1011	-0.20
1011.47	1011	0.47
1011.21	1011	0.21
1011.33	1011	0.33
1011.59	1011	0.59
1011.89	1012	-0.11
1012.40	1012	0.40
1008.64	1009	-0.36
1008.80	1009	-0.20
1009.25	1009	0.25
1009.45	1010	-0.55

Average

0.01

Calibrated by :

Watchapol

Mr. Watchapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

The Result of Calibration

Certification No. 177/23

10 April, 2023

Page : 2 of 5

Standard	HOOK GAGE NO. 1425			TESTED ANEMOMETER	
	Pressure	Vacuum	Velocity	Velocity	Correction
m/sec	inches H2O	inches H2O	m/sec	m/sec	m/sec
1.00	-	-	-	1.0	0.00
3.02	-	-	-	3.0	0.02
5.00	-	-	-	4.9	0.10
7.04	-	-	-	6.9	0.14
9.02	-	-	-	9.0	0.02
11.02	-	-	-	11.0	0.02
13.01	-	-	-	13.1	-0.09
15.01	-	-	-	15.0	0.01
17.02	-	-	-	17.0	0.02
20.02	-	-	-	20.0	0.02

Wind Aloft Plotting Board.

U.S. DEPARTMENT OF COMMERCE WEATHER BUREAU

WIND DIRECTION	TESTED WIND DIRECTION
0	0
90	90
180	180
270	270

Calibrated by :

Watchapol

Mr. Watchapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau

เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

The Result of Calibration

Certification No. 177/23

10 April, 2023

Page : 4 of 5

Standard Barometer	Tested Barometer	Correction
Pressure	Pressure	
759.94	760	-0.06
760.13	760	0.13
760.67	761	-0.33
760.73	761	-0.27
757.28	757	0.28
757.34	757	0.34
757.52	758	-0.48
757.79	758	-0.21
758.10	758	0.10
758.16	758	0.16
758.66	759	-0.34
758.47	759	-0.53
758.56	759	-0.44
758.75	759	-0.25
758.98	759	-0.02
759.36	759	0.36
756.54	756	0.54
756.66	757	-0.34
757.00	757	0.00
757.15	757	0.15

Average

0.06

Calibrated by :

Watcharapol

Mr. Watcharapol Subwat

Mechanical Engineer

Calibration & Test Section
Meteorological Instruments Bureau



เอกสารไม่ควบคุม



THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804, 0-2399-0469

The Result of Calibration

Certification No. 177/23

10 April, 2023

Page : 5 of 5

Standard Temp. °C	Temperature Sensor Reading	
	Reading °C	Correction °C
45.15	45.2	-0.05
31.05	31.0	0.05
15.32	15.4	-0.08

Calibrated by :

Watcharapol

Mr. Watcharapol Subwat

Mechanical Engineer



เอกสารไม่ควบคุม

MULTI-POINT GAS TEST REPORT

Test Date : June 2, 2021

Equipment : Hydrocarbon Analyzer Model : APHA-370
Manufacturer : HORIBA Serial Number : RTHK2PDH

Standard Gas Concentration

Sulphur Dioxide (SO₂) - PPM
Nitric Oxide (NO) - PPM
Methane (CH₄) 39.8 PPM
Carbon Monoxide (CO) - PPM
Cylinder No. : D824432
Expiration Date : Aug 4, 2028

Dilutor Detail


Manufacturer :
Model :
Serial Number :

Multi-point gas test data

Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1 Zero 0.00	1.58	1.58	1.58	1.58
Level 2 80.00%	38.71	-1.29	-3.33	3.33
Remark : Measuring Range 50.00 ppm		Average Difference (%)		2.46

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

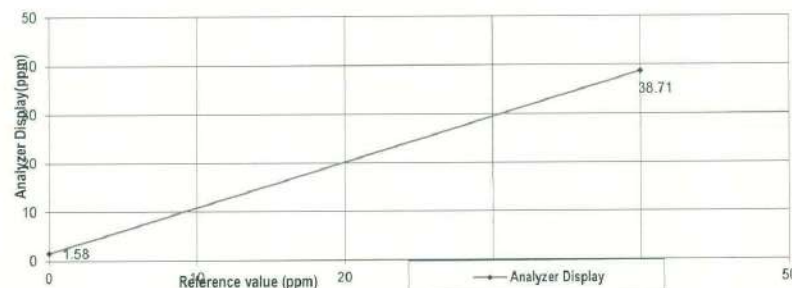

Calculate by

Smichai Y.
2, June, 2021

Approve by

Patiratt u.
2, June, 2021

MULTI-POINT GAS TEST REPORT

Test Date : Jan 22, 2020

Equipment : Hydrocarbon Analyzer Model : APHA-370
Manufacturer : HORIBA Serial Number : 93JN1MN9

Standard Gas Concentration

Sulphur Dioxide (SO₂) 45.23 PPM
Nitric Oxide (NO) 45.55 PPM
Methane (CH₄) 504.6 PPM
Carbon Monoxide (CO) 5003 PPM
Cylinder No. : CC112620
Expiration Date : Jun 15, 2020

Dilutor Detail


Manufacturer : Thermo SCIENTIFIC
Model : 146i
Serial Number : 1180540071

Multi-point gas test data

Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1 Zero 0.00	0.40	0.40	0.40	0.40
Level 2 20.00%	2.50	0.50	20.00	20.00
Level 3 40.00%	4.60	0.60	13.04	13.04
Level 4 60.00%	6.50	0.50	7.69	7.69
Level 5 80.00%	8.40	0.40	4.76	4.76
Remark : Measuring Range 10.00 ppm		Average Difference (%)		9.18

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

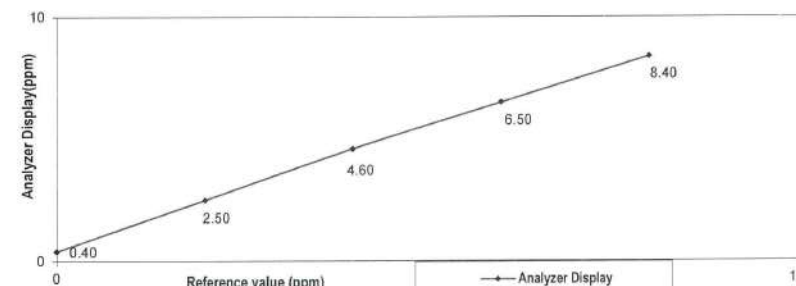

Calculate by

Smichai Y.
22, 01, 69

Approve by

Patiratt u.
22, Jan, 2020

MULTI-POINT GAS TEST REPORT

Test Date : Dec 15, 2023

Equipment : Hydrocarbon Analyzer

Model : APHA-370

Manufacturer : HORIBA

Serial Number : RTHK2PDH

Standard Gas Concentration

Sulphur Dioxide (SO ₂)	-	PPM
Nitric Oxide (NO)	-	PPM
Methane (CH ₄)	39.8	PPM
Carbon Monoxide (CO)	-	PPM
Cylinder No. :	D824432	
Expiration Date :	Aug 4, 2028	

Dilutor Detail


Manufacturer :	
Model :	
Serial Number :	

Multi-point gas test data

Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1 Zero 0.00	0.30	0.30	0.30	0.30
Level 2 80.00% 40.00	39.20	-0.80	-2.04	2.04
Remark : Measuring Range 50.00 ppm		Average Difference (%)		1.17

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

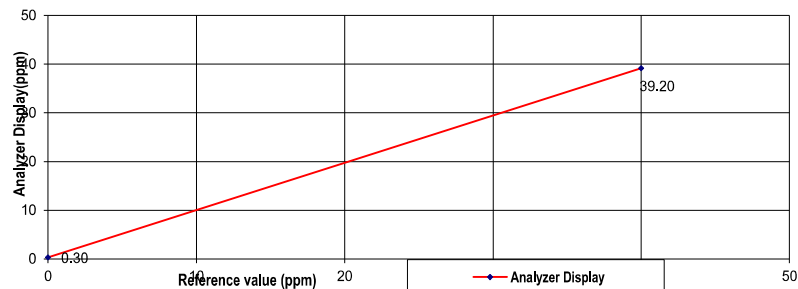

Calculate by

.....
...15...../.....12...../.....2023.

Approve by

.....
...15...../.....Dec...../.....2023.

MULTI-POINT GAS TEST REPORT

Test Date : Dec 15, 2023

Equipment : Hydrocarbon Analyzer

Model : APHA-370

Manufacturer : HORIBA

Serial Number : HAMEHU5M

Standard Gas Concentration

Sulphur Dioxide (SO ₂)	-	PPM
Nitric Oxide (NO)	-	PPM
Methane (CH ₄)	39.8	PPM
Carbon Monoxide (CO)	-	PPM
Cylinder No. :	D824432	
Expiration Date :	Aug 4, 2028	

Dilutor Detail


Manufacturer :	
Model :	
Serial Number :	

Multi-point gas test data

Reference Value (ppm)	Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1 Zero 0.00	0.30	0.30	0.30	0.30
Level 2 80.00% 40.00	39.50	-0.50	-1.27	1.27
Remark : Measuring Range 50.00 ppm		Average Difference (%)		0.78

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

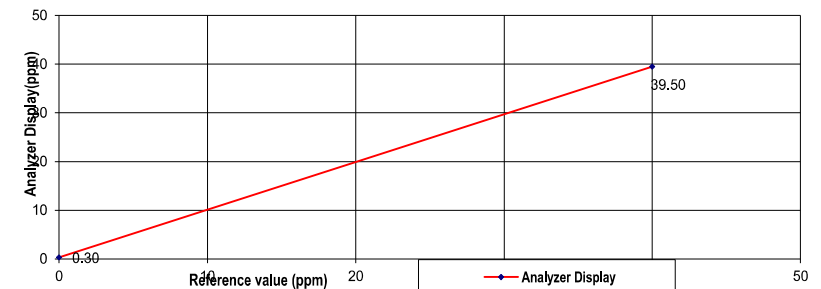

Calculate by

.....
...15...../.....12...../.....2023.

Approve by

.....
...15...../.....Dec...../.....2023.

MULTI-POINT GAS TEST REPORT

Test Date : Dec 21, 2023

Equipment : Hydrocarbon Analyzer Model : APHA-370
Manufacturer : HORIBA Serial Number : KWWV1R96


Standard Gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	-	PPM	Manufacturer :
Nitric Oxide (NO)	-	PPM	Model :
Methane (CH ₄)	39.8	PPM	Serial Number :
Carbon Monoxide (CO)	-	PPM	
Cylinder No. :	D824432		
Expiration Date :	Aug 4, 2028		

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	0.40	0.40	0.40	0.40
Level 2	80.00%	40.00	39.40	-0.60	-1.52	1.52
Remark : Measuring Range 50.00 ppm			Average Difference (%)			0.96

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

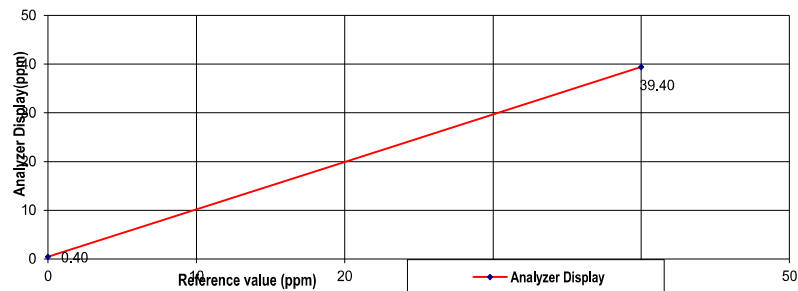

Calculate by

Signature

21/12/2023

Approve by

Signature

22/Dec/2023

MULTI-POINT GAS TEST REPORT

Test Date : Dec 15, 2023

Equipment : Hydrocarbon Analyzer Model : APHA-370
Manufacturer : HORIBA Serial Number : 93JN1MN9


Standard Gas Concentration		Dilutor Detail	
Sulphur Dioxide (SO ₂)	-	PPM	Manufacturer :
Nitric Oxide (NO)	-	PPM	Model :
Methane (CH ₄)	39.8	PPM	Serial Number :
Carbon Monoxide (CO)	-	PPM	
Cylinder No. :	D824432		
Expiration Date :	Aug 4, 2028		

Multi-point gas test data

Reference Value (ppm)			Analyzer Display (ppm)	Difference Error	Percent Error	[% Error]
Level 1	Zero	0.00	0.35	0.35	0.35	0.35
Level 2	80.00%	40.00	39.50	-0.50	-1.27	1.27
Remark : Measuring Range 50.00 ppm			Average Difference (%)			0.81

:Acceptable Limit $\pm 5\%$

Multi-Point Gas Test Chart

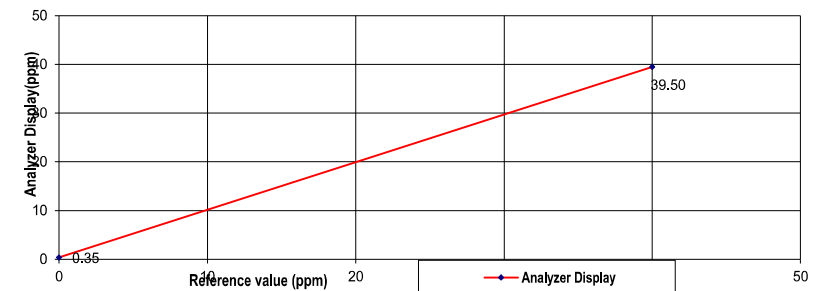

Calculate by

Signature

15/12/2023

Approve by

Signature

16/Dec/2023



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11229/UM11229
CLID. NO. : 251701314
JOB CONTROL NO. : 231019117022

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 19 October 2023

DATE OF ISSUED : 25 October 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Suwit Phuanbusabong
Calibration Engineer

Approved By :

Mongkol Yotsoontorn
Authorized Signatory
25 October 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23117022


F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration



Certificate Of Analysis Special Gases Mixture

Customer Details

Name: United Analyst & Engineering Co., Ltd. Address: 3 Soi Udomsuk 41, Sukhumvit Rd., Bang Chak, Khet Phra Khanong, Bangkok 10260 Customer Tag No.:

Certificate Details

Number: 3384/20 Date of Issue: 4-Aug-2020 Expiry date: 4-Aug-2028
Material Details
Production Order: 90161442 Material Code: 400400-AL-34 Cylinder No.: D824432
Gas content: 6.60 M³ Filling pressure: 137.0 bar Valve: CGA 590 BRASS
Cylinder Owner: LINDE Cylinder Material: Aluminum Cylinder Size: 50 L

Laboratory Report

Analytical Result

Component	Normal Concentration	Analysis Result ¹	Uncertainty ²	Method of Analysis ³	Assay Date
Methane In Air	40.0 ppm	39.8 ppm	± 1% relative	(6) I-PB-352	4-Aug-2020

Reference Standard used in Assay

Reference Standard	Cylinder number	Concentration	Expiry date
Methane In Nitrogen	2559995G	49.29 ± 0.39 ppm	4-Oct-2020

Analytical Instruments used in Assay

Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
FTIR Spectrometers Nicolet iS50	FTIR-CH4	4-Aug-2020

Recommend usage condition

Minimum utilization: 5% of actual content or before expiry date whichever comes first.
Storage condition: Keep in well ventilation and secure area.

Comments

When reordering, please quote the material number.

Note:

- All results expressed in this report are on mole/mole basis, unless otherwise specified. The Assay of this Standard has been performed in accordance with the EPA Traceability Protocol EPA-600/R-12/531 for the Assay and Certification of Gaseous Calibration Standards using procedure G1.
- The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%. The measurement of this material is traceable to the SI through the reference gas standard which is traceable to Swiss National Standard of Mass or other recognised national metrology institutes.
- (1) Gas Chromatography, (2) Paramagnetic Oxygen Analyzer, (3) Electrochemical Oxygen Analyzer, (4) Electrochemical Moisture Analyzer, (5) Total Hydrocarbon Analyzer, (6) Other - Specified

Sukanya Parinyasontorn
Signatory for and on behalf of Linde (Thailand) Co., Ltd.

PB-002/T006

Page 1 of 1

This report shall not be reproduced except in full

บริษัท ลินด์ (ประเทศไทย) จำกัด (มหาชน)
เลขที่ใบอนุญาต: 015557000000

ชั้น 15 อาคารทาวเวอร์ เอ 2/3 หมู่ 14 ถนนพหลโยธิน-บางนา กม. 6.5 แขวงคลอง
บางลำโพง เขตคลองเตย กรุงเทพฯ 10540 โทรศัพท์ (66) 2338-6100 โทรสาร (66) 2338-6333
ใบอนุญาตประกอบกิจการ : 105 หมู่ 5 แขวงคลองเตย เขตคลองเตย กรุงเทพฯ 10540
โทรศัพท์ (66) 38.570-479-93 โทรสาร (66) 38.570-323

Linde (Thailand) Public Company Limited 15th Floor, Bangna Tower A, 2/3 Moo 14, Bangna Trunk Rd. Km. 6.5 Road, Bangnae
Bangkok, Samutprakarn 10540, Tel. (66) 2338-6100 Fax (66) 2338-6333
Wellgrow Plant: 105 Moo 5, 1 Bangnamak, A Bangkok, Chachoengsao 24180
Thailand, Tel (66) 38.570-479-93 Fax (66) 38.570-323

เอกสารไม่ควบคุม



CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(g)	(frequency)		(g)	(g)	(g)	\pm (% of rdg.)
0.3	50 Hz	peak	0.300	0.306	-0.006	1.9
0.4	50 Hz		0.400	0.407	-0.007	1.9
0.5	50 Hz		0.500	0.508	-0.008	1.9
0.6	50 Hz		0.600	0.609	-0.009	1.9
0.7	50 Hz		0.700	0.709	-0.009	1.9
0.3	100 Hz	peak	0.300	0.302	-0.002	1.9
0.4	100 Hz		0.400	0.403	-0.003	1.9
0.5	100 Hz		0.500	0.504	-0.004	1.9
0.6	100 Hz		0.600	0.605	-0.005	1.9
0.7	100 Hz		0.700	0.706	-0.006	1.9

2. VELOCITY RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm/s)	(frequency)		(mm/s)	(mm/s)	(mm/s)	\pm (% of rdg.)
3	50 Hz	peak	3.000	3.023	-0.023	1.9
4	50 Hz		4.000	4.036	-0.036	1.9
5	50 Hz		5.000	5.044	-0.044	1.9
6	50 Hz		6.000	6.061	-0.061	1.9
7	50 Hz		7.000	7.076	-0.076	1.9
3	100 Hz	peak	3.000	3.029	-0.029	1.9
4	100 Hz		4.000	4.035	-0.035	1.9
5	100 Hz		5.000	5.042	-0.042	1.9
6	100 Hz		6.000	6.055	-0.055	1.9
7	100 Hz		7.000	7.068	-0.068	1.9

Certificate No. Q23117022

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11229/UM11229
DATE OF CALIBRATION : 20 October 2023

ENVIRONMENT CONDITIONS :

Temperature : $(23 \pm 2) ^\circ\text{C}$ Relative Humidity : $(55 \pm 15) \% \text{RH}$

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, Programmable Timer/Counter and Vibration Calibrator Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

- Vibration Calibrator, The Modal Shop Model 9110D S/N. 11424.
- Digital Multimeter, Hewlett Packard Model 34401A S/N. 3146A75935.
- Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.

TRACEABILITY :

- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0030-23, Due Date 26 June 2024.
- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. EE-0136-22, Due Date 11 November 2023.
- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0043/23, Due Date 12 April 2024.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2,00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23117022

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration

CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A3301
SERIAL NO. : UM11230/UM11230
CLID. NO. : 251701315
JOB CONTROL NO. : 231019117018

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 19 October 2023

DATE OF ISSUED : 25 October 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Suwit Phuanbusabong
Calibration Engineer

Approved By : Mongkol Yotsoontorn
Authorized Signatory
25 October 2023



CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
0.03	50 Hz	peak	0.030	0.030	0.000	2.7
0.04	50 Hz		0.040	0.040	0.000	2.4
0.05	50 Hz		0.050	0.050	0.000	2.2
0.06	50 Hz		0.060	0.061	-0.001	2.1
0.07	50 Hz		0.070	0.071	-0.001	2.1
0.03	100 Hz	peak	0.030	0.030	0.000	2.7
0.04	100 Hz		0.040	0.040	0.000	2.4
0.05	100 Hz		0.050	0.050	0.000	2.2
0.06	100 Hz		0.060	0.061	-0.001	2.1
0.07	100 Hz		0.070	0.071	-0.001	2.1

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 009 Page 1,2 of 59

This report is valid for the above stated instrument/s only.

End of Certificate

This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23117018

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration

Certificate No. Q23117022

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration



CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(g)	(frequency)		(g)	(g)	(g)	\pm (% of rdg.)
0.3	50 Hz	peak	0.300	0.302	-0.002	1.9
0.4	50 Hz		0.400	0.402	-0.002	1.9
0.5	50 Hz		0.500	0.503	-0.003	1.9
0.6	50 Hz		0.600	0.603	-0.003	1.9
0.7	50 Hz		0.700	0.704	-0.004	1.9
0.3	100 Hz	peak	0.300	0.303	-0.003	1.9
0.4	100 Hz		0.400	0.404	-0.004	1.9
0.5	100 Hz		0.500	0.504	-0.004	1.9
0.6	100 Hz		0.600	0.605	-0.005	1.9
0.7	100 Hz		0.700	0.706	-0.006	1.9

2. VELOCITY RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm/s)	(frequency)		(mm/s)	(mm/s)	(mm/s)	\pm (% of rdg.)
3	50 Hz	peak	3.000	3.033	-0.033	1.9
4	50 Hz		4.000	4.045	-0.045	1.9
5	50 Hz		5.000	5.057	-0.057	1.9
6	50 Hz		6.000	6.066	-0.066	1.9
7	50 Hz		7.000	7.081	-0.081	1.9
3	100 Hz	peak	3.000	3.039	-0.039	1.9
4	100 Hz		4.000	4.046	-0.046	1.9
5	100 Hz		5.000	5.055	-0.055	1.9
6	100 Hz		6.000	6.067	-0.067	1.9
7	100 Hz		7.000	7.079	-0.079	1.9

Certificate No. Q23117018

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A3301
SERIAL NO. : UM11230/UM11230
DATE OF CALIBRATION : 20 October 2023

ENVIRONMENT CONDITIONS :

Temperature : $(23 \pm 2) ^\circ\text{C}$ Relative Humidity : $(55 \pm 15) \% \text{RH}$

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, Programmable Timer/Counter and Vibration Calibrator Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

- Vibration Calibrator, The Modal Shop Model 9110D S/N. 11424.
- Digital Multimeter, Hewlett Packard Model 34401A S/N. 3146A75935.
- Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.

TRACEABILITY :

- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0030-23, Due Date 26 June 2024.
- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. EE-0136-22, Due Date 11 November 2023.
- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0043/23, Due Date 12 April 2024.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2,00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23117018

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11355/UM11355
CLID. NO. : 252000637
JOB CONTROL NO. : 230221019604

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 21 February 2023

DATE OF ISSUED : 24 February 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Suwit Phuanbusabong
Calibration Engineer

Approved By : Mongkol Yotsoontorn
Authorized Signatory
24 February 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23019604

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration

CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
0.03	50 Hz	peak	0.030	0.030	0.000	2.7
0.04	50 Hz		0.040	0.040	0.000	2.4
0.05	50 Hz		0.050	0.050	0.000	2.2
0.06	50 Hz		0.060	0.060	0.000	2.1
0.07	50 Hz		0.070	0.071	-0.001	2.1
0.03	100 Hz	peak	0.030	0.030	0.000	2.7
0.04	100 Hz		0.040	0.040	0.000	2.4
0.05	100 Hz		0.050	0.050	0.000	2.2
0.06	100 Hz		0.060	0.061	-0.001	2.1
0.07	100 Hz		0.070	0.071	-0.001	2.1

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 009 Page 1,2 of 59

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23117018

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration

CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(g)	(frequency)		(g)	(g)	(g)	± (% of rdg.)
0.3	50 Hz	peak	0.300	0.299	+0.001	1.9
0.4	50 Hz		0.400	0.398	+0.002	1.9
0.5	50 Hz		0.500	0.498	+0.002	1.3
0.6	50 Hz		0.600	0.597	+0.003	1.3
0.7	50 Hz		0.700	0.697	+0.003	1.3
0.3	100 Hz	peak	0.300	0.300	0.000	1.9
0.4	100 Hz		0.400	0.399	+0.001	1.9
0.5	100 Hz		0.500	0.499	+0.001	1.3
0.6	100 Hz		0.600	0.598	+0.002	1.3
0.7	100 Hz		0.700	0.698	+0.002	1.3

2. VELOCITY RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm/s)	(frequency)		(mm/s)	(mm/s)	(mm/s)	± (% of rdg.)
3	50 Hz	peak	3.000	3.010	-0.010	1.8
4	50 Hz		4.000	4.016	-0.016	1.8
5	50 Hz		5.000	5.019	-0.019	1.8
6	50 Hz		6.000	6.024	-0.024	1.8
7	50 Hz		7.000	7.031	-0.031	1.8
3	100 Hz	peak	3.000	3.009	-0.009	1.8
4	100 Hz		4.000	4.011	-0.011	1.8
5	100 Hz		5.000	5.017	-0.017	1.8
6	100 Hz		6.000	6.023	-0.023	1.8
7	100 Hz		7.000	7.028	-0.028	1.8

Certificate No. Q23019604

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2601/721A3301
SERIAL NO. : UM11355/UM11355
DATE OF CALIBRATION : 22 February 2023

ENVIRONMENT CONDITIONS :

Temperature : (23 ± 2) °C Relative Humidity : (55 ± 15) %RH

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, High Resolution Programmable Timer/Counter, Accelerometer and Measuring Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

- Digital Multimeter, Wavetek Model 1281 S/N. 29320.
- High Resolution Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.
- Accelerometer with Measuring Amplifier, Bruel & Kjaer Model 8305, 2525 S/N. 397018, 2434988.

TRACEABILITY :

- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 05-0207/21, Due Date 31 May 2023.
- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0001/22, Due Date 22 February 2023.
- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0009-22, Due Date 22 June 2023.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2.00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23019604

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration



CALIBRATION LABORATORY Co., LTD.

2/10-11, 14, 55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION LABORATORY Co., LTD.

2/10-11, 14, 55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A2901
SERIAL NO. : UM11356/UM11356
CLID. NO. : 251701398
JOB CONTROL NO. : 231019117017

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 19 October 2023

DATE OF ISSUED : 25 October 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Suwit Phuanbusabong
Calibration Engineer

Approved By : Mongkol Yotsoontorn
Authorized Signatory
25 October 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23019604

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration

CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
*0.03	50 Hz	peak	0.030	0.030	0.000	2.1
*0.04	50 Hz		0.040	0.040	0.000	1.7
*0.05	50 Hz		0.050	0.050	0.000	1.5
*0.06	50 Hz		0.060	0.060	0.000	1.3
*0.07	50 Hz		0.070	0.069	+0.001	1.2
0.03	100 Hz	peak	0.030	0.030	0.000	2.1
0.04	100 Hz		0.040	0.040	0.000	1.7
0.05	100 Hz		0.050	0.050	0.000	1.5
0.06	100 Hz		0.060	0.059	+0.001	1.3
0.07	100 Hz		0.070	0.069	+0.001	1.2

Note: * means Calibrations marked " Not ANAB Accredited " in this Certificate have been included for completeness.

The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 008 Page 1 of 58

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23019604

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading (g)	DUC Reading (g)	Correction (g)	Uncertainty ± (% of rdg.)
(g)	(frequency)					
0.3	50 Hz	peak	0.300	0.305	-0.005	1.9
0.4	50 Hz		0.400	0.406	-0.006	1.9
0.5	50 Hz		0.500	0.507	-0.007	1.9
0.6	50 Hz		0.600	0.608	-0.008	1.9
0.7	50 Hz		0.700	0.709	-0.009	1.9
0.3	100 Hz	peak	0.300	0.306	-0.006	1.9
0.4	100 Hz		0.400	0.407	-0.007	1.9
0.5	100 Hz		0.500	0.507	-0.007	1.9
0.6	100 Hz		0.600	0.608	-0.008	1.9
0.7	100 Hz		0.700	0.710	-0.010	1.9

2. VELOCITY RESULT

Test point		Mode	STD Reading (mm/s)	DUC Reading (mm/s)	Correction (mm/s)	Uncertainty ± (% of rdg.)
(mm/s)	(frequency)					
3	50 Hz	peak	3.000	3.048	-0.048	1.9
4	50 Hz		4.000	4.059	-0.059	1.9
5	50 Hz		5.000	5.067	-0.067	1.9
6	50 Hz		6.000	6.072	-0.072	1.9
7	50 Hz		7.000	7.091	-0.091	1.9
3	100 Hz	peak	3.000	3.049	-0.049	1.9
4	100 Hz		4.000	4.051	-0.051	1.9
5	100 Hz		5.000	5.069	-0.069	1.9
6	100 Hz		6.000	6.082	-0.082	1.9
7	100 Hz		7.000	7.098	-0.098	1.9

Certificate No. Q23117017

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A2901
SERIAL NO. : UM11356/UM11356
DATE OF CALIBRATION : 20 October 2023

ENVIRONMENT CONDITIONS :

Temperature : $(23 \pm 2) ^\circ\text{C}$ Relative Humidity : $(55 \pm 15) \% \text{RH}$

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, Programmable Timer/Counter and Vibration Calibrator Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

- Vibration Calibrator, The Modal Shop Model 9110D S/N. 11424.
- Digital Multimeter, Hewlett Packard Model 34401A S/N. 3146A75935.
- Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.

TRACEABILITY :

- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0030-23, Due Date 26 June 2024.
- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. EE-0136-22, Due Date 11 November 2023.
- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0043/23, Due Date 12 April 2024.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2,00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %.
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23117017

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CERTIFICATE OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER

MANUFACTURER : INSTANTEL

MODEL / TYPE : 721A2501/721A2901

SERIAL NO. : UM12393/UM12393

CLID. NO. : 251801351

JOB CONTROL NO. : 230221019601

CUSTOMER : UNITED ANALYST AND ENGINEERING CONSULTANT CO., LTD.
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK, PHRAKHANONG, BANGKOK 10260

DATE OF RECEIVED : 21 February 2023

DATE OF ISSUED : 24 February 2023

Report of calibration screening must not be taken in part. Except complete. Without the approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Suwit Phuanbusabong
Calibration Engineer

Approved By : Mongkol Yotsoontorn
Authorized Signatory
24 February 2023



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q23019601

F3-011-04/01-12

page 1 of 4

เอกสารไม่ควบคุม



@clccalibration

CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
0.03	50 Hz	peak	0.030	0.030	0.000	2.7
0.04	50 Hz		0.040	0.040	0.000	2.4
0.05	50 Hz		0.050	0.050	0.000	2.2
0.06	50 Hz		0.060	0.061	-0.001	2.1
0.07	50 Hz		0.070	0.071	-0.001	2.1
0.03	100 Hz	peak	0.030	0.030	0.000	2.7
0.04	100 Hz		0.040	0.040	0.000	2.4
0.05	100 Hz		0.050	0.050	0.000	2.2
0.06	100 Hz		0.060	0.061	-0.001	2.1
0.07	100 Hz		0.070	0.071	-0.001	2.1

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 009 Page 1,2 of 59

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23117017

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration

CONDITION OF CALIBRATION ITEM : GOOD

MEASUREMENT RESULTS : (X) without adjustment () adjustment

CALIBRATION DATA

1. ACCELERATION RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(g)	(frequency)		(g)	(g)	(g)	± (% of rdg.)
0.3	50 Hz	peak	0.300	0.305	-0.005	1.9
0.4	50 Hz		0.400	0.408	-0.008	1.9
0.5	50 Hz		0.500	0.511	-0.011	1.3
0.6	50 Hz		0.600	0.618	-0.018	1.3
0.7	50 Hz		0.700	0.721	-0.021	1.3
0.3	100 Hz	peak	0.300	0.304	-0.004	1.9
0.4	100 Hz		0.400	0.407	-0.007	1.9
0.5	100 Hz		0.500	0.509	-0.009	1.3
0.6	100 Hz		0.600	0.613	-0.013	1.3
0.7	100 Hz		0.700	0.719	-0.019	1.3

2. VELOCITY RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm/s)	(frequency)		(mm/s)	(mm/s)	(mm/s)	± (% of rdg.)
3	50 Hz	peak	3.000	3.041	-0.041	1.8
4	50 Hz		4.000	4.055	-0.055	1.8
5	50 Hz		5.000	5.067	-0.067	1.8
6	50 Hz		6.000	6.079	-0.079	1.8
7	50 Hz		7.000	7.089	-0.089	1.8
3	100 Hz	peak	3.000	3.039	-0.039	1.8
4	100 Hz		4.000	4.048	-0.048	1.8
5	100 Hz		5.000	5.055	-0.055	1.8
6	100 Hz		6.000	6.068	-0.068	1.8
7	100 Hz		7.000	7.080	-0.080	1.8

Certificate No. Q23019601

F3-011-04/01-12

page 3 of 4

เอกสารไม่ควบคุม



@clccalibration

REPORT OF CALIBRATION

FOR

NOMENCLATURE : VIBRATION METER
MANUFACTURER : INSTANTEL
MODEL / TYPE : 721A2501/721A2901
SERIAL NO. : UM12393/UM12393
DATE OF CALIBRATION : 22 February 2023

ENVIRONMENT CONDITIONS :

Temperature : (23 ± 2) °C Relative Humidity : (55 ± 15) %RH

PROCEDURE USED :

This instrument was calibrated under procedure No. CLC-CPEE-08 based on ISO 16063-21 as calibration guideline.
The calibration was performed by using Digital Multimeter, High Resolution Programmable Timer/Counter, Accelerometer and Measuring Amplifier which maintained by the Calibration Laboratory Co., Ltd.

REFERENCE STANDARD USED :

- Digital Multimeter, Wavetek Model 1281 S/N. 29320.
- High Resolution Programmable Timer/Counter, Philips Model PM6680B S/N. SM607101.
- Accelerometer with Measuring Amplifier, Bruel & Kjaer Model 8305, 2525 S/N. 397018, 2434988.

TRACEABILITY :

- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 05-0207/21, Due Date 31 May 2023.
- The measurements are traceable to International System of Units (SI), through Aeronautical Radio of Thailand Ltd. Certificate No. 07-0001/22, Due Date 22 February 2023.
- The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand) Certificate No. AV-0009-22, Due Date 22 June 2023.

UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2.00$ which for a normal distribution corresponds to a coverage probability of approximately 95 %. It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q23019601

F3-011-04/01-12

page 2 of 4

เอกสารไม่ควบคุม



@clccalibration



Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING
CONSULTANT CO.,LTD.
Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak,
Prakanong, Bangkok 10260

Certificate No : 23-ACT-118

Request No : Req-2023-1547

Unit Under Calibration Details

Measurement item : Acoustic Calibrator
Manufacturer : LARSON DAVIS
Model : CAL150
Serial Number : 6171
ID : UAE.EFM.117/2562

Class : 2
Range : 94 , 114 dB / 1000 Hz
Instrument Status : Used

Calibration Environment and Details

Temperature : (23 ±2 °C)
Humidity : (50 ± 20 %RH)
Barometric Pressure : (1013 ±10.0 hPa)
Received Date : 21 July 2023
Calibration Date : 4 August 2023
Location of Calibration : LAB 1 Acoustic
Calibration Procedure : In-house method CP-ACT-02 based on IEC 60942:2017 Electroacoustics - Sound calibrators

Reference Standard	Model	Serial Number	Traceable	Due Calibration
Sound Calibrator	SV 35A	58079	EEI	31 May 2024
THD Multimeter	2015	1047765	NIMT	31 January 2024

Traceability : This certificate provides traceability of measurement to recognized national standard, and to the realization of the international System of Units (SI).

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor k=2, providing a level of confidence approximately 95 %.

Calibrated By : me
Mr. Noppadon Luangart
Service Calibration Engineer

Approved By : พ.อ.พ.
Mr. Pacit Mathavorn
Calibration Engineer Supervisor
Issue Date : 4 August 2023



CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



CALIBRATION DATA

3. DISPLACEMENT RESULT

Test point		Mode	STD Reading	DUC Reading	Correction	Uncertainty
(mm)	(frequency)		(mm)	(mm)	(mm)	± (% of rdg.)
*0.03	50 Hz	peak	0.030	0.030	0.000	2.1
*0.04	50 Hz		0.040	0.040	0.000	1.7
*0.05	50 Hz		0.050	0.050	0.000	1.5
*0.06	50 Hz		0.060	0.061	-0.001	1.3
*0.07	50 Hz		0.070	0.071	-0.001	1.2
0.03	100 Hz	peak	0.030	0.030	0.000	2.1
0.04	100 Hz		0.040	0.040	0.000	1.7
0.05	100 Hz		0.050	0.050	0.000	1.5
0.06	100 Hz		0.060	0.061	-0.001	1.3
0.07	100 Hz		0.070	0.071	-0.001	1.2

Note. * means Calibrations marked " Not ANAB Accredited " in this Certificate have been included for completeness.

The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 008 Page 1 of 58

This report is valid for the above stated instrument/s only.

End of Certificate

Certificate No. Q23019601

F3-011-04/01-12

page 4 of 4

เอกสารไม่ควบคุม



@clccalibration

SITHIPHORN ASSOCIATES CO.,LTD. CALIBRATION LABORATORY

451-451/1 Sirinthorn Rd.,Bangbunru, Bangplud Bangkok 10700 THAILAND.
Tel.0-2435-8800 Fax.0-2433-1679 e-mail:cal-center@sithiphorn.com http://www.sithiphorn.com



Cert. No. : ACL22081
Pages : 1 of 8

Calibration Certificate

Equipment : SOUND LEVEL METER
Manufacturer : LARSON DAVIS
Model : LxT2/ Microphone 375B02 / Preamplifier PRML x T2B
Serial No.: 0005286 / 011740 / 056087
ID No.: -

Condition As Found : GOOD

Customer : UNITED ANALYST AND ENGINEERING CONSULTANT (UAE)
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK SUB-DISTRICT,
PHRAKHANONG DISTRICT, BANGKOK 10260
THAILAND.

Location : -
Ambient Temperature : (23.0 ± 3) °C
Pressure : (101.3 ± 3) kPa
Relative Humidity : (50.0 ± 20) %

Received Date : 18 JANUARY 2022
Calibration Date : 26 JANUARY 2022
Date of Issue : 28 JANUARY 2022

Calibrated by : Nathakorn Pisutpaisan

Approved by :

T. Petchurai
(Thanakul Petchurai)

This certificate is issued in accordance with the requirements of ISO/IEC 17025 standard, may not be reproduced other than in full, except with the prior written approval of the head of Calibration Laboratory.

เอกสารไม่ควบคุม

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAE0.
AMPHOE BANG PHU SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140



Certificate No : 23-ACT-118

Request No : Req-2023-1547

Sound pressure level

Calibration Results : Without Adjustment

Calibration Range (dB)	Without Adjustment (dB)		Adjustment (dB)		Uncertainty (± dB)	Acceptance limit Class 2 (± dB)
	Measured	Error	Measured	Error		
94 dB / 1000 Hz	94.14	0.14	-	-	0.13	0.40
114 dB / 1000 Hz	114.15	0.15	-	-	0.13	0.40

Frequency of Sound pressure level

Calibration Range (Hz)	Without Adjustment		Adjustment		Uncertainty (± %)	Acceptance limit Class 2 (± %)
	Measured (Hz)	Error (%)	Measured (Hz)	Error (%)		
94 dB / 1000 Hz	1000.00	0.00	-	-	0.01	1.7
114 dB / 1000 Hz	1000.00	0.00	-	-	0.01	1.7

Total Harmonic Distortion plus Noise of Sound pressure level (THD+N %)

Calibration Range (Hz)	Without Adjustment	Adjustment	Uncertainty (± %)	Acceptance limit Class 2 (± %)
	Measured (%)	Measured (%)		
94 dB / 1000 Hz	0.04	-	0.40	3.0
114 dB / 1000 Hz	0.20	-	0.40	3.0

Note :

- Acceptance limit was IEC60942:2017 Class 1
- The calibration results exclude the calibrator pressure correction
- The calibration results exclude the microphone volume correction

End of Calibration

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 3 of 8

Summary of Measurement Result :

Parameter	Pass	Fail	Uncertainty (dB)	Maximum-permitted uncertainty of measurement (dB)
1. Absolute sensitivity	✓	-	0.2	N/A
2. Self-generated noise	✓	-	0.2	N/A
3. Acoustical signal tests of frequency weightings				
125 Hz	✓	-	0.3	0.6
1000 Hz	✓	-	0.3	0.6
8000 Hz	✓	-	0.3	0.7
4. Electrical signal tests of frequency weightings				
For 10 Hz to 4 kHz	✓	-	0.3	0.6
For > 4 kHz to 10 kHz	✓	-	0.3	0.7
For > 10 kHz to 20 kHz	✓	-	0.3	1.0
5. Frequency and time weightings at 1 kHz	✓	-	0.2	0.2
6. Long - term stability	✓	-	0.1	0.1
7. Level linearity on the reference level range	✓	-	0.2	0.3
8. Level linearity including the level range control	✓	-	0.2	0.3
9. Tone burst response	✓	-	0.2	0.3
10. Peak C sound level	✓	-	0.2	0.35
11. Overload indication	✓	-	0.2	0.25
12. High level stability	✓	-	0.1	0.1

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 2 of 8

Calibration Procedure : CP-AC-02

Calibration Method :

This equipment was calibrated by based on IEC-61672-3 (2013) Standard for sound level meter (SLM).
The SLM had tests to Acoustical and Electrical signal tests of frequency weighting with Anechoic chamber and Reference Standard Instruments.
For tests results of each items were made by observation of each Instruments display and also with SLM's display.

Condition of this result of calibration :

1. Reference Standard Instruments :

Instrument	Model	Serial No.	Cert. No.	Due Date
Waveform Generator	33210A	MY48017076	EF-0012-21	10-Feb-22
Waveform Generator	33511B	MY52302742	EF-0011-21	10-Feb-22
Digital Multimeter	33461A	MY53220104	EEL.BP. 05/0264	10-Feb-22
Digital Multimeter	33461A	MY53220076	EEL.BP. 03/0264	08-Feb-22
Digital Multimeter	34461A	MY60024273	1-15180725251-1	15-Sep-22
Programmable Attenuator	MAT-1070	62100114	1500-07774E	08-Mar-22
Condenser Microphone	4180	2977900	AA-1008-21	05-Feb-22
Measuring Amplifier	NA-42KAI	34560495	AA-3003-21	16-Feb-22

2. This result of calibration was found accurate as shown on date and place of calibration for this calibrated item only.

3. This certificate is traceable to the international system of unit maintained at :

- 3.1 National Institute of Metrology (Thailand).
- 3.2 Thailand Institute of Scientific and Technological Research (TISTR).

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 5 of 8

4. Electrical signal tests of frequency weightings

Weighting network response with relative to 1 kHz.

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
63	0.0	0.0	0.0	±2.0
125	0.0	0.0	0.0	±1.5
250	0.0	0.0	0.0	±1.5
500	0.0	0.0	0.0	±1.5
1000	0.0	0.0	0.0	±1.0
2000	0.0	0.1	0.0	±2.0
4000	0.0	0.0	0.0	±3.0
8000	0.0	0.0	0.0	±5.0
16000	-0.1	0.0	0.1	±5.0(-∞)

5. Frequency and time weightings at 1 kHz

5.1 Frequency weightings at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	0.0	-
C - weight	94.0	0.0	± 0.2
Flat	94.0	0.0	± 0.2

5.2 Time weighting at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	94.0	0.0	-
Slow	94.0	0.0	± 0.1
Leq	94.0	0.0	± 0.1

6. Long - term stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	94.0	0.0	± 0.3

เอกสารไม่ควบคุม

T. Retch

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 4 of 8

Result of calibration :

1. Absolute sensitivity

Reference Acoustic Signal (dB)	Measured Value (dB)	Deviation (dB)	Acceptance Limit (dB)
93.9 (93.96)	94.0	0.0	±0.3

2. Self-generated noise

2.1 Normal test

Measured Value (dB)
31.0

2.2 The microphone of the sound level meter was replaced by electrical signal input device.

Frequency Weighting	Measured value (dB)
A - weight	30.8
C - weight	30.6
Flat	36.8

3. Acoustical signal tests of frequency weightings

Meter free-field acoustic response at a level of 84 dB

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
125	-0.1	0.1	0.0	± 1.5
1000	-0.2	-0.2	-0.2	± 1.0
8000	3.1	3.2	3.2	±5.0

เอกสารไม่ควบคุม

T. Retch

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 7 of 8

8. Level linearity including the level range control

Range	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
140	94.0	94.0	0.0	±0.5

9. Tone burst response

Time Weighting	Tone burst duration, Tb (ms)	Cycle	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	0.25	1	108.0	107.8	-0.2	1.5 ; -5.0
	2	8	117.0	116.7	-0.3	1.0 ; -2.5
	200	800	134.0	133.9	-0.1	±1.0
Slow	2	8	108.0	107.8	-0.2	1.5 ; -5.0
	200	800	127.6	127.5	-0.1	±1.0
SEL	0.25	1	N/A	N/A	N/A	1.5 ; -5.0
	2	8	N/A	N/A	N/A	1.0 ; -2.5
	200	800	N/A	N/A	N/A	±1.0

10. Peak C sound level

Number of cycle in test signal	Anticipated Value (dB)	Measured Value, L _{peak} (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
One	136.4	135.7	-0.7	±3.0

Number of cycle in test signal	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
Positive half cycle	135.4	135.2	-0.2	±2.0
Negative half cycle	135.4	135.2	-0.2	±2.0

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 6 of 8

7. Level linearity on the reference level range

Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
135.0	135.1	0.1	± 1.1
134.0	134.1	0.1	± 1.1
133.0	133.1	0.1	± 1.1
132.0	132.1	0.1	± 1.1
131.0	131.1	0.1	± 1.1
129.0	129.1	0.1	± 1.1
124.0	124.1	0.1	± 1.1
119.0	119.1	0.1	± 1.1
114.0	114.1	0.1	± 1.1
109.0	109.1	0.1	± 1.1
104.0	104.1	0.1	± 1.1
99.0	99.0	0.0	± 1.1
94.0	94.0	0.0	± 1.1
89.0	89.0	0.0	± 1.1
84.0	84.0	0.0	± 1.1
79.0	79.0	0.0	± 1.1
74.0	74.0	0.0	± 1.1
69.0	69.0	0.0	± 1.1
64.0	64.0	0.0	± 1.1
59.0	59.0	0.0	± 1.1
54.0	54.0	0.0	± 1.1
49.0	49.1	0.1	± 1.1
44.0	44.2	0.2	± 1.1
39.0	39.6	0.6	± 1.1

SITHIPORN ASSOCIATES CO.,LTD. CALIBRATION LABORATORY

451-451/1 Sirinthorn Rd.,Bangbunru, Bangplud Bangkok 10700 THAILAND.
Tel.0-2435-8800 Fax.0-2433-1679 e-mail:cal-center@sithiporn.com http://www.sithiporn.com



Cert. No. : ACL22082
Pages : 1 of 8

Calibration Certificate

Equipment : SOUND LEVEL METER
Manufacturer : LARSON DAVIS
Model : LxT2/ Microphone 375B02 / Preamplifier PRML x T2B
Serial No.: 0005289 / 011732 / 056076
ID No.: -

Condition As Found : GOOD

Customer : UNITED ANALYST AND ENGINEERING CONSULTANT (UAE)
81 SOI UDOMSUK 41, SUKHUMVIT ROAD,
BANGCHAK SUB-DISTRICT,
PHRAKHANONG DISTRICT, BANGKOK 10260
THAILAND.

Location : -
Ambient Temperature : (23.0 \pm 3) °C
Pressure : (101.3 \pm 3) kPa
Relative Humidity : (50.0 \pm 20) %

Received Date : 18 JANUARY 2022
Calibration Date : 26 JANUARY 2022
Date of Issue : 28 JANUARY 2022

Calibrated by : Nathakorn Pisutpaisan

Approved by :

T. Petchurai
(Thanakul Petchurai)

This certificate is issued in accordance with the requirements of ISO/IEC 17025 standard, may not be reproduced other than in full, except with the prior written approval of the head of Calibration Laboratory.

เอกสารไม่ควบคุม

SITHIPORN ASSOCIATES CO.,LTD. CALIBRATION LABORATORY

Continuation of Calibration Certificate

Cert. No. : ACL22081
Job No. : VC65AC0044
Pages : 8 of 8

11. Overload indication

Measured value (dB)		Deviated Value	Acceptance Limits
Positive one-half cycle	Negative one-half cycle	(dB)	(dB)
89.2	89.4	0.2	± 1.5

12. High level stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	137.0	137.0	0.0	± 0.3

The reported uncertainty is based on a standard uncertainty multiplied by coverage factor $k = 2$ or any value following calculation, providing a level of confidence of approximately 95 %

End of Calibration Certificate

เอกสารไม่ควบคุม

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 3 of 8

Summary of Measurement Result :

Parameter	Pass	Fail	Uncertainty (dB)	Maximum-permitted uncertainty of measurement (dB)
1. Absolute sensitivity	✓	-	0.2	N/A
2. Self-generated noise	✓	-	0.2	N/A
3. Acoustical signal tests of frequency weightings				
125 Hz	✓	-	0.3	0.6
1000 Hz	✓	-	0.3	0.6
8000 Hz	✓	-	0.3	0.7
4. Electrical signal tests of frequency weightings				
For 10 Hz to 4 kHz	✓	-	0.3	0.6
For > 4 kHz to 10 kHz	✓	-	0.3	0.7
For > 10 kHz to 20 kHz	✓	-	0.3	1.0
5. Frequency and time weightings at 1 kHz	✓	-	0.2	0.2
6. Long - term stability	✓	-	0.1	0.1
7. Level linearity on the reference level range	✓	-	0.2	0.3
8. Level linearity including the level range control	✓	-	0.2	0.3
9. Tone burst response	✓	-	0.2	0.3
10. Peak C sound level	✓	-	0.2	0.35
11. Overload indication	✓	-	0.2	0.25
12. High level stability	✓	-	0.1	0.1

เอกสารไม่ควบคุม

T. Petch

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 2 of 8

Calibration Procedure : CP-AC-02

Calibration Method :

This equipment was calibrated by based on IEC-61672-3 (2013) Standard for sound level meter (SLM).
The SLM had tests to Acoustical and Electrical signal tests of frequency weighting with Anechoic chamber and Reference Standard Instruments.
For tests results of each items were made by observation of each Instruments display and also with SLM's display.

Condition of this result of calibration :

1. Reference Standard Instruments :

Instrument	Model	Serial No.	Cert. No.	Due Date
Waveform Generator	33210A	MY48017076	EF-0012-21	10-Feb-22
Waveform Generator	33511B	MY52302742	EF-0011-21	10-Feb-22
Digital Multimeter	33461A	MY53220104	EEL.BP. 05/0264	10-Feb-22
Digital Multimeter	33461A	MY53220076	EEL.BP. 03/0264	08-Feb-22
Digital Multimeter	34461A	MY60024273	1-15180725251-1	15-Sep-22
Programmable Attenuator	MAT-1070	62100114	1500-07774E	08-Mar-22
Condenser Microphone	4180	2977900	AA-1008-21	05-Feb-22
Measuring Amplifier	NA-42KAI	34560495	AA-3003-21	16-Feb-22

2. This result of calibration was found accurate as shown on date and place of calibration for this calibrated item only.

3. This certificate is traceable to the international system of unit maintained at :

3.1 National Institute of Metrology (Thailand).

3.2 Thailand Institute of Scientific and Technological Research (TISTR).

เอกสารไม่ควบคุม

T. Petch

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 5 of 8

4. Electrical signal tests of frequency weightings

Weighting network response with relative to 1 kHz.

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
63	0.0	0.0	0.0	±2.0
125	0.0	0.1	0.0	±1.5
250	0.0	0.0	0.0	±1.5
500	0.0	0.0	0.0	±1.5
1000	0.0	0.0	0.0	±1.0
2000	0.0	0.1	0.0	±2.0
4000	0.0	-0.1	0.0	±3.0
8000	0.0	0.1	0.0	±5.0
16000	-0.1	0.1	0.1	±5.0(-∞)

5. Frequency and time weightings at 1 kHz

5.1 Frequency weightings at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	0.0	-
C - weight	94.0	0.0	± 0.2
Flat	94.0	0.0	± 0.2

5.2 Time weighting at 1 kHz

Frequency Weighting	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	94.0	0.0	-
Slow	94.0	0.0	± 0.1
Leq	94.0	0.0	± 0.1

6. Long - term stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	94.0	94.0	0.0	± 0.3

เอกสารไม่ควบคุม

7. Retch

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 4 of 8

Result of calibration :

1. Absolute sensitivity

Reference Acoustic Signal (dB)	Measured Value (dB)	Deviation (dB)	Acceptance Limit (dB)
93.9 (93.96)	94.0	0.0	±0.3

2. Self-generated noise

2.1 Normal test

Measured Value (dB)
29.6

2.2 The microphone of the sound level meter was replaced by electrical signal input device.

Frequency Weighting	Measured value (dB)
A - weight	29.4
C - weight	29.1
Flat	34.8

3. Acoustical signal tests of frequency weightings

Meter free-field acoustic response at a level of 84 dB

Frequency (Hz)	Deviation from various frequency weighting response curve (dB)			
	Flat	C-weight	A-weight	Acceptance Limits
125	-0.1	0.2	0.2	± 1.5
1000	-0.2	-0.2	-0.2	± 1.0
8000	2.6	2.6	2.6	±5.0

เอกสารไม่ควบคุม

7. Retch

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 7 of 8

8. Level linearity including the level range control

Range	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
140	94.0	94.0	0.0	±0.5

9. Tone burst response

Time Weighting	Tone burst duration, Tb (ms)	Cycle	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Fast	0.25	1	108.0	107.8	-0.2	1.5 ; -5.0
	2	8	117.0	116.7	-0.3	1.0 ; -2.5
	200	800	134.0	133.9	-0.1	±1.0
Slow	2	8	108.0	107.8	-0.2	1.5 ; -5.0
	200	800	127.6	127.6	0.0	±1.0
SEL	0.25	1	N/A	N/A	N/A	1.5 ; -5.0
	2	8	N/A	N/A	N/A	1.0 ; -2.5
	200	800	N/A	N/A	N/A	±1.0

10. Peak C sound level

Number of cycle in test signal	Anticipated Value (dB)	Measured Value, L _{peak} (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
One	136.4	135.8	-0.6	±3.0

Number of cycle in test signal	Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
Continuous	133.0	133.0	0.0	-
Positive half cycle	135.4	135.4	0.0	±2.0
Negative half cycle	135.4	135.4	0.0	±2.0

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 6 of 8

7. Level linearity on the reference level range

Anticipated Value (dB)	Measured Value (dB)	Deviated Value (dB)	Acceptance Limits (dB)
135.0	135.0	0.0	± 1.1
134.0	134.0	0.0	± 1.1
133.0	133.0	0.0	± 1.1
132.0	132.0	0.0	± 1.1
131.0	131.0	0.0	± 1.1
129.0	129.0	0.0	± 1.1
124.0	124.0	0.0	± 1.1
119.0	119.0	0.0	± 1.1
114.0	114.0	0.0	± 1.1
109.0	109.0	0.0	± 1.1
104.0	104.0	0.0	± 1.1
99.0	99.0	0.0	± 1.1
94.0	94.0	0.0	± 1.1
89.0	89.0	0.0	± 1.1
84.0	84.0	0.0	± 1.1
79.0	79.0	0.0	± 1.1
74.0	74.0	0.0	± 1.1
69.0	69.0	0.0	± 1.1
64.0	64.0	0.0	± 1.1
59.0	59.0	0.0	± 1.1
54.0	54.0	0.0	± 1.1
49.0	49.0	0.0	± 1.1
44.0	44.0	0.0	± 1.1
39.0	39.0	0.0	± 1.1



Page: 1/6.

Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD. Certificate No : 22-ACT-249
Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok Request No : Req-2022-0629
10260

Unit Under Calibration Details

Measurement item : Sound Level Meter Microphone Class : 2
Manufacturer : LARSON DAVIS Microphone Model : 375A04
Model : LxT2 Microphone S/N : 329356
Serial Number : 0005304 Preamplifier Model : PRMLxT2B
ID : UAE.EFM.115/2562 Preamplifier S/N : 056099
Resolution : 0.1 dB Instrument Status : Used

Calibration Environment and Details

Temperature : 23 °C ± 2 °C
Humidity : 50 %RH ± 20 %RH
Barometric Pressure : 1013 hPa ± 10 hPa
Received Date : 23 March 2022
Calibrated Date : 1 April 2022
Calibration Procedure : In-house method CP-SLM-01 based on IEC 61672-3 : 2013 Electroacoustics - Sound level meters - Part 3: Periodic tests
Location of Calibration : Lab Acoustic

Reference Standard

Instrument	Brand	Model	SN.	Due calibration	Traceability
Standard Microphone	GRAS	40AN	188273	15 September 2022	GRAS
Multifrequency Calibrator	Quest	Quest-cal	EFA000234	14 June 2022	TSI
Audio Generator	Svantek	Svan401	131	18 October 2022	WK Electric

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibrated By : ME
Mr. Noppadon Luangart
Calibration Officer

Approved By : Mr. Pacit Mathavorn
Mr. Pacit Mathavorn
Calibration Engineer Supervisor
Issue Date : 1 April 2022

Continuation of Calibration Certificate

Cert. No. : ACL22082
Job No. : VC65AC0044
Pages : 8 of 8

11. Overload indication

Measured value (dB)		Deviated Value (dB)	Acceptance Limits (dB)
Positive one-half cycle	Negative one-half cycle		
89.2	89.4	0.2	±1.5

12. High level stability

Frequency Weighting	SLM Display at initial (dB)	SLM Display at final (dB)	Deviated Value (dB)	Acceptance Limits (dB)
A - weight	137.0	137.0	0.0	±0.3

The reported uncertainty is based on a standard uncertainty multiplied by coverage factor $k = 2$ or any value following calculation, providing a level of confidence of approximately 95 %

End of Calibration Certificate

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

5. Electrical signal test of frequency weightings, Weighting network response with relative to 1 kHz

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance
FAST / 37-139	Weighting Responce curve				
STD Setting	A (dB)	C (dB)	Z (dB)	(± dB)	(± dB)
63 Hz	-0.1	-0.1	-0.1	0.2	2.0
125 Hz	-0.1	0.0	0.0		1.5
250 Hz	0.0	0.0	0.0		1.5
500 Hz	0.0	0.0	0.0		1.5
1000 Hz	0.0	0.0	0.0		1.0
2000 Hz	0.0	0.0	0.0		2.0
4000 Hz	0.0	0.0	0.0		3.0
8000 Hz	-0.1	-0.1	0.0		5.0
16000 Hz	-0.1	-0.1	-0.1		+5, -INF

6. Frequency and time weightings at 1kHz

UUC Setting	STD	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / 37-139	REF	UUC	ERR		
UUC Weighting	(dB)	(dB)	(dB)	0.2	0.2
A	114.00	114.0	0.0		
C	114.00	114.1	0.1		
Z	114.00	114.1	0.1		

UUC Setting	STD	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
37-139 / A	REF	UUC	ERR		
UUC Time Response	(dB)	(dB)	(dB)	0.2	0.1
Fast	114.00	114.0	0.0		
Slow	114.00	114.0	0.0		
Leq	114.00	114.0	0.0		

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

1. Indication at the calibration check frequency

UUC Setting	Nominal	Before Adjust		Adjust		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A / 37-139	Level	UUC	ERR	UUC	ERR		
Calibrator Setting	(dB)	(dB)	(dB)	(dB)	(dB)	0.20	0.3
1000 Hz 114.00 dB	113.85	113.8	-0.05	113.9	0.05		

Note : Absolute sensitivity was established by the use of Sound Calibrator Brand SVANTEK, Model SV 35A, SN.58079

2. Self-generated noise, Microphone installed

UUC Setting	Measured	UNCERTAINTY (\pm dB)
FAST / 37-139		
UUC Weighting	(dB)	(\pm dB)
A	24.7	0.10

3. Self-generated noise, Microphone replaced by the electrical input signal device

UUC Setting	Measured	UNCERTAINTY (\pm dB)
FAST / 37-139		
UUC Weighting	(dB)	(\pm dB)
A	24.1	0.10
C	23.5	0.10
Z	27.8	0.10

4. Acoustic signal test of frequency weightings (Without Windscreen)

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance Limit
	Weighting Response curve				
FAST / 37-139	A	C	Z	(± dB)	(± dB)
STD Setting	(dB)	(dB)	(dB)		
125 Hz	0.1	0.1	0.1	0.50	2.0
1000 Hz	0.0	0.0	0.0	0.60	1.0
4000 Hz	0.4	0.3	0.3	0.60	3.0
8000 Hz	-0.2	-0.3	-0.1	0.70	5.0

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

9. Level linearity including the level range control

UUC Setting	STD	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A	REF	UUC	ERR		
UUC Range	(dB)	(dB)	(dB)		
37-139	43.9	44.1	0.2	0.3	1.1
	114	114.0	0.0		1.1

10. Tone burst response

UUC Setting	STD	Anticipated	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
A / 37-139	Toneburst	Ref	UUC	ERR		
UUC Time Response	(ms)	(dB)	(dB)	(dB)		
Fast	200	135.0	135.0	0.0	0.3	1.0
	2	118.0	117.8	-0.2		+1.0, -2.5
	0.25	109.0	108.8	-0.2		+1.5, -5.0
Slow	200	128.6	128.5	-0.1		1.0
	2	109.0	108.9	-0.1		+1.0, -5.0
SEL	200	129.0	129.0	0.0		1.0
	2	109.0	108.9	-0.1		+1.0, -2.5
	0.25	100.0	99.9	-0.1		+1.5, -5.0

11. Peak C Sound level

UUC Setting	Anticipated	Measured		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / C / 95-142	REF	UUC	ERR		
STD Setting	(dB)	(dB)	(dB)		
Complete cycle	137.4	136.9	-0.50	0.2	3.0
Positive half cycle	136.4	136.2	-0.20		2.0
Negative half cycle	136.4	136.2	-0.20		2.0

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

7. Long Term Stability

UUC Setting	Measured	UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A / 37-139	UUC		
STD Setting	(dB)		
Initial	114.0		
Final	114.0		
Deviated	0.0	0.1	0.3

8. Level linearity on the reference level range

UUC Setting	Anticipated	Deviation		UNCERTAINTY (\pm dB)	Acceptance Limit (\pm dB)
FAST / A / 37-139	REF	UUC	ERR		
STD dB	(dB)	(dB)	(dB)		
139.00	139	139.0	0.0	0.3	1.1
134.00	134	134.0	0.0		1.1
129.00	129	129.0	0.0		1.1
124.00	124	124.0	0.0		1.1
119.00	119	119.0	0.0		1.1
114.00	114	114.0	0.0		1.1
109.00	109	109.0	0.0		1.1
104.00	104	104.0	0.0		1.1
99.00	99	98.9	-0.1		1.1
94.00	94	94.0	0.0		1.1
89.00	89	89.0	0.0		1.1
84.00	84	84.0	0.0		1.1
79.00	79	79.0	0.0		1.1
74.00	74	74.0	0.0		1.1
69.00	69	69.0	0.0		1.1
64.00	64	64.0	0.0		1.1
59.00	59	59.0	0.0		1.1
54.00	54	54.0	0.0		1.1
49.00	49	49.0	0.0		1.1
44.00	44	44.1	0.1		1.1
39.00	39	39.3	0.3		1.1
38.00	38	38.4	0.4		1.1

Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD. Certificate No : 22-ACT-105
 Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok Request No : Req-2022-0229
 10260

Unit Under Calibration Details

Measurement item : Sound Level Meter Microphone Class : 2
 Manufacturer : LARSON DAVIS Microphone Model : 375A04
 Model : LxT2 Microphone S/N : 329350
 Serial Number : 0005396 Preamplifier Model : PRMLxT2C
 ID : UAE.EFM.033/2564 Preamplifier S/N : 073812
 Resolution : 0.1 dB Instrument Status : Used

Calibration Environment and Details


Temperature : 23 °C ± 2 °C
 Humidity : 50 %RH ± 20 %RH
 Barometric Pressure : 1013 hPa ± 10 hPa
 Received Date : 31 January 2022
 Calibrated Date : 11 February 2022
 Calibration Procedure : In-house method CP-SLM-01 based on IEC 61672-3 : 2013 Electroacoustics - Sound level meters - Part 3: Periodic tests
 Location of Calibration : Lab Acoustic


Reference Standard

Instrument	Brand	Model	SN.	Due calibration	Traceability
Standard Microphone	GRAS	40AN	188273	15 September 2022	GRAS
Multifrequency Calibrator	Quest	Quest-cal	EFA000234	14 June 2022	TSI
Audio Generator	Svantek	Svan401	131	18 October 2022	WK Electric

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibrated By : 
 Mr. Noppadon Luangart
 Calibration Officer

Approved By : 
 Mr. Pacit Mathavorn
 Calibration Engineer Supervisor
 Issue Date : 11 February 2022

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd

FM-708-SLM-01 Rev.0 Issue date 01/07/19

เอกสารไม่ควบคุม

Certificate No : 22-ACT-249
 Request No : Req-2022-0629

12. Overload indication

UUC Setting	Measured	UNCERTAINTY	Acceptance
FAST / A / 37-139	UUC	(± dB)	Limit
STD Setting	(dB)		(± dB)
Positive one-half cycle	142.9		
Negative one-half cycle	142.7		
Deviated	0.2	0.2	1.5

13. High Level Stability

UUC Setting	Measured	UNCERTAINTY	Acceptance
FAST / A / 37-139	UUC	(± dB)	Limit
STD Setting	(dB)		(± dB)
Initial	138.0		
Final	138.0		
Deviated	0.0	0.1	0.3

End of Certificate

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd

เอกสารไม่ควบคุม

Certificate No : 22-ACT-105
Request No : Req-2022-0229

5. Electrical signal test of frequency weightings, Weighting network response with relative to 1 kHz

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance
FAST / 37-139	Weighting Response curve				Limit
STD Setting	A (dB)	C (dB)	Z (dB)	(± dB)	(± dB)
63 Hz	-0.2	0.0	0.0	0.2	2.0
125 Hz	-0.1	0.0	0.0		1.5
250 Hz	-0.1	0.0	0.0		1.5
500 Hz	-0.1	0.0	0.0		1.5
1000 Hz	0.0	0.0	0.0		1.0
2000 Hz	0.0	0.1	0.0		2.0
4000 Hz	0.0	0.0	0.0		3.0
8000 Hz	0.0	0.0	0.0		5.0
16000 Hz	-0.1	-0.1	-0.1		+5 _s -INF.

6. Frequency and time weightings at 1kHz

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
	REF	UUC	ERR		
FAST / 37-139	(dB)	(dB)	(dB)	0.2	0.2
UUC Weighting	(dB)	(dB)	(dB)		
A	114.00	114.0	0.0		
C	114.00	114.0	0.0		
Z	114.00	114.0	0.0	0.2	0.2

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
	REF	UUC	ERR		
37-139 / A	(dB)	(dB)	(dB)	0.2	0.1
UUC Time Response	(dB)	(dB)	(dB)		
Fast	114.00	114.0	0.0		
Slow	114.00	114.0	0.0		
Leq	114.00	114.0	0.0	0.1	0.1

Certificate No : 22-ACT-105
Request No : Req-2022-0229

1. Indication at the calibration check frequency

UUC Setting	Nominal Level (dB)	Before Adjust		Adjust		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
		UUC (dB)	ERR (dB)	UUC (dB)	ERR (dB)		
FAST / A / 37-139							
Calibrator Setting	(dB)	(dB)	(dB)	(dB)	(dB)	(± dB)	(± dB)
1000 Hz 114.00 dB	113.85	113.9	+0.05	113.9	0.05	0.20	0.3

Note : Absolute sensitivity was established by the use of Sound Calibrator Brand SVANTEK, Model SV 35A, SN.58079

2. Self-generated noise, Microphone installed

UUC Setting	Measured (dB)	UNCERTAINTY (± dB)
FAST / 37-139		
UUC Weighting	(dB)	(± dB)
A	27.8	0.10

3. Self-generated noise, Microphone replaced by the electrical input signal device

UUC Setting	Measured (dB)	UNCERTAINTY (± dB)
FAST / 37-139		
UUC Weighting	(dB)	(± dB)
A	27.8	0.10
C	27.3	0.10
Z	33.1	0.10

4. Acoustic signal test of frequency weightings (Without Windscreen)

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance
	Weighting Response curve				Limit
FAST / 37-139	A	C	Z	(± dB)	(± dB)
STD Setting	(dB)	(dB)	(dB)		
125 Hz	0.1	0.1	0.2	0.50	2.0
1000 Hz	0.0	0.0	0.0	0.60	1.0
4000 Hz	0.6	0.5	0.6	0.60	3.0
8000 Hz	0.1	0.0	0.2	0.70	5.0



Certificate No : 22-ACT-105
Request No : Req-2022-0229

9. Level linearity including the level range control

UUC Setting	STD	Measured		UNCERTAINTY	Acceptance
FAST / A	REF	UUC	ERR		Limit
UUC Range	(dB)	(dB)	(dB)	(± dB)	(± dB)
37-139	43.2	42.8	-0.4	0.3	1.1
	114	114.0	0.0		1.1

10. Tone burst response

UUC Setting	STD	Anticipated	Measured		UNCERTAINTY	Acceptance
A / 37-139	Toneburst	Ref	UUC	ERR		Limit
UUC Time Response	(ms)	(dB)	(dB)	(dB)	(± dB)	(± dB)
Fast	200	135.0	134.9	-0.1	0.3	1.0
	2	118.0	117.6	-0.4		+1.0, -2.5
	0.25	109.0	108.7	-0.3		+1.5, -5.0
Slow	200	128.6	128.5	-0.1		1.0
	2	109.0	108.9	-0.1		+1.0, -5.0
SEL	200	129.0	129.0	0.0		1.0
	2	109.0	108.9	-0.1		+1.0, -2.5
	0.25	100.0	100.0	0.0		+1.5, -5.0

11. Peak C Sound level

UUC Setting	Anticipated	Measured		UNCERTAINTY	Acceptance
FAST / C / 95-142	REF	UUC	ERR		Limit
STD Setting	(dB)	(dB)	(dB)	(± dB)	(± dB)
Complete cycle	137.4	136.7	-0.70	0.2	3.0
Positive half cycle	136.4	136.2	-0.20		2.0
Negative half cycle	136.4	136.2	-0.20		2.0



Certificate No : 22-ACT-105
Request No : Req-2022-0229

7. Long Term Stability

UUC Setting	Measured	UNCERTAINTY	Acceptance
FAST / A / 37-139	UUC		Limit
STD Setting	(dB)	(± dB)	(± dB)
Initial	114.0		
Final	114.0		
Deviated	0.0	0.1	0.3

8. Level linearity on the reference level range

UUC Setting	Anticipated	Deviation		UNCERTAINTY	Acceptance
FAST / A / 37-139	REF	UUC	ERR		Limit
STD dB	(dB)	(dB)	(dB)	(± dB)	(± dB)
139.00	139	139.0	0.0	0.3	1.1
134.00	134	134.0	0.0		1.1
129.00	129	129.0	0.0		1.1
124.00	124	124.0	0.0		1.1
119.00	119	119.0	0.0		1.1
114.00	114	114.0	0.0		1.1
109.00	109	109.0	0.0		1.1
104.00	104	104.0	0.0		1.1
99.00	99	99.0	0.0		1.1
94.00	94	93.9	-0.1		1.1
89.00	89	88.9	-0.1		1.1
84.00	84	83.9	-0.1		1.1
79.00	79	78.9	-0.1		1.1
74.00	74	73.9	-0.1		1.1
69.00	69	68.9	-0.1		1.1
64.00	64	63.9	-0.1		1.1
59.00	59	58.9	-0.1		1.1
54.00	54	53.9	-0.1		1.1
49.00	49	48.9	-0.1		1.1
44.00	44	44.0	0.0		1.1
39.00	39	39.2	0.2		1.1
38.00	38	38.3	0.3		1.1

Certificate of Calibration

Customer

Name : UNITED ANALYST AND ENGINEERING CONSULTANT CO.,LTD. Certificate No : 22-ACT-035
 Address : 81 Soi Udomsuk 41, Sukhumvit Road, Bangchak, Prakanong, Bangkok Request No : Req-2022-0094
 10260

Unit Under Calibration Details

Measurement item : Sound Level Meter Microphone Class : 2
 Manufacturer : LARSON DAVIS Microphone Model : 375A04
 Model : LX22 Microphone S/N : 328675
 Serial Number : 0005398 Preamplifier Model : PRMLxT2C
 ID : UAE.EFM.035/2564 Preamplifier S/N : 073793
 Resolution : 0.1 dB Instrument Status : Used

Calibration Environment and Details

Temperature : 23 °C ± 2 °C
 Humidity : 50 %RH ± 20 %RH
 Barometric Pressure : 1013 hPa ± 10 hPa
 Received Date : 14 January 2022
 Calibrated Date : 21 January 2022
 Calibration Procedure : In-house method CP-SLM-01 based on IEC 61672-3 : 2013 Electroacoustics - Sound level meters - Part 3: Periodic tests
 Location of Calibration : Lab Acoustic

Reference Standard

Instrument	Brand	Model	SN.	Due calibration	Traceability
Standard Microphone	GRAS	40AN	188273	15 September 2022	GRAS
Multifrequency Calibrator	Quest	Quest-cal	EFA000234	14 June 2022	TSI
Audio Generator	Svantek	Svan401	131	18 October 2022	WK Electric

Note

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibrated By : me
 Mr. Noppidon Luangart
 Calibration Officer

Approved By : นางสาว
 Mr. Pacit Mathavorn
 Calibration Engineer Supervisor
 Issue Date : 21 January 2022

Certificate No : 22-ACT-105
 Request No : Req-2022-0229

12. Overload indication

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit
FAST / A / 37-139	UUC		(± dB)
STD Setting	(dB)		
Positive one-half cycle	141.7		
Negative one-half cycle	141.8		
Deviated	-0.1	0.2	1.5

13. High Level Stability

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit
FAST / A / 37-139	UUC		(± dB)
STD Setting	(dB)		
Initial	138.0		
Final	138.0		
Deviated	0.0	0.1	0.3

End of Certificate

Certificate No : 22-ACT-035
 Request No : Req-2022-0094

5. Electrical signal test of frequency weightings, Weighting network response with relative to 1 kHz

UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance
FAST / 37-139	Weighting Response curve				Limit
STD Setting	A (dB)	C (dB)	Z (dB)	(± dB)	(± dB)
63 Hz	-0.2	-0.1	-0.1	0.2	2.0
125 Hz	-0.1	0.0	-0.1		1.5
250 Hz	-0.1	0.0	-0.1		1.5
500 Hz	-0.1	0.0	-0.1		1.5
1000 Hz	0.0	0.0	0.0		1.0
2000 Hz	0.0	0.0	0.0		2.0
4000 Hz	0.0	0.0	0.0		3.0
8000 Hz	-0.1	-0.1	0.0		5
16000 Hz	-0.1	-0.1	-0.1		+5, -INF.

6. Frequency and time weightings at 1kHz

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / 37-139	REF	UUC	ERR		
UUC Weighting	(dB)	(dB)	(dB)	0.2	(± dB)
A	114.00	114.0	0.0		
C	114.00	114.0	0.0		
Z	114.00	114.0	0.0		

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
37-139 / A	REF	UUC	ERR		
UUC Time Response	(dB)	(dB)	(dB)	0.2	(± dB)
Fast	114.00	114.0	0.0		
Slow	114.00	114.0	0.0		
Leq	114.00	114.0	0.0		

Certificate No : 22-ACT-035
 Request No : Req-2022-0094

1. Indication at the calibration check frequency

UUC Setting	Nominal	Before Adjust		Adjust		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A / 37-139	Level	UUC	ERR	UUC	ERR		
Calibrator Setting	(dB)	(dB)	(dB)	(dB)	(dB)	0.20	0.3
1000 Hz 114.00 dB	113.85	114.0	+0.15	113.9	0.05		

Note : Absolute sensitivity was established by the use of Sound Calibrator Brand SVANTEK, Model SV 35A, SN.58079

2. Self-generated noise, Microphone installed

UUC Setting	Measured	UNCERTAINTY
FAST / 37-139	(dB)	(± dB)
UUC Weighting	(dB)	(± dB)
A	28.1	0.10

3. Self-generated noise, Microphone replaced by the electrical input signal device

UUC Setting	Measured	UNCERTAINTY
FAST / 37-139	(dB)	(± dB)
UUC Weighting	(dB)	(± dB)
A	27.9	0.10
C	27.3	0.10
Z	31.9	0.10

4. Acoustic signal test of frequency weightings (Without Windscreen)

4. Acoustic signal test (frequency weightings (without windscreen))					
UUC Setting	Deviation from various Frequency			UNCERTAINTY	Acceptance Limit
	Weighting Response curve				
FAST / 37-139	A	C	Z	(± dB)	(± dB)
STD Setting	(dB)	(dB)	(dB)		
125 Hz	0.0	0.0	0.0	0.50	2.0
1000 Hz	0.0	0.0	0.0	0.60	1.0
4000 Hz	0.4	0.3	0.3	0.60	3.0
8000 Hz	-0.1	-0.2	-0.1	0.70	5.0



Certificate No : 22-ACT-035
 Request No : Req-2022-0094

9. Level linearity including the level range control

UUC Setting	STD	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A	REF	UUC	ERR		
UUC Range	(dB)	(dB)	(dB)		
37-139	43.2	43.4	0.2	0.3	1.1
	114	114.0	0.0		1.1

10. Tone burst response

UUC Setting	STD	Anticipated	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
A / 37-139	Toneburst	Ref	UUC	ERR		
UUC Time Response	(ms)	(dB)	(dB)	(dB)		
Fast	200	135.0	135.0	0.0	0.3	1
	2	118.0	117.9	-0.1		+1.0, -2.5
	0.25	109.0	108.7	-0.3		+1.5, -5.0
Slow	200	128.6	128.5	-0.1		1
	2	109.0	108.9	-0.1		+1.0, -5.0
SEL	200	129.0	129.0	0.0		1
	2	109.0	109.1	+0.1		+1.0, -2.5
	0.25	100.0	99.9	-0.1		+1.5, -5.0

11. Peak C Sound level

UUC Setting	Anticipated	Measured		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / C / 95-142	REF	UUC	ERR		
STD Setting	(dB)	(dB)	(dB)		
Complete cycle	137.4	136.8	-0.60	0.2	3.0
Positive half cycle	136.4	136.1	-0.30		2.0
Negative half cycle	136.4	136.1	-0.30		2.0



Certificate No : 22-ACT-035
 Request No : Req-2022-0094

7. Long Term Stability

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A / 37-139	UUC		
STD Setting	(dB)		
Initial	114.0	0.1	0.3
Final	114.0		
Deviated	0.0		

8. Level linearity on the reference level range

UUC Setting	Anticipated	Deviation		UNCERTAINTY (± dB)	Acceptance Limit (± dB)
FAST / A / 37-139	REF	UUC	ERR		
STD dB	(dB)	(dB)	(dB)		
139.00	139	139.0	0.0	0.3	1.1
134.00	134	134.0	0.0		1.1
129.00	129	129.0	0.0		1.1
124.00	124	124.0	0.0		1.1
119.00	119	119.0	0.0		1.1
114.00	114	114.0	0.0		1.1
109.00	109	109.0	0.0		1.1
104.00	104	104.0	0.0		1.1
99.00	99	99.0	0.0		1.1
94.00	94	93.9	-0.1		1.1
89.00	89	88.9	-0.1		1.1
84.00	84	83.9	-0.1		1.1
79.00	79	78.9	-0.1		1.1
74.00	74	73.9	-0.1		1.1
69.00	69	69.0	0.0		1.1
64.00	64	63.9	-0.1		1.1
59.00	59	59.0	0.0		1.1
54.00	54	54.0	0.0		1.1
49.00	49	49.0	0.0		0.8
44.00	44	44.1	0.1		1.1
39.00	39	39.3	0.3		1.1
38.00	38	38.3	0.3		1.1
37.00	37	37.5	0.5		1.1

Certificate No : 22-ACT-035

Request No : Req-2022-0094

12. Overload indication

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit
FAST / A / 37-139	UUC		(± dB)
STD Setting	(dB)		
Positive one-half cycle	142.3		
Negative one-half cycle	142.0		
Deviated	0.3	0.2	1.5

13. High Level Stability

UUC Setting	Measured	UNCERTAINTY (± dB)	Acceptance Limit
FAST / A / 37-139	UUC		(± dB)
STD Setting	(dB)		
Initial	138.0		
Final	138.0		
Deviated	0.0	0.1	0.3

End of Certificate