

ภาคผนวก ข

เอกสารสอบเทียบเครื่องมือที่ใช้ในการวิเคราะห์



THAI HEART CALIBRATION CO., LTD.
112/1 Moo 2, Bang Na Suburb, Bang Na District, Bangkok 10760
Tel: 02-855-6622 (0975) 455-455 Fax: 02-855-6623



ANAB
ACCREDITED
CALIBRATION LABORATORY
AC-2095

CERTIFICATE OF CALIBRATION

Certificate No.: C0-1808005/23

Page 1 of total 4 pages

Customer
WATER ANALYSIS CENTER CO., LTD.
1/94 Moo 5, T. Kanham,
A.U-thai, Ayuthaya 13210

Equipment
Manufacturer METTLER TOLEDO
Serial No. B327527211
Description pH Meter
Range : 0 - 14 pH, Resolution : 0.01 pH

Model SevenCompact S220
ID No. WWL 0068

Environmental Conditions
Ambient Temperature: (20 ± 2) °C
Relative Humidity: (50 ± 10) %
Atmospheric Pressure: -

Calibration Location Jayhawks Laboratory (CL&GL)

Received Date 18 August 2023

Calibration Date 18 August 2023

Date of Issue 21 August 2023

Condition of Artifacts Used conditions but can be calibrated

Checked by

Approved by

Act as Technical Manager

Representative of Managing Director

(Dr. Ekachai Putthiwong)

() (Krisyosl K.) () (Sakda Y.)

() (Patiphan K.) () (Onnapa P.)

() (Pongsak H.) () (Nitiphong K.)

() (Kanung C.) () (Nonthachai K.)

() (Pramong P.) () (Noppol P.)

This calibration certificate shall not be reproduced other than in full except with the prior written approval of the Thai Heart Calibration Co., Ltd.

FE-169

REV.02 02/24/21



THAI HEART CALIBRATION CO., LTD.
112/1 Moo 2, Bang Na Suburb, Bang Na District, Bangkok 10760
Tel: 02-855-6622 (0975) 455-455 Fax: 02-855-6623



ANAB
ACCREDITED
CALIBRATION LABORATORY
AC-2095

Certificate No.: C0-1808005/23

Page 2 of total 4 pages

Reference Method:

- The calibration method used was CP-178 based on an in-house method.
- This certificate can be traceable to the national standards, which is realized the shown measurement units according to the International System of Units (SI Units).

Reference Standard:

Type	pH Value	Lot No.	Due Date	Traceability
pH Standard Solution	4.01	030822	Feb. 9, 2024	NIMT
	7.01	300522	Feb. 9, 2024	
	10.01	230822	Feb. 7, 2024	

Type	Model	Serial No.	Certificate No.	Due Date	Traceability
Documenting Process Calibrator	754	2630521	10-2412001/22	Dec. 23, 2023	THC
Digital Thermometer with Sensor	1523 / 5622	1709138 / 4605984-005	10-0806001/23	Jun. 8, 2024	

Remark: This certificate is traceable to the International System of Unit (SI Unit) through:

- NIMT, National Institute of Metrology (Thailand).
- THC, Thai Heart Calibration Co., Ltd.

Measurement Results:

1. Function Simulated pH Meter

Standard Applied (mV)	Nominal Value (pH)	UUC Reading		Uncertainty (± mV)
		pH	mV	
177.48	4.00	4.01	177.4	0.060
0.00	7.00	7.00	0.0	0.060
-177.48	10.00	10.01	-177.4	0.060

UUC : Unit Under Calibration

Note : Adjust Curve to simulate pH (4,7,10)

Calibrated by

Kitipong

REV.02 02/24/21

FE-169

Certificate No.: C0-1808005/23

Page 3 of total 4 pages

Measurement Results (Cont.):

2. Calibration of pH Electrode (Serial No.: 3222623)

pH Standard Solution (pH)	Measured Value		Uncertainty (± pH)
	(pH)	(mV)	
4.01	4.01	180.0	0.013
7.01	7.00	4.0	0.013
10.01	10.01	-172.0	0.013

Note : Adjust Curve to Buffer Solution pH (4,7,10)

Temperature stability of micro bath : $25 \pm 0.2^\circ\text{C}$

The above reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor $k = 2.00$, providing a level of confidence approximately 95%.

Certificate No.: C0-1808005/23

Page 4 of total 4 pages

Reference Method:

- The calibration method used was CP-096 based on an in-house method.
- The temperature scale used was an ITS-90.
- This certificate can be traceable to the national standards, which is realized the shown measurement units according to the International System of Units (SI Units).

Reference Standard Instruments:

Type	Model	Serial No.	Cert. No.	Due Date	Traceability
Thermometer Readout	1529-R	B7C853	10-0911001/22	Nov. 9, 2023	THC
Platinum Resistance Thermometer	5626	4854	C0A30047	Oct. 22, 2023	FLUKE
Liquid Bath	XORTS-40A	XO111019	10-2405001/23	May 25, 2025	THC

Remark: This certificate is traceable to the International System of Unit (SI Unit) through:

- THC, Thai Heart Calibration Co., Ltd.
- FLUKE, Fluke Corporation, U.S.A.

Measurement Results:

(X) Without Adjustment

Dimension of probe : Diameter 4 mm. Sensor Type : RTD (PT100)

Immersion Depth (mm.)	Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
120	22.00	22.2	-0.20	0.065
120	25.00	25.2	-0.20	0.065
120	28.00	28.2	-0.20	0.065

UUC : Unit Under Calibration

The above reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor $k = 2.00$, providing a level of confidence approximately 95%.

- End of Certificate -

Calibrated by Kittipong
REV.02 02/24/21

Calibrated by Pongsak
REV.02 02/24/21

Certificate No.: MC 2307702

Page 2 of 3

The Reference Standard Instrument :

Description	Certificate No.	Serial No.	Due date	Traceable thru
Data Acquisition/Switch Unit	MC 2303173	MY41010916	9 Mar 2024	MCAL
With Thermocouple Type "T" ID. No.1771 to 1779				

Traceability :

The measurement standard traceable to the international system of units (SI) through certificate as mentioned above


1. Calibration Procedure:

This Instrument was calibration according to TLAS G-20 by comparison with calibrated thermocouple type T under no load condition. The Thermocouples were placed on nine points and located one thermocouple in each of the eight corners of the chamber and was away from the each wall of 5 cm to 10 cm. And placed the ninth thermocouple within 2.5 cm of the geometric center of the chamber.

Temperature Uniformity - the maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady state conditions. The reference sensor should preferably be located at the geometric center of the chamber.

Temperature Stability - one-half of the greatest maximum difference of measured temperatures at any one sensor.

Overall Variation - The Difference of the maximum and minimum measured temperatures throughout observation.

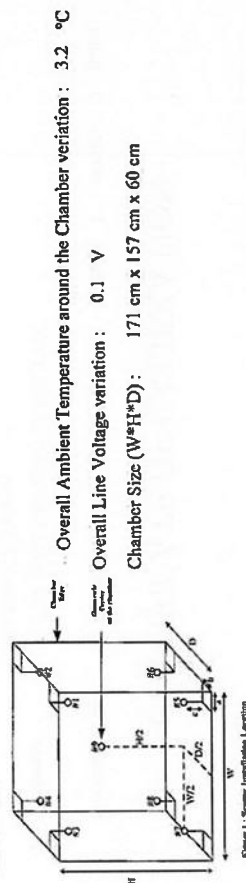

Checked by : *Thangin*

[MCF-Q-077 ; Rev.6 ; Date : 22/04/2021]

Certificate of Calibration

TEMPERATURE
CONTROLLER ENCLOSURES



Certificate No.: MC 2307702

Page 1 of 3

Customer : Water Analysis Center Co., Ltd.
1/94 Moo 5, T.Kantham, A.U-Thai, Ayuthaya 13210.

Reference Job No. : 23-1577 Received Date : 11 July 2023

Description : Refrigerator
Manufacturer : SANDEN INTERCOOL Model : SEC-1500SBD
Serial No. : SEC1500201A-0708-00304 ID. No. : WWL0038
Marking : Additionally for the purpose of identification by this laboratory a label marked with this certificate number (MC 2307702) has been attached to the case.

Method : In-House calibration procedure MWL-T-033 this method is reference to TLAS G-20 "Temperature Controlled Enclosures".

Location of Calibration : Water Analysis Center Co., Ltd. ; Laboratory.
Environmental Conditions : Ambient Temperature : (25.3 to 25.9) °C

Relative Humidity : (65.2 to 67.9) %

Date of Calibration : 11 July 2023 Date of Issue : 12 July 2023

Checked by : *Thangin* Approved by : *Aittipong*
Thanagorn Limchaicharoen Aittipong Kanjanawasit
(Calibration Supervisor) (Technical Manager)

The uncertainties are for a confidence probability of approximately 95%

This certificate is issued in accordance with the conditions of accreditation granted by the National Standardization Council of Thailand-Office of the National Standardization Council that has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of Master Calibration Co., Ltd.

[MCF-Q-077 ; Rev.6 ; Date : 22/04/2021]

Certificate No.: MC 2307702

Page 3 of 3

2. Result of calibration :

Temperature Measurement Accuracy Test

Indicating Temperature (°C)	Measured Temperature (°C) at Spread Locations								Uncertainty (±°C)
	#1	#2	#3	#4	#5	#6	#7	#8	Ref. #9
2.5	4.4	4.2	4.2	4.2	4.0	3.9	4.1	4.0	3.8
									0.86

Chamber Characterization Result

Controller Temperature (°C)	Indicating Temperature (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
2.0	2.5	1.50	1.01	3.3

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

This certificate will certify of the calibrated equipment only.

End of Certificate

Checked by: *Thanggron*

[MCF-Q-077 ; Rev.6 ; Date : 22/04/2021]



CERTIFICATE OF CALIBRATION

Certificate No.: CO-1907007/23 Page 1 of total 2 pages

Customer
WATER ANALYSIS CENTER CO., LTD.
1/94 Moo 5, T.Kanham,
A.U-thai, Ayutthaya 13210

Equipment
Conductivity Meter
Manufacturer
EUTECH
Serial No.
2657889
Description
-
Model
CON 2700
ID No.
WWL 0136

Environmental Conditions
Ambient Temperature: (20 ± 2) °C
Relative Humidity: (50 ± 10) %
Atmospheric Pressure: -

Calibration Location
Jayhawks Laboratory (CL&GL)
Received Date
19 July 2023
Calibration Date
19 July 2023
Date of Issue
20 July 2023
Condition of Artifacts
Used conditions but can be calibrated

Checked by: *[Signature]* Approved by: *[Signature]*

Representative of Managing Director

Act as Technical Manager

(Dr. Ekachai Putitwong)

() (Krisyosl K.)

() (Sakda Y.)

() (Paliphan K.)

() (Onnapa P.)

() (Pongsak H.)

() (Nitiphong K.)

() (Kanung C.)

() (Nonthachai K.)

() (Pramong P.)

() (Noppol P.)

This calibration certificate shall not be reproduced other than in full except with the prior written approval of the Thai Heart Calibration Co., Ltd.

FE-169

REV.02 02/24/21



AUTOMATION SERVICE CO., LTD.
CALIBRATION LABORATORY

Cert. No. WAC-065
Page 1 of 2

SV 2010057024

Certificate No.: C0-1907007/23

Page 2 of total 2 pages

Reference Method:

- The calibration method used was CP-177 based on an in-house method.
- This certificate can be traceable to the national standards, which is realized the shown measurement units according to the International System of Units (SI Units).

Reference Standard :

Material	Batch Value	Lot Number	Due Date	Traceability
Conductivity Standard Solution	147.8 μ S/cm	S220611005	Dec. 6, 2023	SCP Science
	1.425 mS/cm	S220812006	May 31, 2024	

Remark: This certificate is traceable to the International System of Unit (SI Unit) through:

- SCP Science.

ภาคผนวก ข-5

Measurement Results: (Probe Serial No. : 93X219065)

Conductivity Standard Solution	Measured Value	Correction	Uncertainty ($\pm$)
147.8 μ S/cm	147.5 μ S/cm	0.3 μ S/cm	2.5 μ S/cm
1.425 mS/cm	1.427 mS/cm	-0.002 mS/cm	0.0051 mS/cm

Note : Adjustment points: 147.8 μ S/cm 1.425mS/cm

The above reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor $k = 2.00$, providing a level of confidence approximately 95%.

- End of Certificate -

CERTIFICATE OF CALIBRATION

Instrument : DO Meter
Model : DO-31P
Serial No. : 780065
Manufacturer : TOA-DKK
Measuring Range : 0.00 ~ 20.00 mg/l

Machine : -
Location : -

Customer : Water Analysis Center Co., Ltd.
1/94 Moo.5 T.Kanburi, A.U.-Thai
Ayuthaya 13210 Thailand

Date Of Received : 11/01/2024
Date Of Calibration : 11/01/2024

Ambient Condition : Temperature 26 $^{\circ}$ C
Humidity 58 % RH

Calibrated By : P. Yooyen
(Ms. Phanee Yooyen)
Technician

Approved By : [Signature]
(Mr. Nipon Phungsomsak)
Technical Manager

Date Of Issue : 15/01/2024

This Certificate may not be reproduced other than in full, except with the prior written approval of the head of the industrial instruments calibration center.

Calibrated by : Onnapa
REV.02 02/24/21

FE-169

Automation Service Co., Ltd. 929/02/1 Soi Pattanakarn30, Pattanakarn Rd. Suanluang, Bangkok 10250
Tel. : 02-319-9994 ext. 7817251 E-mail : info@automation.co.th, service@automation.co.th, www.automation.co.th

Instrument : DO Meter
Model : DO-31P
Serial No. : 780065

Cert. No. WAC-065
Page 2 of 2

Calibrate Procedure

- ☐ This instrument was calibrated by comparison with standard solution (PH/ORP)
☐ This instrument was calibrated by comparison with scattering plate value (Turbidity)
☐ This instrument was calibrated by comparison with conductivity (Conductivity)
☒ This instrument was calibrated by comparison with Sodium sulfite anhydrous (DO)

Condition of this result of calibration

- ### 11). Reference Standard Solution

Standard	Lot No	Batch.	Cert. No.	Due Date
----------	--------	--------	-----------	----------

Sodium Sulfite Power 408K1405

- 2). Traceability This certification is traceable to
☒ Kanto Chemical Co.,INC.
☐ DKK Corporation

Result Of Calibration

Standard Solution		Before Adjust		After Adjust	
	(mg/l) at 25.7°C	Indicator	Error	Indicator	Error
Zero	0.00	0.10	+ 0.10	0.00	-
Snan	8.02	6.45	- 1.57	8.02	-

DO Electrode No. OE270AA(5) S/N 111F0029

Calibrated By

P. Yooen

(Ms. Phance Yooyen)
Technician



IMC
Intech Metrological Center Co., Ltd.
 39/1 Soi 82, Sukhapiban 5 Rd., O ngoen,
 Saimai, Bangkok 10220, Thailand
 Tel. (662) 909-8820 (Auto 10 lines) www.imcinstru.com

Certificate of Calibration

Certificate No. : MT24-3208
Page : 1 of 2

Customer : Water Analysis Center Co., Ltd.

Address : 1/94 M.5, Rolana Industrial Park, T.Kanham, A.U-Thai, Ayutthaya 13210

Description	: Hot Air Oven	Order No.	: 1152/24
-------------	----------------	-----------	-----------

Manufacturer : Memmert

Model : UF 260

Serial No. : B620.0814

Identification No. : WWL 0212

Calibration Method : Calibration were conducted using In-house calibration procedure *CP-MT-006*. According to comparison with LXI Data Acquisition Switch Unit with sensor. The calibration methods based on Euramet Calibration Guide No.20 - guidelines on the Calibration of Temperature and/or Humidity Controlled Enclosures.

Reference Standard Instruments :

Instrument

LXI Data Acquisition Switch Unit with Sensor

Model

Call No.
MY49020096

Certificate No.

Due Date
Nov 30, 2024

The effect that the result relate only to the items calibrated. It was found accurate as shown on date and place of calibration only.

Traceability : This measurement are traceable to the International System of Unit (SI), through National Institute of Metrology Thailand (NIMT)

The reported expanded uncertainty of measurement was based on standard uncertainty multiplied by coverage factor $k=2$, providing a level of confidence of not less than 95%.



Calibrated by : Mr.Yuttakom Jamneansri

Approved by :

Issue date: Apr 10, 2024


This calibration certificate shall not be reproduced other than in full except with the prior written approval of Intech Metrological Center Co., Ltd

Rev.03 / Feb 2024

FM-MT-013

Calibration point (°C)	Temperature of UUC* at each position (°C)									Uncertainty of measurement (+/- °C)
	Ch.1	Ch.2	Ch.3	Ch.4	Ch.5	Ch.6	Ch.7	Ch.8	Ch.9	
104	103.494	103.933	103.871	103.988	103.980	104.081	103.843	104.217	104.022	0.45
180	179.985	179.953	180.047	179.985	179.908	180.088	180.065	180.273	180.105	0.54

Setting temperature (°C)	Indicating Temperature (°C)	Measured stability (+/- °C)	Measured uniformity (°C)	Overall variation (°C)
104.0	104.0	0.34	0.66	1.3
180.0	180.0	0.41	0.86	1.2



Front view

UUC* = Unit under calibration
Uniformity = Maximum and Minimum difference of measured temperature at any probes and the measured temperature at the reference and same time.
Overall Variation = Difference of temperature value between the maximum and minimum any time.
Stability = One half of the maximum difference of measured temperatures at any one probe.



Certificate of Calibration

Equipment: Balance
Model: BL 210S
Serial No. (or ID.): 15808131 (WWL 0022)
Manufacturer: Sartorius
Condition: In condition

Certificate No.: C01241754
Issued Date: 05 June 2024
Job No.: WO-00030302
Page: 1 of 2

Customer: Water Analysis Center Co., Ltd.
1/94 Moo 5, Rojana Industrial Park, Rojana Road,
Tambol Kanham, Amphur U-Thai, Ayutthaya 13210 Thailand

Environment Condition: Temperature 26 °C ± 0.2 °C
Humidity 50 %RH ± 2.6 %RH

Calibration Place: Water Analysis Center Co., Ltd. (น้ำวิเคราะห์)
1/94 Moo 5, Rojana Industrial Park, Rojana Road,
Tambol Kanham, Amphur U-Thai, Ayutthaya 13210 Thailand

Calibration By: Mr. Polawad Ruemlup
Calibration Date: 05 June 2024
The Method used: In-house method, CAL-WI-47, based on UKAS Lab 14
Traceability: This certificate is traceable to the SI Units maintained by National Institute of Metrology (NIMT), Thailand through DKSH Technology Co., Ltd. Certificate No. C02240400

Polawad Ruemlup

(Mr. Polawad Ruemlup)

Person in charge

Rungrod

(Mr. Rungrod Jenkitrakulchai)

Authorized signatory

This certificate is issued in the units of measurement according to the International System of Units (SI). It provides traceability of measurement to International or national standard or other recognized national standard laboratories.
The measurement uncertainty stated is the expanded uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM).
These results may be affected by deviations from specified conditions. The results relate only to the items tested, calibrated or sampled. This report shall not be reproduced except in full without approval of DKSH Technology Limited.

DKSH America verified this
2533 meunghin university road, bangkok, thailand 10260
2533 Sukhumvit Road, Bangkok, Thailand 10260
Phone: +66 2639 7000 Email: info@dksh.com Website: www.dksh.com

Delivering Growth - in Asia and Beyond.



Certificate No.: C01241754

Page: 2 of 2

Calibration Results:

Without Adjustment

Excentric Error: Weight to be 1/3 or 1/2 of Maximum capacity, taken from the center of the pan as a zero reference.

Nominal Test Value (g)	Reference Points (g)				
	A	B	C	D	E
-	0.0000	0.0001	0.0000	0.0000	-0.0002

Repeatability: Determination of the standard deviation of weighing balance., Readability 0.0001 (g)

Nominal test value (g)	Standard Deviation
20	0.00004
200	0.00006

Error of indication from nominal or conventional mass value., Readability 0.0001 (g)

Nominal Value (g)	Conventional Mass (g)	Displayed Value (g)	Error of Indication (g)	Uncertainty (g)	k
1	1.00001	1.0000	0.0000	0.00011	2.04
2	2.00002	2.0000	0.0000	0.00011	2.04
5	5.00002	5.0000	0.0000	0.00011	2.04
10	10.00001	10.0000	0.0000	0.00011	2.04
20	20.00001	20.0000	0.0000	0.00012	2.03
50	50.00003	50.0000	0.0000	0.00013	2.02
70	70.00004	70.0000	0.0000	0.00016	2.01
100	99.99996	100.0001	0.0001	0.00017	2.01
120	119.99997	120.0002	0.0002	0.00021	2.00
150	149.99999	150.0002	0.0002	0.00024	2.00
200	199.99996	200.0004	0.0004	0.00030	2.00

The End of Certificate

DKSH Technology Limited
2533 Sukhumvit Road, Bangkok, Prachinburi, Bangkok 10259
Phone: +66 2638 7000 Email: info.dksh@dksh.com Website: www.dksh.com/thailand

Delivering Growth - in Asia and Beyond.

CAL-FM-C01-14: 12 Sep 2022



Master Calibration Co., Ltd.

547 Soi Rachadavut, Kwang Samsenok, Krua Huaykwang, Bangkok 10310

Tel : (02) 274 2978-9, (02) 2742987-8 Fax : (02) 274 2518, (02) 274 2989

Website : www.mastercalibration.com E-mail : calibrate@mastercalibration.com

Certificate of Calibration

LIQUID BATH



NIST-17025
CALIBRATION UNIT

Certificate No.: MC 2314268

Page 1 of 3



Customer : Water Analysis Center Co., Ltd.
1/94 Moo 5, T.Kantham, A.U.-Thai, Ayuthaya 13210.

Reference Job No. : 23-2833 Received Date : 15 December 2023
Description : Water Bath
Manufacturer : ESSTELL Model : EWB-122D
Serial No. : 20180508122 ID. No. : WWL 0214
Marking : Additionally for the purpose of identification by this laboratory a label marked with this certificate number (MC 2314268) has been attached to the case.
Method : In-House calibration procedure MWI-T-029 this method is reference to ASTM E715 "Liquid Bath".
Location of Calibration : Water Analysis Center Co., Ltd. ; Laboratory.
Environmental Condition : Ambient Temperature : (29.4 to 29.8) °C
Relative Humidity : (49.0 to 52.0) %
Date of Calibration : 15 December 2023 Date of Issue : 19 December 2023

Checked by : Chalermkit Rakphada
(Calibration Engineer)

Approved by : Aittipong Kasit
(Technical Manager)

The uncertainties are for a confidence probability of approximately 95%

This certificate is issued in accordance with the conditions of accreditation granted by the National Standardization Council of Thailand-Office of the National Standardization Council that has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of Master Calibration Co., Ltd.

[MCF-Q-077 ; Rev6 ; Date : 22/04/2021]

Certificate No.: MC 2314268

Page 2 of 3

Reference Standard Instrument :

Description	Certificate No.	Serial No.	Due date	Traceable thru
Data Acquisition/Switch Unit With Thermocouple Type " T " ID. No.27/1 to 27/5	MC 2301270	MY44020009	9 Mar 2024	MCAL

Traceability :

The measurement standard traceable to the international system of units (SI) through certificate as mentioned above


1. Calibration Procedure:

This Instrument was calibration according to ASTM E715 - 2007 by comparison with calibrated sensor under no load condition. The sensor were placed on five points and located one sensor in each of the eight corners of the chamber and was away from the each wall of 5 cm to 10 cm. And placed the five sensor within 2.5 cm of the geometric center of the chamber.

Temperature Uniformity - the maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady state conditions. The reference sensor should preferably be located at the geometric center of the chamber.

Temperature Stability - one-half of the greatest maximum difference of measured temperatures at any one sensor.

Overall Variation - The Difference of the maximum and minimum measured temperatures throughout observation.

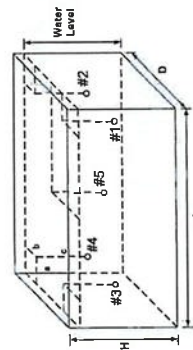

- Overall Ambient Temperature around the Chamber variation : 1.3 °C
- Overall Line Voltage variation : 0.0 V
- Chamber Size (W*H*D) : 50 cm x 12 cm x 30 cm
- Water Level : 7 cm

Checked by : Chalermkai

[MCF-Q-077 ; Rev.6 ; Date : 22/04/2021]

Certificate No.: MC 2314268

Page 3 of 3

2. Result of calibration :

Temperature Measurement Accuracy Test

Indicating Temperature (°C)	Measured Temperature (°C) at Spread Locations					Uncertainty (±°C)
	#1	#2	#3	#4	Ref. #5	
45.0	44.5	44.4	44.5	44.5	44.6	0.45

Chamber Characterization Result

Desired Temperature (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
44.5	45.0	45.0	0.62	0.88	1.5

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.0$, providing a level of confidence of approximately 95 %.

This certificate will certify of the calibrated equipment only.

End of Certificate

Checked by : Chalermkai

[MCF-Q-077 ; Rev.6 ; Date : 22/04/2021]

Certificate No.: MC 2314270

Reference Standard Instrument :

Description Certificate No. Serial No. Due date Traceable thru
Data Acquisition/Switch Unit MC 2214032 MY41029992 26 Dec 2023 MCAL
With Thermocouple Type " T " ID. No.31/1 to 31/9

Traceability :

The measurement standard traceable to the international system of units (SI) through certificate as mentioned above

1. Calibration Procedure:

This Instrument was calibration according to TLAS G-20 by comparison with calibrated thermocouple type T under no load condition. The Thermocouples were placed on nine points and located one thermocouple in each of the eight corners of the chamber and was away from the each wall of 5 cm to 10 cm. And placed the ninth thermocouple within 2.5 cm of the geometric center of the chamber.

Temperature Uniformity - the maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady state conditions. The reference sensor should preferably be located at the geometric center of the chamber.

Temperature Stability - one-half of the greatest maximum difference of measured temperatures at any one sensor.

Overall Variation - The Difference of the maximum and minimum measured temperatures throughout observation.




Figure 1 : Sensor Installation Location

Checked by : Chalermkit

Master Calibration Co.,Ltd.

547 Soi Rachadaniwa, Kwang Samenok, Khet Huaykwang, Bangkok 10310
Tel. : (02) 274 2978-9 (02) 2742987-8 Fax : (02) 274 2518, (02) 274 2989
Website : www.mastercalibration.com E-mail : calibrate@mastercalibration.com

Certificate of Calibration



**TEMPERATURE
CONTROLLER ENCLOSURES**

Certificate No.: MC 2314270

Customer : Water Analysis Center Co., Ltd.
1/94 Moo 5, T. Kantham, A.U.-Thai, Ayuthaya 13210.

Reference Job No. : 23-2833 Received Date : 15 December 2023
Description : Incubator
Manufacturer : Memmert Model : IN260
Serial No. : D619.0170 ID. No. : WWL 0192
Marking : Additionally for the purpose of identification by this laboratory a label marked with this certificate number (MC 2314270) has been attached to the case.
Method : In-House calibration procedure MWI-T-033 this method is reference to TLAS G-20 "Temperature Controlled Enclosures".

Location of Calibration : Water Analysis Center Co., Ltd. ; Laboratory.
Environmental Conditions : Ambient Temperature : (25.2 to 25.6) °C
Relative Humidity : (65.4 to 66.2) %
Date of Calibration : 15 December 2023 Date of Issue : 19 December 2023

Checked by : Chalermkit Rakphada
Chalermkit Rakphada
(Calibration Engineer)
Approved by : Aittipong Kaljanawasit
Aittipong Kaljanawasit
(Technical Manager)

The uncertainties are for a confidence probability of approximately 95%

This certificate is issued in accordance with the conditions of accreditation granted by the National Standardization Council of Thailand-Office of the National Standardization Council that has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of Master Calibration Co.,Ltd.

Certificate No.: MC 2314270

Page 3 of 3

2. Result of calibration :

Temperature Measurement Accuracy Test

Indicating Temperature (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (±°C)
	#1	#2	#3	#4	#5	#6	#7	#8	Ref. #9	
35.0	35.2	35.2	35.2	35.2	35.1	35.1	35.0	35.1	35.1	0.44

Chamber Characterization Result

Desired Temperature (°C)	Controller Temperature (°C)	Indicating Temperature (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
35.0	35.0	35.0	0.13	0.21	0.4

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

This certificate will certify of the calibrated equipment only.

End of Certificate

Checked by: Chalermkitt

[MCF-Q-077 ; Rev.6 ; Date : 22/04/2021]

Certificate of Calibration



AUTOClave

Certificate No.: MC 2314269

Page 1 of 3



Customer : Water Analysis Center Co., Ltd.
1/94 Moo 5, T.Kantham, A.U.-Thai, Ayuthaya 13210.

Reference Job No. : 23-2833 Received Date : 15 December 2023
Description : Autoclave
Manufacturer : TOMY Model : Autoclave ES-315
Serial No. : 51135128 ID. No. : WWL 0083
Marking : Additionally for the purpose of identification by this laboratory a label marked with this certificate number (MC 2314269) has been attached to the case.
Method : In-House calibration procedure MWI-T-036 this method is reference to based on BS 2646 : 1993 Part 5 "Autoclave".
Location of Calibration : Water Analysis Center Co., Ltd. ; Laboratory.
Environmental Condition : Ambient Temperature : (29.4 to 30.7) °C
Relative Humidity : (50.0 to 52.0) %
Date of Calibration : 15 December 2023 Date of Issue : 19 December 2023

Checked by : Chalermkitt
Chalermkitt Rakphada
(Calibration Engineer)

Approved by : Aittipong
Aittipong Kanjanawastit
(Technical Manager)

The uncertainties are for a confidence probability of approximately 95%

This certificate is issued in accordance with the conditions of accreditation granted by the National Standardization Council of Thailand-Office of the National Standardization Council that has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standards laboratory. This certificate may not be reproduced other than in full except with the prior written approval of Master Calibration Co.,Ltd.

[MCF-Q-077 ; Rev.6 ; Date : 22/04/2021]

Certificate No.: MC 2314269

Page 2 of 3

Reference Standard Instrument :

Description	Certificate No.	Serial No.	Due date	Traceable thru
Temperature Recorder RTD 100 Ohm	MC 2300163	M79252	9 Jan 2024	MCAL
Temperature Recorder RTD 100 Ohm	MC 2300164	5978194	9 Jan 2024	MCAL
Temperature Recorder RTD 100 Ohm	MC 2300165	M79251	9 Jan 2024	MCAL

Traceability :


The measurement standard traceable to the international system of units (SI) through certificate as mentioned above

1. Calibration Procedure:

The equipment list above was calibrated an accuracy of temperature in a chamber of the sterilizer.

The calibration was performed by direct measurement of generated temperatures using the standard thermometer with three temperature sensors. The data was recorded in a period of fifteen minutes of the sterilizing status. The temperature scale used was based on ITS-90.

The calibration of sterilizer was carried out at the point indicated by following the In-house calibration method No. MWI-T-036 based on BS 2646 : 1993 : Part 5 in Tests for performance section.

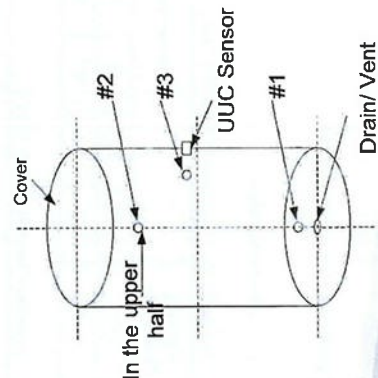

- Overall Line Voltage variation : 0.0 V

Checked by : Chalermpit

[MCF-Q-077 : Rev.6 : Date : 22/04/2021]

Certificate No.: MC 2314269

Page 3 of 3

2. Result of calibration :

Temperature Measurement Accuracy Test

Indicating Temperature (°C)	Measured Temperature (°C) at Spread Locations			Uncertainty (±°C)
	#1	#2	#3	
121	121.72	121.73	121.95	0.61

Characterization Result

Desired Temperature (°C)	Setting Temperature (°C)	Timer Setting (min)	Indicating Temperature (°C)	Indicating Pressure (kPa)	Measured Stability (±°C)	Measured Uniformity (°C)	Overall Variation (°C)
121	121	15.0	121	120	0.60	0.35	1.35

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

This certificate will certify of the calibrated equipment only.

End of Certificate

Checked by : Chalermpit

[MCF-Q-077 : Rev.6 : Date : 22/04/2021]