

ภาคผนวก ฉ

สำเนาเอกสารรับรองเครื่องมือการตรวจวัด

Certificate of Calibration

Certificate No. : 66-420087-1

Page : 1 of 2

Submitted by :

M Green Group Co.,Ltd.

188/46 Wisatsukhakhon 25, Pracha-Uttd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

pH Meter with electrode

pH meter

Manufacturer : Eutech

Model : pH 700

Range : N/A pH Resolution : 0.01 pH

Serial No. : 2884323 ID No. : N/A

Electrode

Model : N/A Serial No. : 01X0999320

Environment : On site calibration was carried out at the Laboratory, M Green Group Co.,Ltd.

Ambient Temperature : (25.0 to 25.5)°C

Relative Humidity : (45 to 50) %

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by : Permon Chumpu

Calibration Method : In-house method CAL-M4201 direct measurement by using standard voltage calibrator and using certified reference material (CRM)

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Multiproduct Calibrator

ID No.	Cert.No.	Due Date	Traceability
400005	SG-E-00307/66	23 Aug 2025	National Institute of Metrology Thailand (NIMT)

2. Standard Buffer Solution

pH	Cert. No.	Lot No.	Exp.Date	Traceability
4.008	61270213	915161	19 Jul 2025	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
6.985	61275614	898428	28 May 2024	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
9.997	61281073	915163	19 Jul 2024	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.

Certificate of Calibration

Certificate No. : 66-420087-1

Page : 2 of 2

Result of Calibration :

UUC Condition As-Received : Good

Function : Electrical measurement

pH meter

Performing standard curve by Multiproduct Calibrator at pH (4,7,10)

Adjustment Curve at nominal pH	Applied Voltage (mV)	Nominal Value (pH)	UUC Reading (pH)	UUC Reading (mV)	Correction (mV)	Uncertainty (± mV)
4, 7, 10	177.4800	4	4.00	177.5	0.0	0.12
	0.0000	7	7.00	0.1	-0.1	0.086
	-177.4800	10	10.00	-177.4	-0.1	0.12

Function : pH meter with electrode

Performing a three - buffer standard curve using buffer nominal pH (4,7,10)

Adjustment Curve at nominal pH	Standard Buffer (pH)	UUC Reading (pH)	Correction (pH)	Uncertainty (± pH)
4, 7, 10	4.008	4.01	0.00	0.010
	6.985	7.00	-0.01	0.011
	9.997	10.01	-0.01	0.014

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2 , providing a level of confidence of approximately 95%

-o/o-



Certificate of Calibration

Certificate No. : 66-400519-1

Page : 1 of 2

Submitted by :

M Green Group Co.,Ltd.

188/46 Wisetukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Digital Thermometer with Thermistor probe

Temperature Indicator

Manufacturer : Eutech

Model : pH 700

Range : N/A °C

Resolution : 0.1 °C

Serial No. : 2884323

ID No. : N/A

Thermistor probe

Model : N/A

Sheath Material : Stainless

Diameter : 3.2 mm.

Length : 100 mm.

Serial No. : PH5TEMB01P

ID No. : N/A

Environment :

On site calibration was carried out at the M Green Group Co.,Ltd.

Ambient Temperature : (25.0 to 26.0) °C

Relative Humidity : (56 to 60) %

Line Voltage : (224.0 to 225.2) VAC

Date of Received :

20 September 2023

Date of Calibration :

20 September 2023

Date of Issue :

25 September 2023

Calibrated by :

Penpon Chanpu

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4003

by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert. No. Due Date Traceability

400002 TT-0074-22 20 Jun 2024

National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert. No. Due Date Traceability

400033 22E569 22 Feb 2024

National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 66-400519

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Immersion Depth (mm.)	Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
100	25.006	24.9	0.1	0.19

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-



Certificate of Calibration

Certificate No. : 66-200300-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisetasuknakhon 25, Pracha-Uitd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Electronic Balance

Manufacturer : SHIMADZU Model : AP225WD

Serial No. : D316300690

Capacity : 220 g Resolution : 0.00001g/102g, 0.0001g/220g

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.6 to 26.7) °C

Relative Humidity : (54.4 to 56.6) %

Air Pressure : 1010.0 mbar

Date of Received :

20 September 2023

Date of Calibration :

20 September 2023

Date of Issue :

22 September 2023

Calibrated by :

Akaradath Thippichai

Calibration Method :

In-house method CAL-M2001 based on UKAS Publication ref : LAB 14

Edition 7 - November 2022

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No. Cert. No. Due Date

E261-E2624 C0222345 10 Nov 2023

Traceability

National Institute of Metrology (Thailand), (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 66-200300-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Departure of indication from nominal value

Nominal Value (g)	Correction (g)	Uncertainty ± (g)
0.001	0.00000	0.000012
0.01	0.00000	0.000013
0.1	0.00000	0.000015
1	0.00000	0.000026
10	0.00000	0.000053
20	-0.00003	0.000071
50	0.00004	0.00011
100	-0.00009	0.00020
150	0.00000	0.00038
200	-0.0001	0.00038


This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.15$, providing a level of confidence of approximately 95%

Eccentric error

Load test : 50 g

A	B	C	D	E
-0.00003	0.00000	0.00000	-0.00005	0.00000



Repeatability

Load test : 200 g

Sidev. : 0.000048 g

-o0o -





Certificate of Calibration

Certificate No. : 66-400531-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd

188/46 Wisatsukmakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Liquid in Glass Thermometer

Manufacturer : N/A

Model : N/A

Range : 0 °C to 100 °C

Resolution : 1 °C

Serial No. : N/A

Immersion : Total

ID No. : 94-49747

Environment :

Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Line Voltage : (220 ± 22) VAC

Date of Received :

21 September 2023

Date of Calibration :

23 September to 26 September 2023

Date of Issue :

26 September 2022

Calibrated by :

Chortip Samchusri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4001 based on ASTM E77-07 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert. No. Due Date

400001 TT-0016-22 07 Feb 2024

Traceability

National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert. No. Due Date

400003 23E1866 01 Jun 2025

Traceability

National Institute of Metrology Thailand (NIMT)

400004 23E1866 01 Jun 2025

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 66-400531-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Ice point check : UUC* reading 0 °C Standard reading 0.0352 °C

Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
39.7228	40	-0.3	0.31

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

- o0G -





Certificate of Calibration

Certificate No. : 66-400520-2

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Uttd Rd., Thungkru Bangkok 10140 Thailand

Equipment : Air Chamber (Oven)

Manufacturer : Memmert

Model : UF110

Range : N/A °C

Resolution : 0.1 °C

Serial No. : B419.1092

ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.0 to 26.0) °C

Relative Humidity : (40 to 50) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by : Permporn Chianpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with Thermocouple probe

ID No. Cert. No.

400046 & 400028 66-400184-3

Due Date

Traceability

National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



Certificate of Calibration

Certificate No. : 66-400520-2


Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)

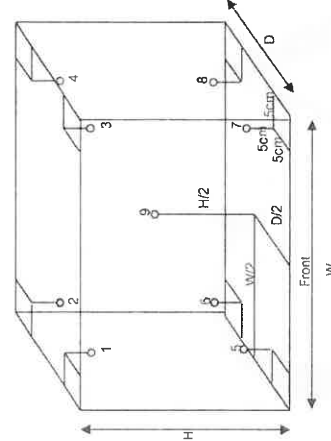

Inside of Chamber

W = 0.56 m

D = 0.40 m

H = 0.48 m

Capacity = 0.11 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
103.0	103.0	103.0	103.3	103.0	103.7	103.3	103.1	103.0	103.8	102.7	103.3	0.69
105.0	105.0	105.0	105.3	105.0	105.7	105.3	105.2	105.0	105.8	104.6	105.3	0.71
180.0	180.0	180.0	180.4	180.1	181.2	180.4	180.3	180.0	181.4	179.0	180.5	0.95

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured		Overall Variation (°C)
			Uniformity (°C)	Stability (°C)	
103.0	103.0	103.0	0.8	0.1	1.3
105.0	105.0	105.0	0.9	0.1	1.4
180.0	180.0	180.0	1.7	0.2	2.7

Remark: The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- olo -





Certificate of Calibration

Certificate No. : **66-400520-3** Page : **1 of 2**Submitted by : M Green Group Co., Ltd.
188/46 Wisatsitkhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 ThailandEquipment : Water Bath
Manufacturer : Memmert
Range : N/A °C
Serial No. : L619.0037
Model : WNB29
Resolution : 0.1 °C
ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.0 to 26.0) °C
Relative Humidity : (40 to 50) %
Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by : Permpon Chianpu

Calibration Method : This instrument was calibrated by In-house method CAL-M4006 based on ASTM E715-80
The temperature scale used was based on ITS-90Reference Standard Instruments : This certification is traceable to the International System of Units
Standard Digital Thermometer with RTD probe

ID No. 400046 & 400024 Cert.No. 66-400184-2 Due Date 06 Oct 2023 Traceability National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)
Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.




Certificate of Calibration

Certificate No. : **66-400520-3** Page : **2 of 2**

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

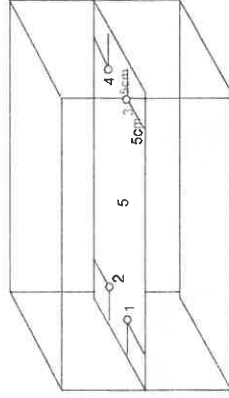

Front

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.					Uncertainty (± °C)	Measured Uniformity (°C)	Measured Stability (°C)
			1	2	3	4	5			
85.0	85.0	85.0	85.08	85.04	84.98	85.17	85.02	0.18	0.2	0.05

Remark The uncertainty is not combine uniformity of the water bath

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. :

66-400520-4

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Air Chamber (Incubator)

Manufacturer : Biobase

Model : Biochemistry Incubator

Range : 0 °C to 65 °C

Resolution : 0.1 °C

Serial No. : KYP1502202003

ID No. : N/A

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (25.0 to 25.5) °C

Relative Humidity : (45 to 50) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2023

Date of Calibration : 20 September 2023

Date of Issue : 25 September 2023

Calibrated by :

Permon Chanpu

Calibration Method :

CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No.

Cert. No.

Due Date

Traceability

400029 & 400043

66-400226-1

27 Oct 2023
National Institute of Metrology Thailand (NIMT)

Approved by :

(Surachai Promthong)

Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



Certificate of Calibration


Certificate No. : 66-400520-4

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was selfing air ventilation at position 0 (close)

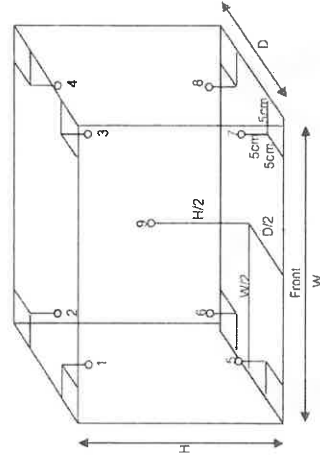

Inside of Chamber

W = 0.45 m

D = 0.41 m

H = 0.85 m

Capacity = 0.16 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
20.0	20.0	20.0	20.14	20.04	19.91	19.97	20.03	19.96	19.91	19.96	19.92	0.70

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
20.0	20.0	20.0	0.28	0.37	0.8

Remark: The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- o0o -





Certificate of Calibration

Certificate No. : 66-300589-7

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisutesuknakhon 25, Pracha-Ud Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Burette

Manufacturer : GLASSCO

Class : A

Capacity : 10 ml **Graduation** : 0.05 ml

ID No. : 2212-0344-1

Environment

: **Ambient Temperature** : (20 ± 3) °C

: **Relative Humidity** : (50 ± 10) %

: **Air Pressure** : 1006.7 mbar.

Date of Received : 20 September 2023

Date of Calibration : 27 September 2023

Date of Issue : 27 September 2023

Calibrated by : Wipa Tovadee

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. **Cert. No.** **Due Date** **Traceability**

241003 66-200196-2 02 Dec 2023 National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



Certificate of Calibration

Certificate No. : 66-300589-7

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 21.33 sec.

Nominal Volume (ml)	Measuring Volume (ml)
10	9.9913

Uncertainty of measurement with in ± 0.0039 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-



CAL

Calibratech Co., Ltd.

7/106-7 Moo 2, Sukhprachasri 3 Rd., Banggood, Pakkred, Nonthaburi 11120
Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.com



NSG-TISI-TIS 17025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 66-300589-8

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisetasukhakon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Burette
Manufacturer : GLASSCO Class : A
Capacity : 25 ml Graduation : 0.1 ml
ID No. : 2212-0344-2

Environment : Ambient Temperature : (20 ± 3) °C
Relative Humidity : (50 ± 10) %
Air Pressure : 1006.7 mbar.

Date of Received : 20 September 2023
Date of Calibration : 27 September 2023
Date of Issue : 27 September 2023
Calibrated by : Wipa Tovadee

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.	Cert. No.	Due Date	Traceability
241003	66-200196-2	02 Dec 2023	National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



CAL-P0021-05

CAL

Calibratech Co., Ltd.

7/106-7 Moo 2, Sukhprachasri 3 Rd., Banggood, Pakkred, Nonthaburi 11120
Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.com

Certificate of Calibration

Certificate No. : 66-300589-8

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 46.01 sec.

Nominal Volume (ml)	Measuring Volume (ml)
25	24.9741

Uncertainty of measurement with in $\pm$ 0.0066 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-



CAL-P0021-05

Certificate of Calibration

Certificate No. : 66-300590-1

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatsuknakhon 25, Pracha-Uitd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Imhoff Cone

Manufacturer : VITLAB

Capacity : 1000 ml **Graduation :** 50 ml

ID No. : CY1000/01/22

Environment

: Ambient Temperature : (20 ± 3) °C

: Relative Humidity : (50 ± 10) %

: Air Pressure : 1003.4 mbar.

Date of Received : 20 September 2023

Date of Calibration : 26 September 2023

Date of Issue : 26 September 2023

Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert No.

Due Date

Traceability

241002

66-200196-1

02 Dec 2023

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Towadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 66-300590-1

Page : 2 of 2

Result of Calibration :

This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
500	501.19
1000	1010.67

Uncertainty of measurement with in ± 0.17 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

- o0o -





QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksoeng, Banglae, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



CERTIFICATE No : 24T1185
REFERENCE No : 72116-3

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D518.0082-
ID No : EQL-205
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : CHAICHARN CH.
CALIBRATION DATE : 09-Feb-24

APPROVED BY : 
ISSUED DATE : 12-Feb-24
RECEIVED DATE : 09-Feb-24

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-0010 REV : 03



QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksoeng, Banglae, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

CERTIFICATE No : 24T1185

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-205
RECEIVED DATE : 09-Feb-24
AMBIENT TEMPERATURE : 25 °C ± 1 °C
SN : D518.0082
CALIBRATION DATE : 09-Feb-24
RELATIVE HUMIDITY : 53 %RH ± 10 %RH

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TIAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.


2. REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER WITH RTD
MODEL : HYDRA 2635A
SERIAL No : 7301307
CERTIFICATE No : 2376636
DUE DATE : 10-Jul-24
3. THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT

GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 1
Overall Line Voltage (V) variation : 3
Instrument Condition : Normal
Chamber Size (W*L*H): 36*40*72 cm



CHAMBER PERFORMANCE

Calibrate Point (°C)	Average All Position Temp. (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
35.0	35.03	0.05	0.09	0.16
36.0	36.05	0.07	0.08	0.19
41.5	41.45	0.08	0.13	0.20

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
		#1	#2	#3	#4	#5	#6	#7	#8	#9	
35.0	35.0	34.98	35.01	35.00	35.00	35.02	35.08	35.07	35.04	35.10	0.25
36.0	36.0	36.00	36.03	36.03	36.02	36.04	36.09	36.10	36.04	36.12	0.25
41.5	41.5	41.45	41.45	41.39	41.46	41.46	41.47	41.43	41.44	41.49	0.36

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.

NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%
END OF CALIBRATION REPORT

F-0010 REV : 03



QUALITY CALIBRATION CO., LTD.
235 Petchkasem 63/2 Road, Latkong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com



QUALITY CALIBRATION CO., LTD.
235 Petchkasem 63/2 Road, Latkong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

CERTIFICATE No : 24T1189
REFERENCE No : 72116-7

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : AUTOCLAVE

MANUFACTURER : HIRAYAMA

MODEL : HVE-50

SERIAL No : 30612085166

ID No : EQL-155

CONDITION AS RECEIVED : USED ITEM

SUBMITTED BY : TEST TECH CO., LTD.

30,32 RAMA II SOI 63, RAMA II RD.,
SAMAEDAM, BANGKHUNTHIAN, BANGKOK
10150

CALIBRATED BY :

CHAICHARN CH.

CALIBRATION DATE :

09-Feb-24

APPROVED BY :

PONGSAK J.

ISSUED DATE :

12-Feb-24

RECEIVED DATE :

09-Feb-24

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.

F-G010 REV : 03



QUALITY CALIBRATION CO., LTD.
235 Petchkasem 63/2 Road, Latkong, Bangkok, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

CERTIFICATE No : 24T1189

PAGE : 2 OF 2

Calibration Report

EQUIPMENT : AUTOCLAVE
MANUFACTURER : HIRAYAMA
ID NUMBER : EQL-155
RECEIVED DATE : 09-Feb-24
MODEL : HVE-50
SERIAL NUMBER : 30612085166
CALIBRATION DATE : 09-Feb-24
RELATIVE HUMIDITY : 53 %RH $\pm$ 10 % RH
AMBIENT TEMPERATURE : 30° C $\pm$ 1° C

CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED BASED ON BS 2646-1:2021 BY COMPARISON WITH CALIBRATED RTD DATA LOGGERS UNDER NO LOAD CONDITION. THE SENSORS WERE PLACED ON FIVE LOCATIONS AS SHOWN IN THE PICTURE. THE SENSOR ON LOCATION 1 AND 2 WERE PLACED IN THE UPPER HALF AND LOWER HALF OF CHAMBER FREE SPACE RESPECTIVELY. THE THIRD SENSOR WAS PLACED WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE INSTRUMENT CHAMBER. SENSOR NUMBER 4 WAS ATTACHED TO THE LOAD TEMPERATURE PROBE, IF FITTED, WITHIN 15 mm OF ITS TIP. SENSOR NUMBER 5 WAS PLACED IN THE CHAMBER DRAIN OR VENT WITHIN 100 mm OF ITS CONNECTION TO THE CHAMBER.

2. REFERENCE STANDARD INSTRUMENTS :-

- 1) DATA LOGGER
VALPROBE
MODEL : S330.S367.DV35.DN94
SERIAL No : 24T0890
CERTIFICATE No : 26-Jan-23
DUE DATE : 26-Jan-23
- 3) THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber variation : 0.5 °C

Autoclave Condition : Normal

Chamber Size (Diameter*H): 30 * 71 cm

CHAMBER PERFORMANCE

Calibrate Point (°C)	Average all Position (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)	Pressure (MPa)	Holding time (min)	Operating Cycle time (min)
115	115.74	0.09	0.11	0.25	0.090	20	60
121	121.59	0.06	0.21	0.28	0.125	20	60

FRONT

TEMPERATURE MEASUREMENT ACCURACY TEST(°C)

Cont Temp	Ind Temp	Measured Temperature (°C) at Spread Locations					Uncertainty (± °C)
		#1	#2	#3	#4	#5	
115	115	115.72	115.74	115.79	115.71	115.71	0.59
121	121	121.59	121.62	121.56	121.58	121.59	0.59

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT OF TEMPERATURE MEASUREMENT ACCURACY TEST EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : THE STABILITY TERM IN THE UNCERTAINTY BUDGET WAS REPLACED BY THE STANDARD REPEATABILITY.

NOTE 3 : LOCATION 3 WAS REFERENCE LOCATION.

NOTE 4 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.

THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k =2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT



F-G010 REV : 03

การดูแลบำรุงรักษาเชิงป้องกัน Preventive Maintenance



บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด
ฝ่ายบริการหลังการขาย
โทร 0 2 639 7000 E-mail: service.th@dksh.com
ฝ่ายขายและการตลาด
โทร 0 2 639 7000 E-Mail : marketing.th@dksh.com
Website : www.dksh.co.th/technology/solutions/thai

แผนการให้บริการ Preventive Maintenance

Type text here

บริษัทฯ จะส่งวิศวกรผู้ชำนาญ เพื่อให้บริการตามขอบเขตของบริการเฉพาะ ในวันและเวลา ราชการ หากมีความประสงค์ที่จะรับบริการนอกเหนือจากวัน เวลา ราชการ (วันหยุดเสาร์ – อาทิตย์ หรือวันหยุด นักศึกษา) บริษัทฯ จะคิดค่าบริการเพิ่มเติมตามอัตราที่กฎหมายแรงงานกำหนดไว้

ขอบข่ายการบริการ

- ตรวจสอบสภาพการทำงานต่าง ๆ ของเครื่องมือ
- ทดสอบประสิทธิภาพการทำงานของเครื่องมือ
- รายการผลการตรวจสอบเครื่องมือ

หมายเหตุ

- ราคาไม่รวมถึงค่าบริการซ่อม หรือ เปลี่ยนอะไหล่ที่ชำรุดเสียหาย หรือหมดสภาพการใช้งาน
- ในกรณีที่ผู้รับบริการอยู่นอกเขตพื้นที่ให้บริการ บริษัทฯ จำเป็นต้องคิดค่าใช้จ่ายเพิ่มเติม ได้แก่ ค่าเดินทาง เป็นต้น
- บริษัทฯ ขอสงวนสิทธิ์ในการเปลี่ยนแปลงราคา โดยไม่แจ้งให้ทราบล่วงหน้า



DKSH Technology Limited (บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด)
เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260
เลขประจำตัวผู้เสียภาษี 010-555-001-4547 (สำนักงานใหญ่)

ช่องทางการติดต่อ



Call center 0 2 639 7000



DKSH Scientific



www.dksh.com/scientific-thailand



marketing.tes.th@dksh.com



@dkshscientific

Preventive Maintenance Contract

จำนวนใบการทำสัญญาบริการ ...1...ครั้ง ต่อปี
ครั้งที่ 1 วันที่ 19/04/2024.....

รายละเอียดผู้รับบริการ

หน่วยงาน	บริษัท เพอร์ เทค จำกัด
ที่อยู่	30,32 ซอยพระรามที่ 2 ซอย 63 ถนนพระรามที่ 2 แขวงแสนคำ เขตบางขุนเทียน กรุงเทพมหานคร 10150
โทรศัพท์	0-2893-4211-7 แฟกซ์ 0-2893-4218

ผู้ติดต่อ


ชื่อ - นามสกุล	คุณกรรณก ขุนพิทักษ์
ตำแหน่ง	หัวหน้าส่วน
โทรศัพท์	087 398 9274 เบอร์ติดต่อ - แฟกซ์ -
E-mail	lab_center@tesstech.co.th

รายละเอียดผู้ให้บริการ

บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด (ฝ่ายบริการหลังการขาย) (สำนักงานใหญ่) เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260 โทรศัพท์ 0 2 693 7000 Email: marketing.tes.th@dksh.com เจ้าหน้าที่ประจำสถานงาน : คุณสุภารัตน์ ศรีรัตน์ โทรศัพท์ 090 678 6925	
เจ้าหน้าที่ผู้ให้บริการ	นายจิรายุส ผลอาจ
ตำแหน่ง	Specialist, Technical Service
โทรศัพท์	0938138736 แฟกซ์ -
E-mail	Jirayut.j@dksh.com


ลงนามผู้รับบริการ	นางสาว จุฬาลักษณ์	ลงนามผู้ให้บริการ	[Redacted]
ตัวรับรอง	(ลงลายมือชื่อ...)	ตัวรับรอง	(นาย) จิรายุส ผลอาจ
ตำแหน่ง	หัวหน้าส่วนงาน	ตำแหน่ง	Specialist, Technical Service
วันที่ / ประทับตราบริษัท	19/04/2024	วันที่ / ประทับตราบริษัท	19/04/2024

Inside Steam generator

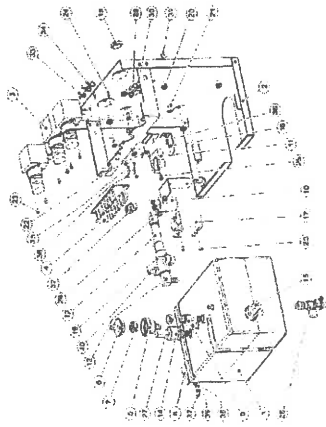


No		PASS	FAIL	N/A
1	Steam generator	☒	☐	N/A
2	Steam generator traverse	☒	☐	☐
3	Pinch valve	☒	☐	☐
4	Circuit board distributor	☒	☐	☐
5	Valve tubing connection	☒	☐	☐
6	Housing safety valve	☒	☐	☐
7	Safety valve SKT	☒	☐	☐
8	Excess temperature protection , steam generator	☒	☐	☐
9	Safety valve G 1/8 0.5 bar	☒	☐	☐
10	Ventilation glass pinch valve VAPODEST	☒	☐	☐
11	Hose clamp for ventilation clamp	☒	☐	☐
12	Distributor PP	☒	☐	☐
13	Angle connection PP	☒	☐	☐
14	Pressure transmitter	☒	☐	☐
15	Level switch	☒	☐	☐
16	Fixing bracket steam generator	☒	☐	☐
17	Relay HT+	☒	☐	☐
18	VA Hexagon nut 1/8"	☒	☐	☐
19	Angle connection 1/8"	☒	☐	☐
20	Bushing nipple 6-10-14	☒	☐	☐
21	VA Lens head screw M5 X 10	☒	☐	☐
22	Grounding connection , 2-pole	☒	☐	☐
23	VA Lens head screw M4 X 6	☒	☐	☐
24	Spacer bolt 5 mm	☒	☐	☐
25	VA Lens head screw M4 X 10	☒	☐	☐
26	Tubing connection	☒	☐	☐
27	Hose clamp 14.5 mm	☒	☐	☐
28	Module ball valve with nozzles	☒	☐	☐
29	Cross manifold with spout	☒	☐	☐
30	Seal copper G 1/8	☒	☐	☐
31	Locking screw 1/8"	☒	☐	☐
32	Pin strip	☒	☐	☐
33	Bundle clamp 12 H 4500	☒	☐	☐
34	Bundle clamp 12 H 4502	☒	☐	☐
35	Temperature switch 80°C	☒	☐	☐
36	VA Lens head screw M3 X 6	☒	☐	☐
37	VA Hexagon nut M4	☒	☐	☐
38	Lins head screw M4 X 8	☒	☐	☐
39	VA Spring washer	☒	☐	☐
40	Angle connection , reduced , 1/8" PP	☒	☐	☐

Module Pump holder VAP200 - 450 V3

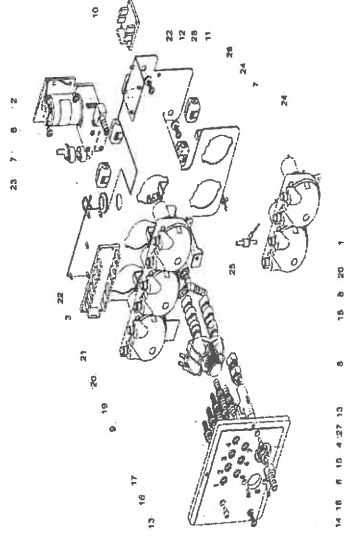

No		PASS	FAIL	N/A
1	Peristaltic pump	☒	☐	☐
2	Diaphragm pump NaOH, with non return valve	☒	☐	☐
3	Circuit board	☒	☐	☐
4	Tubing connection module	☒	☐	☐
5	Flow controller	☒	☐	☐
6	Lens head screw M5 x 10	☒	☐	☐
7	Bushing nozzle	☒	☐	☐
8	Screw in socket	☒	☐	☐
9	Magnetic valve 2/2 way	☒	☐	☐
10	Circuit board distributor	☒	☐	☐
11	Bushing nozzle	☒	☐	☐
12	Screw 5 x 25	☒	☐	☐
13	Cylinder screw	☒	☐	☐
14	Screw 5 x 20	☒	☐	☐
15	Seal EPDM 15 x 4	☒	☐	☐
16	Tubing connection piece 51x10x6.5	☒	☐	☐
17	Tubing connection piece 51x10x10	☒	☐	☐
18	Screw M4x10	☒	☐	☐
19	Clamp	☒	☐	☐
20	Clamp	☒	☐	☐
21	Y-tube connector	☒	☐	☐
22	Spacer bolt 5 mm	☒	☐	☐
23	Bundle clamp	☒	☐	☐
24	Bundle clamp	☒	☐	☐
25	Retrofit earthing pumpv	☒	☐	☐
26	Snap ferrite	☒	☐	☐
27	Nut G 3/8"	☒	☐	☐
28	Pump holder plate	☒	☐	☐

Control panel

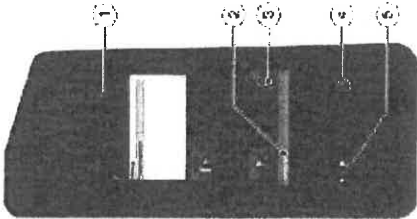

No		PASS	FAIL
1	Title bar	☒	☐
2	Status bar	☒	☐
3	Navigation button	☒	☐
4	Smart switch with multiple functions	☒	☐
5	USB interface	☒	☐

- รายละเอียดการตรวจสอบ
- ขั้นตอนการบริการ
- ตรวจสอบระบบไฟฟ้า (Electrical Test)
- ตรวจสอบความทนทานของไฟฟ้าของเครื่องกับกราฟ
 - กระแสไฟฟ้าที่ใช้งาน
- ตรวจสอบสภาพเครื่อง (Optical Test)
- Main cable
 - Electric wiring
 - Pumps
 - Distribution Head
 - Condensor
 - Steam generator
 - Tubing
 - Viton cone
- ตรวจสอบ Function การทำงาน (The Function Test)
- ระบบสร้างและควบคุมความดันของ Steam
 - ระบบการเดินน้ำเข้า Sample Tube
 - ระบบการเติม Na OH
 - ระบบการเติม H3BO3

รายงานผลการปฏิบัติการ

1. TECHNICAL DATA

Main Supply 220 volt+ 10% 50 Hz with ground
Nominal current

Pass ☒ Fail ☐ N/A ☐ Remark

8a.....

1.1 COOLING WATER BATH

Temperature 15-20 °C
Cooling Water Outlet
Control Temperature

Pass ☒ Fail ☐ N/A ☐ Remark

1.2 OPTICAL TEST/AR300

Screw cap GL14
Screw cap GL18
Screw cap GL32
Distillation Head
Condensor
Viton Cone
Ventilation Valve BV
Micro Switch Sample
Agitator motor for propeller

Pass ☒ Fail ☐ N/A ☐ Remark

2. SYSTEM COOLING WATER INLET

Cooling Water Inlet
Cooling Water Outlet
Flow control valve

Pass ☒ Fail ☐ N/A ☐ Remark

3.SYSTEM CONTROL

Display
Program
Adding NaOH
Adding H2O
Adding H3BO3
Suction Sample
Suction Receiver

Pass ☒ Fail ☐ N/A ☐ Remark

4.SYSTEM DISTILLATION

Boiler
Level Sensor
Nonopen
Solenoid Valve Shut-Off
Solenoid Valve Steam
Solenoid Valve soft steam
Ventilation Valve Premount
Excess Pressure Detector
Heating Element

Pass ☒ Fail ☐ N/A ☐ Remark

5. PUMP

Pump H₂O Steam
- Non-Return Valve
Pump H₂O Sample
- Non-Return Valve
Pump NaOH
- Non-Return Valve
Pump H3BO3
- Non-Return Valve
Pump suction
Pump suction receiver

Pass ☒ Fail ☐ N/A ☐ Remark

6. The Following Program Run :

Addition H2O 0-999 ml.
Addition NaOH 0-999 ml.
Addition H3BO3 0-999 ml.
Reaction Time 0-108 min
Distillation Time 0-108 min
Steam Capacity 10%-100%
Suction Sample
Suction Receiver

Pass ☒ Fail ☐ N/A ☐ Remark

7. Measured pumps

Pump NaOH
Pump H2O
Pump H3BO3

Volume :20.40.....ml
Volume :10.00.....ml
Volume :ml

Remark :

ข้อมูลสนับสนุนด้านเทคนิค (General Technical Support)

การบำรุงรักษาทั่วไป (Basic maintenance)

Cleaning program

Glass parts and tubes must be flamed daily before starting analysis in order to prevent clogging by crystallizing chemicals.

The following sections are recommended for this:

Parameters	Values
H ₂ O addition	120 ml
NaOH addition	0 ml
Condensation time	7 min
Silicon power	100 %
Reaction time	0 s
Reaction sample	20 s

→ Invert a digestion tube (without sample) and start the program.

→ All liquid carrying parts are cleaned. In the case of delay of 10 min or more, the sample is not lost and the reaction time is the reaction time.

estava sendo feita para (adunco pinguim) com um grampo e uma

➤ All liquid carrying parts are cleaned. In the case of strong sooting, approx. 10 ml of isopropyl acid can also be added to the cleaning liquid.

General error message

Crash under 100% relative cost - o Cost under 100% - o Check critical path. - o Check critical link. Program continues automatically once user has been freed.	Simple table editing o Read sample link. Continue program or repeat.	Crash under 100% relative cost - o Cost under 100% - o Check critical path. - o Check critical link. Program continues automatically once user has been freed.
Crash under 100% relative cost - o Cost under 100% - o Check critical path. - o Check critical link. Program continues automatically once user has been freed.	Crash under 100% relative cost - o Cost under 100% - o Check critical path. - o Check critical link. Program continues automatically once user has been freed.	Crash under 100% relative cost - o Cost under 100% - o Check critical path. - o Check critical link. Program continues automatically once user has been freed.

Analytical errors

[illegible]