ภาคผนวก ง

ใบรับรองเอกสารการสอบเทียบเครื่องมือตรวจวิเคราะห์

right solutions.
right partner.


รายการเครื่องมือที่ใช้ในการวิเคราะห์ / ทดสอบ

Sample Name	Parameter	Equipment Name	ID No.	Calibrated Date	Next Cal	Freq. Calibrate (Months)
Ambient	Nitrogen Dioxide	NO_2 Analyzer	BKK_FS1090	3-Jul-24	3-Jan-25	6
Ambient	Sulfur Dioxide	SO_2 Analyzer	BKK_FS1089	5-Jul-24	5-Jan-25	6
Ambient	Total Suspended Particulate	High Volume	BKK_FS1058	-	-	On site Calibration
Ambient	Total Suspended Particulate	Digital Balance	BKK_EN0403	3-Jun-24	3-Jun-25	12
Ambient	Particulate Matter (PM-10)	High Volume	BKK_FS0386	-	-	On site Calibration
Ambient	Particulate Matter (PM-10)	Digital Balance	BKK_EN0403	3-Jun-24	3-Jun-25	12
Ambient	Total Hydrocarbon	DRYCAL FLOWMETER	BKK_FS1346	29-Jan-24	28-Jan-25	12
Ambient	Total Hydrocarbon	Total Hydrocarbon Analyzer	BKK_FS1068	11-Dec-23	11-Jun-25	18
Ambient	Carbon Monoxide	DRYCAL FLOWMETER	BKK_FS1346	29-Jan-24	28-Jan-25	12
Ambient	Carbon Monoxide	CO Analyzer	BKK_EN0375	5-Aug-24	5-Aug-25	12
Water Lab	pH at 25 ^{o}C	pH meter	BKK_EN0342	17-Oct-24	17-Oct-25	12
Water Lab	Settleable Solids	Chamber (Cooling Room)	BKK_EN0167	6-Dec-23	6-Jun-25	18
Water Lab	Sulfide	Burette	BKK_EN0171	27-Feb-24	27-Aug-25	18
Water Lab	Sulfide	Chamber (Cooling Room)	BKK_EN0167	6-Dec-23	6-Jun-25	18
Water Lab	Oil & Grease	Electronic Top-Loading Balance	BKK_EN0003	2-Aug-24	2-Aug-25	12
Water Lab	Oil & Grease	Water Bath	BKK_EN0148	4-Jul-23	4-Jan-25	18
Water Lab	Total Kjeldahl Nitrogen	Digestion Unit	BKK_EN0223	24-May-24	24-May-25	12
Water Lab	Total Kjeldahl Nitrogen	Discrete analyzer	BKK_EN0037	16-Aug-24	16-Aug-25	12
Water Lab	Total Suspended Solids	Electronic Top-Loading Balance	BKK_EN0003	2-Aug-24	2-Aug-25	12
Water Lab	Total Suspended Solids	Oven	BKK_EN0273	14-May-24	14-Nov-25	18
Water Lab	Total Dissolved Solids 180°C	Electronic Top-Loading Balance	BKK_EN0003	2-Aug-24	2-Aug-25	12
Water Lab	Total Dissolved Solids 180°C	Oven	BKK_EN0273	14-May-24	14-Nov-25	18
Water Lab	BOD	DO Meter	BKK_EN0017	16-Nov-23	16-May-25	18
Water Lab	BOD	Incubator	BKK_EN0304	20-Mar-24	20-Mar-25	12
Water Lab	BOD	Burette	BKK_EN0171	27-Feb-24	27-Aug-25	18
Water Lab	Total Coliform	Autoclave	BKK_ML0037	17-Jul-23	17-Jan-25	18
Water Lab	Total Coliform	Incubator	BKK_ML0010	17-Jul-23	17-Jan-25	18
Water Lab	Total Coliform	Hot Air Oven	BKK_ML0013	23-Apr-24	23-Oct-25	18
Water Lab	Standard Plate Count	Autoclave	BKK_ML0037	17-Jul-23	17-Jan-25	18
Water Lab	Standard Plate Count	Incubator	BKK_ML0010	17-Jul-23	17-Jan-25	18
Water Lab	Standard Plate Count	Hot Air Oven	BKK_ML0013	23-Apr-24	23-Oct-25	18
Water Lab	*Escherichia coli*	Autoclave	BKK_ML0037	17-Jul-23	17-Jan-25	18
Water Lab	*Escherichia coli*	Incubator	BKK_ML0010	17-Jul-23	17-Jan-25	18
Water Lab	*Escherichia coli*	Hot Air Oven	BKK_ML0013	23-Apr-24	23-Oct-25	18
Water Lab	*Escherichia coli*	Water Bath	BKK_ML0056	1-Mar-24	1-Mar-25	12
Water Lab	Residual Free Chlorine	Chlorine Meter	BKK_LG0040	13-Aug-24	13-Aug-25	12
Water Lab	*Legionella spp.*	Balance	BKK_ML0001	23-Jan-24	23-Jan-25	12
Water Lab	*Legionella spp.*	Autoclave	BKK_ML0041	4-Oct-23	4-Apr-25	18
Water Lab	*Legionella spp.*	Incubator	BKK_ML0189	26-Sep-24	26-Mar-26	18
Water Lab	*Legionella spp.*	Hot Air Oven	BKK_ML0013	23-Apr-24	23-Oct-25	18

MULTIPOINT CALIBRATION REPORT

Calibration Date	3-Jul-24	Equipment Name	NOx Analyzer
Manufacturer	HORIBA	Model	APNA-370
Serial No.	SUDL58MU	Equipment ID	BKK_FS1090
Calibrator Manufacturer	Teledyne API	Model	700
Serial No.	947		
Std. Gas Concentration (PPM)	55.88	Cylinder No.	GN0027222
Cylinder Pressure (psi)	1800	Certified By	Airgas Inc.
Certified Date	9-Feb-22	Expired Date	9-Feb-30

Point	CALIBRATION RESULTS						
	Ideal	Actual NO	Error NO	%Error NO	Actual NOx	Error NOx	%Error NOx
ZERO	0.00	0.10	0.10	0.10	0.10	0.10	0.10
1	100.00	98.70	-1.30	-1.30	99.10	-0.90	-0.90
2	200.00	198.30	-1.70	-0.85	201.50	1.50	0.75
3	300.00	299.30	-0.70	-0.23	302.00	2.00	0.67
4	400.00	398.30	-1.70	-0.42	401.20	1.20	0.30
AVERAGE (%)				-0.54			0.18

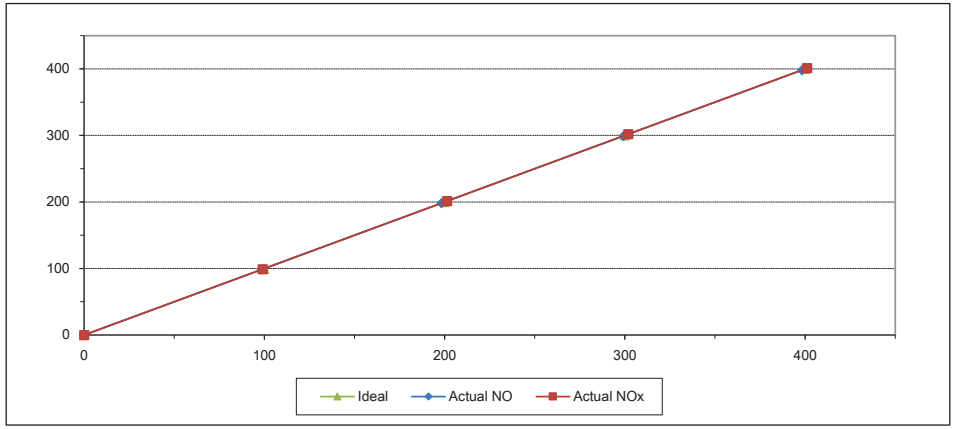

Calibrated By

(Mr.Jirawut Sakarn)
Field Environmental Scientist (3)


Approved By

(Mr.Sarayuth Jittranont)
Assistant General Manager

MULTIPOINT CALIBRATION REPORT

Calibration Date	5-Jul-24	Equipment Name	SO2 Analyzer
Manufacturer	HORIBA	Model	APSA-370
Serial No.	XGYYV1AU	Equipment ID	BKK_FS1089
Calibrator Manufacturer	Teledyne API	Model	700
Serial No.	947		
Std. Gas Concentration (PPM)	56.3	Cylinder No.	GN0027222
Cylinder Pressure (psi)	1800	Certified By	Airgas Inc.
Certified Date	9-Feb-22	Expired Date	9-Feb-30

Point	CALIBRATION RESULTS			
	Ideal	Autual	Error	%Error
ZERO	0.00	0.10	0.10	0.10
1	100.00	98.80	-1.20	-1.20
2	200.00	197.40	-2.60	-1.30
3	300.00	297.50	-2.50	-0.83
4	400.00	401.20	1.20	0.30
AVERAGE (%)				-0.59

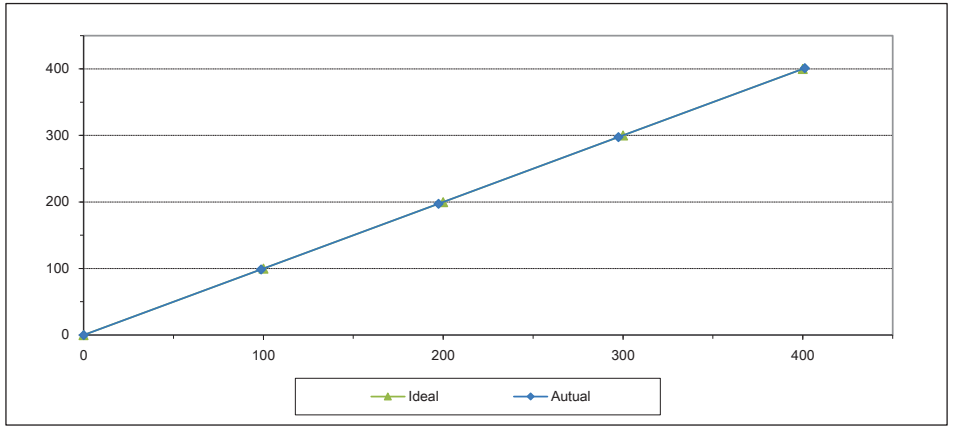

Calibrated By

(Mr.Jirawut Sakarn)
Field Environmental Scientist (3)


Approved By

(Mr.Sarayuth Jittranont)
Assistant General Manager

High Volume Air Sampler Calibration Worksheet

Project Site :	Piyasombat Property Co., Ltd.	**Barometric Pressure (mm Hg) :**	758.2
Calibrate Location :	Hotel Indigo Bangkok : บริเวณเริมรัว ด้านหลังพื้นที่โครงการ (ทางทิศ	**Temperature (°C) :**	33.2
Calibrate Date :	25-Nov-24	**High Volume ID :**	BKK_FS1058
CalibrationSheet No.:	C-251124-BKK_FS1058	**High Volume Model :**	TE-5009X
Calibrator ID:	BKK_FS0625	**High Volume S/N :**	5689
Calibrator Model :	TE-5028A	**Calibrator Slope :**	1.67329
Calibrator S/N :	2585	**Calibrator Intercept :**	-0.01925

Test No.	Delta H_2O (inch)	Q_{std} (m^3/min)	I : Chart (CFM)	Linear Regression
1	2.4	0.9315	40	Slope : 25.7517
2	3.6	1.1365	46	Intercept : 16.3303
3	4.8	1.3094	50	Correlation Coefficient : 0.9993
4	6.6	1.5321	56	
5	8.2	1.7055	60	

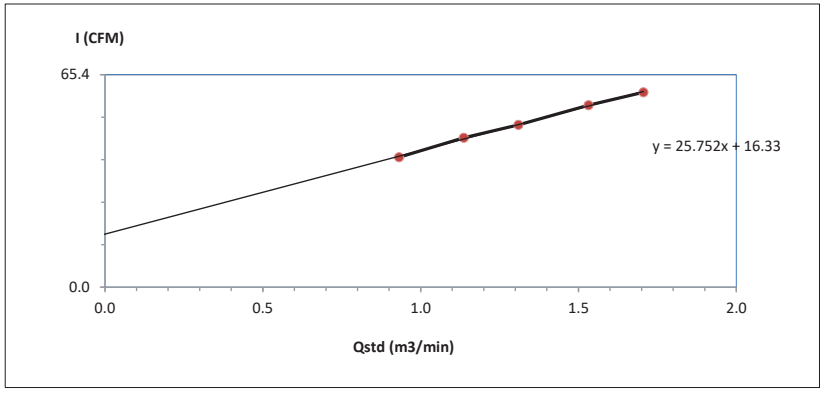

Calibrated by Winyou B.

(Mr. Winyou Boontanai)
Field Scientist(2)

Approved by :

(Mr. Noppong Juntarupan)
Enviro Field Coordinator Scientist (3)

PLAY SOLUTION TECHNOLOGY COMPANY LIMITED
179/75 Nawong Pracha Pattana Road, Sikan, Donmuang, Bangkok 10210
Tel.:+66 2 011 0505, Fax:+66 2 010 7700
www.playsotec.com

NSC-TISI-TIS17025
CALIBRATION 0378

CERTIFICATE OF CALIBRATION

Certificate No. : PST-0126-24 **W/O No. : WO-0051-24**

Customer

Company : ALS LABORATORY GROUP (THAILAND) CO., LTD.
Address : 104 Phatthanakan 40, Phatthanakan Road, Khwaeng Phatthanakan,
City / Province : Khet Suan Luang, Bangkok
Zip/Postal : 10250

Device

Equipment : Electronic Balance — Capacity : 120 / 220 g
Manufacturer : OHAUS — Readability : 0.00001 / 0.0001 g
Model : EX225D/AD — ID No. : BKK_EN0403
Serial No. : C309774648
Condition : Normal

Environment Conditions

Location of Calibration : Enviroment Lab
Ambient Temperature : 20.1 (°C) ± 3 °C
Relative Humidity : 70.3 (%RH) ± 15 %RH
Barometric Pressure : 1011.1 (mba) ± 10 hPa
Comment :

REVIEW BY Sinda K.
APPROVED BY Siriluk P.
NEXT CAL. DATE 03/06/25

Date of Receipt : June 3, 2024
Date of Calibration : June 3, 2024
Issue Date : June 5, 2024

Calibrated by : Mr.Kittichai Rattanatham
Calibrator

Approved by
(Mr.Kittichai Rattanatham)
Approved Signature

The reported measurement result relates only to the measurand and applies only at the time of measurement.

This Certificate is issued in accordance with the conditions of accreditation granted by Thai Laboratory Accreditation scheme which has assessed the measurement capability of the laboratory and is traceability to recognize national standards and to the unit of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval prior written approval of the calibration center, Play Solution Technology Co.,Ltd

PLAY SOLUTION TECHNOLOGY COMPANY LIMITED
179/75 Nawong Pracha Pattana Road, Sikan, Donmuang, Bangkok 10210
Tel.:+66 2 011 0505, Fax:+66 2 010 7700
www.playsotec.com

NSC-TISI-TIS17025
CALIBRATION 0378

CERTIFICATE OF CALIBRATION

Certificate No. : PST-0126-24 **W/O No. : WO-0051-24**

Result of Calibration : Without Adjustment

1. Repeatability

Weighing Range 1 g	Nominal Value g	Standard Deviation g
Max.capacity 220	50	0.000012
	200	0.000048

2.Linearity, Departure of Indication from nominal value

Weighing Range 1

Nominal Value g	Standard Value g	Indication g	Error of Indication g	Expanded Uncertainty g	Factor k
0.01	0.01000	0.01000	-0.000001	0.000082	2.87
0.1	0.10001	0.10001	0.000004	0.000082	2.87
0.5	0.50000	0.50001	0.000012	0.00008	2.87
1	1.00001	1.00002	0.000013	0.00008	2.87
5	5.00002	5.00003	0.000009	0.00008	2.52
10	9.99999	9.99999	-0.000001	0.00008	2.28
50	50.00001	49.99998	-0.000027	0.00016	2.00
100	100.00002	100.00002	0.000004	0.00030	2.00
150	150.00002	150.0001	0.000077	0.00045	2.00
200	200.00003	200.0001	0.000068	0.00060	2.00

PLAY SOLUTION TECHNOLOGY COMPANY LIMITED
179/75 Nawong Pracha Pattana Road, Sikan, Donmuang, Bangkok 10210
Tel.:+66 2 011 0505, Fax:+66 2 010 7700
www.playsotec.com

NSC-TISI-TIS17025
CALIBRATION 0378

CERTIFICATE OF CALIBRATION

Certificate No. : PST-0126-24 W/O No. : WO-0051-24

Result of Calibration

3.Eccentricity

Test load at least 1/3 of the maximum capacity, typically placed between 1/2 and 1/3 of the distance from the centre of the load receptor to the edge.



☑ ☐

Weighing Range 1
Test Load : 100 g

Position	Indication g
1	100.00004
2	100.00005
3	100.00002
4	100.00004
5	100.00003
Max.Deviation	0.00002

Standard method

The calibration was performed by using calibration laboratory's in-house calibration method : CP-M-001 based on "UKAS LAB 14 : Calibration of weighing machine" : edition 6 | October 2019

Reference standards instrument

Instrument	OIML Class	S/N	Ceritificate No.	Due Date
Standard Weight Set	E2	4000021952	22-128725	November 30, 2024
Standard Weight Set	-	-	-	-
Standard Weight Set	-	-	-	-
Standard Weight Set	-	-	-	-

Measurement Uncertainty

The given measurement uncertainty is the standard of the measurement multiplied by an extension factor k which corresponds to a confidence level of about 95% for a normal distribution. The standard uncertainty was calculated according to UKAS M3003.


Traceability : The measurement is traceable to national standard, which realize the physical unit of measurement (SI)
- Through the reference calibration laboratory of Asia Medical and Agricultural Laboratory and Research Center Co.,Ltd

END OF REPORT

High Volume Air Sampler Calibration Worksheet

Project Site :	Piyasombat Property Co., Ltd.	**Barometric Pressure (mm Hg) :**	758.2
Calibrate Location :	Hotel Indigo Bangkok : บริเวณเริมรั้วด้านหลังพื้นที่โครงการ (ทางทิศ	**Temperature (°C) :**	33.2
Calibrate Date :	25-Nov-24	**High Volume ID :**	BKK_FS0386
CalibrationSheet No.:	**C-251124-BKK_FS0386**	**High Volume Model :**	TE-5009X
Calibrator ID:	BKK_FS0625	**High Volume S/N :**	4790
Calibrator Model :	TE-5028A	**Calibrator Slope :**	1.04803
Calibrator S/N :	2585	**Calibrator Intercept :**	-0.01206

Test No.	Delta H_2O (inch)	Qa (m^3/min)	I : Chart (CFM)	Linear Regression
1	1.8	0.826	32	Slope : 32.1034
2	2.4	0.951	36	Intercept : 5.5847
3	3.0	1.062	40	Correlation Coefficient : 0.9995
4	3.8	1.194	44	
5	4.7	1.327	48	

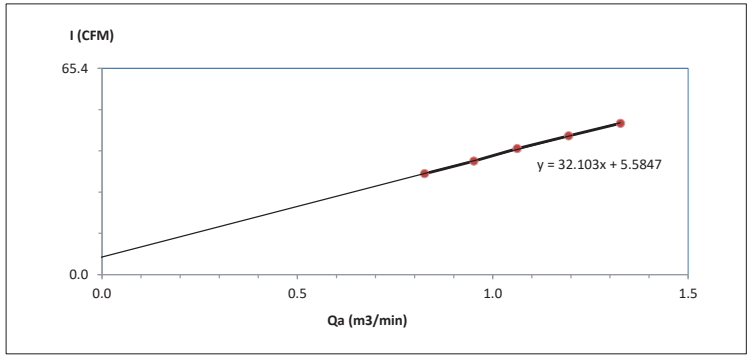

Calibrated by Winyou B.

(Mr. Winyou Boontanai)
Field Scientist(2)

Approved by :

(Mr. Noppong Juntarupan)
Enviro Field Coordinator Scientist (3)

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

ANAB ACCREDITED ISO/IEC 17025 CALIBRATION LABORATORY AC-2961

Certificate of Calibration

Customer

Certificate No : 24-AFM-018 Rev.1

Name : ALS Laboratory Group Thailand Co., Ltd.

Request No : Req-2024-0043

Address : 104 Soi Phatthanakan 40, Phatthanakan Road, Suan Luang, Bangkok 10250

Unit Under Calibration Details

Measurement Item : Air Flow Meter

Manufacturer : Bios

Model : Defender 510-L

Sensor Model : -

Serial Number : 206895

Sensor Serial Number : -

ID : BKK_FS1346

Location of Calibration : LAB 4 AIR VELOCITY METER

REVIEW BY Nonahorn P.
APPROVED BY
NEXT CAL. DATE 28/1/25

Calibration Environment and Details

Temperature : 23 °C ± 3 °C

Humidity : 55 %RH ± 20 %RH

Barometric Pressure : 1013 hPa ± 10 hPa

Received Date : 3 January 2024

Calibration Date : 29 January 2024

Calibration Procedure : In-house method CP-AFM-01 by Comparison technique with Standard Primary Flow Calibrator

Reference Standard	Model	Serial Number	Traceble	Due Calibration
Air Flow Meter	Gilibrator 3 Low flow	18501010006	Sensidyne	12 July 2024
Air Flow Meter	Gilibrator 3 Standard flow	19031011003	Sensidyne	12 July 2024
Temperature meter	GT 11	08000057	Qreborn	27 February 2024
Pressure meter	CPG2400	41000KDU/651882	TPA	9 November 2024

Traceability :

This Certificate is traceable to SI Unit through Sensidyne A2LA Accreditation No. 3943.01

Note :

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor k = 2, providing a level of confidence approximately 95 %.

This Certificate was issued to replace to Calibration Certificate No. 24-AFM-018

Calibration By :

Mr. Noppadon Luangart

Service Calibration Engineer

Approved By :

Mr. Pacit Mathavorn

Calibration Engineer Supervisor

Issue Date : 1 February 2024

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate No : 24-AFM-018 Rev.1

Request No : Req-2024-0043

Result of Calibration : Without Adjustment

Temperature (°C)	Pressure (kPa)	STD (ml/min)	UUC (ml/min)	Error (ml/min)	Uncertainty (ml/min)
25.00	101.66	20	20.148	0.1	1.3
25.00	101.67	100	99.409	-0.6	2.8
24.90	101.63	199	197.46	-1.5	5.6
25.00	101.61	300	298.15	-1.8	8.4
24.90	101.60	399	400.13	1	11
24.90	101.59	480	478.02	-2.0	6.8

Note STD : Standard UUC : Unit Under Calibration

- UUC Reference Condition : At atmospheric pressure and room temperature condition
- Flow Rate was corrected for non-standard operating condition by using equation :

$$Q_{meas} = Q_{ref} \times \frac{P_{ref}}{P_{ref}} \times \frac{T_{meas}}{T_{ref}}$$

where Q = Flow Rate P = Absolute Pressure T = Absolute Temperature
Meas = Measurement Condition ref = Standard Condition

* Indicates non accredited

End of Certificate

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

BKK_FS0614

MesaLabs

NVLAP Lab Code 200661-0
Calibration

Calibration Certificate

CertificateNo. 610563
Product 200-510M Defender 510 Medium Flow
Serial No. 151114
Cal. Date 21-May-2024

Sold To:

All calibrations are performedin accordance with ISO 17025 at Mesa Laboratories, Inc., 12100 W. 6th Ave, Lakewood, CO 80228, an ISO 17025:2017 accredited laboratory through NVLAP. This report shall not be reproduced except in full without the written approval of the laboratory. Results only relate to the items calibrated. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

As Received Calibration Data

Technician Derek Dellape

Lab. Pressure 614.2 mmHg
Lab. Temperature 24.3 °C

Instrument Reading	Lab Standard Reading	Deviation	Allowable Deviation	As Received
0 ccm	4504.81 ccm	-100.0%	1.00%	Out of Tolerance
0 ccm	1000.98 ccm	-100.0%	1.00%	Out of Tolerance
0 ccm	249.55 ccm	-100.0%	1.00%	Out of Tolerance

Mesa Laboratories Standards Used

Description	Standard Serial Number	Calibration Date	Calibration Due Date
ML-800-24	117991	13-Nov-2023	13-Nov-2024

REVIEW BY Narakorn P.
APPROVED BY
NEXT CAL. DATE 21/5/25

Mesa Laboratories Inc. 12100 W. 6th Ave, Lakewood, CO 80228 USA
(303) 987-8000 www.mesalabs.com Symbol "MLAB" on the NASDAQ

MesaLabs

NVLAP Lab Code 200661-0
Calibration

As Shipped Calibration Data

Certificate No	610563	**Lab. Pressure**	617 mmHg
Technician	Derek Dellape	**Lab. Temperature**	24.6 °C

Instrument Reading	Lab Standard Reading	Deviation	Allowable Deviation	As Shipped
4482.47 ccm	4493.49 ccm	-0.25%	1.00%	In Tolerance
997.25 ccm	996.83 ccm	0.04%	1.00%	In Tolerance
248.51 ccm	248.67 ccm	-0.06%	1.00%	In Tolerance

Mesa Laboratories Standards Used

Description	Standard Serial Number	Calibration Date	Calibration Due Date
ML-800-24	211063	04-Oct-2023	04-Oct-2024

Calibration Notes

The expanded uncertainty of flow has a coverage factor of k = 2 for a confidence interval of approximately 95%.

Flow testing is in accordance with our test number MP-00672 with an expanded uncertainty of 0.27% using high-purity nitrogen or filtered laboratory air.

Traceability to the International System of Units (SI) is verified by accreditation to ISO/IEC 17025 by NVLAP under NVLAP Code 200661-0.

Technician Notes:

By:

Derek Dellape
Production Assembler II

Approved By:

Troy Thacker

Troy Thacker
Quality Engineer

Mesa Laboratories, Inc. certifies that the above instrument meets or exceeds published specifications, and that the calibration results in this certificate were obtained using equipment capable of producing results that are traceable through NIST to the International System of Units (SI). Calibration results are in compliance with ISO/IEC 17025:2017. Calibrations process has a Test Uncertainty Ration (TUR) of 4:1 or greater. Any Pass/Fail determination is made without taking measurement uncertainty into account and is based on UUT performance against required tolerance only.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

INNOVATIVE INSTRUMENT CO., LTD. บริษัท อินโนเวทีฟ อินสทรูเมนต์ จำกัด

ANAB ANSI National Accreditation Board ACCREDITED ISO/IEC 17025 CALIBRATION LABORATORY AC-2961

Certificate of Calibration

Customer

Certificate No : 24-AFM-033

Name : ALS Laboratory Group Thailand Co., Ltd.

Request No : Req-2024-0241

Address : 104 Soi Phatthanakan 40, Phatthanakan Road, Suan Luang, Bangkok 10250

Unit Under Calibration Details

Measurement Item : Primary Flow Calibrator

Manufacturer : Bios

Model : Defender 510-L

Sensor Model : -

Serial Number : 130027

Sensor Serial Number : -

ID : RYG_FS0208

Location of Calibration : LAB 4 AIR VELOCITY METER

REVIEW BY Nanakorn P
APPROVED BY
NEXT CAL. DATE 13/8/25

Calibration Environment and Details

Temperature : 23 °C ± 3 °C

Humidity : 55 %RH ± 20 %RH

Barometric Pressure : 1013 hPa ± 10 hPa

Received Date : 31 January 2024

Calibration Date : 13 February 2024

Calibration Procedure : In-house method CP-AFM-01 by Comparison technique with Standard Primary Flow Calibrator

Reference Standard	Model	Serial Number	Traceble	Due Calibration
Air Flow Meter	Gilibrator 3 Low flow	18501010006	Sensidyne	12 July 2024
Air Flow Meter	Gilibrator 3 Standard flow	19031011003	Sensidyne	12 July 2024
Temperature meter	GT 11	08000057	Qreborn	27 February 2024
Pressure meter	CPG2400	41000KDU/651882	TPA	9 November 2024

Traceability :

This Certificate is traceable to SI Unit through Sensidyne A2LA Accreditation No. 3943.01

Note :

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibration By :

Mr. Noppadon Luangart
Service Calibration Engineer

Approved By :

Mr. Pacit Mathavorn
Calibration Engineer Supervisor

Issue Date : 13 February 2024

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate No : 24-AFM-033

Request No : Req-2024-0241

Result of Calibration : Without Adjustment

Temperature (°C)	Pressure (kPa)	STD (cc/min)	UUC (cc/min)	Error (cc/min)	Uncertainty (cc/min)
24.50	101.26	20	19.965	0.0	1.3
24.20	101.25	101	100.50	-0.5	2.8
24.00	101.31	200	199.13	-0.9	5.6
23.90	101.42	301	303.56	2.6	8.4
24.10	101.41	401	404.57	4	11
24.10	101.49	480	483.81	3.8	7.0

Note STD : Standard UUC : Unit Under Calibration

- UUC Reference Condition : At atmospheric pressure and room temperature condition
- Flow Rate was corrected for non-standard operating condition by using equation :

$$Q_{meas} = Q_{ref} \times \frac{P_{ref}}{P_{ref}} \times \frac{T_{meas}}{T_{ref}}$$

where Q = Flow Rate P = Absolute Pressure T = Absolute Temperature
Meas = Measurement Condition ref = Standard Condition

* Indicates non accredited

End of Certificate

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate of Calibration

Customer

Certificate No : 24-AFM-032

Name : ALS Laboratory Group Thailand Co., Ltd.

Request No : Req-2024-0240

Address : 104 Soi Phatthanakan 40, Phatthanakan Road, Suan Luang, Bangkok 10250

Unit Under Calibration Details

Measurement Item : Primary Flow Calibrator

Manufacturer : Bios

Model : Defender 510-M Sensor Model : -

Serial Number : 129958 Sensor Serial Number : -

ID : RYG_FS0209

Location of Calibration : LAB 4 AIR VELOCITY METER

REVIEW BY Wanaloom P
APPROVED BY
NEXT CAL. DATE 13/8/25

Calibration Environment and Details

Temperature : 23 °C ± 3 °C

Humidity : 55 %RH ± 20 %RH

Barometric Pressure : 1013 hPa ± 10 hPa

Received Date : 31 January 2024

Calibration Date : 13 February 2024

Calibration Procedure : In-house method CP-AFM-01 by Comparison technique with Standard Primary Flow Calibrator

Reference Standard	Model	Serial Number	Traceble	Due Calibration
Air Flow Meter	Gilibrator 3 Low flow	18501010006	Sensidyne	12 July 2024
Air Flow Meter	Gilibrator 3 Standard flow	19031011003	Sensidyne	12 July 2024
Temperature meter	GT 11	08000057	Qreborn	27 February 2024
Pressure meter	CPG2400	41000KDU/651882	TPA	9 November 2024

Traceability :

This Certificate is traceable to SI Unit through Sensidyne A2LA Accreditation No. 3943.01

Note :

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibration By : Mr. Noppadon Luangart
Service Calibration Engineer

Approved By : Mr. Pacit Mathavorn
Calibration Engineer Supervisor

Issue Date : 13 February 2024

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

FM-708-AFM-01 Rev.01 Issue date 25/01/24

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate No : 24-AFM-032

Request No : Req-2024-0240

Result of Calibration : Without Adjustment

Temperature (°C)	Pressure (kPa)	STD (cc/min)	UUC (cc/min)	Error (cc/min)	Uncertainty (cc/min)
23.80	101.89	95	100.13	5.1	2.8
23.90	101.71	501	513.93	12.9	7.2
24.18	101.62	1006	1019.3	13	14
24.00	101.81	1997	2023.0	26	29
24.10	101.87	2999	3035.5	37	45
24.60	102.00	3944	3991.8	48	59
24.60	102.08	4739	4790.5	52	72

Note STD : Standard UUC : Unit Under Calibration

- UUC Reference Condition : At atmospheric pressure and room temperature condition
- Flow Rate was corrected for non-standard operating condition by using equation :

$$Q_{meas} = Q_{ref} \times \frac{P_{ref}}{P_{ref}} \times \frac{T_{meas}}{T_{ref}}$$

where Q = Flow Rate P = Absolute Pressure T = Absolute Temperature
Meas = Measurement Condition ref = Standard Condition

* Indicates non accredited

End of Certificate

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate of Calibration

Customer

Name : ALS Laboratory Group Thailand Co., Ltd.

Address : 104 Soi Phatthanakan 40, Phatthanakan Road, Suan Luang, Bangkok 10250

Certificate No : 24-AFM-174

Request No : Req-2024-1861

Unit Under Calibration Details

Measurement Item : Air Flow Meter

Manufacturer : MesaLabs

Model : 510-M

Serial Number : 208345

ID : BKK_FS1347

Location of Calibration : LAB 4 AIR VELOCITY METER

Accuracy : 1% of Reading

Sensor Model : -

Sensor Serial Number : -

Instrument Status : Used

Calibration Environment and Details

Temperature : 23 °C ± 3 °C

Humidity : 55 %RH ± 20 %RH

Barometric Pressure : 1013 hPa ± 10 hPa

Received Date : 22 August 2024

Calibration Date : 28 August 2024

Calibration Procedure : In-house method CP-AFM-01 by Comparison technique with Standard Primary Flow Calibrator

REVIEW BY Wanalom P.

APPROVED BY

NEXT CAL. DATE 28/8/25

Reference Standard	Model	Serial Number	Traceble	Due Calibration
Air Flow Meter	Gilibrator 3 Low flow	18501010006	Sensidyne	6 August 2025
Air Flow Meter	Gilibrator 3 Standard flow	19031011003	Sensidyne	2 August 2025
Temperature meter	GT 11	08000057	Qreborn	1 March 2025
Pressure meter	CPG2400	41000KDU/651882	TPA	9 November 2024

Traceability :

This Certificate is traceable to SI Unit through Sensidyne A2LA Accreditation No. 3943.01

Note :

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibration By : Mr. Noppadon Luangart
Service Calibration Engineer

Approved By : Mr. Pacit Mathavorn
Calibration Engineer Supervisor

Issue Date : 28 August 2024

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate No : 24-AFM-174

Request No : Req-2024-1861

Result of Calibration : Without Adjustment

Temperature (°C)	Pressure (kPa)	STD (cc/min)	UUC (cc/min)	Error (cc/min)	Uncertainty (cc/min)	MPE (cc/min)	Result
22.30	100.57	100	99.526	-0.5	2.8	1	N/A
22.40	100.61	499	500.48	1.5	7.8	5	N/A
22.50	100.56	1004	1004.8	1	15	10	N/A
22.60	100.54	2008	2003.3	-5	29	20	N/A
22.80	100.62	3034	3032.1	-2	45	30	N/A
23.20	100.71	4032	4022.4	-10	60	40	N/A
23.40	100.73	5060	5056.4	-4	79	51	N/A

Note STD : Standard UUC : Unit Under Calibration

- UUC Reference Condition : At atmospheric pressure and room temperature condition
- Flow Rate was corrected for non-standard operating condition by using equation :

$$Q_{meas} = Q_{ref} \times \frac{P_{ref}}{P_{ref}} \times \frac{T_{meas}}{T_{ref}}$$

where Q = Flow Rate P = Absolute Pressure T = Absolute Temperature
Meas = Measurement Condition ref = Standard Condition

* Indicates non accredited

MPE = Maximum Permissible Error (Specified in Manufacturer's Specifications)

N/A = Not Aavailable, Customer does not require a statement of conformity.

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7/139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate No : 24-AFM-174

Request No : Req-2024-1861

Decision Rule for Statements of Conformity


The standard decision rule employed for the statements of conformity to each calibration result will be applied using ILAC-G8:09/2019: Guidelines on the Reporting of Compliance with Specification as following Fig. and statements

Pass = The measurement result plus the expanded uncertainty with a 95% coverage probability were within the limit.

Pass[1] = The measurement result was within the limit. However, a portion of the expanded uncertainty of measurement at 95% exceeds the limit.

Fail[1] = The measurement result was out of the limit. However, a portion of the expanded uncertainty of measurement at 95% is within the limit.

Fail = The measurement result plus the expanded uncertainty with a 95% coverage probability were outside the limit.

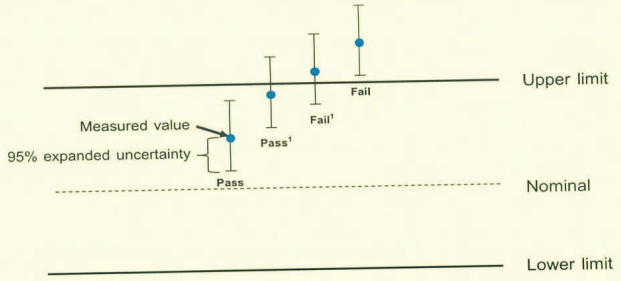

End of Certificate

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

FM-708-AFM-01 Rev.04 Issue date 17/6/24

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7 139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate of Calibration

Customer

Certificate No : 24-AFM-177

Name : ALS Laboratory Group Thailand Co., Ltd.

Request No : Req-2024-1862

Address : 104 Soi Phatthanakan 40, Phatthanakan Road, Suan Luang, Bangkok 10250

Unit Under Calibration Details

Measurement Item : Air Flow Meter

Manufacturer : Bios

Accuracy : 1% of Reading

Model : Defender 510-L

Sensor Model : -

Serial Number : 130026

Sensor Serial Number : -

ID : BKK_FS0619

Instrument Status : Used

Location of Calibration : LAB 4 AIR VELOCITY METER

REVIEW BY ..... Marakorn P.

APPROVED BY .....

NEXT CAL. DATE 9/9/26

Calibration Environment and Details

Temperature : 23 °C ± 3 °C

Humidity : 55 %RH ± 20 %RH

Barometric Pressure : 1013 hPa ± 10 hPa

Received Date : 22 August 2024

Calibration Date : 9 September 2024

Calibration Procedure : In-house method CP-AFM-01 by Comparison technique with Standard Primary Flow Calibrator

Reference Standard	Model	Serial Number	Traceble	Due Calibration
Air Flow Meter	Gilibrator 3 Low flow	18501010006	Sensidyne	6 August 2025
Air Flow Meter	Gilibrator 3 Standard flow	19031011003	Sensidyne	2 August 2025
Temperature meter	GT 11	08000057	Qreborn	1 March 2025
Pressure meter	CPG2400	41000KDU/651882	TPA	9 November 2024

Traceability :

This Certificate is traceable to SI Unit through Sensidyne A2LA Accreditation No. 3943.01

Note :

The reported uncertainty is based on standard uncertainty multiplied by the Coverage Factor $k = 2$, providing a level of confidence approximately 95 %.

Calibration By :

Mr. Noppadon Luangart

Service Calibration Engineer

Approved By :

Mr. Pacit Mathavorn

Calibration Engineer Supervisor

Issue Date : 9 September 2024

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7 139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate No : 24-AFM-177

Request No : Req-2024-1862

Result of Calibration : Without Adjustment

Temperature (°C)	Pressure (kPa)	STD (cc/min)	UUC (cc/min)	Error (cc/min)	Uncertainty (cc/min)	MPE (cc/min)	Result
24.70	100.92	20	20.192	0.2	1.3	0.2	N/A
24.70	100.90	100	99.923	-0.1	2.8	1.0	N/A
24.70	100.94	201	200.7	-0.3	5.6	2.0	N/A
24.70	100.97	298	300.1	2.1	8.4	3.0	N/A
24.70	100.99	403	399.1	-4	11	4.0	N/A
24.80	101.05	482	477.6	-4.4	6.9	4.8	N/A

Note STD : Standard UUC : Unit Under Calibration

- UUC Reference Condition : At atmospheric pressure and room temperature condition
- Flow Rate was corrected for non-standard operating condition by using equation :

$$Q_{meas} = Q_{ref} \, x \, \frac{P_{ref}}{P_{ref}} \, x \, \frac{T_{meas}}{T_{ref}}$$

where Q = Flow Rate P = Absolute Pressure T = Absolute Temperature

Meas = Measurement Condition ref = Standard Condition

* Indicates non accredited

MPE = Maximum Permissible Error (Specified in Manufacturer's Specifications)

N/A = Not Aavailable, Customer does not require a statement of conformity.

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

FM-708-AFM-01 Rev.04 Issue date 17/6/24

INNOVATIVE INSTRUMENT CALIBRATION LAB
INNOVATIVE INSTRUMENT CO., LTD. HEAD OFFICE
7 139 MOO 13, SOI SUNTINAKORN 11 TAMBON BANG KAEO,
AMPHOE BANG PHLI SAMUT PRAKAN PROVINCE 10540 THAILAND
TEL: (66)0-2116-5860-1 FAX: (66)0-2116-7140

Certificate No : 24-AFM-177

Request No : Req-2024-1862

Decision Rule for Statements of Conformity


The standard decision rule employed for the statements of conformity to each calibration result will be applied using ILAC-G8:09/2019: Guidelines on the Reporting of Compliance with Specification as following Fig. and statements

Pass = The measurement result plus the expanded uncertainty with a 95% coverage probability were within the limit.

Pass[1] = The measurement result was within the limit. However, a portion of the expanded uncertainty of measurement at 95% exceeds the limit.

Fail[1] = The measurement result was out of the limit. However, a portion of the expanded uncertainty of measurement at 95% is within the limit.

Fail = The measurement result plus the expanded uncertainty with a 95% coverage probability were outside the limit.

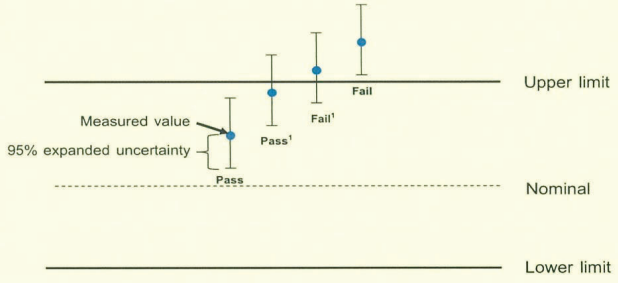

End of Certificate

The results related only to the item calibrated. The certificate shall not be reproduced except in full, without written approval of the Innovative Instrument Co., Ltd.

JNAC
JIRANATEE ASSOCIATES CO.,LTD.


TEST REPORT

REVIEW BY Vichuta N.
APPROVED BY Janyatorn M.
NEXT CAL. DATE 11/6/25

CUSTOMER NAME	: ALS Laboratory Group (Thailand) Co., Ltd. [บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด]				
EQRIPMENT NAME	: THC Analyzer				
MANUFACTURER	: HORIBA	MODEL	: APHA-370	SERIAL NO	: WKJ0NS9M
STANDARD GAS CONCENTRATION (PPM) :	506.1 PPM			CYLINDER NO	: CC734373
CYLINDER PRESSURE (psig) :	1,000 PSI			CERTIFIED DATE	: 12/05/2020
CERTIFIED BY :	AIRGAS			EXPIRED DATE	: 12/05/2028

TEST RESULTS

POINT NO	TEST RESULTS						
	IDEAL	ACTUAL CH4	ERROR CH4	%ERROR CH4	ACTUAL THC	ERROR THC	%ERROR THC
ZERO	0.000	0.00	0.000	-	0.00	0.000	-
1	10.000	10.30	0.300	3.00	10.29	0.290	2.90
2	20.000	20.20	0.200	1.00	20.09	0.090	0.45
3	30.000	30.01	0.010	0.03	30.10	0.100	0.33
4	40.000	39.90	-0.100	-0.25	39.99	-0.010	-0.02
AVERAGE (%)				0.95			0.91

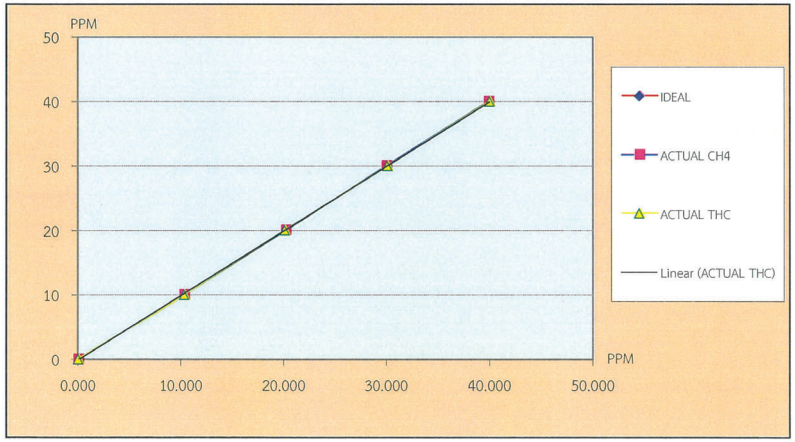

CALIBRATED BY : วรพจ ศักดิ์สวัสดิ์ DATE : 11/12/66

CHECKED BY : ศันสนีย์ DATE : 11/12/66

ต้องการข้อมูลทางด้านเทคนิคเพิ่มเติม : เจ้าหน้าที่ฝ่ายบริการหลังการขาย , โทร 02-868-0812 # 15,16 , E-Mail : Engineer@jiranatee.com
เลขที่ 63/14-15,67/35-36 ถนนเพชรเกษม 7,7/1 แขวงวัดท่าพระ เขตบางกอกใหญ่ กรุงเทพฯ 10600 โทร 02-8680812-13 โทรสาร 02-868-1889


MULTI POINT CALIBRATION REPORT

CUSTOMER NAME : ALS Laboratory Group (Thailand) Co.Ltd.		
EQUIPMENT NAME : CO Analyzer		
MANUFACTURER : Teledyne - API	MODEL : T300	SERIAL NO : 5947
STANDARD GAS CONCENTRATION (PPM) : 808.9		CERTIFIED DATE : CC739972
CYLINDER PRESSURE (pslg) : 900		CERTIFIED DATE : Nov ,05 ,2020
CERTIFIED BY : AIRGAS SPECIALTY GASES		EXPIRED DATE : Nov ,05, 2028

CALIBRATION RESULTS

REVIEW BY Vichuta N.
APPROVED BY Tanyatorn M.
NEXT CAL. DATE 5 Aug 25

POINT NO	CALIBRATION RESULTS			
	IDEAL (PPM)	ACTUAL CO (PPM)	ERROR CO (PPM)	% ERROR CO
ZERO	0.00	0.01	0.01	-
1	50.00	49.36	-0.64	-1.28
2	90.00	89.54	-0.46	-0.51
3	199.20	202.08	2.88	1.45
4	400.30	402.41	2.11	0.53
5	808.90	808.47	-0.43	-0.05
AVERAGE (%)				0.76

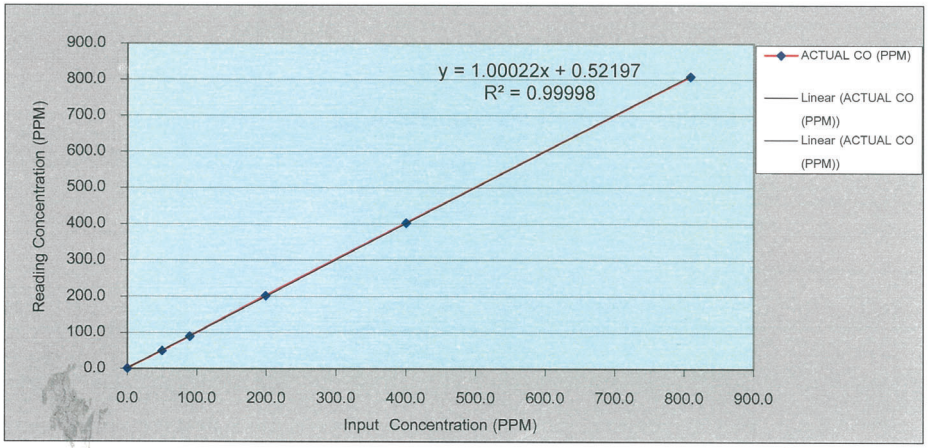

CALIBRATED BY : คุณธนาคม มหาอาจ	DATE : 5 สิงหาคม 2567

ต้องการข้อมูลทางด้านเทคนิคเพิ่มเติม : คุณธนาคม มหาอาจ โทรศัพท์ : 02-515-8987

เลขที่ 388 ถนนรัชดาภิเษก แขวงจันทรเกษม เขตจตุจักร กรุงเทพฯ 10900 โทรศัพท์ : 0-2515-8999 โทรสาร : 0-2515-8988 E-Mail : Info@kinetics.co.th

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Cert.No.: 23CH1369
Page.: 1 of 3

Certificate of Calibration

Equipment :	pH Meter
Manufacturer :	Hach
Model :	HQ411d
Serial No. :	200100031163
ID No. :	BKK_EN0342
Condition As-Received:	Used Item
Received Date :	26 October 2023
Calibration Date :	27 October 2023
Reference :	2310-0865DSC-3
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Ambient Temperature :	(25 ± 2.5) °C
Relative Humidity :	(50 ± 15) %
Calibration Procedure :	In - house method : - CP-CH5 by direct measurement with standard voltage calibrator and direct measurement with certified reference material (CRM) - CP-CH8 by comparison with standard thermometer
Calibrated by :	Warakorn Lerngagtrakul
Approved by :	Saithip Approved Signatory

REVIEW BY Siriluk B.
APPROVED BY
NEXT CAL. DATE 27/10/24

(✓) Saithip Meangmai
( ) Warakorn Lerngagtrakul
( ) Ponpan Paipim

Issue Date : 31 October 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Condition of this calibration result

1. Reference Standard Instrument : -

Instrument	Serial No.	ID No.	Cert. No.	Due Date
1) Ref. Standard Thermometer	4982054	110RC044	23I908	26 Jul 2024

This certification is traceable to the International System of Unit maintained through:-
- Technology Promotion Association (Thailand-Japan)

2. Certified Reference Materials : The measurement results are traceable to SI through CPA chem Ltd., ANSI-ASQ National Accreditation Board, Accredited No. AR-1835

Buffer Solution	Manufacturer	Lot No.	Exp. date
pH 4.008	CPA chem	913598	14 July 2025
pH 6.985	CPA chem	913599	14 July 2024
pH 9.997	CPA chem	931961	30 Sep 2024

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration Results

Function : pH Measurement

Performing three buffers standard curve by using buffer nominal pH (4,7,10)

Unit Under Calibration	Standard pH Buffer Solution	Actual pH Reading	Actual mV Reading (mV)	Uncertainty of pH measurement (±)	Coverage factor *k*
pH Electrode	4.008	4.002	166.5	0.0044	2.00
S/N.:230473042902	6.985	6.987	-10.4	0.0084	2.00
	9.997	10.005	-189.3	0.0071	2.00

Remark - Can not connect the BNC because the plug does not match with the socket.

Calibration Results

Function : Temperature Measurement

(*) Without adjustment

This equipment was connected with Temperature Probe;
- Model : PHC281
- Serial No. : 230473042902

Dimension of probe;
- Length : 103 mm
- Diameter : 12 mm
- Immersion Depth : 90 mm

Calibration Point (°C)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of measurement (± °C)	Coverage factor *k*
25.0	25.002	25.1	0.098	0.13	2.00

Remark : - UUC* = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k* , providing a level of confidence of approximately 95 %.

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert.No.: 24CH1295
Page.: 1 of 3

Equipment :	pH Meter
Manufacturer :	Hach
Model :	HQ411d
Serial No. :	200100031163
ID No. :	BKK_EN0342
Condition As-Received:	Used Item
Received Date :	16 October 2024
Calibration Date :	17 October 2024
Reference :	2410-0548DSC-5
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Ambient Temperature :	(25 ± 2.5) °C
Relative Humidity :	(50 ± 15) %
Calibration Procedure :	In - house method : - CP-CH5 by direct measurement with certified reference material (CRM) - CP-CH8 by comparison with temperature standard

REVIEW BY ..... Jinda K. .....
APPROVED BY ..... Siriluk P. .....
NEXT CAL DATE ..... 17/10/25 .....

Calibrated by : Warakorn Lerngagtrakul

Approved by : Saithip

Approved Signatory

( ) Unnopphol Harachai
( ) Ponpan Paipim
(✓) Saithip Meangmai

Issue Date : 21 October 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Condition of this calibration result

1. Reference Standard Instrument

Instrument	Serial No.	ID No.	Cert. No.	Due Date
1)Ref. Standard Thermometer	2188080	130RC044	24I1022	16 Sep 2025

- This Certification is traceable to SI Throught Technology Promotion Association (Thailand - Japan)

2. Certified Reference Materials :The measurement results are traceable to SI through Hach Lenge GmbH Ltd. Deutsche Akkreditierungsstelle, Accredited No.D-RM-15184-01-00
:The measurement results are traceable to SI through CPA chem Ltd., ANSI-ASQ National Accreditation Board, Accredited No. AR-1835

Buffer Solution	Manufacturer	Lot No.	Exp. date
pH 4.008	CPA chem	1034203	27 Sep 2026
pH 6.999	Hach Lenge GmbH	C03145	28 Feb 2026
pH 10.010	CPA chem	1034205	27 Sep 2025

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration Results

Function : pH Measurement

Performing three buffers standard curve by using buffer nominal pH (4,7,10)

Unit Under Calibration	Standard pH Buffer Solution	Actual pH Reading	Actual mV Reading (mV)	Uncertainty of pH Measurement (±)	Coverage factor *k*
pH Electrode	4.008	4.028	174.6	0.0044	2.00
S/N.: 230473042902	6.999	7.014	1.4	0.0084	2.05
	10.010	10.018	-172.8	0.0066	2.00

Remark - Can not connect the BNC because the plug does not match with the socket.

Calibration Results

Function : Temperature Measurement

(*) Without adjustment

This equipment was connected with Temperature Probe;

- Model : PHC281
- Serial No. : 230473042902

Dimension of probe

- Length : 103 mm.
- Diameter : 12 mm.
- Immersion Depth : 90 mm.

Calibration Point (°C)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of measurement (± °C)	Coverage factor *k*
25.0	25.002	25.0	-0.002	0.13	2.00

Remark : UUC* = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

SCG
Metrology
SCI ECO Services Company Limited
33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.
Saraburi Tel : +66 3627 3096 Fax : +66 3627 3100
Bangkok Tel : +668 9205 6851 , +669 8247 2360
Website : www.scieco.co.th E-Mail : calibrate@scg.com

NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate No. T232160

Certificate of Calibration

Equipment : Chamber (Cooling Room)

Manufacturer : KOLDTECH

Model : KM 320

Serial No. : TBN-1012061/05

Customer Code : BKK_EN0167

ID No. : T2463A3

Customer : ALS Laboratory Group (Thailand) Co.,Ltd.
104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan,
Khet Suan Luang, Bangkok 10250

Customer Location : Laboratory

Date of Receipt : 29 November 2023

Calibrated By : Atiphong Rongrat (Technician)

Approved By : _____ / Boonchai Suriyawong (Site Calibration Manager)

Date of Issue : 09 JAN 2024

REVIEW BY .....
APPROVED BY Sirilak P.
NEXT CAL. DATE 06/06/25

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrology.

Calibration Report

Equipment : **Chamber (Cooling Room)**
Date of Calibration : **6 December 2023**
Environment : **Temperature : 23.4-24.9 °C**
Line Voltage : 221.4-230.2 V
Relative Humidity : 55 - 65 %RH

Condition of this results of calibration :

1. Thisequipment was calibrated by insert 16 standard thermocouples type T into its chamber , the other one standard thermocouples type T use for ambient temperature measurement . The calibration was done in according to WI-T20 (based on ASTM E145-94 (Reapproved 2001) and AS2853-1986).
   All data show below were final values and the initial data from customer request . The temperature scale used was based on ITS - 90 .
2. Reference Standard Instrument :


Instrument	Model	Instrument No.	Certificate No.	Due Date
TC	TYPE T	TN161-TN170	T230773	10 April 2024
TC	TYPE T	TN171-TN180	T230773	10 April 2024
DATA LOGGER	34970A	T149	T230773	10 April 2024

3. This certificate is traceable to :
   National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244.)
4. Condition of calibrated item : good
   Equipment Description :
   Time Constant 1 Hour 30 Minute At 3 °C
   Fresh Air Damper ☐ Open ☐ Min ☐ Medium ☐ Max
   ☐ Close
   ☒ Not Available
5. Adjustment :
   (X) without adjustment ( ) after adjustment

Approved By. _____

SCG Metrology
SCI ECO Services Company Limited
33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.
NSC-TISI-TIS 17025 CALIBRATION 0244

Calibration Report

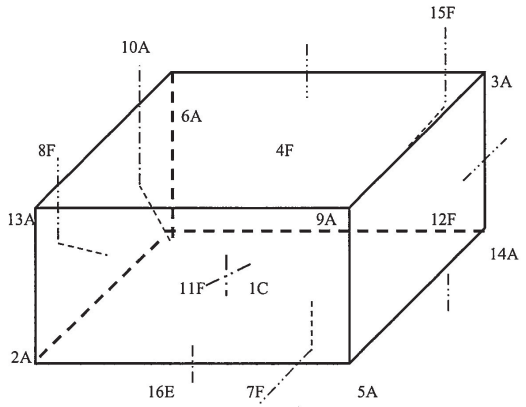

C = Centre , F = Centre of Face , A = Corner , E = Centre of Edge

1C	= TN161	12F	= TN172
2A	= TN162	13A	= TN173
3A	= TN163	14A	= TN174
4F	= TN164	15F	= TN175
5A	= TN165	16E	= TN176
6A	= TN166		
7F	= TN167		
8F	= TN168		
9A	= TN169		
10A	= TN170		
11F	= TN171		

Approved By. _____

SCG

Metrology

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.

NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate No. T232160

Calibration Report

Measurement Results

Calibration Point	Average Standard Reading at each position (°C)											
	TN161	TN162	TN163	TN164	TN165	TN166	TN167	TN168	TN169	TN170	TN171	TN172
3.0	2.83	3.34	2.95	3.46	3.45	3.76	3.25	3.46	3.39	3.50	3.58	3.42
	TN173	TN174	TN175	TN176								
	3.33	3.39	3.15	3.43								

Chamber (Cooling Room)			Temperature Distribution				
Setting (°C)	Reading (°C)		Average (°C)	Stability (±°C)	Uniformity (°C)	Uncertainty (±°C)	Coverage Factor *k*
	Min , Max	Average					
3.0	2.8 , 4.1	**3.5**	3.36	1.10	2.00	1.90	2.09

The calibration result apply only the above calibrated item.
The result of test was found accurate as shown on date and place of test only.
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor *k* which for a t-distribution, providing a level of confidence of approximately 95 % .

Approved By. _____

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

ilac-MRA

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert.No.: 24CG952
Page.: 1 of 2

REVIEW BY Sirilak P.

APPROVED BY

NEXT CAL DATE 27/08/25

Equipment :	Burette
Capacity :	50 mL
Serial No. :	-
ID. No. :	BKK_EN0171
Manufacturer :	Witeg
Made in :	Germany
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Ambient Temperature :	(20 ± 2.5) °C
Relative Humidity :	(50 ± 10) %
Barometric Pressure :	760 mmHg
Calibration Procedure :	ASTM E 542 - 01
Calibrated by :	Natcha Chayyingcheiw

Approved by :

Approved Signatory

( ) Unnopphol Harachai
(✓) Srisuda Khamtha
( ) Sa-ngeunkam Wongsa

Issue Date : 27 February 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Equipment : Burette
Received Date : 23 February 2024
Condition As-Received : New Item
Calibration Date : 27 February 2024
Reference : 2402-0757DSC-1

Cert.No.: 24CG952

Condition of this result of calibration

1. Reference Standard Instruments :

Instruments	Model	Serial No.	ID. No.	Certificate No.	Traceability	Due date
1) Balance	XP205DR	1126143764	140RC004	23MM538	TPA	15 Sep 2024
2) Thermo-Hygrograph	THDX-CE	00016540	140EC001	23H1275	TPA	09 June 2024
3) Thermometer	-	0834181	140EC005	23I948	TPA	10 Aug 2024

This certification is traceable to SI Unit

2. The certificate is valid only to the item calibrated on date and place of calibration.
3. True value is converted to true volume at the standard temperature of 20 °C

Calibration result :

Nominal capacity (mL)	Reading (mL)	Uncertainty (± mL)	*k* Factor
50	50.0032	0.010	2.00

Remark mL = cm^3

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k* , providing a level of confidence of approximately 95 %.

-o0o-

Sartorius (Thailand) Co., Ltd.
129 Rama 9 Road, Huaykwang, Huaykwang, Bangkok 10310
Tel: +66 2643 8361-6 , e-mail: service.thailand@sartorius.com

NSC-TISI-TIS 17025
CALIBRATION 0426

REVIEW BY linda K
APPROVED BY Siriluk P
NEXT CAL DATE 02/08/25

Certificate of Calibration

Model Number : MSE224S-100-DU
Description : Analytical Balance
Serial Number : 0027405555
ID No. : BKK_EN0003
Manufacturer : Sartorius

Certificate No. : 24BCI0270
Issued Date : Monday, August 05, 2024
Reference No. : 240942
Page No. : 1 of 2

Customer Name : ALS Laboratory Group (Thailand)Co., Ltd.
104 Phatthanakan 40,Phatthanakan Rd., Khwaeng Suan Luang, Khet Suan Luang, Bangkok 10250.

Calibrated Place : Lab Room

Calibrated By : Mr.Chonchai Inthana
Calibration Date : Friday, August 02, 2024

Calibration Procedure No. : This calibration was conducted by
Using in-house calibration procedure number (WI-003)
Based on UKAS LAB 14 : 2019

Metrological data :
Capacity : 220 g Readability : 0.0001 g

Ambients Conditions:
Temperature : 23.0 °C ± 5.0 °C
Humidity : 55.0 % RH ± 10.0 % RH
Pressure ± _

Reasons for calibration
☐ New Installation ☐ Service / Repaired ☒ Re-calibration/ Maintenance

Equipment Condition: ☒ Good Operate ☐ Fair

Measurement Method UKAS Publication Ref :Lab 14

The measurement uncertainty stated is the expended uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM). The calibration certificate documents the traceability to National Standards, which realise the unit of measurement according to the International Standard System of Units (SI). Report of Tolerance came form list of Sartorius Metrological Specifications.

Traceability:

Model Number	Description	Traceability	Cetificate No.	Due Date
YCS011-522-00	Sartorius weight set 1mg - 5000g E2,YCS011-522-00	TCS	M23081975	23-Aug-2025
Testo 174 H	Thermo-Hygrometer , Testo 174H	ENTECH	H/T 661303,H661140	12-Nov-2024

This certificate relate and apply this equipment only.
This certificate may not be reproduced other than in full except with the prior written approval of the Verification Operation Division Sartorius (Thailand) Co., Ltd.

Mr.chonchai Intrhana(Technical Manager)

STAMP

Sartorius (Thailand) Co., Ltd.
129 Rama 9 Road, Huaykwang, Huaykwang, Bangkok 10310
Tel: +66 2643 8361-6 Fax: +66 2643-8367, e-mail: service.thailand@sartorius.com

SARTORIUS

Certificate of Calibration

Model Number :	MSE224S-100-DU	Certificate No. :	24BCI0270
Description :	Analytical Balance	Issued Date :	Monday, August 05, 2024
Serial Number :	0027405555	Reference No. :	240942
ID No. :	BKK_EN0003		
Manufacturer :	Sartorius	Page No. :	2 of 2

Calibration Results : Without Adjustment

Repeatability


The reproducibility is the ability of a weighing instrument to display nearly identical readouts under constant test conditions when the same load within a measurement series is placed repeatedly on the weighing pan in the same manner. The standard deviation is used to express reproducibility quantitatively.

Nominal Value : (Low Load)	20.0000	200.0000
20 g	20.0000	199.9999
Tolerance	20.0001	200.0000
0.0001 g	20.0000	200.0000
	20.0000	200.0000
Nominal Value : (High Load)	20.0000	200.0000
200 g	20.0001	200.0001
Tolerance	20.0000	200.0000
0.0001 g	20.0000	199.9999
	20.0000	200.0000
Standard Deviation	0.00004	0.00006

Eccentricity (Off-center loading error)

The off-center loading error is yielded by the difference between the readout of the load, i.e. 1/3 or 1/4 of maximim capacity, placed in the middle of the weighing pan and between each of four additional measurement points (positions defined according to OIML R76).

Nominal value : 100 g
Tolerance *0.0004* g



	Difference
1	-
2	0.0000
3	0.0000
4	0.0000
5	0.0001
6	-

Linearity

The linearity, also called linearity error. Describes the deviation of the characteristic curve of a weighing instrument from the linear slope.

Tolerance *0.0002* g

Nominal Value (g)	Conventional Mass Value (g)	Displayed Value (g)	Deviation (g)	Uncertainty (g)
0.01	0.0100	0.0100	0.0000	0.00015
0.1	0.1000	0.1000	0.0000	0.00015
1	1.0000	1.0000	0.0000	0.00015
2	2.0000	2.0000	0.0000	0.00015
5	5.0000	5.0000	0.0000	0.00015
10	10.0000	10.0000	0.0000	0.00015
20	20.0000	20.0000	0.0000	0.00015
50	50.0000	50.0001	0.0001	0.00016
100	100.0000	100.0001	0.0001	0.00019
200	200.0000	200.0000	0.0000	0.00029

End of Report.

SCG
Metrological Center
SCI ECO Services Company Limited
33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.
Saraburi Tel : +66 3627 3096 Fax : +66 3627 3100
Bangkok Tel : +668 9205 6851 , +669 8247 2360
Website : www.scieco.co.th E-Mail : calibrate@scg.com
NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate No. T231303

Certificate of Calibration

Equipment	:	**Liquid Bath (Water)**
Manufacturer	:	**MEMMERT**
Model	:	**WNB29**
Serial No.	:	**L611.0135**
Customer Code	:	**BKK_EN0148**
ID No.	:	**T6455A4**
Customer	:	**ALS Laboratory Group (Thailand) Co.,Ltd.**
		104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan,
		Khet Suan Luang, Bangkok 10250
Customer Location	:	**ORGANIC PREPARATION LAB**
Date of Receipt	:	**27 June 2023**
Calibrated By	:	**Sujjar Naknakred (Site Calibration Manager)**
Approved By	:	**/ Boonchai Suriyawong (Site Calibration Manager)**
Date of Issue	:	11 JUL 2023

REVIEW BY Sirilux P.
APPROVED BY
NEXT CAL. DATE 04/01/25

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrological Center.

Certificate No. T231303

Calibration Report

Equipment : **Liquid Bath (Water)**
Date of Calibration : **4 July 2023**
Environment : **Temperature : 22.2-22.5 °C**
Line Voltage : 221.6-224.8 V
Relative Humidity : 55 - 65 %RH

Condition of this results of calibration :

1. This equipment was calibrated by insert five resistance thermometer detectors into its water bath , the other one thermocouple type T use for ambient temperature measurement . The calibration was done in according to WI-T36 (based on ASTM E715-80 (Reapproved 2001)).
   All data show below were final values and the initial data from customer request . The temperature scale used was based on ITS - 90 .
2. Reference Standard Instrument :

Instrument	Model	Instrument No.	Certificate No.	Due Date
RTD	100 OHM	M18 (CH1,CH6-CH7,CH9-CH10)	T230545	10 April 2024
DATA LOGGER	34970A	T149	T230545	10 April 2024


3. This certificate is traceable to :
   National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244.)
4. Condition of calibrated item : good
   Equipment Description :
   Time Constant 3 Hour 45 Minute At 60 °C
5. Adjustment :
   (X) without adjustment ( ) after adjustment

Approved By.

SCG
Metrological Center
SCI ECO Services Company Limited
33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.
NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate No. T231303

Calibration Report

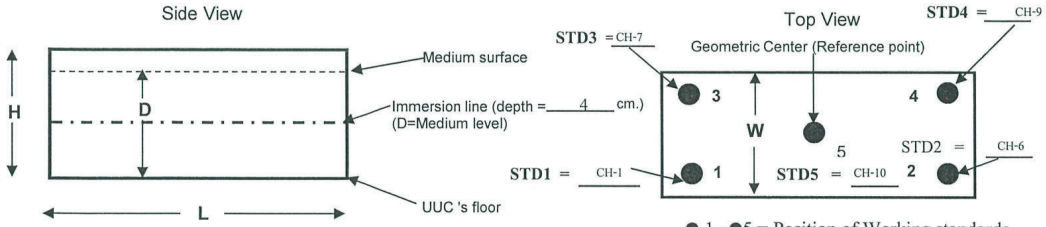

● 1~●5 = Position of Working standards

- D = Medium level : 8 cm. Working space dimension : 40 × 60 × 16 (WxLxH)
- UUC 's medium : Water
- Working standards are located at 2.5 cm. away from each coner and walls.

Measurement Results:

	Average Standard Reading at each position (°C)				
Calibration Point	**CH-1**	**CH-6**	**CH-7**	**CH-9**	**CH-10**
60	60.03	60.06	60.24	60.11	60.18
85	84.79	84.83	85.42	85.05	85.20
95	93.71	93.83	94.62	94.15	94.42

Liquid Bath (Water)			**Temperature Distribution**				
Setting (°C)	**Reading (°C)**		**Average**	**Stability**	**Uniformity**	**Uncertainty**	**Coverage**
	Min , Max	**Average**	**(°C)**	**(±°C)**	**(±°C)**	**(±°C)**	**Factor *k***
61.0	60.9 , 61.1	61.0	60.12	0.13	0.19	0.29	2.04
86.0	85.8 , 86.2	86.0	85.06	0.19	0.47	0.44	2.17
95.0	94.6 , 95	94.9	94.15	0.32	0.65	0.55	2.13

*** The quoted uncertainty exclude "uniformity"**
The calibration result apply only the above calibrated item.
The result of test was found accurate as shown on date and place of test only.
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor *k* which for a t-distribution, providing a level of confidence of approximately 95 % .

Approved By.

Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110

Telephone : +66 2 586 5792-4 Fax : +66 2 586 5109

Website : www.scieco.co.th E-Mail : calibrate@scg.co.th

Certificate of Calibration

Equipment	:	**DIGESTION UNIT**
Manufacturer	:	**Environmental Express**
Model	:	**TKN100**
Serial No.	:	**2017TKNBC142**
Customer Code	:	**BKK_EN0223**
ID No.	:	**T6773A4**
Customer	:	**ALS Laboratory Group (Thailand) Co.,Ltd.**
		104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan,
		Khet Suan Luang, Bangkok 10250
Customer Location	:	**Wet Chemistry Lab1**
Date of Receipt	:	**15 May 2024**
Calibrated By	:	**Sujjar Naknakred (Site Calibration Manager)**
Approved By	:	**Preecha Phisassutthikul (Temperature Calibration Manager)**
Date of Issue	:	28 MAY 2024

REVIEW BY Jinda K.
APPROVED BY Siriluk P.
NEXT CAL. DATE 24/05/25

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrological Center.

Metrological Center

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110

Telephone : +66 2 586 5792-4 Fax : +66 2 586 5109

Website : www.scieco.co.th E-Mail : calibrate@scg.co.th

Calibration Report

Equipment	:	**DIGESTION UNIT**
Date of Calibration	:	**24 May 2024**
Environment	:	**Temperature : 28.7 - 30.0 °C**
		Line Voltage : 222.8 - 225.9 V
		Relative Humidity : 55 - 65 %RH

Condition of this results of calibration :

1. This equipment was calibrated by insert four standard thermocouples type S into its chamber , the other one thermocouple type T use for ambient temperature measurement . The calibration was done in according to WI-T10.
2. Reference Standard Instrument :

Instrument	Model	Instrument No.	Certificate No.	Due Date
TC	Type S	M20A1-(CH17-CH20)	T240714	23 April 2025
DATA LOGGER	34970A	T149	T240714	23 April 2025

3. This certificate is traceable to :
   National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244.)
4. Condition of calibrated item : good
   Equipment Description :
   Time Constant 2 Hour 2 Minute At 380 °C
   Fresh Air Damper ☐ Open ☐ Min ☐ Medium ☐ Max
   ☐ Close
   ☒ Not Available
5. Adjustment :
   ( ) without adjustment (X) after adjustment

Approved By

Metrological Center


SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110

Telephone : +66 2 586 5792-4 Fax : +66 2 586 5109

Website : www.scieco.co.th E-Mail : calibrate@scg.co.th

Calibration Report

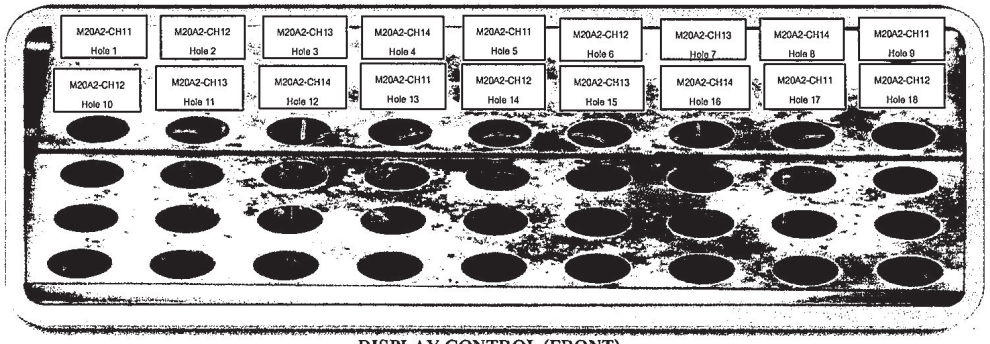

DISPLAY CONTROL (FRONT)

Measurement Results

Cal. Point	Setting	Reading	STD.	Position of Standards at Block								
(°C)	(°C)	(°C)	Reading	M20A2-CH11 Hole 1	M20A2-CH12 Hole 2	M20A2-CH13 Hole 3	M20A2-CH14 Hole 4	M20A2-CH11 Hole 5	M20A2-CH12 Hole 6	M20A2-CH13 Hole 7	M20A2-CH14 Hole 8	M20A2-CH11 Hole 9
380.0	380.0	379.8 - 380.2	Average °C	377.34	380.04	380.62	383.20	380.97	379.00	381.21	378.62	379.36
			Stability ±°C	0.31	0.27	0.31	0.25	0.24	0.37	0.15	0.26	0.23

Cal. Point	Setting	Reading	STD.	Position of Standards at Block								
(°C)	(°C)	(°C)	Reading	M20A2-CH12 Hole 10	M20A2-CH13 Hole 11	M20A2-CH14 Hole 12	M20A2-CH11 Hole 13	M20A2-CH12 Hole 14	M20A2-CH13 Hole 15	M20A2-CH14 Hole 16	M20A2-CH11 Hole 17	M20A2-CH12 Hole 18
380.0	380.0	379.8 - 380.2	Average °C	376.66	381.17	380.28	383.11	383.26	382.04	380.37	381.00	381.61
			Stability ± °C	0.35	0.34	0.35	0.24	0.21	0.23	0.23	0.20	0.22

Approved By.

Metrological Center


SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110

Telephone : +66 2 586 5792-4 Fax : +66 2 586 5109

Website : www.scieco.co.th E-Mail : calibrate@scg.co.th

Calibration Report

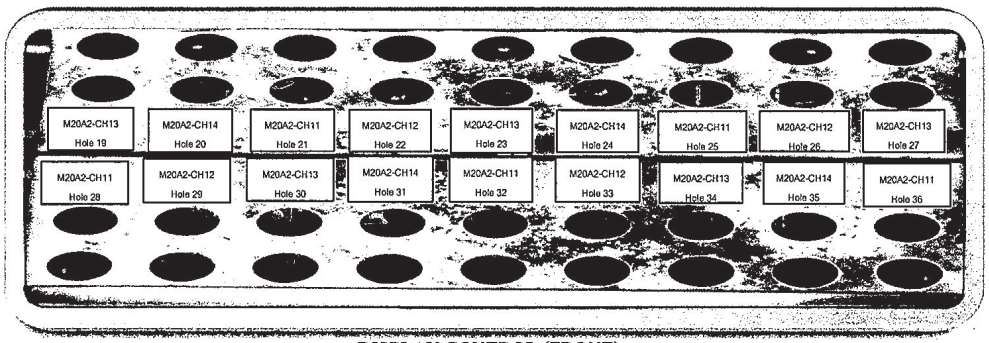

DISPLAY CONTROL (FRONT)

Measurement Results

Cal. Point	Setting	Reading	STD.	Position of Standards at Block								
(°C)	(°C)	(°C)	Reading	M20A2-CH13 Hole 19	M20A2-CH14 Hole 20	M20A2-CH11 Hole 21	M20A2-CH12 Hole 22	M20A2-CH13 Hole 23	M20A2-CH14 Hole 24	M20A2-CH11 Hole 25	M20A2-CH12 Hole 26	M20A2-CH13 Hole 27
380.0	380.0	379.8 - 380.2	Average °C	376.97	383.29	383.26	381.86	380.47	381.36	382.07	379.37	381.87
			Stability ±°C	0.22	0.26	0.22	0.22	0.23	0.22	0.25	0.21	0.22

Cal. Point	Setting	Reading	STD.	Position of Standards at Block								
(°C)	(°C)	(°C)	Reading	M20A2-CH11 Hole 28	M20A2-CH12 Hole 29	M20A2-CH13 Hole 30	M20A2-CH14 Hole 31	M20A2-CH11 Hole 32	M20A2-CH12 Hole 33	M20A2-CH13 Hole 34	M20A2-CH14 Hole 35	M20A2-CH11 Hole 36
380.0	380.0	379.8 - 380.2	Average °C	377.29	381.19	381.69	380.72	381.02	380.42	378.65	380.63	376.92
			Stability ± °C	0.25	0.27	0.27	0.26	0.22	0.28	0.19	0.23	0.22


Approved By.

Metrological Center

SCG CEMENT-BUILDING MATERIALS
SCI ECO Services Company Limited
33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110
Telephone : +66 2 586 5792-4 Fax : +66 2 586 5109
Website : www.scieco.co.th E-Mail : calibrate@scg.co.th

Certificate No. T240977

Calibration Report

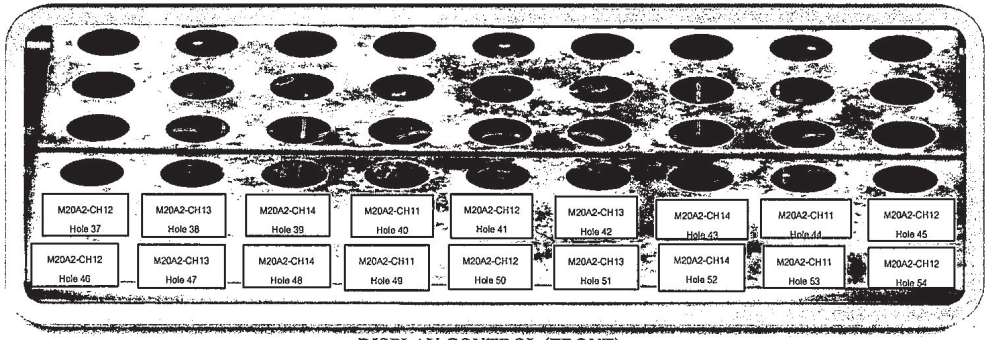

DISPLAY CONTROL (FRONT)

Measurement Results

Cal. Point	Setting	Reading	STD.	Position of Standards at Block								
(°C)	(°C)	(°C)	Reading	M20A2-CH12 Hole 37	M20A2-CH13 Hole 38	M20A2-CH14 Hole 39	M20A2-CH11 Hole 40	M20A2-CH12 Hole 41	M20A2-CH13 Hole 42	M20A2-CH14 Hole 43	M20A2-CH11 Hole 44	M20A2-CH12 Hole 45
380.0	380.0	379.8 - 380.2	Average °C	380.39	378.84	380.87	381.85	379.87	382.97	383.29	379.42	378.50
			Stability ±°C	0.21	0.16	0.19	0.25	0.18	0.19	0.19	0.23	0.42

Cal. Point	Setting	Reading	STD.	Position of Standards at Block								
(°C)	(°C)	(°C)	Reading	M20A2-CH12 Hole 46	M20A2-CH13 Hole 47	M20A2-CH14 Hole 48	M20A2-CH11 Hole 49	M20A2-CH12 Hole 50	M20A2-CH13 Hole 51	M20A2-CH14 Hole 52	M20A2-CH11 Hole 53	M20A2-CH12 Hole 54
380.0	380.0	379.8 - 380.2	Average °C	377.89	381.24	380.93	379.91	380.08	380.61	381.63	383.34	383.04
			Stability ±°C	0.63	0.41	0.24	0.14	0.15	0.15	0.14	0.16	0.38

The expanded uncertainty of temperature measurement was ± 1.65 °C
The calibration result apply only the above calibrated item.
The result of test was found accurate as shown on date and place of test only.
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2 , providing a level of confidence of approximately 95 % .

Approved By. _____

DOUBLE S DIAGNOSTICS
บริษัท ดับเบิ้ล เอส ไดแอคนอสติคส์ จำกัด
DOUBLE S DIAGNOSTICS CO., LTD.
4 ซอยอุดมสุข 14 แขวงบางนา เขตบางนา กรุงเทพฯ 10260 โทรศัพท์: (02) 747-7009 โทรสาร: (02) 747-7008
4 Soi Udomsuk 14, Bangna, Bangkok 10260 Tel. (02) 747-7009 Fax: (02) 747-7008

Maintenance Plan YEAR : 2024

เดือน	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
รอบ								BM CM				

Periodical maintenace check list for Konelab

	6M	12M	Note!
1.Diluent-wash tubing change	☐	☑	
2.ISE tubing change	☒	☒	none.
3.Syringe check/change		☑	
4.Dispensing check/ change		☑	
5.Waste tubing change when necessary		☑	
6.Lamp check/change	☐	☑	
7.Mixer paddle/paddle change(not Konelab20)		☑	
8.ISE needles check/change		☒	none.
9.Pump tubing check/ chance	☐	☑	
10.Broken/worn out part check /change		☑	
11.Peristaltic pump check /cleaning/ lubrication	☐	☑	
12.Heating check		☑	
13.Cooling check		☑	
14.Dispenser mechanic check/adjustment	☐	☑	
15.Cuvette transfer mechanic check/adjustment	☐	☑	
16.Dispenser movement check/adjustment	☐	☑	
17.Sample/reagent register check/adjustment	☐	☑	
18.Dispensing tubing tightness check	☐	☑	
19.Photometer and optics cleaning/check/adjustment	☐	☑	
20.Workstation PC cleaning if necessary	☐	☑	
21.Mechanic cleaning/lubrication	☐	☑	
22.Instrument cleaning if necessary	☐	☑	
23.Complete analyzer testing with waterblank/QC or sample	☐	☑	
24.Test parameters/Adjustment/config. Save to USB key	☐	☑	
25.UPS Test	☐	☑	

Place: ALS LAB **Instrument:** Vio Aqua Ion
Date/Time: 16/8/67 **Serial no:** 22781
Service done by: [signature] **Install date:** _____
Signature of customer: [signature] **Date/Time:** 16/08/2024

Laboratory
Analyzer User

8/16/2024 14:53

Performed 8/16/2024
Lot WB34

ACCEPTANCE CRITERIA

	Result	Limit	Warning
Temperature (?C)	37.8	37.0 +/- 1.0	
Dispensing ratio	16.4	14.8 - 17.2	
CV%	0.29	<1.7	
Photometric noise			
Max SD L340_2 (mA)	0.17	<2.0	
Max SD L340_4 (mA)	0.87	<3.0	
Linearity of photometer			
Slope	1.0141	0.94 - 1.06	
Curvature	0.0053	+/- 0.02	
Max bias from linear fit (mA)	4.3	<15.0	
Max delta %	-1.6	+/- 6.0	
Linearity of sample dispensing			
Proport. volume XDISP2 (?l)	2.06	1.96 - 2.16	
Proport. volume XDISP4 (?l)	4.14	3.85 - 4.40	
XDISP2 CV%	1.21	<2.0	
XDISP4 CV%	0.90	<2.0	
XDISP10 CV%	0.68	<2.0	
Needle 0 ?l volume			
Average (A)	0.005	<0.050	
Standard deviation (A)	0.002	<0.005	
Volume (?l)	0.03	<0.32	

OTHER INFORMATION

Dispensing ratio

Posit	Result (A)
1	0.1549
2	0.1549
3	0.1537
4	0.1547
5	0.1547
6	0.1545

Photom. noise: SD (mA)

Posit	L340_2	L340_4
1	0.15	0.80
2	0.17	0.79
3	0.04	0.65
4	0.16	0.31
5	0.11	0.58
6	0.14	0.87

Laboratory
Analyzer User


8/16/2024 14:53

Linearity of sample dispensing

Test	Absorbance (A)
XDISP2	0.306
XDISP4	0.612
XDISP10	1.471

Linearity of photometer

L340_	Target (A)	Meas (A)	Delta (A)	Delta %
1	0.002	0.006	-0.004	-217.7
2	0.486	0.493	-0.007	-1.5
3	1.451	1.469	-0.018	-1.2
4	1.936	1.963	-0.027	-1.4
5	2.415	2.454	-0.039	-1.6

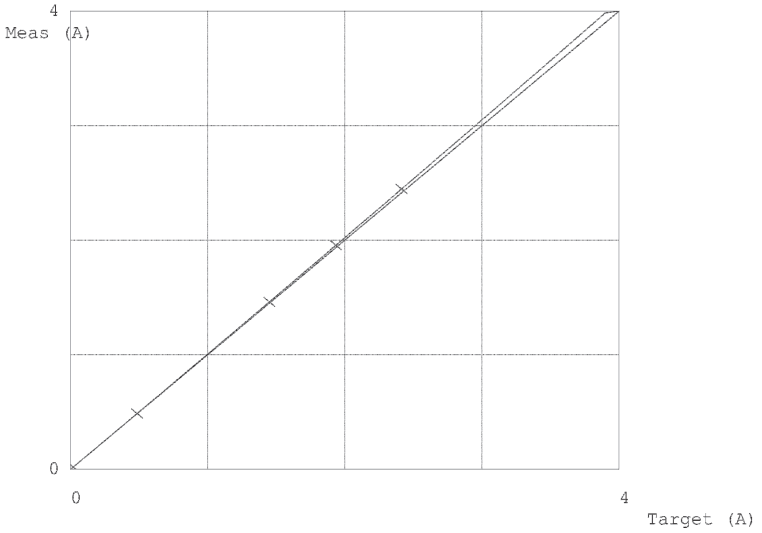

SCG

Metrology

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.

Saraburi Tel : +66 3627 3096 Fax : +66 3627 3100

Bangkok Tel : +668 9205 6851 , +669 8247 2360

Website : www.scieco.co.th E-Mail : calibrate@scg.com

NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate of Calibration

Equipment : **Chamber (Oven)**

Manufacturer : **Memmert**

Model : **UF 450**

Serial No. : **B717.0531**

Customer Code : **BKK_EN0273**

ID No. : **T8042A4**

Customer : **ALS Laboratory Group (Thailand) Co.,Ltd.**

104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan,

Khet Suan Luang, Bangkok 10250

Customer Location : **Laboratory (Oven Room)**

Date of Receipt : **08 May 2024**

Calibrated By : **Preecha Phisassutthikul (Temperature Calibration Manager)**

Approved By : _____ / **Nuafun Sungchum (Metrology Manager)**

Date of Issue : 23 MAY 2024

REVIEW BY Jinda K.
APPROVED BY Siriluk P.
NEXT CAL. DATE 14/11/25

The uncertainties are for a confidence probability of approximately 95%.

This Certificate is issued in accordance with the conditions of accreditation granted by the Thai Laboratory Accreditation Scheme which has assessed the measurement capability of the laboratory and its traceability to recognized national standards and to the units of measurement realized at the corresponding national standard laboratory. This certificate may not be reproduced other than in full except with the prior written approval of the Metrology.

SCG

Metrology

SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.

NSC-TISI-TIS 17025
CALIBRATION 0244

Calibration Report

Equipment : **Chamber (Oven)**
Date of Calibration : **14 May 2024**
Environment : **Temperature : 26.5-28.1 °C**
Line Voltage : 226.7-229.8 V
Relative Humidity : 51 - 57 %RH

Condition of this results of calibration :

1. This equipment was calibrated by insert nine resistance thermometer detectors into its chamber , the other one resistance thermometer detector use for ambient temperature measurement . The calibration was done in according to WI-T20 (based on ASTM E145-94 (Reapproved 2001) and AS2853-1986).
   All data show below were final values and the initial data from customer request . The temperature scale used was based on ITS - 90 .
2. Reference Standard Instrument :

Instrument	Model	Instrument No.	Certificate No.	Due Date
RTD	100 ohm	21-(CH1-10)	T231955	17 November 2024
DATA LOGGER	34970A	T121	T231955	17 November 2024

3. This certificate is traceable to :
   National Institute of Metrology (Thailand) through Metrological Center (NSC-TISI-TIS 17025 CALIBRATION 0244.)
4. Condition of calibrated item : good
   Equipment Description :
   Time Constant 1 Hour 30 Minute At 104 °C
   Fresh Air Damper ☐ Open ☐ Min ☐ Medium ☐ Max
   ☐ Close
   ☒ Not Available
5. Adjustment :
   (X) without adjustment ( ) after adjustment

Approved By_____

SCG

Metrology


SCI ECO Services Company Limited

33/2 Moo 3, T.Banpa, A.Kaengkhoi, Saraburi 18110, Thailand.

NSC-TISI-TIS 17025
CALIBRATION 0244

Certificate No. T240904

Calibration Report

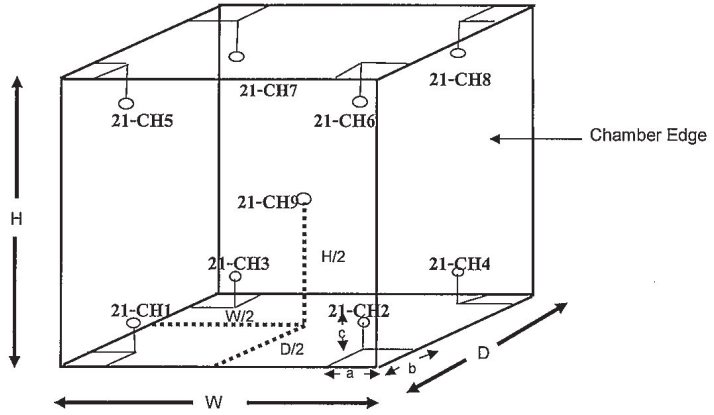

Remark :

Internal Dimensions of Chamber : W (Width) = 104 cm. , H(Height)=72 cm. and D(Depth)=60 cm.
Size of Installed Standard sensor number21-CH1to number21-CH8 : a = 5 cm. ,b = 5 cm. and c = 5 cm.
Size of Installed Standard sensor number21-CH9 : W/2=104 cm./2 , H/2=72 cm./2 and D/2=60 cm./2

Measurement Results

	Average Standard Reading at each position (°C)								
Calibration Point	21-CH1	21-CH2	21-CH3	21-CH4	21-CH5	21-CH6	21-CH7	21-CH8	21-CH9
104	103.4	105.0	103.7	103.6	103.3	104.6	103.3	104.0	103.9
180	179.5	181.1	179.2	179.5	179.0	181.3	179.8	179.9	180.2

Chamber (Oven)			Temperature Distribution				
Setting (°C)	Reading (°C) Min , Max	Reading (°C) Average	Average (°C)	Stability (±°C)	Uniformity (°C)	Uncertainty (±°C)	Coverage Factor *k*
104.0	103.9 , 104	104.0	103.85	0.14	1.27	0.44	2.00
180.0	179.9 , 180.1	180.0	179.94	0.39	2.29	0.76	2.00

*** The quoted uncertainty exclude "uniformity"**

The calibration result apply only the above calibrated item.

The result of test was found accurate as shown on date and place of test only.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor *k* which for a t-distribution, providing a level of confidence of approximately 95 % .

End of Certificate

Approved By._____

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)

CORPORATE SERVICES 3 : EQUIPMENT CALIBRATION AND TESTING SERVICES

534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250

TEL. 0-2717-3000 FAX. 0-2719-9484

Cert.No.: 23TW243

Certificate of Testing

Equipment :	DO Meter
Manufacturer :	YSI
Model :	5000-230V
Serial No. :	09J101147
ID No. :	BKK_EN0017
Received Date :	15 November 2023
Test Date :	16 November 2023
Reference :	2311-0505DSC-4
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Laboratory Condition :	Temperature (25 ± 5) °C Humidity (50 ± 20) %
Test Procedure :	In - house method : CP-CH9 by Comparison Technique with Azide Modification Method
Tested by :	Walalak Sirithean
Approved by :	Saithip Approved Signatory

REVIEW BY Karn Anh
APPROVED BY Siriluk P.
NEXT CAL. DATE 16/05/25

(√) Saithip Meangmai
( ) Warakorn Lerngagtrakul
( ) Ponpan Paipim

Issue Date : 17 November 2023

B 0328589

Condition of this result of calibration

1. Reference Standard Instruments :
   This certification is traceable to the International System of Unit through the reference standards laboratory of Industrial Calibration Center, Technology Promotion Association (Thailand-Japan).

Instruments	Serial No.	ID No.	Certificate No.	Due Date
1) Burette	-	130BU10	23CG1172	22 Mar 2025
2) Balance	1124013382	140RC006	23MM18	20 Feb 2024

2. Standard Material :-

Material	Manufacturer	Lot.No.	Assay
Sodium Thiosulfate pentahydrate	Merck	AM1763316	100.2%

Result : **Dissolved Oxygen Meter Adjustment With Air 100 %**
Dissolved Oxygen Probe No.: 16K100498

Titration Method (Azide Modification Method) (mg/L)	DO Meter Reading (mg/L)	Standard Deviation (mg/L)
8.18	8.18	0.0055

This report was certified only for the instrument we tested.It is allowable to use for study the system efficiency,The environmental impact control and present to organization it may concerned Intend to use for advertising and referral purpose is prohibited.This report may not be reproduced other in full,without written approval of the laboratory

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Equipment :	DO Meter with Sensor
Manufacturer :	YSI
Model :	5000-230V
Serial No. :	09J101147
ID No. :	BKK_EN0017
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Location :	TPA Chemistry Calibration Laboratory
Received Order :	15 November 2023
Calibrated Date :	16 November 2023
Ambient Temperature :	(26 ± 10) °C
Relative Humidity :	(50 ± 30) %
AC Line Voltage :	(220 ± 22) V
Calibrated by :	Kunchit Promprat
Approved by :	Approved Signatory

( ) Pornthippa Tameyakul
( ) Ponpan Paipim
(✓) Suwit Imjai

Issue Date : 17 November 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Equipment : DO Meter with Sensor **Cert. No.:** 23LM192
Condition As-Received : Used Item **Page.:** 2 of 2
Reference : 2311-0505DSC-10
Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-OT01 according to comparison with Industrial Platinum Resistance Thermometer (IPRT) into Temperature Bath.

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Digital Thermometer	3240076	23I305	TPA	15 Mar 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function : Temperature measurement.

This instrument was connected with temperature sensor, S/N.: 16K100498

Calibration Point (°C)	Immersion Depth (mm)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty (± °C)	Coverage Factor *k*
20.0	60	19.997	19.93	-0.067	0.15	2.00

UUC* : Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

a 1190298

QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksong, Bangkae, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584
www.qcalibration.com

ilac-MRA NSC-TISI-TIS17025 CALIBRATION 0049

CERTIFICATE No : 24T2852
REFERENCE No : 72619-8

Certificate of Calibration

EQUIPMENT	:	COOLED INCUBATOR
MANUFACTURER	:	MEMMERT
MODEL	:	ICP750
SERIAL No	:	F819.0021
ID No	:	BKK_EN0304
CONDITION AS RECEIVED	:	USED ITEM
SUBMITTED BY	:	ALS LABORATORY GROUP (THAILAND) CO., LTD. 104 PHATTHANAKAN 40, PHATTHANAKAN RD.,KHWAENG PHATTHANAKAN,KHET SUAN LUANG, BANGKOK 10250, THAILAND

REVIEW BY Jinda K.
APPROVED BY Siriluk P.
NEXT CAL. DATE 20/03/25

CALIBRATED BY	:	CHAICHARN CH.
CALIBRATION DATE	:	20-Mar-24
APPROVED BY	:	PONGSAK J.
ISSUED DATE	:	21-Mar-24
RECEIVED DATE	:	20-Mar-24

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF QUALITY CALIBRATION CO., LTD.

QUALITY CALIBRATION CO.,LTD.
235 Petchkasem 63/2 Road, Laksong, Bangkae, Bangkok 10160
Tel (662) 421-5402, (662) 444-0152-3, Fax (662) 809-4584

Calibration Report

EQUIPMENT	:	COOLED INCUBATOR			
MANUFACTURER	:	MEMMERT			
MODEL	:	ICP750			
ID No	:	BKK_EN0304	**S/N**	:	F819.0021
RECEIVED DATE	:	20-Mar-24	**CALIBRATION DATE**	:	20-Mar-24
AMBIENT TEMPERATURE	:	26 °C ± 1 °C	**RELATIVE HUMIDITY**	:	54 %RH ± 10 %RH


CONDITION OF THIS RESULTS OF CALIBRATION

1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLAS G-20 BY COMPARISON WITH CALIBRATED THERMOCOUPLE TYPE K UNDER NO LOAD CONDITION. THE THERMOCOUPLES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOCOUPLE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOCOUPLE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.
2. REFERENCE STANDARD INSTRUMENTS :-

INSTRUMENT	MODEL	SERIAL No	CERTIFICATE No	DUE DATE
1) DATA LOGGER WITH TC TYPE K	HYDRA 2635A	7286308	23T6641	14-Jul-24

3. THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
   - NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



FRONT

GENERAL INFORMATION

Overall Ambient Temperature around the Chamber (°C) variation : 1
Overall Line Voltage (V) variation : 5
Instrument Condition : Normal

CHAMBER PERFORMANCE

Controller Temperature (°C)	Indicating Temperature (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
20.0	20.0	0.16	0.21	0.41

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (±°C)
		#1	#2	#3	#4	Ref. 5	#6	#7	#8	#9	
20.0	20.0	19.88	19.93	19.87	19.86	19.98	19.94	19.94	19.89	19.91	0.42

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.
NOTE 2: LOCATION 5 WAS REFERENCE LOCATION.
NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.
THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k =2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

Sample

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Cert. No.: 23TM1103
Page : 1 of 3

Certificate of Calibration

Equipment :	Autoclave
Manufacturer :	Sanyo
Model :	MLS-3781
Serial No. :	830167
ID No. :	BKK_ML0037
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Location :	Media Preparation Room
Received Order :	17 July 2023
Calibration Date :	17 July 2023
Ambient Temperature :	(26 ± 10) °C
Relative Humidity :	(50 ± 30) %
Calibrated by :	Preecha Hlahib
Approved by :	Approved Signatory

REVIEW BY Sithichok
APPROVED BY
NEXT CAL. DATE 17/07/25

( ) Pornthippa Tameyakul
( ) Malee Butkruea
(✓) Suwit Imjai

Issue Date : 24 July 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Equipment : Autoclave **Cert. No.:** 23TM1103
Condition As-Received : Used Item **Page :** 2 of 3
Reference : 2307-0285OC-3

Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-OT03 according to direct measurement method with Data Acquisition which connected with Thermocouple Type T

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY57013823	23LM66	TPA	25 Mar 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.
4. This result of calibration covers laboratory autoclaves for the sterilization of goods and material which could be infected with organisms categorized as Hazard Group 1, 2 and 3**


(** = Categorization of pathogens according to hazard and categories of containment, second edition, 1990)

It does not cover autoclaves for use with material infect with organisms in Hazard Group 4, for which complete containment and sterilization of infected condensate is considered to be essential.

This result of calibration does not apply to sterilizers or disinfectors used for medical, dental, pharmaceutical or veterinary purposes which are directry concerned with patient care, or those used for fabrics subjected to sterilization which are required to be dry at the end of cycle.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source



	Environmental		
	(°C)	(%R.H.)	(Volt)
Beginning of Calibration	22	53	220
Finished of Calibration	22	54	220

Position	Description	Ref. Std. ID No.:
1 =	Center of chamber	22-17TC-01
2 =	Temperature sensor	23-17TC-02
3 =	Exhaust port	19-17TC-03

Equipment : Autoclave **Cert. No.:** 23TM1103
Condition As-Received : Used Item **Page :** 3 of 3
Reference : 2307-0285OC-3
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source

Operating parameter Set : Temperature = 121 °C
Sterilization period = 15 minute

UUC* Setting (°C)	UUC* Reading (°C)	Position	Average* Standard Reading (°C)	Stability (± °C)	Pressure Reading (MPa)	Uncertainty (± °C)	Coverage Factor *k*
121	121	1	120.877	0.39	0.12	1.0	2
		2	120.870				
		3	120.866				

Average* : The average of 30 values in each position.
Stability : One-half of the greatest maximum difference of measured temperature at any one probe.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Cert. No.: 23TM1146
Page : 1 of 3

Certificate of Calibration

Equipment :	Incubator
Manufacturer :	SHEL-LAB
Model :	1915A
Serial No. :	0200599
ID No. :	BKK_ML0010
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthakan Rd., Khwawng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Location :	Incubation & Micrological Reading
Received Order :	17 July 2023
Calibration Date :	17 July 2023
Ambient Temperature :	(26 ± 10) °C
Relative Humidity :	(50 ± 30) %
Calibrated by :	Man Pattanapongpaiboon

REVIEW BY sithichok
APPROVED BY
NEXT CAL. DATE 17/07/25

Approved by : Malu.
Approved Signatory

( ) Pornthippa Tameyakul
(/) Malee Butkruea
( ) Suwit Imjai

Issue Date : 24 July 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0056489

Equipment : Incubator
Condition As-Received : Used Item
Reference : 2307-0285OC-1

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-


Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49001451	23LM27	TPA	25 Feb 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Environment during calibration		
	Beginning	Finished
Temp. (°C)	24	24
REL.Humid. (%)	54	56
AC Supply (Volt)	221	223

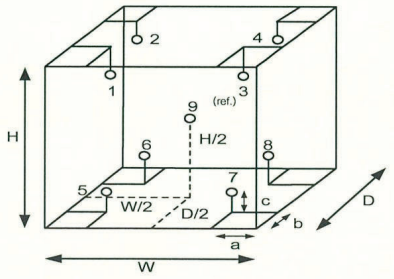

Position :	Ref. Std. ID No.:
1	19RTD-2/1
2	19RTD-2/2
3	19RTD-2/3
4	19RTD-2/4
5	19RTD-2/5
6	19RTD-2/6
7	19RTD-2/7
8	19RTD-2/8
9 (ref.)	19RTD-2/9

Probe Installation Details :

a =	10	cm
b =	10	cm
c =	10	cm

Dimension of Chamber :

D =	0.50	m
W =	0.75	m
H =	1.2	m
Capacity =	0.45	m^3

Malu.

a 1172189

Equipment : Incubator
Condition As-Received : Used Item
Reference : 2307-0285OC-1
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Cert. No.: 23TM1146
Page : 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Coverage Factor *k*
35.0	35.0	35.0	0.055	0.30	0.44	2

Calibration Point (°C)	Measured Temperature (°C) Position									Uncertainty (±°C)
	1	2	3	4	5	6	7	8	9 (ref.)	
35.0	34.888	34.933	34.815	34.813	35.064	35.019	35.156	35.141	35.087	0.30

Average* : The average of 30 values in each position.
Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.
Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

Malu.

a 1172188

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

ilac-MRA
NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert. No.: 24TM667
Page : 1 of 3

REVIEW BY ..... Sithichok T.
APPROVED BY .....
NEXT CAL DATE..... 23/10/25

Equipment : Hot Air Oven
Manufacturer : Binder
Model : ED 240/E2
Serial No. : 00-15533
ID No. : BKK_ML0013

Submitted by : ALS Laboratory Group (Thailand) Co.,Ltd.
104 Phatthanakan 40, Phatthanakan Rd.,
Khwaeng Phatthanakan, Khet Suan Luang,
Bangkok 10250 Thailand

Location : Media Preparation Room

Received Order : 23 April 2024
Calibration Date : 23 April 2024
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %

Calibrated by : Tawatchai Pama

Approved by :
P.Suwit
Approved Signatory

( ) Ponpan Paipim
(✓) Suwit Imjai
( ) Kunchit Promprat

Issue Date : 26 April 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Equipment : Hot Air Oven
Condition As-Received : Used Item
Reference : 2404-0439OC-8

Cert. No.: 24TM667
Page : 2 of 3

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 based on TLAS G-20 according to direct measurement method with Data Acquisition which connected with Thermocouple Type T.

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-


Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49001451	24LM44	TPA	17 Mar 2025

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Environment during calibration		
	Beginning	Finished
Temp. (°C)	24	23
REL.Humid. (%)	65	65
AC Supply (Volt)	223	222



Position :	Ref. Std. ID No.:
1	24-19TC-01
2	24-19TC-02
3	24-19TC-03
4	24-19TC-04
5	24-19TC-05
6	24-19TC-06
7	24-19TC-07
8	24-19TC-08
9 (ref.)	24-19TC-09

Probe Installation Details :

a =	10	cm
b =	10	cm
c =	10	cm

Dimension of Chamber :

D =	0.50	m
W =	0.80	m
H =	0.60	m
Capacity =	0.24	m³

Equipment : Hot Air Oven
Condition As-Received : Used Item
Reference : 2404-0439OC-8
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Close

Cert. No.: 24TM667
Page : 3 of 3

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Coverage Factor *k*
180	180	180	0.64	2.7	3.7	2

Calibration Point	Measured Temperature (°C)									Uncertainty
	Position									
(°C)	1	2	3	4	5	6	7	8	9 (ref.)	(±°C)
180	181.009	181.511	180.922	181.359	181.217	183.659	181.664	181.986	181.474	1.5

Average* : The average of 30 values in each position.
Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.
Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert. No.: 24TM469
Page : 1 of 3

Equipment :	Water Bath
Manufacturer :	Memmert
Model :	WNE 45
Serial No. :	L712.0429
ID No. :	BKK_ML0056
Submitted by :	ALS Laboratory Group (Thailand) Co.,Ltd. 104 Phatthanakan 40, Phatthanakan Rd., Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250 Thailand
Location :	Incubation $ Microbiological Reading
Received Order :	01 March 2024
Calibration Date :	01 March 2024
Ambient Temperature :	(26 ± 10) °C
Relative Humidity :	(50 ± 30) %
Calibrated by :	Krisda Malee
Approved by :	Approved Signatory

REVIEW BY ..... SithichokT.
APPROVED BY.....
NEXT CAL DATE..... 01/03/25

( ) Pornthippa Tameyakul
( ) Unnopphol Harachai
(✓) Suwit Imjai

Issue Date : 4 March 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-OT04 Based on ASTM E715 according to direct measurement method with Data Acquisition which connected with Industrial Platinum Resistance Thermometer (IPRT).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-


Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY57013711	23LM115	TPA	11 Jul 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Heat transfer medium used : Water

	Environmental		AC Voltage Supply
	(°C)	(%R.H.)	(Volt)
Beginning of Calibration	24	55	221
Finished of Calibration	23	56	220

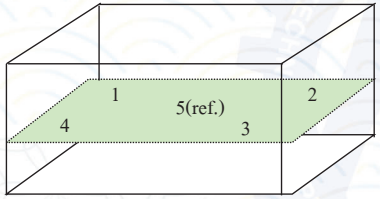

Front

Position :	Ref. Std. ID No.:
1	4803988-001
2	4803988-002
3	4803988-003
4	4803988-004
5(ref.)	4803988-005

Equipment : Water Bath
Condition As-Received : Used Item
Reference : 2403-0001OC-1
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source

Cert. No.: 24TM469
Page : 3 of 3

Calibration point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Average* Standard Reading (°C) Position 1	2	3	4	5 (ref.)	Uncertainty (± °C)
44.5	44.5	44.5	44.469	44.462	44.492	44.510	44.496	0.15
45.0	45.0	45.0	44.975	44.974	45.007	45.023	44.999	0.15

Calibration point (°C)	Uniformity (°C)	Stability (± °C)	Coverage Factor *k*
44.5	0.087	0.029	2
45.0	0.069	0.031	2

Average* : The average of 30 values in each position.
Uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Stability : One-half of the greatest maximum difference of measured temperature at any one probe.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity.

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

REVIEW BY Chayathron P.
APPROVED BY Marathon P
NEXT CAL. DATE 13/08/25

Test Report

Customers	:	ALS Laboratory Group (Thailand) Co., Ltd.			
Equipment	:	Colorimeter	Manufacturer	:	HACH
Controller Model	:	☑ DR300 ☐ Pocket II	ID No.	:	BKK_LG0040
Controller Serial No.	:	19050A000330	Sensor Serial No.	:	-
Date of test	:	13/08/2024	Period	:	1 Year
Environment temperature	:	25 °C	Humidity	:	60 %RH

Results

Instrument Checked

Item	Characteristic	Before	After	Remark
1	Visual Inspect	☑ Pass ☐ Fail	☑ Pass ☐ Fail	
2	Power Supply (4.5 – 6.0 VDC)	6.0 VDC	6.0 VDC	
3	Display Check	☑ Pass ☐ Fail	☑ Pass ☐ Fail	
4	Keyboard Check	☑ Pass ☐ Fail	☑ Pass ☐ Fail	
5	Function System Program	☑ Pass ☐ Fail	☑ Pass ☐ Fail	

Warning and Error Checked

Item	Event	Before	After
6	Error list	☑ None ☐ Appear_____	☑ None ☐ Appear_____

Check with Standard

Item	Characteristic	Before	After	Remark
	DPD-CHLORINE-LR			
7	Blank (0.00 mg/l)	0.00 mg/l	0.00 mg/l	
8	Standard Cl2 No. 1 (0.19 ± 0.09 mg/l)	0.21 mg/l	0.20 mg/l	
9	Standard Cl2 No. 2 (0.87 ± 0.10 mg/l)	0.89 mg/l	0.88 mg/l	
10	Standard Cl2 No. 3 (1.55 ± 0.14 mg/l)	1.57 mg/l	1.56 mg/l	
	DPD-CHLORINE-HR			
11	Blank (0.0 mg/l)	0.0 mg/l	0.0 mg/l	
12	Standard Cl2 No. 1 (2.2 ± 0.2 mg/l)	2.2 mg/l	2.2 mg/l	
13	Standard Cl2 No. 2 (3.9 ± 0.3 mg/l)	3.9 mg/l	3.9 mg/l	
14	Standard Cl2 No. 3 (6.8 ± 0.6 mg/l)	6.8 mg/l	6.8 mg/l	

บริษัท ฮัคค์ (ประเทศไทย) จำกัด: อาคารดี ห้องเลขที่ ดี 3 11 ชั้นที่3 เลขที่ 735/4 ถนนศรีนครินทร์ แขวงพัฒนาการ เขตสวนหลวง กรุงเทพฯ 10250
Tel: +66 (02) 026-3529 | Fax: +66(02) 026-3572 | Tax ID : 0105552107330 | Email: thmarketing@hach.com | www.th.hach.com

HACH
Be Right™

Summary of checked

- ☑ The instrument can work normally and efficiently. (เครื่องมือวัดสามารถทำงานได้ปกติและมีประสิทธิภาพ)
- ☐ The instrument can work but it's requiring to maintenance. (เครื่องมือวัดสามารถทำงานได้แต่ต้องบำรุงรักษา)
- ☐ The instrument could not work it's requiring to repair. (เครื่องมือวัดไม่สามารถทำงานได้และต้องการซ่อมบำรุง)

Remark:

Standard Equipment Used

Equipment	Equipment I.D.	
Standard Absorbance DPD-CHLORINE-LR	Lot No. A3020	Exp date : Feb-25
Standard Absorbance DPD-CHLORINE-HR	Lot No. A4025	Exp date : Jan-26
Digital multi meter	S/N : 19430676	Due date : Oct-24
Thermo hygrometer	S/N : 34855953	Due date : Oct-24

Test By : WILAILAK S. Approved by :

(Miss Wilailak Sawangpun) (Mr. Suanun Sartyangkool)

Service Engineer Position : Assistant Service Division Manager

บริษัท ฮัคค์ (ประเทศไทย) จำกัด: อาคารดี ห้องเลขที่ ดี 3 11 ชั้นที่3 เลขที่ 735/4 ถนนศรีนครินทร์ แขวงพัฒนาการ เขตสวนหลวง กรุงเทพฯ 10250
Tel: +66 (02) 026-3529 | Fax: +66(02) 026-3572 | Tax ID : 0105552107330 | Email: thmarketing@hach.com | www.th.hach.com

Sartorius (Thailand) Co., Ltd.
129 Rama 9 Road, Huaykwang, Huaykwang, Bangkok 10310
Tel: +66 2643 8361-6 , e-mail: service.thailand@sartorius.com

ilac-MRA MC THAILAND NSC-TISI-TIS 17025 CALIBRATION 0426

SARTORIUS

REVIEW BY Sithichok
APPROVED BY
NEXT CAL. DATE 23/01/25

Certificate of Calibration

Model Number : CP3202S
Description : Precision Balance
Serial Number : 16704832
ID No. BKK_ML0001
Manufacturer : Sartorius

Certificate No. : 24BCI0026
Issued Date : Thursday, January 25, 2024
Reference No. : 227439
Page No. : 1 0f 2

Customer Name : ALS Laboratory Group (Thailand)Co., Ltd.
104 Phatthanakan 40, Phatthanakan Rd.,Khwaeng Phatthanakan, Khet Suan Luang, Bangkok 10250.

Calibrated Place : Balance Room.

Calibrated By : Mr.Chonchai Inthana
Calibration Date : Tuesday, January 23, 2024

Calibration Procedure No. : This calibration was conducted by
Using in-house calibration procedure number (WI-003)
Based on UKAS LAB 14 : 2019

Metrological data :
Capacity : 3,200 g Readability : 0.01 g

Ambients Conditions:
Temperature : 22.0 °C ± 3.0 °C
Humidity : 60.0 % RH ± 5.0 % RH
Pressure ± _

Reasons for calibration
☐ New Installation ☐ Service / Repaired ☑ Re-calibration/ Maintenance

Equipment Condition: ☑ Good Operate ☐ Fair

Measurement Method UKAS Publication Ref :Lab 14

The measurement uncertainty stated is the expended uncertainty which is obtained from the standard uncertainty multiplied by the coverage factor (k=2) to provide a level of confidence of approximately 95%. It is determined in accordance with the Guide to Expression of Uncertainty in Measurement (GUM). The calibration certificate documents the traceability to National Standards, which realise the unit of measurement according to the International Standard System of Units (SI). Report of Tolerance came form list of Sartorius Metrological Specifications.

Traceability:

Model Number	Description	Traceability	Cetificate No.	Due Date
YCS011-522-00	Sartorius weight set 1mg - 5000g E2,YCS011-522-00	TCS	M2308197S	23-Aug-2025
MHB-382SD	Humidity/Barometer/Temp Lutron MHB-382SD	DKSH	C19231845	23-Aug-2024

This certificate relate and apply this equipment only.

This certificate may not be reproduced other than in full except with the prior written approval of the Verification Operation Division Sartorius (Thailand) Co., Ltd.

Mr.Chonchai Inthana(Technical Manager)

STAMP SARTORIUS (THAILAND) CO.,LTD. SARTORIUS ISO/IEC 17025:2017

Sartorius (Thailand) Co., Ltd.
129 Rama 9 Road, Huaykwang, Huaykwang, Bangkok 10310
Tel: +66 2643 8361-6 Fax: +66 2643-8367, e-mail: service.thailand@sartorius.com

SARTORIUS

Certificate of Calibration

Model Number : CP3202S
Description : Precision Balance
Serial Number : 16704832
ID No. : BKK_ML0001
Manufacturer : Sartorius

Certificate No. : 24BCI0026
Issued Date : Thursday, January 25, 2024
Reference No. : 227439
Page No. : 2 of 2

Calibration Results : Without Adjustment

Repeatability


The reproducibility is the ability of a weighing instrument to display nearly identical readouts under constant test conditions when the same load within a measurement series is placed repeatedly on the weighing pan in the same manner. The standard deviation is used to express reproducibility quantitatively.


Nominal Value : (Low Load)	200.00	2000.00
200 g	200.00	2000.00
Tolerance	200.00	2000.00
0.01 g	200.00	2000.00
	200.00	1999.99
Nominal Value : (High Load)	199.99	2000.00
2000 g	200.00	2000.00
Tolerance	200.00	2000.00
0.01 g	200.00	2000.00
	200.00	1999.99
Standard Deviation	0.003	0.004

Eccentricity (Off-center loading error)

The off-center loading error is yielded by the difference between the readout of the load, i.e. 1/3 or 1/4 of maximim capacity, placed in the middle of the weighing pan and between each of four additional measurement points (positions defined according to OIML R76).

Nominal value : 1000 g
Tolerance *0.06* g





	Difference
1	–
2	−0.01
3	0.00
4	0.00
5	0.00
6	-

Linearity

The linearity, also called linearity error. Describes the deviation of the characteristic curve of a weighing instrument from the linear slope.

Tolerance *0.02* g

Nominal Value (g)	Conventional Mass Value (g)	Displayed Value (g)	Deviation (g)	Uncertainty (g)
0.5	0.50	0.50	0.00	0.011
1	1.00	1.00	0.00	0.011
10	10.00	10.00	0.00	0.011
100	100.00	100.00	0.00	0.011
200	200.00	200.00	0.00	0.011
500	500.00	500.00	0.00	0.011
1000	1000.00	1000.00	0.00	0.011
1500	1500.00	1500.00	0.00	0.012
2000	2000.00	2000.00	0.00	0.012
3000	3000.00	3000.01	0.01	0.012

End of Report.

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL. 0-2717-3000-29 FAX. 0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Cert. No.: 23TM1408
Page : 1 of 4

Certificate of Calibration

Equipment : Autoclave
Manufacturer : TOMY
Model : SX-700
Serial No. : 48134190
ID No. : BKK_ML0041

REVIEW BY Sithichds
APPROVED BY 04/04/25
NEXT CAL. DATE ~~03/10/24~~ 04/10/25

Submitted by : ALS Laboratory Group (Thailand) Co.,Ltd.
104 Phatthanakan 40, Phatthanakan Rd.,
Khwaeng Phatthanakan, Khet Suan Luang,
Bangkok 10250 Thailand

Location : Media Preparation Room

Received Order : 03 October 2023
Calibration Date : 04 October 2023
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %

Calibrated by : Khit Ruttanaprapachai

Approved by :
Approved Signatory

( ) Pornthippa Tameyakul
(V) Ponpan Paipim
( ) Suwit Imjai

Issue Date : 11 October 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0059272

Equipment : Autoclave **Cert. No.:** 23TM1408
Condition As-Received : Used Item **Page :** 2 of 4
Reference : 2310-0006OC-6
Procedure Used :-

Calibration were conducted using in-house calibration procedure CP-OT03 according to direct measurement method with Data Acquisition which connected with Thermocouple Type T

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY57013823	23LM66	TPA	25 Mar 2024

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.
4. This result of calibration covers laboratory autoclaves for the sterilization of goods and material which could be infected with organisms categorized as Hazard Group 1, 2 and 3**


(** = Categorization of pathogens according to hazard and categories of containment, second edition, 1990)

It does not cover autoclaves for use with material infect with organisms in Hazard Group 4, for which complete containment and sterilization of infected condensate is considered to be essential.

This result of calibration does not apply to sterilizers or disinfectors used for medical, dental, pharmaceutical or veterinary purposes which are directry concerned with patient care, or those used for fabrics subjected to sterilization which are required to be dry at the end of cycle.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source



	Environmental		
	(°C)	(%R.H.)	(Volt)
Beginning of Calibration	26	64	221
Finished of Calibration	27	67	222

Position	Description	Ref. Std. ID No.:
1 =	Center of chamber	19-17TC-08
2 =	Temperature sensor	19-17TC-09
3 =	Exhaust port	19-17TC-10

Equipment : Autoclave **Cert. No.:** 23TM1408
Condition As-Received : Used Item **Page :** 3 of 4
Reference : 2310-0006OC-6
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source

Operating parameter Set : Temperature = 108 °C
Sterilization period = 10 minute

UUC* Setting (°C)	UUC* Reading (°C)	Position	Average* Standard Reading (°C)	Stability (± °C)	Pressure Reading (MPa)	Uncertainty (± °C)	Coverage Factor *k*
108	108	1	108.352	0.12	0.04	0.90	2
		2	108.263				
		3	108.140				

Operating parameter Set : Temperature = 115 °C
Sterilization period = 20 minute

UUC* Setting (°C)	UUC* Reading (°C)	Position	Average* Standard Reading (°C)	Stability (± °C)	Pressure Reading (MPa)	Uncertainty (± °C)	Coverage Factor *k*
115	115	1	115.376	0.13	0.08	0.90	2
		2	115.297				
		3	115.157				

Operating parameter Set : Temperature = 118 °C
Sterilization period = 10 minute

UUC* Setting (°C)	UUC* Reading (°C)	Position	Average* Standard Reading (°C)	Stability (± °C)	Pressure Reading (MPa)	Uncertainty (± °C)	Coverage Factor *k*
118	118	1	118.083	0.11	0.09	0.90	2
		2	118.037				
		3	117.954				

Average* : The average of 30 values in each position.
Stability : One-half of the greatest maximum difference of measured temperature at any one probe.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity .

Equipment : Autoclave
Condition As-Received : Used Item
Reference : 2310-0006OC-6
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source

Operating parameter Set : Temperature = 121 °C
Sterilization period = 30 minute

UUC* Setting (°C)	UUC* Reading (°C)	Position	Average* Standard Reading (°C)	Stability (± °C)	Pressure Reading (MPa)	Uncertainty (± °C)	Coverage Factor *k*
121	121	1	121.186	0.17	0.11	0.91	2
		2	121.082				
		3	120.980				

Average* : The average of 30 values in each position.
Stability : One-half of the greatest maximum difference of measured temperature at any one probe.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was excluded stability.

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

a 1184531

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

REVIEW BY ..... Sithichok T.
APPROVED BY.....
NEXT CAL DATE..... 26/03/26

Equipment : Incubator
Manufacturer : Memmert
Model : ICP 750
Serial No. : F816.0004
ID No. : BKK_ML0189
Submitted by : ALS Laboratory Group (Thailand) Co.,Ltd.
104 Phatthanakan 40, Phatthanakan Rd.,
Khwaeng Phatthanakan, Khet Suan Luang ,
Bangkok 10250 Thailand
Location : Incubation & Microbiological Reading

Received Order : 26 September 2024
Calibration Date : 26 September 2024
Ambient Temperature : (26 ± 10) °C
Relative Humidity : (50 ± 30) %
AC Line Voltage : (220 ± 22) V

Calibrated by : Preecha Hlahib

Approved by : Kunchit
Approved Signatory

( ) Ponpan Paipim
( ) Suwit Imjai
(✓) Kunchit Promprat

Issue Date : 09 October 2024

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 based on TLAS G-20 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-


Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY57013711	24LM115	TPA	13 Jul 2025

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certification is traceable to the International System of Unit.

Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Not Available

Environment during calibration		
	Beginning	**Finished**
Temp. (°C)	22	22
REL.Humid. (%)	65	59
AC Supply (Volt)	220	221



Position :	Ref. Std. ID No.:
1	18-18RTD-01
2	24-18RTD-02
3	18-18RTD-03
4	18-18RTD-04
5	18-18RTD-05
6	23-18RTD-06
7	18-18RTD-07
8	22-18RTD-08
9 (ref.)	24-18RTD-09

Probe Installation Details :

a =	5.0	cm
b =	5.0	cm
c =	5.0	cm

Dimension of Chamber :

D =	0.60	m
W =	1.0	m
H =	1.2	m
Capacity =	0.75	m³

Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Not Available

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Coverage Factor *k*
37.0	37.0	37.0	0.12	0.17	0.30	2

Calibration Point (°C)	Measured Temperature (°C) Position									Uncertainty (±°C)
	1	2	3	4	5	6	7	8	9 (ref.)	
37.0	36.898	36.906	36.974	36.911	36.943	36.936	36.978	36.958	36.850	0.30

Average* : The average of 30 values in each position.
Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.
Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

ภาคผนวก จ

สำเนาหนังสืออนุญาตขึ้นทะเบียน
ห้องปฏิบัติการวิเคราะห์เอกชน



ที่ อก ๐๓๑๐(๑)/ ๑๖๑๖๘

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๔๐๐

๒๐ พฤศจิกายน ๒๕๖๖

เรื่อง ต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

เรียน กรรมการผู้จัดการ บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และขนิดสารมลพิษของห้องปฏิบัติการวิเคราะห์เอกชน ลงวันที่ ๔ สิงหาคม ๒๕๖๖

สิ่งที่ส่งมาด้วย ๑. รายชื่อผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์ จำนวน ๑ แผ่น
๒. รายชื่อเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๕ แผ่น
๓. ขอบข่ายสารมลพิษที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๓๑ แผ่น

ตามหนังสือที่อ้างถึง บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด ขอต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน เลขทะเบียน ว-๒๐๔ สถานที่ตั้งเลขที่ ๑๐๔ ซอยพัฒนาการ ๔๐ ถนนพัฒนาการ แขวงพัฒนาการ เขตสวนหลวง กรุงเทพมหานคร ต่อกรมโรงงานอุตสาหกรรม นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด ต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน โดยมีองค์ประกอบดังนี้

ก. ผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์ จำนวน ๖ ราย ตามสิ่งที่ส่งมาด้วย ๑
ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ ๑๘๑ ราย ตามสิ่งที่ส่งมาด้วย ๒
ค. ขอบข่ายสารมลพิษที่ได้รับขึ้นทะเบียนให้วิเคราะห์ในน้ำเสีย น้ำใต้ดิน อากาศเสีย สิ่งปฏิกูล หรือวัสดุที่ไม่ใช้แล้ว และดิน ตามสิ่งที่ส่งมาด้วย ๓

หนังสือฉบับนี้จะหมดอายุในวันที่ ๒ กันยายน ๒๕๖๙ หากประสงค์จะต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ให้ยื่นคำขอต่ออายุพร้อมเอกสารประกอบคำขอต่อกรมโรงงานอุตสาหกรรม ภายใน ๓๐ วัน ก่อนวันสิ้นอายุของหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ทั้งนี้ สามารถยื่นคำขอผ่านระบบอิเล็กทรอนิกส์ได้ที่หน้าเว็บไซต์กรมโรงงานอุตสาหกรรม

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

(นายศิระ จันทร์เฉิด)
นักวิทยาศาสตร์เชี่ยวชาญ รักษาราชการแทน
ผู้อำนวยการกองวิจัยและเตือนภัยมลพิษโรงงาน
ปฏิบัติราชการแทนอธิบดีกรมโรงงานอุตสาหกรรม

กองวิจัยและเตือนภัยมลพิษโรงงาน
กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ
โทร. ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๐๓-๕
โทรสาร ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๙๙
ไปรษณีย์อิเล็กทรอนิกส์ saraban@diw.mail.go.th

Green Industry กระทรวงอุตสาหกรรม "อุตสาหกรรมก้าวไกล ประเทศไทยก้าวหน้า ร่วมกันพัฒนา อุตสาหกรรมสีเขียว"

สิ่งที่ส่งมาด้วย ๑

เอกสารแนบท้ายหนังสือรับต่ออายุขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด เลขทะเบียน ว-๒๐๔
ที่ อก ๐๓๑๐(๑)/ ๑๖๑๖๘ ลงวันที่ ๒๐ พฤศจิกายน ๒๕๖๖

ก. ผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์ จำนวน ๖ ราย

๑) นางสาวยุพาพร จันทร์เปล่ง	ทะเบียนเลขที่ ว-๒๐๔-ค-๐๐๐๑
๒) นางสาวชัชนัย โกมารกุล ณ นคร	ทะเบียนเลขที่ ว-๒๐๔-ค-๐๐๐๒
๓) นายศรายุทธ จิตรานนท์	ทะเบียนเลขที่ ว-๒๐๔-ค-๐๐๐๓
๔) นางสาวกนกกร เอนก	ทะเบียนเลขที่ ว-๒๐๔-ค-๐๐๐๔
๕) นายสุริยา สอนแก้ว	ทะเบียนเลขที่ ว-๒๐๔-ค-๐๐๐๕
๖) นายวิชาญ ชุณหรัต	ทะเบียนเลขที่ ว-๒๐๔-ค-๐๐๐๖

เอกสารแนบท้ายหนังสือรับต่ออายุขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด เลขทะเบียน ว-๒๐๔
ที่ อก ๐๓๑๐(๑)/ ๑๖๑๖๘ ลงวันที่ ๒๐ พฤศจิกายน ๒๕๖๖

ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑๘๑ ราย

๑) นายกาจบัณฑิต กิตติศุภวณิชย์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๑
๒) นายภัทรพล สว่างใจธรรม์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๒
๓) นายนราธิป เทือกชัยคำ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๓
๔) นายศิริโชค พงษ์ประสม ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๔
๕) นายณัฐวุฒิ ด้วงแพง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๕
๖) นางสาวจินดา โขจุลธรรม ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๖
๗) นางสาวสาวิตรี น้อยเสงี่ยม ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๗
๘) นางสาวชณัฐกาญจน์ อิ่มชม ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๘
๙) นางสาวนรินทร์ สายเส็ง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๐๙
๑๐) นางสาวนันทวดี สมบูรณ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๐
๑๑) นางสาวศรัณยา เฉลิมธำรงค์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๑
๑๒) นางสาวธัญญธร มงคลจิรวุฒิ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๒
๑๓) นางสาวศิริลักษณ์ บุนนาค ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๓
๑๔) นายนพพงศ์ จันทรุพันธุ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๔
๑๕) นายนรเศรษฐ์ โกมาลย์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๕
๑๖) นายธันวา จริยา ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๖
๑๗) นางสาวเกศรินทร์ แก้วมั่น ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๗
๑๘) นางสาวสุวิมล ชัยเรืองวุฒิ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๘
๑๙) นางสาวสุชาดา ธรรมถาวร ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๑๙
๒๐) นางสาวเปมิกา ชัยเดชธนกุล ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๐
๒๑) นางสาวศศิธร หมูสวัสดิ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๑
๒๒) นางสาวเสาวลักษณ์ ภู่นภาอำพร ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๒
๒๓) นายอภิสิทธิ์ สิงหา ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๓
๒๔) นายศักดิ์สิทธิ์ ไพศาลพิสุทธิ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๔
๒๕) ว่าที่ร้อยตรีหญิง พรรณิภา ขำเจริญ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๕
๒๖) นางจิลดา คำภูแก้ว ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๖
๒๗) นางสาวอรวรรณ รักยง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๗
๒๘) นางสาวนพรัตน์ แย้มกรานต์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๘
๒๙) นายจุลเดช วารินทร์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๒๙
๓๐) นางสาวดายุรัตน์ ร้องคำ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๐
๓๑) นายพรมมี ศรีปัตเนตร ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๑
๓๒) นายอุทิศ อุ่นสิม ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๒
๓๓) ว่าที่ร้อยตรี เฉลิมเกียรติ อมรศรีเสริม ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๓
๓๔) นางสาววริยา สร้างนา ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๔
๓๕) นายอนุพงศ์ รัตนศรีประเสริฐ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๕

๓๖) นางสาวจุฑารัตน์...

๓๖) นางสาวจุฑารัตน์ โอนสันเทียะ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๖
๓๗) นางสาวจารุวรรณ พิมพ์อภิกฤติยา ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๗
๓๘) นางสาวปรางค์ทิพย์ กิจไพศาลศักดิ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๘
๓๙) นางสาวเตือนใจ ทางกลาง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๓๙
๔๐) นางสาวจิราพร ศิริเวช ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๐
๔๑) นายวรากร ผูกรักษ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๑
๔๒) นายทนง วิริยะสหกิจ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๒
๔๓) นายธนิต เจนจบ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๓
๔๔) นายคณิศร ขำเพชร ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๔
๔๕) นายภูวิช พรหมสะอาด ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๕
๔๖) นายธนเดช โภคาพิพัฒน์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๖
๔๗) นายชวฤทธิ์ วงษ์จันทร์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๗
๔๘) นายอาทิตย์ ศรีเสน ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๘
๔๙) นายเจษดินทร์ คงศักดิไทย ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๔๙
๕๐) นายจรัส บุญยิ่ง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๐
๕๑) นายธนาณัติ เอนก ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๑
๕๒) นายอภิวัฒน์ ทุมหนู ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๒
๕๓) นางสาวสุภาขวัญ มาก ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๓
๕๔) นางสาวทัตพร ชวาลสมบูรณ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๔
๕๕) นางสาวธิติมา บุญเพ็ง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๕
๕๖) นางสาวภานุมาศ นามวัฒน์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๖
๕๗) นางสาวอุไรรัตน์ ทึงสร้างแป้น ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๗
๕๘) นายธีรวัฒน์ ปวงสุข ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๘
๕๙) นายอิทธิพล ยะโส ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๕๙
๖๐) นายประพจน์ วรรณชูชัย ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๐
๖๑) นายชยธร พวงทิพย์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๑
๖๒) นางสาวกนกวรรณ จันทบาล ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๒
๖๓) นายสิทธิโชค ธงเงิน ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๓
๖๔) นางศิลาวรรณ ใจบุญ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๔
๖๕) นางสาวพรรณธิดา พุ่มคง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๕
๖๖) นายนวภัทร ศรีวิริยะ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๖
๖๗) นายสุวิชา ทองอ่อน ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๗
๖๘) นายวิญญู บุญตะนัย ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๘
๖๙) นายสมบูรณ์ บุตรจันทร์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๙
๗๐) นายวิรัตน์ ไชยนะรา ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๐
๗๑) นายนฤเบศน์ เพิ่มพูน ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๑
๗๒) นายจิรณัฐ ขาวละออ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๒
๗๓) นายอัสรี นามบุรี ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๓
๗๔) นายอัศวเรศ จ่อสาว ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๔

๗๕) นายประเสริฐ...

๗๕) นายประเสริฐ สุระขันธ์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๕
๗๖) นายนุกูล จันทร์เนียม	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๖
๗๗) นายพีรพงษ์ ทองคูณปรีดา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๗
๗๘) นายนฤพล ทองนุช	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๘
๗๙) นายอนุวัฒน์ ม่วงแพร	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๗๙
๘๐) นายเจตศราวุฒิ ปัตตะมะ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๐
๘๑) นายกฤษณะ สายวรรณ์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๑
๘๒) นายพิชัย บุญยงค์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๒
๘๓) นายภานุพงศ์ โฮมวงศ์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๓
๘๔) นายสามารถ คุ้มปลี	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๔
๘๕) นายสัญชัย โกศรีนาม	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๕
๘๖) นายณัฐวุฒิ ศรีประเสริฐ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๖
๘๗) นายชวัลธัช นาคพนม	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๗
๘๘) นายพงศธร ชัยทิพย์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๘
๘๙) นายสิทธิโชค ทาสีดา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๘๙
๙๐) นายธนากร อินสุตา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๐
๙๑) นางสาววรณิชชา ชาติวันชัย	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๑
๙๒) นางสาวพิมพ์ตะวัน มินากูล	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๒
๙๓) นางสาวเพชรัตน์ สิงห์สมบุญ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๓
๙๔) นางสาวชญานิน พรหมจันทร์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๔
๙๕) นายกีรติ ทวีราช	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๕
๙๖) นายจักริน หมั่นวิชา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๖
๙๗) นายฉัตรชัย สุขเปีย	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๗
๙๘) นายณรนนท์ ต๊ะทองคำ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๘
๙๙) นายดุลยพล สนนอก	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๙๙
๑๐๐) นายทักษ์ดนัย อุบลศรี	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๐
๑๐๑) นายธนศวร นามะกุณณา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๑
๑๐๒) นายธิติพงศ์ บัวแดง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๒
๑๐๓) นายนนทชัย อุปถัมภ์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๓
๑๐๔) นายนัฐพล คุณสุทธิ์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๔
๑๐๕) นายนันทวัฒน์ สาริน	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๕
๑๐๖) นายปิยะนัฐ พลมะศรี	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๖
๑๐๗) นายพงศ์สิริ โสมเขียว	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๗
๑๐๘) นายพีรพัฒน์ กำคำ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๘
๑๐๙) นายภาณุพงศ์ มานิตย์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๐๙
๑๑๐) นายมงคล ผลาทิพย์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๐
๑๑๑) นายสิรินนท์ ทองอั้น	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๑
๑๑๒) นายอเนชา ทันสมัย	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๒
๑๑๓) นายอดิศักดิ์ ผมไผ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๓

๑๑๔) นายอนันตชัย...

๑๑๔) นายอนันตชัย วีสม	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๔
๑๑๕) นายวรวุธ ดีนัก	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๕
๑๑๖) นายแสงตะวัน นะตะสัต	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๖
๑๑๗) นายยุทธพงศ์ รัตนะ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๗
๑๑๘) นายชยัณวุฒิ ไชยฮะนิจ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๘
๑๑๙) นายวิศรุต ศรีธรรมมา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๑๙
๑๒๐) นายนนทกร เผือกผ่อง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๐
๑๒๑) นายกำชัย สุทธะ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๑
๑๒๒) นางสาวณัฐภรณ์ บุญตะนัย	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๒
๑๒๓) นางสาวพัชรินทร์ แสนสร้อย	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๓
๑๒๔) นายไพรวัลย์ เปรี่ยมพิมาย	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๔
๑๒๕) นางสาวศุภมาศ ทองมาก	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๕
๑๒๖) นางสาวลลิตา จิตรสว่าง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๖
๑๒๗) นางสาวชไมพร เสิกภู่เขียว	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๗
๑๒๘) นางสาวกฤติมาพร คำมีแก่น	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๘
๑๒๙) นางสาวสกุลรัตน์ ภาคภูมิ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๙
๑๓๐) นางสาวไพรินทร์ ศรีรูปี	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๐
๑๓๑) นางสาวทิพเนตร ผุยปัญญา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๑
๑๓๒) นางสาวสาธิตา ป่านทอง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๒
๑๓๓) นางสาวอริสา ทองนวล	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๓
๑๓๔) นางสาวอรยา ค้าคล่อง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๔
๑๓๕) นางสาวชุดาภรณ์ สุนทรสนาน	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๕
๑๓๖) นางสาวอัญชลี คำจันทร์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๖
๑๓๗) นายบุญฤทธิ์ เอี่ยมเทศ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๗
๑๓๘) นางสาวศุภรดา ปั้นมยุรา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๘
๑๓๙) นางสาวพาฤดี คุณนาน	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๙
๑๔๐) นางสาวจิราเจต ฟองดา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๐
๑๔๑) นางสาวอารยา มีชัย	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๑
๑๔๒) นางสาววิชชุตา นาคผจญ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๒
๑๔๓) นางสาวนันทิยา จันทะลุน	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๓
๑๔๔) นายกิตติพงศ์ แซ่ลี้	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๔
๑๔๕) นายอนุวัติ ภูถวิล	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๕
๑๔๖) นายธีรพล แสงทอง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๖
๑๔๗) นายศักดิ์พิพัฒน์ บุญมั่น	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๗
๑๔๘) นายฐิติวัลค์ เอมอุไร	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๘
๑๔๙) นายชัยณรงค์ ศรีบุรินทร์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๔๙
๑๕๐) นางสาวอัจฉราวรรณ สวนสนอง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๐
๑๕๑) นางสาวณัฐฐาพร สิงหา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๑
๑๕๒) นายภีมเรศ แหยมโต	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๒

๑๕๓) นางสาวอุบล...

๑๕๓) นางสาวอุบล เศิกศิริ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๓
๑๕๔) นางสาวมโนรัตน์ ทองบุตร ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๔
๑๕๕) นายภาคภูมิ แทนไทย ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๕
๑๕๖) นางสาวสุภาณัฐ เมล์พ่วง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๖
๑๕๗) นางสาวพรทิวา สาตาชนม์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๗
๑๕๘) นายเอกวิทย์ วันทะนา ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๘
๑๕๙) นายไตรมณฑล ทิพย์วรรณ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๕๙
๑๖๐) นายจิรเมธ ประเสริฐสิริพงศ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๐
๑๖๑) นายจิรายุส เกษมสุข ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๑
๑๖๒) นายจีรศักดิ์ ศรีวิชัย ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๒
๑๖๓) นายณัฐกฤษณ์ สะพานแก้ว ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๓
๑๖๔) นายบูรณศักดิ์ ปะทิ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๔
๑๖๕) นายปัณณวิชญ์ เสมอทรัพย์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๕
๑๖๖) นายพิษณุพงษ์ ไชยา ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๖
๑๖๗) นายภัทรพงษ์ มณฑาทอง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๗
๑๖๘) นายวสันต์ ตรีนกุล ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๘
๑๖๙) นายภาณุเดช เพชรอุด ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๖๙
๑๗๐) นายอนุกูล วิละแสง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๐
๑๗๑) นายภัทรพงษ์ มีสุข ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๑
๑๗๒) นางสาวนุชรวี ลีละทีป ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๒
๑๗๓) นางสาวสุภาวดี โกศรีนาม ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๓
๑๗๔) นางสาวอรณิช เทียนดำ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๔
๑๗๕) นางสาวพรเพ็ญ ชอบสอน ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๕
๑๗๖) นางสาววันวิสา ขอนพิกุล ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๖
๑๗๗) นางสาวอรวรรณ เถาว์ทอง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๗
๑๗๘) นางสาวอัยย์ลิณ เมอร์วิณณ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๘
๑๗๙) นางสาววิสรา คุ่ยครอง ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๗๙
๑๘๐) นายวุฒิกร ศิริวรรณ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๐
๑๘๑) นางสาวจารุวรรณ กระจ่างพันธุ์ ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๑

สิ่งที่ส่งมาด้วย ๓

เอกสารแนบท้ายหนังสือรับต่ออายุขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด เลขทะเบียน ว-๒๐๔
ที่ อก ๐๓๑๐(๑)/ ๑๖๑๖๘ ลงวันที่ ๒๐ พฤศจิกายน ๒๕๖๖

ค. ขอบข่ายสารมลพิษที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๓๗๔ รายการ

น้ำเสีย จำนวน 60 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Aldicarb	High-Performance Liquid Chromatographic Method[4]
2	Aldicarb Sulfone	High-Performance Liquid Chromatographic Method[4]
3	Aldicarb Sulfoxide	High-Performance Liquid Chromatographic Method[4]
4	Aldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
5	Arsenic	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
6	Barium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
7	α-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
8	β-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
9	δ-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
10	γ-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
11	Biochemical Oxygen Demand	1) 5-Day BOD Test, Azide Modification Method[4] 2) 5-Day BOD Test, Membrane Electrode Method[4]
12	Carbaryl	High-Performance Liquid Chromatographic Method[4]
13	Carbofuran	High-Performance Liquid Chromatographic Method[4]
14	Cadmium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
15	Chemical Oxygen Demand	1) Closed Reflux, Colorimetric Method[4] 2) Closed Reflux, Tritimetric Method[4]
16	Chlordane	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
17	Chromium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
18	Color	ADMI Weighted-Ordinate Spectrophotometric Method[4]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
19	Copper	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
20	Cyanide	Distillation, Colorimetric Method[4]
21	2,4´-DDD	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
22	4,4´-DDD	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
23	2,4´-DDE	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
24	4,4´-DDE	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
25	2,4´-DDT	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
26	4,4´-DDT	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
27	Dieldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
28	Endosulfan Sulfate	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
29	Endosulfan I	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
30	Endosulfan II	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
31	Endrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
32	Endrin Aldehyde	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
33	Formaldehyde	Distillation, Colorimetric Method[3]
34	Free Chlorine	1) DPD Ferrous Titrimetric Method[4] 2) DPD Colorimetric Method[4]
35	Heptachlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
36	Heptachlor Epoxide	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
37	Hexavalent Chromium	Colorimetric Method[4]
38	3-Hydroxycarbofuran	High-Performance Liquid Chromatographic Method[4]
39	Lead	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]

40 Manganese...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
40	Manganese	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
41	Mercury	1) Digestion, Cold-Vapor Atomic Absorption Spectrometric Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass spectrometric Method[4]
42	Methiocarb	High-Performance Liquid Chromatographic Method[4]
43	Methoxychlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
44	Methomyl	High-Performance Liquid Chromatographic Method[4]
45	Nickel	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
46	Oil & Grease	1) Liquid-Liquid, Partition-Gravimetric Method[4] 2) Soxhlet Extraction Method[4]
47	Oxamyl	High-Performance Liquid Chromatographic Method[4]
48	Propoxur	High-Performance Liquid Chromatographic Method[4]
49	pH	Electrometric Method[4]
50	Phenols	1) Distillation, Chloroform Extraction Method[4] 2) Distillation, Direct Photometric Method[4]
51	Selenium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
52	Sulfide	Iodometric Method[4]
53	Temperature	Laboratory and Field Methods[4]
54	Total Dissolved Solids	Dried at 180 ^{0}C[4]
55	Total Kjeldahl Nitrogen	Semi-Micro Kjeldahl Method[4]
56	Total Phosphorous	Digestion, Colorimetric Method[4]
57	Total Suspended Solids	Dried from 103-105 ^{0}C[4]
58	Toxaphene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
59	Trivalent Chromium	1) Digestion, Inductively Coupled Plasma Method; Colorimetric Method; Calculation[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method; Colorimetric Method; Calculation[4]
60	Zinc	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[4]

น้ำใต้ดิน...

น้ำใต้ดิน จำนวน 126 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Acenaphthene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
2	Acetone	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
3	Aldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
4	Anthracene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
5	Antimony	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
6	Arsenic	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
7	Atrazine	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
8	Barium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
9	Benz(a)anthracene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
10	Benzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
11	Benzo(b)fluoranthene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
12	Benzo(k)fluoranthene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
13	Benzoic Acid	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
14	Benzo(a)pyrene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
15	Benzo[g,h,i]perylene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
16	Beryllium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
17	Bis(2-chloroethyl)ether	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]

18 Bis(2-ethylhexyl)phthalate...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
18	Bis(2-ethylhexyl)phthalate	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
19	Bromodichloromethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
20	Bromoform	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
21	Butanol	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
22	Butyl benzyl phthalate	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
23	Cadmium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
24	Carbazole	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
25	Carbon disulfide	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
26	Carbon tetrachloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
27	Chlordane	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
28	p-Chloroaniline	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
29	Chlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
30	Chlorodibromomethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
31	Chloroform	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
32	2-Chlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
33	Chromium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
34	Chromium (III)	1) Digestion, Inductively Coupled Plasma Method; Colorimetric Method; Calculation[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method; Colorimetric Method; Calculation[4]
35	Chromium (VI)	Colorimetric Method[4]

36 Chrysene...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
36	Chrysene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
37	Cyanide	Distillation, Colorimetric Method[4]
38	2,4-D	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
39	DDD	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
40	DDE	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
41	DDT	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
42	Dibenz(a,h)anthracene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
43	Di-n-Butyl Phthalate	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
44	1,2-Dichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
45	1,3-Dichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
46	1,4-Dichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
47	3,3-Dichlorobenzidine	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
48	1,1-Dichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
49	1,2-Dichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
50	1,1-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
51	cis-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
52	trans-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
53	2,4-Dichlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
54	1,2-Dichloropropane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
55	1,3-Dichloropropane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]

56 1,3-Dichloropropene...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
56	1,3-Dichloropropene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
57	Dieldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
58	Diethyl Phthalate	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
59	2,4-Dimethylphenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
60	2,4-Dinitrophenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
61	2,4-Dinitrotoluene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
62	2,6-Dinitrotoluene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
63	Di-n-octyl phthalate	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
64	Endosulfan	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
65	Endrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
66	Ethylbenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
67	Fluoranthene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
68	Fluorene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
69	Heptachlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
70	Heptachlor epoxide	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
71	Hexachlorobenzene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
72	Hexachloro-1,3-butadiene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
73	n-Hexane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
74	α-HCH	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
75	β-HCH	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]

76 γ-HCH...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
76	γ-HCH	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
77	Hexachlorocyclopentadiene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
78	Hexachloroethane	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
79	Indeno(1,2,3-cd)pyrene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
80	Isophorone	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
81	Lead	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
82	Manganese	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
83	Mercury	1) Digestion, Cold Vapor Atomic Absorption Spectrometric Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
84	Methanol	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
85	Methoxychlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
86	Methyl bromide	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
87	Methylene chloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
88	2-Methylphenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
89	2-Methylnapthalene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
90	Methyl tert-butyl Ether	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
91	Naphthalene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
92	Nickel	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
93	Nitrobenzene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
94	N-Nitrosodiphenylamine	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
95	N-Nitrosodi-n-Propylamine	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
96	Polychlorinated Biphenyls - PCB 1016 - PCB 1221 - PCB 1232 - PCB 1242 - PCB 1248 - PCB 1254 - PCB 1260	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
97	Pentachlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
98	pH	Electrometric Method[4]
99	Phenanthrene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
100	Phenol	1) Distillation, Chloroform Extraction Method[4] 2) Distillation, Direct Photometric Method[4] 3) Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
101	Pyrene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
102	Selenium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
103	Silver	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
104	Styrene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
105	1,1,2,2-Tetrachloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
106	Tetrachloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
107	Toluene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
108	Toxaphene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
109	TPH (C_5-C_8)	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[14,25]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
110	TPH ($C_{>8}$-C_{16})	Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method[9,22]
111	TPH ($C_{>16}$-C_{35})	Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic Method[9,22]
112	1,2,4-Trichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
113	1,1,1-Trichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
114	1,1,2-Trichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
115	Trichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
116	2,4,5-Trichlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
117	2,4,6-Trichlorophenol	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method[4]
118	1,3,5-Trimethylbenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
119	Vanadium	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]
120	Vinyl acetate	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
121	Vinyl chloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
122	m-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
123	o-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
124	p-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
125	Xylene (Total)	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[4]
126	Zinc	1) Digestion, Inductively Coupled Plasma Method[4] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[4]

อากาศเสีย...

อากาศเสีย (ปล่องระบาย) จำนวน 28 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Antimony	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
2	Arsenic	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
3	Beryllium	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
4	Cadmium	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
5	Carbon Monoxide	1) Instrumental Analyzer Method[5] 2) Sampling Bag Non-Dispersive Infrared Method[5]
6	Chlorine	1) Absorption Sampling, Ion Chromatographic Method[5] 2) Isokinetic Sampling, Ion Chromatographic Method [5]
7	Chromium	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
8	Cobalt	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
9	Copper	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
10	Cresol	Adsorption Sampling, Gas Chromatographic Method[5]
11	Dioxins	Isokinetic Sampling[5]
12	Hydrogen Chloride	1) Absorption Sampling, Ion Chromatographic Method[5] 2) Isokinetic Sampling, Ion Chromatographic Method[5]
13	Hydrogen Fluoride	1) Absorption Sampling, Ion Chromatographic Method[5] 2) Isokinetic Sampling, Ion Chromatographic Method[5]
14	Hydrogen Sulfide	Absorption Sampling, Iodometric Method[5]

15 Lead...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
15	Lead	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
16	Manganese	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
17	Mercury	1) Isokinetic Sampling, Digestion, Cold-Vapor Atomic Absorption Spectrometric Method[5] 2) Isokinetic Sampling, Digestion, Cold-Vapor Atomic Fluorescence Spectrometric Method[5]
18	Nickel	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
19	Opacity	Ringelmann's Method[2]
20	Oxides of Nitrogen	1) Absorption Sampling, Phenoldisulfonic Acid Method[5] 2) Absorption Sampling, Alkaline Permanganate/ Colorimetric Method[5] 3) Instrumental Analyzer Method[5]
21	Selenium	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
22	Sulfur Dioxide	1) Absorption Sampling, Barium-Thorin Titrimetric Method[5] 2) Instrumental Analyzer Method[5]
23	Sulfuric Acid	Isokinetic Sampling, Barium-Thorin Titrimetric Method[5]
24	Tellurium	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
25	Tin	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
26	Total Suspended Particulate	1) Isokinetic Sampling, Gravimetric Method[5] 2) Paired Train, Isokinetic Sampling, Gravimetric Method[5]

27 Vanadium...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
27	Vanadium	1) Isokinetic Sampling, Digestion, Inductively Coupled Plasma Method[5] 2) Isokinetic Sampling, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[5]
28	Xylene	Adsorption Sampling, Gas Chromatographic Method[5]

<u>สิ่งปฏิกูลหรือวัสดุที่ไม่ใช้แล้ว จำนวน 35 รายการ</u>

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Aldrin	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26] 2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
2	Antimony	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
3	Arsenic	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
4	Barium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]

5 Beryllium...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
5	Beryllium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
6	Cadmium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
7	Chlordane	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26] 2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
8	Chromium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
9	Chromium (III)	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method; Waste Extraction, Colorimetric Method; Calculation Method[1,6,16,19] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method; Waste Extraction, Colorimetric Method; Calculation Method[1,6,17,19] 3) Digestion, Inductively Coupled Plasma Method; Alkaline Digestion, Colorimetric Method; Calculation Method[7,8,16,19] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method; Alkaline Digestion, Colorimetric Method; Calculation Method[7,8, 17,19]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
10	Chromium (VI)	1) Waste Extraction, Colorimetric Method[1,6,19] 2) Alkaline Digestion, Colorimetric Method[8,19]
11	Cobalt	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
12	Copper	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
13	2,4-D	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26] 2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
14	DDD	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26] 2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
15	DDE	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26] 2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
16	DDT	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
		2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
17	Dieldrin	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]
		2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
18	Endrin	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]
		2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
19	Heptachlor	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]
		2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
20	Lead	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16]
		2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17]
		3) Digestion, Inductively Coupled Plasma Method[7,16]
		4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
21	Lindane	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]
		2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
22	Mercury	1) Waste Extraction, Digestion, Cold-Vapor Atomic Absorption Spectrometric Method[1,6,20]
		2) Waste Extraction, Digestion, Cold-Vapor Atomic Fluorescence Spectrometric Method[1,6,30]
		3) Digestion, Cold-Vapor Atomic Absorption Spectrometric Method[20]
		4) Digestion, Cold-Vapor Atomic Fluorescence Spectrometric Method[30]
		5) Thermal Decomposition Amalgamation and Atomic Absorption Spectrometric Method[21]
23	Methoxychlor	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]
		2) Soxhlet Extraction, Gas Chromatographic / Mass Spectrometric Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic /Mass Spectrometric Method[11,26]
24	Mirex	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]
		2) Soxhlet Extraction, Gas Chromatographic / Mass Spectrometric Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic /Mass Spectrometric Method[11,26]
25	Molybdenum	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16]
		2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17]
		3) Digestion, Inductively Coupled Plasma Method[7,16]
		4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
26	Nickel	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16]
		2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17]
		3) Digestion, Inductively Coupled Plasma Method[7,16]
		4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
27	Polychlorinated biphenyls (PCBs) - Aroclor 1016 - Aroclor 1221 - Aroclor 1232 - Aroclor 1242 - Aroclor 1248 - Aroclor 1254 - Aroclor 1260	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26]
		2) Soxhlet Extraction, Gas Chromatographic Method[10,26]
		3) Automated Soxhlet Extraction, Gas Chromatographic Method[11,26]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
	- 2-Chlorobiphenyl - 2,3-Dichlorobiphenyl - 2,2',5-Trichlorobiphenyl - 2,4',5-Trichlorobiphenyl - 2,2',3,5'-Tetrachlorobiphenyl - 2,2',5,5'-Tetrachlorobiphenyl - 2,3',4,4'-Tetrachlorobiphenyl - 2,2',3,4,5'-Pentachlorobiphenyl - 2,2',4,5,5'-Pentachlorobiphenyl - 2,3,3',4',6-Pentachlorobiphenyl - 2,2',3,4,4',5'-Hexachlorobiphenyl - 2,2',3,4,5,5'-Hexachlorobiphenyl - 2,2',3,5,5',6-Hexachlorobiphenyl - 2,2',4,4',5,5'-Hexachlorobiphenyl - 2,2',3,3',4,4',5-Heptachlorobiphenyl - 2,2',3,4,4',5,5'-Heptachlorobiphenyl - 2,2',3,4,4',5',6-Heptachlorobiphenyl - 2,2',3,4',5,5',6-Heptachlorobiphenyl - 2,2',3,3',4,4',5,5',6-Nonachlorobiphenyl	
28	Pentachlorophenol	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26] 2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
29	pH	Electrometric Method[23,24]
30	Selenium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
31	Silver	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
32	Thallium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
33	Toxaphene	1) Waste Extraction, Separatory Funnel Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method[1,9,26] 2) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 3) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
34	Vanadium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
35	Zinc	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method[1,6,16] 2) Waste Extraction, Digestion, Inductively Coupled Plasma/Mass Spectrometric Method[1,6,17] 3) Digestion, Inductively Coupled Plasma Method[7,16] 4) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]

ดิน จำนวน 125 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Acenaphthene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
2	Acetone	1)Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25] 2) Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method[13]
3	Aldrin	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
4	Anthracene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
5	Antimony	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
6	Arsenic	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
7	Atrazine	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
8	Barium	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
9	Benz(a)anthracene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
10	Benzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
11	Benzo(b)fluoranthene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
12	Benzo(k)fluoranthene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
13	Benzoic acid	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
14	Benzo(a)pyrene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
15	Benzo(g,h,i)perylene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
16	Beryllium	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
17	Bis(2-chloroethyl)ether	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
18	Bis(2-ethylhexyl)phthalate	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
19	Bromodichloromethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
20	Bromoform	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
21	Butanol	Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method[13,25]
22	Butyl Benzyl Phthalate	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
23	Cadmium	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
24	Carbazole	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
25	Carbon Disulfide	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
26	Carbon tetrachloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
27	Chlordane	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
28	p-Chloroaniline	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
29	Chlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
30	Chlorodibromomethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
31	Chloroform	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
32	2-Chlorophenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
33	Chromium	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
34	Chromium (III)	1) Digestion, Inductively Coupled Plasma Method; Alkaline Digestion, Colorimetric Method; Calculation Method[7,8,16,19] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method; Alkaline Digestion, Colorimetric Method; Calculation Method[7,8,17,19]
35	Chromium (VI)	Alkaline Digestion, Colorimetric Method[8,19]

36 Chrysene...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
36	Chrysene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
37	Cyanide	Extraction, Distillation, Colorimetric Method[27,28,29]
38	2,4-D	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
39	DDD	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
40	DDE	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
41	DDT	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
42	Dibenz(a,h)anthracene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
43	Di-n-Butyl Phthalate	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
44	1,2-Dichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
45	1,3-Dichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
46	1,4-Dichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
47	3,3-Dichlorobenzidine	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
48	1,1-Dichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]

49 1,2-Dichloroethane...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
49	1,2-Dichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
50	1,1-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
51	cis-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
52	trans-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
53	2,4-Dichlorophenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
54	1,2-Dichloropropane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
55	1,3-Dichloropropane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
56	1,3-Dichloropropene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
57	Dieldrin	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
58	Diethyl Phthalate	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
59	2,4-Dimethylphenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
60	2,4-Dinitrophenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
61	2,4-Dinitrotoluene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
62	2,6-Dinitrotoluene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
63	Di-n-Octyl Phthalate	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
64	Endosulfan	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
65	Endrin	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
66	Ethylbenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
67	Fluoranthene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
68	Fluorene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
69	Heptachlor	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
70	Heptachlor epoxide	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
71	Hexachlorobenzene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
72	Hexachloro-1,3-butadiene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
73	n-Hexane	1) Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25] 2) Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method[13]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
74	α-HCH	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
75	β-HCH	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
76	γ-HCH	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
77	Hexachlorocyclopentadiene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
78	Hexachloroethane	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
79	Indeno(1,2,3-cd)pyrene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
80	Isophorone	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
81	Lead	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
82	Manganese	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
83	Mercury	1) Digestion, Cold-Vapor Atomic Absorption Spectrometric Method[20] 2) Thermal Decomposition, Amalgamation, and Atomic Absorption Spectrophotometry[21] 3) Digestion, Cold-Vapor Atomic Fluorescence Spectrometric Method[30]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
84	Methanol	1) Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25] 2) Equilibrium Headspace, Gas Chromatographic/ Mass Spectrometric Method[13,25]
85	Methoxychlor	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
86	Methyl Bromide	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
87	Methylene Chloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
88	2-methylphenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
89	2-Methylnaphthalene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
90	Methyl tert-Butyl Ether	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
91	Naphthalene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
92	Nickel	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
93	Nitrobenzene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26
94	N-Nitrosodiphenylamine	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
95	N-Nitrosodi-n-propylamine	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
96	Polychlorinated biphenyls (PCBs) - Aroclor 1016 - Aroclor 1221 - Aroclor 1232 - Aroclor 1242 - Aroclor 1248 - Aroclor 1254 - Aroclor 1260 - 2-Chlorobiphenyl - 2,2',3,5'-Tetrachlorobiphenyl - 2,2',5,5'-Tetrachlorobiphenyl - 2,3',4,4'-Tetrachlorobiphenyl - 2,2',3,4,5'-Pentachlorobiphenyl - 2,2',4,5,5'-Pentachlorobiphenyl - 2,3,3',4',6-Pentachlorobiphenyl - 2,2',3,4,4',5'-Hexachlorobiphenyl - 2,2',3,4,5,5'-Hexachlorobiphenyl - 2,2',3,5,5',6-Hexachlorobiphenyl - 2,2',4,4',5,5'-Hexachlorobiphenyl - 2,2',3,3',4,4',5-Heptachlorobiphenyl - 2,2',3,4,4',5,5'-Heptachlorobiphenyl - 2,2',3,4,4',5',6-Heptachlorobiphenyl - 2,2',3,4',5,5',6-Heptachlorobiphenyl - 2,2',3,3',4,4',5,5',6-Nonachlorobiphenyl	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
97	Pentachlorophenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
98	Phenanthrene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
99	Phenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
100	Pyrene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
101	Selenium	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
102	Silver	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
103	Styrene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
104	1,1,2,2-Tetrachloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
105	Tetrachloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
106	Toluene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
107	Toxaphene	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
108	TPH (C_5–C_8)	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
109	TPH ($C_{>8}$– C_{16})	1) Automate Extraction, Gas Chromatographic Method[11,22] 2) Solvent Extraction, Gas Chromatographic Method[12,22] 3) Ultrasonic Extraction, Gas Chromatographic Method[22,31
110	TPH ($C_{>16}$ – C_{35})	1) Automate Extraction, Gas Chromatographic Method[11,22] 2) Solvent Extraction, Gas Chromatographic Method[12,22] 3) Ultrasonic Extraction, Gas Chromatographic Method[22,31]
111	1,2,4-Trichlorobenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
112	1,1,1-Trichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
113	1,1,2-Trichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
114	Trichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
115	2,4,5-Trichlorophenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
116	2,4,6-Trichlorophenol	1) Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[10,26] 2) Automated Soxhlet Extraction, Gas Chromatographic/ Mass Spectrometric Method[11,26]
117	1,3,5-Trimethylbenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
118	Vanadium	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]
119	Vinyl Acetate	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
120	Vinyl Chloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
121	m-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
122	o-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
123	p-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
124	Xylene (Total)	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method[15,25]
125	Zinc	1) Digestion, Inductively Coupled Plasma Method[7,16] 2) Digestion, Inductively Coupled Plasma/ Mass Spectrometric Method[7,17]

เอกสารอ้างอิง

1. กระทรวงอุตสาหกรรม. ประกาศกระทรวงอุตสาหกรรม, พ.ศ. 2566. เรื่อง การจัดการสิ่งปฏิกูลหรือวัสดุที่ไม่ใช้แล้ว. **ราชกิจจานุเบกษา.** 31 พฤษภาคม 2566. เล่มที่ 140 ตอนพิเศษ 126 ง.

2. กระทรวงอุตสาหกรรม. ประกาศกระทรวงอุตสาหกรรม, พ.ศ. 2549. เรื่อง กำหนดค่าปริมาณเขม่าควันที่เจือปนในอากาศที่ระบายออกจากปล่องของหม้อน้ำโรงสีข้าวที่ใช้แกลบเป็นเชื้อเพลิง. **ราชกิจจานุเบกษา.** 4 ธันวาคม 2549. เล่มที่ 123 ตอนพิเศษ 125ง.

3. สมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย. **คู่มือวิเคราะห์น้ำเสีย.** พิมพ์ครั้งที่ 4. กรุงเทพฯ: เรือนแก้วการพิมพ์, 2547.

4. APHA, AWWA, WEF. **Standard Methods for the Examination of Water and Wastewater.** 24th ed. Washington, DC: APHA, 2023.

5. United States...

5. United States Environmental Protection Agency. **Standards of Performance for New Stationary Sources.** 40 CFR 60. Appendix A, 2023.

6. United States Environmental Protection Agency. **Test Methods for Evaluating Solid Waste Physical/Chemical Methods. SW-846,** 2014.

7. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Acid Digestion of Sludges and Sediments and Soils. SW-846 Method 3050B,** 1996.

8. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Alkaline Digestion for Hexavalent Chromium. SW-846 Method 3060A,** 1996.

9. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Separatory Funnel Liquid-Liquid Extraction. SW-846 Method 3510C,** 1996.

10. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Soxhlet Extraction. SW-846 Method 3540C,** 1996.

11. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Automated Soxhlet Extraction. SW-846 Method 3541,** 1994.

12. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Microscale Solvent Extraction (MSE). SW-846 Method 3570,** 2002.

13. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Volatile Organic Compounds (VOCs) in Various Sample Matrices Using Equilibrium Headspace Analysis. SW-846 Method 5021A,** 2014.

14. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Purge-and-Trap for Aqueous Samples. SW-846 Method 5030B,** 1996.

15. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Closed-System Purge-and-Trap and Extraction for Volatile Organics in Soil and Waste Samples. SW-846 Method 5035,** 1996.

16. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Inductively Coupled Plasma-Atomic Emission Spectrometry. SW-846 Method 6010B,** 1996.

17. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Inductively Coupled Plasma-Mass Spectrometry. SW-846 Method 6020A,** 2007.

18. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Antimony and Arsenic (Atomic Absorption, Borohydride Reduction). SW-846 Method 7062,** 1994. เพิ่มใหม่

19. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Chromium, Hexavalent (Colorimetric). SW-846 Method 7196A,** 1992.

20. United States...

20. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Mercury in Solid or Semisolid Waste (Manual Cold-Vapor Technique). SW-846 Method 7471B,** 2007.

21. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Mercury in Solids and Solutions by Thermal Decomposition, Amalgamation, and Atomic Absorption Spectrophotometry. SW-846 Method 7473,** 2007.

22. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Nonhalogenated Organics by Gas Chromatography. SW-846 Method 8015C,** 2007.

23. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **pH Electrometric Measurement. SW-846 Method 9040C,** 2004.

24. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Soil and Waste pH. SW-846 Method 9045D,** 2004.

25. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Volatile Organic Compounds by Gas Chromatography/ Mass Spectrometry (GC/MS). SW-846 Method 8260D,** 2018.

26. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Semivolatile Organic Compounds by Gas Chromatography/ Mass Spectrometry (GC/MS). SW-846 Method 8270E,** 2018.

27. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Total and Amenable Cyanide: Distillation SW-846 Method 9010B,** 1996.

28. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Cyanide Extraction Procedure for Solids and Oil. SW-846 Method 9013A,** 1996.

29. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Cyanide in Waters and Extracts Using Titrimetric and Manual Spectrophotometric Procedures. SW-846 Method 9014,** 2014.

30. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Mercury in Sediment and Tissue Samples by Atomic Fluorescence Spectrometry. SW-846 Method 7474,** 2007.

31. United States Environmental Protection Agency. Test Methods for Evaluating Solid Waste Physical/Chemical Methods. **Ultrasonic Extraction. SW-846 Method 3550C,** 2007.

ที่ อก ๐๓๑๐(๑)/ ๔๑๒๑

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๔๐๐

๒๕ เมษายน ๒๕๖๗

เรื่อง เปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์

เรียน กรรมการผู้จัดการ บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และชนิดสารมลพิษของห้องปฏิบัติการวิเคราะห์เอกชน ลงวันที่ ๒๙ มีนาคม ๒๕๖๗

ตามคำขอที่อ้างถึง บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด ห้องปฏิบัติการวิเคราะห์เอกชน เลขทะเบียน ว-๒๐๔ สถานที่ตั้งเลขที่ ๑๐๔ ซอยพัฒนาการ ๔๐ ถนนพัฒนาการ แขวงพัฒนาการ เขตสวนหลวง กรุงเทพมหานคร ขอเปลี่ยนแปลงบุคลากร ความละเอียดแจ้งแล้ว นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว มีความเห็นดังนี้

๑. ให้ยกเลิกเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๓ ราย

๑) นางสาวพรรณธิดา พุ่มคง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๐๖๕
๒) นายกำชัย สุทธะ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๒๑
๓) นางสาวศุภรดา ปั้นมยุรา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๓๘

๒. ให้เพิ่มเจ้าหน้าที่ห้องปฏิบัติการวิเคราะห์เอกชน จำนวน ๑๒ ราย

๑) นางสาวฐานิดา กลิ่นเขียว	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๒
๒) นางสาวกัญญ์ภัสสร สายคำ	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๓
๓) นางสาวณัฐนันท์ กันทะวงค์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๔
๔) นายอำนาจ วงษาเคน	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๕
๕) นายกฤษณพล ปัญญาวงค์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๖
๖) นายณชากร หรรษา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๗
๗) นายวัชรินทร์ ผ่องสามสวน	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๘
๘) นายณัฐพงศ์ โสภา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๘๙
๙) นายศักรินทร์ ปานเพ็ง	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๙๐
๑๐) นายณัฐพล ชุ่มชื่น	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๙๑
๑๑) นายธนา สุพาพันธุ์	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๙๒
๑๒) นายนราธร แก้วพงษ์ษา	ทะเบียนเลขที่ ว-๒๐๔-จ-๐๑๙๓

อนึ่ง หนังสือฉบับนี้...

อนึ่ง หนังสือฉบับนี้จะหมดอายุพร้อมหนังสือต่ออายุรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ในวันที่ ๒ กันยายน ๒๕๖๙

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

(นายพรยศ กลั่นกรอง)
รองอธิบดี ปฏิบัติราชการแทน
อธิบดีกรมโรงงานอุตสาหกรรม

กองวิจัยและเตือนภัยมลพิษโรงงาน
กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ
โทร. ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๐๓-๕
โทรสาร ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๙๙
ไปรษณีย์อิเล็กทรอนิกส์ saraban@diw.mail.go.th

right solutions.
right partner.

บริษัท เอแอลเอส แลบอราทอรี กรุ๊ป (ประเทศไทย) จำกัด (สำนักงานใหญ่)

104 ซอยพัฒนาการ 40 ถนนพัฒนาการ

แขวงพัฒนาการ เขตสวนหลวง กรุงเทพฯ 10250



ติดต่อเรา