

ภาคผนวก ฉ

สำเนาเอกสารรับรองเครื่องมือการตรวจวัด



Certificate of Calibration

Certificate No. : 67-420106-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisutesukhakhon 25, Pracha-Uit Rd., Thungkru Bangkok 10140 Thailand

Equipment :

pH Meter with electrode

pH meter

Manufacturer : Eutech

Model : pH 700

Range : N/A

Resolution : 0.01 pH

Serial No. : 2884323

ID No. : N/A

Electrode

Model : ECFC7252101B

Serial No. : 01X099320

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 26.7) °C

Relative Humidity : (40 to 45) %

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Permpon Chaupru

Calibration Method : In-house method CAL-M4201 direct measurement by using standard voltage calibrator and using certified reference material (CRM)

References Standard Instruments : This certification is traceable to the International System of Units

1. Multiproduct Calibrator

ID No.	Cert. No.	Due Date	Traceability
400005	SG-E-00307/66	23 Aug 2025	National Institute of Metrology Thailand (NIMT)

2. Standard Buffer Solution

pH	Cert. No.	Lot No.	Exp. Date	Traceability
4.008	61293328	1027612	15 Sep 2026	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
6.987	61297593	1027614	15 Sep 2025	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
10.010	61306165	1027613	15 Sep 2025	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025

Approved by :

(Permpon Chaupru)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



Certificate of Calibration

Certificate No. : 67-420106-1

Page : 2 of 2

Result of Calibration :

UUC Condition As-Received : Good

Function : Electrical measurement

pH meter

Performing standard curve by Multiproduct Calibrator at pH (4,7,10)

Adjustment Curve at nominal pH	Applied Voltage (mV)	Nominal Value (pH)	UUC Reading		Correction (mV)	Uncertainty (± mV)
			(pH)	(mV)		
4, 7, 10	177.4800	4	4.00	177.5	0.0	0.12
	0.0000	7	7.00	0.0	0.0	0.086
	-177.4800	10	10.00	-177.4	-0.1	0.12

Function : pH meter with electrode

Performing a three - buffer standard curve using buffer nominal pH (4,7,10)

Adjustment Curve at nominal pH	Standard Buffer (pH)	UUC Reading (pH)	Correction (pH)	Uncertainty (± pH)
4, 7, 10	4.008	4.01	0.00	0.0097
	6.987	7.00	-0.01	0.011
	10.010	10.01	0.00	0.014

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2 , providing a level of confidence of approximately 95%

- oDo -



Certificate of Calibration

Certificate No. : 67-400547-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
188/46 Wisatsukhakhon 25, Pracha-Uthit Rd., Thungkru Bangkok 10140 Thailand

Equipment : Temperature Indicator with Thermistor Probe

Temperature Indicator

Manufacturer : Eutech Model : pH 700

Range : N/A °C Resolution : 0.1 °C

Serial No. : 2884323 ID No. : N/A

Thermistor probe

Model : N/A Sheath Material : Stainless

Diameter : 3 mm. Length : 115 mm.

Serial No. : PH5TEMB01P 279 ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 26.7) °C

Relative Humidity : (40 to 45) %

Line Voltage : (220.0 to 223.0) VAC

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Permpon Chumpu

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4003

by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert.No. Due Date Traceability

400002 TT-0095-24 01 Jul 2026 National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert.No. Due Date Traceability

400033 24E633 21 Feb 2026 National Institute of Metrology Thailand (NIMT)

Approved by :
(Permpon Chumpu)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.

Certificate of Calibration

Certificate No. : 67-400547-1 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Immersion Depth (mm.)	Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
130	25.004	24.9	0.1	0.19

Remarks

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. :

67-200334-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisetankunakhon 25, Pracha-Uth Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Electronic Balance

Manufacturer : SHIMADZU Model : AP225WD

Serial No. : D316300690

Capacity : 220 g Resolution : 0.00001g/102g, 0.0001g/220g

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (24.9 to 26.3) °C

Relative Humidity : (40.8 to 55.4) %

Air Pressure : 1003.0 mbar

Date of Received :

20 September 2024

Date of Calibration :

20 September 2024

Date of Issue :

21 September 2024

Calibrated by :

Akaradath Thippichai

Calibration Method :

In-house method CAL-M2001 based on UKAS Publication ref : LAB 14

Edition 7 - November 2022

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID.No.

Cert.No.

Due Date

Traceability

E261-E2624

C02232088

08 Nov 2024

National Institute of Metrology (Thailand), (NIMT)

Approved by :

(Sujja Sangkhum)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%.

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd



Certificate of Calibration

Certificate No. : 67-200334-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Departure of indication from nominal value


Nominal Value (g)	Correction (g)	Uncertainty ± (g)
0.001	0.00000	0.000015
0.01	0.00000	0.000016
0.1	0.00000	0.000018
1	0.00000	0.000026
10	0.00000	0.000053
20	-0.00003	0.000071
50	0.00006	0.00011
100	0.00004	0.00020
150	0.0001	0.00038
200	0.0000	0.00038

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.13 , providing a level of confidence of approximately 95%

Eccentric error

Load test : 50 g

A B C D E
-0.00005 0.00001 0.00002 0.00000 0.00000 0.00000 g

Repeatability

Load test : 200 g

Sidev. : 0.000000 g

-o0o-





Certificate of Calibration

Certificate No. : 67-410112-1

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisutesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Digital Thermo-Hygrometer

Manufacturer : Digicon

Model : TH-02A

Range Temperature : 0 °C to 50 °C Resolution : 0.1 °C

Range Humidity : 20 %R.H. to 99 %R.H. Resolution : 1 %R.H.

Serial No. : 1819A0771796 ID No. : N/A

Environment : Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Date of Received : 20 September 2024

Date of Calibration : 23 September to 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Chortip Samchusri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4013 by compared with standard probe sensor humidity/temperature into humidity/temperature chamber.

Reference Standard Instruments : This certification is traceable to the International System of Units

Digital Indicator with Standard Probe Temp&Hum

ID.No. Cert. No. Due Date Traceability

400034 & 400035 SG-H-00611/67 04 Jan 2025 Success Gateway Co., Ltd., Accredited by TISI Calibration No.0268

Approved by :

(Permon Champa)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-410112-1

Page : 2 of 2

UUC Condition As-Received : Good

Result of Calibration : Without Adjustment

Function : Temperature measurement

Reference Humidity @ 50 %R.H.

Standard Temperature (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
19.99	19.7	0.3	0.46
25.00	24.7	0.3	0.46
30.01	29.7	0.3	0.46

Result of Calibration : Without Adjustment**Function** : Humidity measurement

Reference Temperature @ 25 °C

Standard Humidity (%R.H.)	UUC Reading (%R.H.)	Correction (%R.H.)	Uncertainty (± %R.H.)
40.01	38	2	2.2
60.00	56	4	2.3

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- ๐๑๐ -





Certificate of Calibration

Certificate No. : 67-400548-1 Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisetukhachon 25, Pracha-Uttd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Temperature controlled enclosure (Refrigerator)

Manufacturer : Biobase

Model : BXC-V250M (II)

Range : N/A °C

Resolution : 0.1 °C

Serial No. : YC025025190108

ID No. : N/A

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 27.4) °C

Relative Humidity : (39 to 47) %

Line Voltage : (226.0 to 230.0) V

Date of Received :

20 September 2024

Date of Calibration :

20 September 2024

Date of Issue :

21 September 2024

Calibrated by :

Permpon Changu

Calibration Method :

CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No. Cert.No. Due Date

Traceability

400046 & 400042 67-400442-1 26 Jan 2025

National Institute of Metrology Thailand (NIMT)

Approved by :

(Permpon Changu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.

Certificate of Calibration


Certificate No. : 67-400548-1 Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)

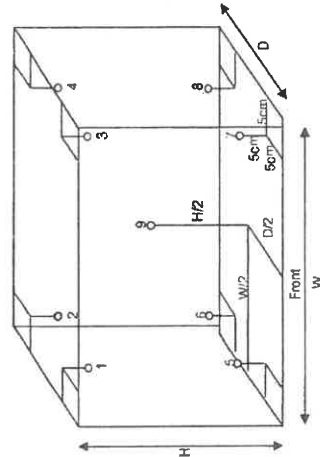

Inside of Chamber

W = 0.50 m

D = 0.40 m

H = 1.20 m

Capacity = 0.24 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
4.0	2.0	2.0	4.70	4.42	5.04	4.99	4.52	4.22	4.74	4.67	3.89	0.45

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
4.0	2.0	2.00	1.23	0.13	1.40

Remark The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2 , providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-400548-2 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
188/46 Wisetueklakhon 25, Pracha-Uthit Rd., Thungkrung Bangkok 10140 Thailand

Equipment : Temperature controlled enclosure (Oven)

Manufacturer : Memmert
Range : N/A °C
Serial No. : B419.1092
Model : UF110
Resolution : 0.1 °C
ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 27.4) °C
Relative Humidity : (39 to 47) %
Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Permpoon Chianpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with Thermocouple probe

ID No. Cert. No. Due Date Traceability

400046 & 400023 67-400198-1 01 Oct 2024 National Institute of Metrology Thailand (NIMT)

Approved by :

(Permpoon Chianpu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration


Certificate No. : 67-400548-2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)

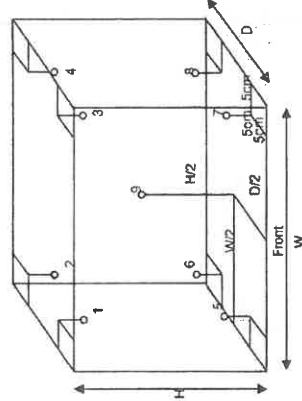

Inside of Chamber

W = 0.56 m

D = 0.40 m

H = 0.48 m

Capacity = 0.11 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
103.0	103.0	103.0	102.3	102.9	103.7	103.7	102.3	102.3	103.8	102.2	102.7	0.82
104.0	104.0	104.0	103.3	103.9	104.8	104.6	103.2	103.3	104.8	103.2	103.7	0.84
105.0	105.0	105.0	104.3	104.9	105.8	105.7	104.3	104.3	105.8	104.3	104.7	0.83
150.0	150.0	150.0	149.3	149.9	151.3	151.2	149.1	149.2	151.2	149.3	149.5	1.1
180.0	180.0	180.0	179.0	179.8	181.4	181.1	178.8	179.0	181.1	178.8	179.3	1.1

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
103.0	103.0	103.0	1.3	0.3	2.0
104.0	104.0	104.0	1.5	0.3	2.1
105.0	105.0	105.0	1.4	0.3	2.0
150.0	150.0	150.0	2.3	0.5	2.7
180.0	180.0	180.0	2.5	0.5	3.3

Remark The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-oOo-





Certificate of Calibration

Certificate No. : 67-400548-3

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Utd Rd., Thungken Bangkok 10140 Thailand

Equipment :

Water Bath

Manufacturer : Memmert

Model : WNB29

Range : N/A °C

Resolution :0.1 °C

Serial No. : L619.0037

ID No. : N/A

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature :

(26.3 to 27.4) °C

Relative Humidity :

(39 to 47) %

Line Voltage :

(226.0 to 230.0)V

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by :

Permpoon Chamru

Calibration Method :

This instrument was calibrated by In-house method CAL-M4006 based on ASTM E715-80
The temperature scale used was based on ITS-90

Reference Standard Instruments :

This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD probe

ID No. Cert. No.

Due Date

Traceability

400046 & 400024

30 Sep 2024

National Institute of Metrology Thailand (NIMT)

Approved by :

(Permpoon Chamru)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration


Certificate No. : 67-400548-3

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

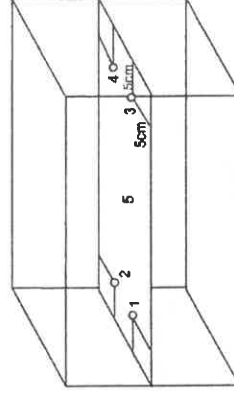

Front

Test Point (°C)	Selling Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.					Uncertainty (± °C)	Measured Uniformity (°C)	Measured Stability (°C)
			1	2	3	4	5			
85.0	85.0	85.0	84.55	84.44	84.49	84.46	84.62	0.20	0.25	0.06

Remark. The uncertainty is not combine uniformity of the water bath

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

- o O o -





Certificate of Calibration

Page : 1 of 2

Certificate No. : 67-400548-4

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Utd Rd., Thungru Bangkok 10140 Thailand

Equipment : Temperature controlled enclosure (Incubator)

Manufacturer : Biobase

Range : 0 °C to 65 °C

Model : Biochemistry Incubator

Resolution : 0.1 °C

Serial No. : KYP1502202003

ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (31.0 to 32.0) °C

Relative Humidity : (50 to 55) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Pempon Chaupu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No. Cert. No.

400029 & 400048 67-400444-1

Due Date

02 Feb 2025

Traceability

National Institute of Metrology Thailand (NIMT)

Approved by :

(Pempon Chaupu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Page : 2 of 2


Certificate No. : 67-400548-4

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)



Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
20.0	20.4	20.4	20.23	20.18	20.08	20.15	19.90	19.92	19.96	19.90	19.96	0.82

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)		Measured Stability (°C)		Overall Variation (°C)
			0.38	0.43	0.43	0.43	
20.0	20.4	20.4	0.38	0.43	0.43	0.43	0.96

Remarks: The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-400560-1

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Ud Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Liquid in Glass Thermometer

Manufacturer : N/A

Model : N/A

Range : 0 °C to 100 °C

Resolution : 1 °C

Serial No. : N/A

Immersion : Total

ID No. : 94-49747

Environment : Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Line Voltage : (220 ± 22) VAC

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Chotip Sanchusi

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4001 based on ASTM E77-07 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert.No. Due Date

400001 TT-0023-24 16 Feb 2026

Traceability

National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert.No. Due Date

400003 23E1866 01 Jun 2025

Traceability

National Institute of Metrology Thailand (NIMT)

400004 23E1866 01 Jun 2025

National Institute of Metrology Thailand (NIMT)

Approved by :

(Signature)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-400560-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Ice point check : UUC* reading 0 °C Standard reading -0.0321 °C

Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
39.8223	40	-0.2	0.31

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

- o f c -





Certificate of Calibration

Certificate No. : 67-300569-1

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisetukulnakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Burette

Manufacturer : GLASSCO

Class : A

Capacity : 10 ml

Graduation : 0.05 ml

ID No. : 2212-0344-1

Environment

: Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1008.0 mbar.

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID.No.

Cert.No.

Due Date

Traceability

241005

67-200210-4

02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300569-1

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 19.92 sec.

Nominal Volume (ml)	Measuring Volume (ml)
2	2.0044
5	5.0024
10	9.9915

Uncertainty of measurement with in ± 0.0039 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-300569-2 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsuknakhon 25, Pracha-Uitd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Burette

Manufacturer : GLASSCO Class : A

Capacity : 25 ml Graduation : 0.1 ml

ID No. : 2212-0344-2

Environment : Ambient Temperature : $(20 \pm 3) ^\circ\text{C}$

Relative Humidity : $(50 \pm 10) \%$

Air Pressure : 1008.0 mbar.

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Arcerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.	Cert.No.	Due Date	Traceability
241005	67-200210-4	02 Dec 2024	National Institute of Metrology (Thailand) (NIMT)

Approved by :

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300569-2 Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at $20 ^\circ\text{C}$

UUC Condition As-Received : Good

Delivery Time : 46.13 sec.

Nominal Volume (ml)	Measuring Volume (ml)
5	5.0039
15	14.9824
25	24.9757

Uncertainty of measurement with in ± 0.0066 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

- o0o -





Certificate of Calibration

Certificate No. : 67-300569-3

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Measuring Pipette

Manufacturer : GLASSCO

Class : A

Capacity : 10 ml

Graduation : 0.1 ml

ID No. : MPI0/01/19

Environment

: Ambient Temperature : (20 ± 3) °C

: Relative Humidity : (50 ± 10) %

: Air Pressure : 1000.8 mbar.

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Areearat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert. No.

Due Date

Traceability

241005

67-200210-4

02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Towadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300569-3

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 12.20 sec.

Nominal Volume (ml)	Measuring Volume (ml)
2	1.9998
5	4.9871
10	9.9742

Uncertainty of measurement with in ± 0.0039 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-300569-4

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatsukraknon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Measuring Pipette

Manufacturer : GLASSCO

Class : A

Capacity : 25 ml

Graduation : 0.1 ml

ID No. : MP25/01/19

Environment

: Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1000.8 mbar.

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID.No. Cert.No.

2411005 67-200210-4

Traceability

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300569-4

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 15.20 sec.

Nominal Volume (ml)	Measuring Volume (ml)
5	5.0302
15	15.0832
25	25.0398

Uncertainty of measurement with in ± 0.0067 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-300571-1

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsukmakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Cylinder
Manufacturer : GLASSCO
Capacity : 100 ml
Graduation : 1 ml
ID No. : CY100/01/24
Class : A

Environment : Ambient Temperature : $(20 \pm 3) ^\circ\text{C}$
Relative Humidity : $(50 \pm 10) \%$
Air Pressure : 1003.9 mbar.

Date of Received : 20 September 2024
Date of Calibration : 24 September 2024
Date of Issue : 24 September 2024
Calibrated by : Arcerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units
Electronic Balance

ID No.	Cert. No.	Due Date	Traceability
241002	67-200210-1	02 Dec 2024	National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Towadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%.

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300571-1

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at $20 ^\circ\text{C}$

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
50	50.45
100	100.52

Uncertainty of measurement with in ± 0.063 ml
This result of calibration was found accurate as shown on date and place of calibration only.
This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-oOb-





Certificate of Calibration

Certificate No. : 67-300571-2

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsuknaknon 25, Pracha-Uttd Rd., Thungkrn, Bangkok 10140 Thailand

Equipment : Cylinder
Manufacturer : GLASSCO
Capacity : 250 ml
ID No. : CY250/01/19
Class : A
Graduation : 2 ml

Environment : Ambient Temperature : (20 ± 3) °C
Relative Humidity : (50 ± 10) %
Air Pressure : 1004.1 mbar.

Date of Received : 20 September 2024
Date of Calibration : 24 September 2024
Date of Issue : 24 September 2024
Calibrated by : Arcerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. : 241002
Certi. No. : 67-200210-1
Due Date : 02 Dec 2024
Traceability : National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300571-2

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
150	151.02
250	251.16

Uncertainty of measurement with in $\pm$ 0.087 ml
This result of calibration was found accurate as shown on date and place of calibration only.
This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-oOo-





Certificate of Calibration

Certificate No. : 67-300571-3

Submitted by : M Green Group Co., Ltd.

188/46 Wisutesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Cylinder

Manufacturer : GLASSCO

Class : A

Capacity : 1000 ml

Graduation : 10 ml

ID No. : CY1000/01/24

Environment : Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1001.7 mbar.

Date of Received : 20 September 2024

Date of Calibration : 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Arcarat Sornbun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. : 241002

Cert. No. : 67-200210-1

Due Date : 02 Dec 2024

Traceability

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300571-3

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
500	500.74
1000	1003.10

Uncertainty of measurement with $\ln \pm 0.17$ ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-



Certificate of Calibration

Certificate No. : 67-300572-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
188/46 Wisatsukhakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 ThailandEquipment : Imhoff Cone
Manufacturer : VITLAB
Capacity : 1000 ml Graduation : 0.1, 50 ml
ID No. : CY1000/01/22Environment : Ambient Temperature : (20 ± 3) °C
Relative Humidity : (50 ± 10) %
Air Pressure : 1001.5 mbar.Date of Received : 20 September 2024
Date of Calibration : 23 September 2024
Date of Issue : 23 September 2024
Calibrated by : Areearat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.	Cert. No.	Due Date	Traceability
241002	67-200210-1	02 Dec 2024	National Institute of Metrology (Thailand) (NIMT)

Approved by :
(Wipa Teekadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%.

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.

Certificate of Calibration

Certificate No. : 67-300572-1 Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
500	500.74
1000	1009.16

Uncertainty of measurement with in $\pm$ 0.17 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-300570-1

Submitted by : M Green Group Co., Ltd.

188/46 Wisutesuknakhon 25, Pracha-Ud Rd., Thungkru, Bangkok 10140 Thailand

Page : 1 of 2

Equipment

: Volumetric Flask

Manufacturer : GLASSCO

Class : A

Capacity : 100 ml

ID No. : VF100/01/19

Environment

: Ambient Temperature : (20 ± 3) °C

: Relative Humidity : (50 ± 10) %

: Air Pressure : 1003.9 mbar.

Date of Received : 20 September 2024

Date of Calibration : 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Areeat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. : 241005

Cert. No. : 67-200210-4

Due Date : 02 Dec 2024

Traceability

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Toivadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300570-1

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Page : 2 of 2

Nominal Volume (ml)	Measuring Volume (ml)
100	100.063

Uncertainty of measurement with in ± 0.018 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-300570-2

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisetuenkunkhon 25, Prachin-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Volumetric Flask

Manufacturer : GLASSCO

Class : A

Capacity : 250 ml

ID No. : VF250/01/19

Environment

: Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1003.8 mbar.

Date of Received

: 20 September 2024

Date of Calibration

: 24 September 2024

Date of Issue

: 24 September 2024

Calibrated by

: Arocrat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert. No.

Due Date

Traceability

241002

67-200210-1

02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovaldee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300570-2

Page : 2 of 2

Result of Calibration :

This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
250	250.04

Uncertainty of measurement with in ± 0.051 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o-o-





Certificate of Calibration

Certificate No. : 67-300570-3

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsuknaknon 25, Pracha-Uthit Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Volumetric Flask

Manufacturer : GLASSCO

Class : A

Capacity : 1000 ml

ID No. : VF1000/01/19

Environment : Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1003.3 mbar.

Date of Received : 20 September 2024

Date of Calibration : 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Arc-rat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. Cent No. Due Date Traceability

241002 67-200210-1 02 Dec 2024 National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Towadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300570-3

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
1000	1000.25

Uncertainty of measurement with in ± 0.14 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

- o0o -





Certificate of Calibration

Certificate No. : 67-210362-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
189/46 Wisetuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 ThailandEquipment : Weight
Manufacturer : N/A Material : Stainless Steel
Weight size : 1 g

ID No. : 63-210391-1

Assumed density of weight : 7950 kg / m³Assumed Air density : 1.2 kg / m³

Environment : Ambient Temperature : (20 ± 2) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1005.7 mbar

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Wutichai Swatphong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID.No.	Cert.No.	Due Date	Traceability
E221-E2210	MM-0042-22	21 Mar 2025	National Institute of Metrology (Thailand). (NIMT)

Approved by
(Sujja Sangkhum)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-210362-1 Page : 2 of 2

Result of Calibration : Without Adjustment
UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	1 g	none	1 g -0.003 mg	± 0.023 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-



Certificate of Calibration

Certificate No. : 67-210362-2 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
188/46 Wisatsuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :
Weight
Manufacturer : N/A Material : Stainless Steel
Weight size : 100 g

ID No. : 63-210391-2
Assumed density of weight : 7950 kg / m³
Assumed Air density : 1.2 kg / m³

Environment :
Ambient Temperature : (20 ± 2) ° C
Relative Humidity : (50 ± 10) %
Air Pressure : 1005.7 mbar

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Wuttichai Swapthong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.	Cert. No.	Due Date	Traceability
E221-E2210	MM-0042-22	21 Mar 2025	National Institute of Metrology (Thailand), (NIMT)

Approved

(Saja Sangkhum)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-210362-2 Page : 2 of 2

Result of Calibration : Without Adjustment
UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	100 g	none	100 g +0.06 mg	± 0.11 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-210362-3

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisutesuknakon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Weight

Manufacturer : N/A

Material : Stainless Steel

Weight size : 200 g

ID No. : 63-210391-3

Assumed density of weight : 7950 kg / m³

Assumed Air density : 1.2 kg / m³

Environment :

Ambient Temperature : (20 ± 2) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1005.7 mbar

Date of Received :

20 September 2024

Date of Calibration :

23 September 2024

Date of Issue :

23 September 2024

Calibrated by :

Wuttichai Swapphong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID.No.

E221-E2210

Cert.No.

MM-0042-22

Due Date

21 Mar 2025

Traceability

National Institute of Metrology (Thailand), (NIMT)

Approved by

(Sattja Singkhum)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-210362-3

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	200 g	none	200 g +0.06 mg	± 0.17 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-



CERTIFICATE No : 24T1185
REFERENCE No : 72116-3
PAGE : 1 OF 2

Certificate of Calibration


EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
SERIAL No : D518.0082
ID No : EQL-205
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD., SAMAEADAM,
BANGKHUNTHIAN, BANGKOK 10150

CALIBRATED BY : CHAICHARN CH
CALIBRATION DATE : 09-Feb-24
APPROVED BY : 
ISSUED DATE : 12-Feb-24
RECEIVED DATE : 09-Feb-24

CERTIFICATE No : 24T1185
PAGE : 2 OF 2

Calibration Report

EQUIPMENT : INCUBATOR
MANUFACTURER : MEMMERT
MODEL : IF 160
ID No : EQL-205
RECEIVED DATE : 09-Feb-24
AMBIENT TEMPERATURE : 25 °C ± 1 °C
SN : D518.0082
CALIBRATION DATE : 09-Feb-24
RELATIVE HUMIDITY : 53 %RH ± 10 %RH
CONDITION OF THIS RESULTS OF CALIBRATION
1. THIS INSTRUMENT WAS CALIBRATED ACCORDING TO TLAS G-20 BY COMPARISON WITH CALIBRATED RTD Pt100 UNDER NO LOAD CONDITION. THE TEMPERATURE PROBES WERE PLACED ON NINE POINTS AND LOCATED ONE THERMOMETER PROBE IN EACH OF THE EIGHT CORNERS OF THE CHAMBER AND WAS AWAY FROM THE EACH WALL OF 5 cm TO 10 cm. AND PLACED THE NINTH THERMOMETER PROBE WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE CHAMBER. THE UNIFORMITY WAS MEASURED BETWEEN REFERENCE PROBE AND OTHER PROBES AT THE SAME TIME.
2. REFERENCE STANDARD INSTRUMENTS :-
3. THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.
RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT
GENERAL INFORMATION



Overall Ambient Temperature around the Chamber (°C) variation : 1
Overall Line Voltage (V) variation : 3
Instrument Condition : Normal
Chamber Size (W*L*H): 56*40*72 cm

CHAMBER PERFORMANCE				
Calibrate Point (°C)	Average All Position Temp. (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)
35.0	35.03	0.05	0.09	0.16
36.0	36.05	0.07	0.08	0.19
41.5	41.45	0.08	0.13	0.20

TEMPERATURE MEASUREMENT ACCURACY TEST

Controller Temp (°C)	Indicating Temp (°C)	Measured Temperature (°C) at Spread Locations									Uncertainty (± °C)
		#1	#2	#3	#4	#5	#6	#7	#8	#9	
35.0	35.0	34.98	35.01	35.00	35.00	35.02	35.08	35.07	35.04	35.10	0.25
36.0	36.0	36.00	36.03	36.03	36.02	36.04	36.09	36.10	36.04	36.12	0.25
41.5	41.5	41.45	41.45	41.39	41.46	41.46	41.47	41.43	41.44	41.49	0.36

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.
NOTE 2 : LOCATION 5 WAS REFERENCE LOCATION.
NOTE 3 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA.
THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A COVERAGE FACTOR k=2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.
END OF CALIBRATION REPORT



CERTIFICATE No : 24T1189
REFERENCE No : 72116-7

PAGE : 1 OF 2

Certificate of Calibration

EQUIPMENT : AUTOCLAVE
MANUFACTURER : HIRAYAMA
MODEL : HVE-50
SERIAL No : 30612085166
ID No : EQL-155
CONDITION AS RECEIVED : USED ITEM
SUBMITTED BY : TEST TECH CO., LTD.
30,32 RAMA II SOI 63, RAMA II RD.,
SAMAEDAM, BANGKHUNTHIAN, BANGKOK
10150

CALIBRATED BY : CHAICHARN CH.
CALIBRATION DATE : 09-Feb-24

APPROVED BY : 
ISSUED DATE : 12-Feb-24
RECEIVED DATE : 09-Feb-24

THIS CERTIFICATE MAY NOT BE REPRODUCED OTHER THAN IN FULL EXCEPT WITH THE PRIOR WRITTEN APPROVAL OF
QUALITY CALIBRATION CO., LTD.



CERTIFICATE No : 24T1189

PAGE : 2 OF 2


Calibration Report

EQUIPMENT : AUTOCLAVE
MANUFACTURER : HIRAYAMA
MODEL : HVE-50
ID NUMBER : EQL-155
SERIAL NUMBER : 30612085166
RECEIVED DATE : 09-Feb-24
CALIBRATION DATE : 09-Feb-24
AMBIENT TEMPERATURE : 30° C ± 1° C
RELATIVE HUMIDITY : 53 %RH ± 10 % RH

CONDITION OF THIS RESULTS OF CALIBRATION

- THIS INSTRUMENT WAS CALIBRATED BASED ON BS 2646-1:2021 BY COMPARISON WITH CALIBRATED RTD DATA LOGGERS UNDER NO LOAD CONDITION. THE SENSORS WERE PLACED ON FIVE LOCATIONS AS SHOWN IN THE PICTURE. THE SENSOR ON LOCATION 1 AND 2 WERE PLACED IN THE UPPER HALF AND LOWER HALF OF CHAMBER FREE SPACE RESPECTIVELY. THE THIRD SENSOR WAS PLACED WITHIN 2.5 cm. OF THE GEOMETRIC CENTER OF THE INSTRUMENT CHAMBER. SENSOR NUMBER 4 WAS ATTACHED TO THE LOAD TEMPERATURE PROBE, IF FITTED, WITHIN 15 mm OF ITS TIP. SENSOR NUMBER 5 WAS PLACED IN THE CHAMBER DRAIN OR VENT WITHIN 100 mm OF ITS CONNECTION TO THE CHAMBER.
- REFERENCE STANDARD INSTRUMENTS :-
 - 1) DATA LOGGER
MODEL : S350, S357, DV33, DN94
SERIAL No : 24T0890
DUE DATE : 26-Jan-25
 3. THE CERTIFICATE IS VALID FOR THE ITEM CALIBRATED AS SHOWN ON THE DATE AND PLACE OF CALIBRATION ONLY.
 4. THIS RESULT EXCLUDE LONG TERM STABILITY OF THE UNIT UNDER CALIBRATION.
 5. THIS CERTIFICATE IS TRACEABLE TO THE INTERNATIONAL SYSTEM OF UNIT MAINTAINED AT:-
- NATIONAL INSTITUTE OF METROLOGY (THAILAND) THROUGH QUALITY CALIBRATION CO.,LTD.

RESULT OF CALIBRATION :- WITHOUT ADJUSTMENT



GENERAL INFORMATION

Overall Ambient Temperature around the Chamber variation : 0.5 °C
Autoclave Condition : Normal
Chamber Size (Diameter*H): 30 * 71 cm

CHAMBER PERFORMANCE

Calibrate Point (°C)	Average all Position (°C)	Temperature Stability (±°C)	Temperature Uniformity (°C)	Overall Variation (°C)	Pressure (MPa)	Holding time (min)	Operating Cycle time (min)
115	115.74	0.09	0.11	0.25	0.090	20	60
121	121.59	0.06	0.21	0.28	0.125	20	60

FRONT

TEMPERATURE MEASUREMENT ACCURACY TEST(°C)

Cont Temp	Ind Temp	Measured Temperature (°C) at Spread Locations				Uncertainty (± °C)
		#1	#2	#3	#4	#5
115	115	115.72	115.74	115.79	115.71	0.59
121	121	121.59	121.62	121.56	121.58	0.59

NOTE 1 : THE UNCERTAINTY OF MEASUREMENT OF TEMPERATURE MEASUREMENT ACCURACY TEST EXCLUDED TEMPERATURE UNIFORMITY OF THE CHAMBER.

NOTE 2 : THE STABILITY TERM IN THE UNCERTAINTY BUDGET WAS REPLACED BY THE STANDARD REPEATABILITY.

NOTE 3 : LOCATION 3 WAS REFERENCE LOCATION.

NOTE 4 : THIS CALIBRATION WAS CARRIED OUT AT THE CUSTOMER'S PLACE AT LABORATORY AREA. THE REPORTED UNCERTAINTY OF MEASUREMENT WAS BASED ON A STANDARD UNCERTAINTY MULTIPLIED BY A FACTOR k = 2, PROVIDING A LEVEL OF CONFIDENCE APPROXIMATELY 95%.

END OF CALIBRATION REPORT

การดูแลบำรุงรักษาเชิงป้องกัน Preventive Maintenance



บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด

ฝ่ายบริการหลังการขาย

โทร 0 2 639 7000 E-mail: service.th@dksh.com

ฝ่ายขายและการตลาด

โทร 0 2 639 7000 E-Mail : marketing.th@dksh.com

Website : www.dksh.co.th/technology/servicethailand

เงื่อนไขการให้บริการ Preventive Maintenance

Type text here

บริษัทฯ จะส่งวิศวกรผู้ชำนาญ เพื่อให้บริการตามขอบข่ายของการบริการ เฉพาะ ในวันและเวลา ราชการ หากมีความประสงค์ที่จะรับบริการนอกเหนือจากวัน เวลา ราชการ (วันหยุดเสาร์ – อาทิตย์ หรือวันหยุด นักชดถรณ์) บริษัทฯ จะคิดค่าบริการเพิ่มเติมตามอัตราที่กฎหมายแรงงานกำหนดไว้

ขอบข่ายการบริการ

- ตรวจสอบสภาพการทำงานต่าง ๆ ของเครื่องมือ
- ทดสอบประสิทธิภาพการทำงานของเครื่องมือ
- รายการผลการตรวจสอบเครื่องมือ

หมายเหตุ

- ราคาเป็นรวมถึงค่าบริการซ่อม หรือ เปลี่ยนอะไหล่ที่ชำรุดเสียหาย หรือหมดสภาพการใช้งาน
- ในกรณีที่ผู้ใช้บริการอยู่นอกเขตพื้นที่ให้บริการ บริษัทฯ จำเป็นต้องคิดค่าใช้จ่ายเพิ่มเติม ได้แก่ ค่าเดินทาง เป็นต้น
- บริษัทฯ ขอสงวนสิทธิ์ในการเปลี่ยนแปลงราคา โดยไม่แจ้งให้ทราบล่วงหน้า



DKSH Technology Limited (บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด)
เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260
เลขประจำตัวผู้เสียภาษี 010-555-001-4547 (สำนักงานใหญ่)

ช่องทางการติดต่อ



Call center 0 2 639 7000



DKSH Scientific



www.dksh.com/scientific-thailand



marketing.dec.th@dksh.com



@dkshscientific

Preventive Maintenance Contract

จำนวนใบการที่สัญญาบริการ ...ครั้ง ต่อปี
ครั้งที่ 1 วันที่ 19/04/2024.....

รายละเอียดผู้รับบริการ

หน่วยงาน	บริษัท เทสต์ เทคโนโลยี จำกัด		
ที่อยู่	30.32 ซอยพระรามที่ 2 ซอย 63 ถนนพระรามที่ 2 แขวงสามตำบลเขตบางขุนเทียน กรุงเทพมหานคร 10150		
โทรศัพท์	0-2893-4211-7	แฟกซ์	0-2893-4218

ผู้ติดต่อ

ชื่อ - นามสกุล	คุณกรกมล ขุนพิทักษ์		
ตำแหน่ง	หัวหน้างาน		
โทรศัพท์	087 398 9274	เบอร์โทร	-
E-mail	lab_center@testtech.co.th		

รายละเอียดผู้ให้บริการ

บริษัท ดีเคเอสเอช เทคโนโลยี จำกัด (ฝ่ายบริการหลังการขาย) (สำนักงานใหญ่) เลขที่ 2533 ถนนสุขุมวิท แขวงบางจาก เขตพระโขนง กรุงเทพฯ 10260 โทรศัพท์ 0 2 639 7000 Email: marketing.dec.th@dksh.com เจ้าหน้าที่ประสานงาน : คุณสุจารีคน์ ศิริรัตน์ โทรศัพท์ 090 678 6925			
เจ้าหน้าที่ผู้ให้บริการ	นายจิรายุญ สดอาด		
ตำแหน่ง	Specialist, Technical Service		
โทรศัพท์	0938138736	แฟกซ์	-
E-mail	Jirayuj.j@dksh.com		

ลงนามผู้รับบริการ	ลงนามผู้ให้บริการ
ตัวจริง	ตัวจริง
ตำแหน่ง	ตำแหน่ง
วันที่/ประทับตราบริษัท	วันที่/ประทับตราบริษัท


(นาย จิรายุญ สดอาด)
Specialist, Technical Service
19/04/2024

JOB No: LSR2402440.....MODEL:VAP300.....S/N: GERS5300210095.

Operational Qualification (OQ)

ตรวจสอบการทำงานของ


FRONT

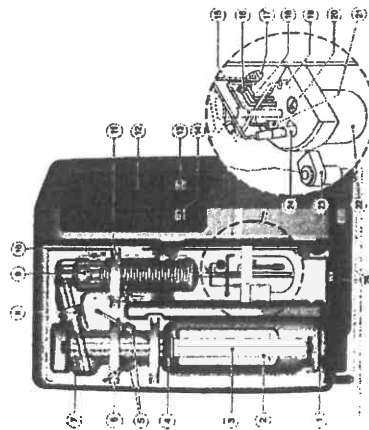

No		PASS	FAIL	N/A
1	Quick clamping device with clamping block	☒	☐	☐
2	Digestion tube 250/300 ml	☒	☐	☐
3	PTFE steam inlet tubing	☒	☐	☐
4	Connection stopper, Viton	☒	☐	☐
5	Screw cap GL18	☒	☐	☐
6	PTFE-inlet tubing NaOH	☒	☐	☐
7	Distribution head made of glass	☒	☐	☐
8	Screw cap GL32	☒	☐	☐
9	Distillation condenser made of glass	☒	☐	☐
10	Screw cap GL14	☒	☐	☐
11	Ventilation valve	☒	☐	☐
12	Control panel	☒	☐	☐
13	Operating Button	☒	☐	☐
14	USB interface (with protective cap)	☒	☐	☐
15	Silicone tubing 8/10 for distillate discharge **	☒	☐	☐
16	Verprene tubing 4/8, receiver suction **	☒	☐	☐
17	Cable duct for electrode cable + titration tube**	☒	☐	☐
18	Silicone tubing 4/7, boric acid inlet**	☒	☐	☐
19	Sensor for level monitoring including connector**	☒	☐	☐
20	Agitator motor with propeller**	☒	☐	☐
21	Titration acid inlet tube **	☒	☐	☐
22	Receiver glass**	☒	☐	☐
23	Holder for pH electrode, removable**	☒	☐	☐
24	pH electrode (combined electrode)**	☒	☐	☐
25	Drip tray PP	☒	☐	☐


** only VAP 450

REAR

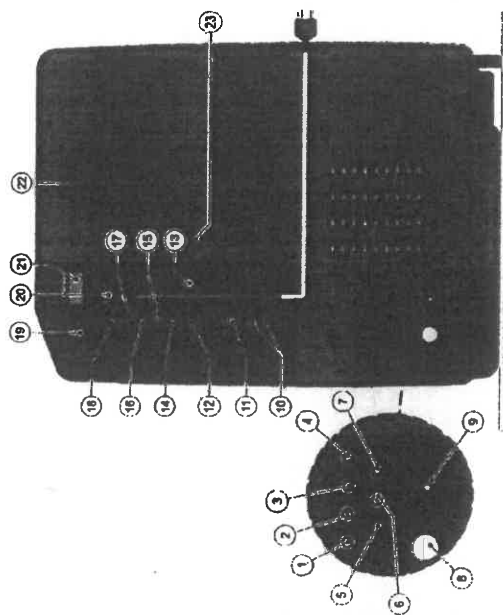


No		PASS	FAIL	N/A
1	Tube connection for sample H3BO3 supply	☐	☐	☒
2	Tube connection for sample H2O supply	☒	☐	☐
3	Tube connection for steam generator H2O supply	☒	☐	☐
4	Tube connection for NaOH supply	☒	☐	☐
5	Tube connection for receiver glass extraction	☒	☐	☐
6	Tube connection for sample waste extraction	☒	☐	☐
7	Tube connection, overpressure steam outlet	☒	☐	☐
8	Connection for cooling water supply (with cleaning sieve)	☒	☐	☐
9	Tube connection for cooling water outlet	☒	☐	☐
10	4 X USB interface	☒	☐	☐
11	1 X RS-232 Interface	☒	☐	☐
12	LAN Interface	☒	☐	☐
13	Screw cap for Perspex cover	☒	☐	☐
14	Connection socket for sample waste tank level monitoring	☒	☐	☐
15	Connection (not used)	☐	☐	☒
16	Connection socket for H2O tank level monitoring	☒	☐	☐
17	Connection socket for H3BO3 tank level monitoring	☒	☐	☐
18	Connection socket for NaOH tank level monitoring	☒	☐	☐
19	Overcurrent circuit breaker	☒	☐	☐
20	Apparatus socket (mains cable connection)	☒	☐	☐
21	Rating plate with serial number	☒	☐	☐
22	Exhaust air fan	☒	☐	☐
23	Excess temperature switch	☒	☐	☐

Inside Steam generator

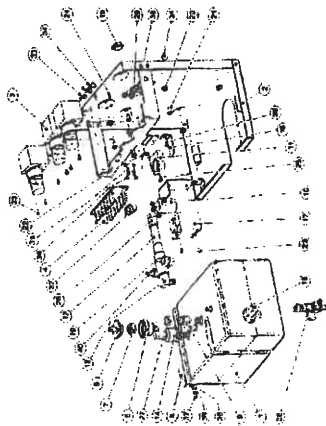


No		PASS	FAIL	N/A
1	Steam generator	☒	☐	N/A
2	Steam generator traverse	☒	☐	☐
3	Pinch valve	☒	☐	☐
4	Circuit board distributor	☒	☐	☐
5	Valve tubing connection	☒	☐	☐
6	Housing safety valve	☒	☐	☐
7	Safety valve SKT	☒	☐	☐
8	Excess temperature protection, steam generator	☒	☐	☐
9	Safety valve G 1/8 0.5 bar	☒	☐	☐
10	Ventilation glass pinch valve VAPODEST	☒	☐	☐
11	Hose clamp for ventilation clamp	☒	☐	☐
12	Distributor PP	☒	☐	☐
13	Angle connection PP	☒	☐	☐
14	Pressure transmitter	☒	☐	☐
15	Level switch	☒	☐	☐
16	Fixing bracket steam generator	☒	☐	☐
17	Relay HT+	☒	☐	☐
18	VA Hexagon nut 1/2"	☒	☐	☐
19	Angle connection 1/8"	☒	☐	☐
20	Bushing nipple 6-10-14	☒	☐	☐
21	VA Lens head screw M5 X 10	☒	☐	☐
22	Grounding connection, 2-pole	☒	☐	☐
23	VA Lens head screw M4 X 6	☒	☐	☐
24	Spacer bolt 3 mm	☒	☐	☐
25	VA Lens head screw M4 X 10	☒	☐	☐
26	Tubing connection	☒	☐	☐
27	Hose clamp 14.5 mm	☒	☐	☐
28	Module ball valve with nozzles	☒	☐	☐
29	Cross manifold with spout	☒	☐	☐
30	Seal copper G 1/8	☒	☐	☐
31	Locking screw 1/8"	☒	☐	☐
32	Pin strip	☒	☐	☐
33	Bundle clamp 12 H 4500	☒	☐	☐
34	Bundle clamp 12 H 4502	☒	☐	☐
35	Temperature switch 80°C	☒	☐	☐
36	VA Lens head screw M3 X 6	☒	☐	☐
37	VA Hexagon nut M4	☒	☐	☐
38	Lins head screw M4 X 8	☒	☐	☐
39	VA Spring washer	☒	☐	☐
40	Angle connection, reduced, 1/8" PP	☒	☐	☐

Module Pump holder VAP200 - 450 V3

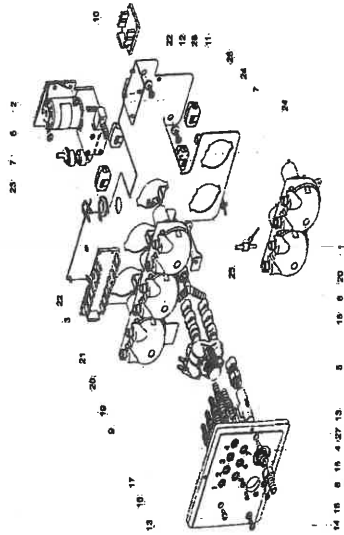

No		PASS	FAIL	N/A
1	Peristaltic pump	☒	☐	☐
2	Diaphragm pump NaOH, with non return valve	☒	☐	☐
3	Circuit board	☒	☐	☐
4	Tubing connection module	☒	☐	☐
5	Flow controller	☒	☐	☐
6	Lens head screw M5 x 10	☒	☐	☐
7	Bushing nozzle	☒	☐	☐
8	Screw in socket	☒	☐	☐
9	Magnetic valve 22 way	☒	☐	☐
10	Circuit board distributor	☒	☐	☐
11	Bushing nozzle	☒	☐	☐
12	Screw 5 x 25	☒	☐	☐
13	Cylinder screw	☒	☐	☐
14	Screw 5 x 20	☒	☐	☐
15	Seal EPDM 15 x 4	☒	☐	☐
16	Tubing connection piece 51x10x6.5	☒	☐	☐
17	Tubing connection piece 51x10x10	☒	☐	☐
18	Screw M4x10	☒	☐	☐
19	Clamp	☒	☐	☐
20	Clamp	☒	☐	☐
21	Y-tube connector	☒	☐	☐
22	Spacer bolt 5 mm	☒	☐	☐
23	Bundle clamp	☒	☐	☐
24	Bundle clamp	☒	☐	☐
25	Retrofit earthing pumpv	☒	☐	☐
26	Snap forite	☒	☐	☐
27	Nut G 3/8"	☒	☐	☐
28	Pump holder plate	☒	☐	☐

Control panel

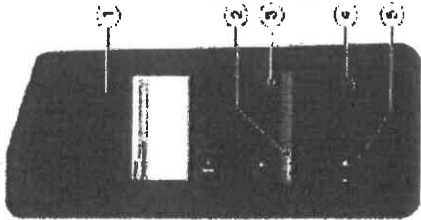

No		PASS	FAIL
1	Title bar	☒	☐
2	Status bar	☒	☐
3	Navigation button	☒	☐
4	Smart switch with multiple functions	☒	☐
5	USB interface	☒	☐

รายละเอียดการตรวจสอบ

ขั้นตอนการบริการ

ตรวจสอบระบบ ไฟฟ้า (Electrical Test)

- ความดันทางไฟฟ้าของเครื่องกับกราฟด์
- กระแสไฟฟ้าที่ใช้งาน

ตรวจสอบสภาพเครื่อง (Optical Test)

- Main cable
- Electric wiring
- Pumps
- Distribution Head
- Condensor
- Steam generator
- Tubing
- Viton cone

ตรวจสอบ Function การทำงาน (The Function Test)

- ระบบฟุ้งและควบคุมความดันของ Steam
- ระบบการเดินน้ำเข้า Sample Tube
- ระบบการเติม Na OH
- ระบบการเติม H3BO3

รายงานผลการให้บริการ

1. TECHNICAL DATA

Main Supply 220 volt + 10% 50 Hz with ground
Nominal current

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....8a.....

1.1 COOLING WATER BATH

Temperature 15-20 °C
Cooling Water Outlet
Control Temperature

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....

1.2 OPTICAL TEST/AR300

Screw cap GL14
Screw cap GL18
Screw cap GL32
Distillation Head
Condenser
Viton Cone
Ventilation Valve BV
Micro Switch Sample
Agitator motor for propeller

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

2. SYSTEM COOLING WATER INLET

Cooling Water Inlet
Cooling Water Outlet
Flow control valve

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....

3.SYSTEM CONTROL

Display
Program
Adding NaOH
Adding H2O
Adding H3BO3
Suction Sample
Suction Resiver

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....

4.SYSTEM DISTILLATION

Boiler
Level Sensor
Novopren
Solenoid Valve Shut-Off
Solenoid Valve Steam
Solenoid Valve soft steam
Ventilation Valve Premount
Excess Pressure Detector
Heating Element

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....
.....
.....

5. PUMP

Pump H₂O Steam
- Non-Return Valve
Pump H₂O Sample
- Non-Return Valve
Pump NaOH
- Non-Return Valve
Pump H3BO3
- Non-Return Valve
Pump suction
Pump suction receiver

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

6. The Following Program Run :

Addition H2O 0-999 mL
Addition NaOH 0-999 mL
Addition H3BO3 0-999 mL
Reaction Time 0-108 min
Distillation Time 0-108 min
Steam Capacity 10%-100%
Suction Sample
Suction Receiver

Pass ☒ Fail ☐ N/A ☐
Remark
.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

7. Measured pumps

Pump NaOH Volume :20.40.....ml
Pump H2O Volume :10.00.....ml
Pump H3BO3 Volume :ml

Remark
.....
.....
.....

Remark :

การบำรุงรักษาทั่วไป (Basic maintenance)

Class participants must be seated only before starting analysis in order to prevent cheating by exchanging answers.

The following ratings are recommended for this:

Class participants must be seated only before starting activities in order to prevent tripping by cryolanthus containers.

Product	Weight
HQ solution	100 ml
NaOH solution	0 ml
Cholesterol base	7 ml
Stem paste	100 %
Fluorescent base	0 ml
Stem sample	20 g

Insert a dipstick into (without touching) and read the measurement.

- All liquid carrying dirt is cleaned, in the case of strong staining, repeat. 10 ml of acetone will cut stain far better to the expected time.

Cutting water bills
Cutting water bills
water bills low
water bills low

- | | | | |
|--|--|--|--|
| <p>Control costs
 1. Control costs
 2. Control costs
 3. Control costs</p> | <p>Control costs
 1. Control costs
 2. Control costs
 3. Control costs</p> | <p>Control costs
 1. Control costs
 2. Control costs
 3. Control costs</p> | <p>Control costs
 1. Control costs
 2. Control costs
 3. Control costs</p> |
|--|--|--|--|