

ภาคผนวก

3-1

ผลการตรวจวัดคุณภาพน้ำทิ้ง และค่ามาตรฐาน

---

ผลการตรวจวัดคุณภาพน้ำทิ้ง  
ประจำเดือนกรกฎาคม – ธันวาคม 2567



รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-1

ผู้ส่งวิเคราะห์ : บริษัท กรีนีโอ จำกัด

Client

ที่อยู่ : 600/54 ซอยรามคำแหง 39 (เทพศิลา 1)

Address แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310

สถานที่เก็บตัวอย่าง : โครงการบึงจอมเทียน

Sampling Site

ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง

Sample Type

วันที่เก็บตัวอย่าง 30 กรกฎาคม 2567

Sampling Date

ผู้เก็บตัวอย่าง : บริษัท กรีนีโอ จำกัด

Sampling by

วันที่รับตัวอย่าง : 31 กรกฎาคม 2567

Received Date

วันที่วิเคราะห์ : 31 กรกฎาคม - 5 สิงหาคม 2567

Analysis Date

วันที่รายงานผล : 6 สิงหาคม 2567

Reported Date

เลขที่วิเคราะห์ : 300724/00605/1 เลขที่ตัวอย่าง : S04350/67

Analysis No.

Sample No.

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.*
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
pH	-	Electrometric	7.3	5.0 - 9.0
TDS	mg/l	Dried at 103-105°C	286	≤ 500
TSS	mg/l	Dried at 103-105°C	36	≤ 40
BOD	mg/l	5-Day BOD Test, Azide Modification	43	≤ 30
Sulfide	mg/l	ZnS Precipitation, Iodometric	0.4	≤ 1.0
TKN	mg/l	Macro Kjeldahl	60.48	≤ 35
Oil & Grease	mg/l	Liquid-Liquid, partition-Gravimetric	<5	≤ 20

## หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2548

Reported results refer to submitted sample only.

Test report shall not be reproduced except in full, without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-2

ผู้ส่งวิเคราะห์ : บริษัท กรีนโอ จำกัด  
Client : 600/54 ซอยรามคำแหง 39 (เทพธิดา 1)  
ที่อยู่ : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310  
Address : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310  
สถานที่เก็บตัวอย่าง : โครงการบึงจอมเทียน  
Sampling Site : บ่อตรวจคุณภาพน้ำทิ้ง  
ประเภทตัวอย่าง :  
Sample Type :  
วันที่เก็บตัวอย่าง : 30 กรกฎาคม 2567  
Sampling Date :

ผู้เก็บตัวอย่าง : บริษัท กรีนโอ จำกัด  
Sampling by :  
วันที่รับตัวอย่าง : 31 กรกฎาคม 2567  
Received Date :  
วันที่วิเคราะห์ : 31 กรกฎาคม - 5 สิงหาคม 2567  
Analysis Date :  
วันที่รายงานผล : 6 สิงหาคม 2567  
Reported Date :  
เลขที่วิเคราะห์ : 300724/00605/2 เลขที่ตัวอย่าง : S04350/67  
Analysis No. : Sample No. :

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.*
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
Settleable Solids	ml/hr	Imhoff Cone	0.0	≤ 0.5
Total Coliform Bacteria	MPN/100ml	MPN Test	$2.4 \times 10^2$	-

หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2548



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full , without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-1

ผู้ส่งวิเคราะห์ : บริษัท กรีนโอ จำกัด  
Client :  
ที่อยู่ : 600/54 ซอยรามคำแหง 39 (เทพศิลา 1)  
Address : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310  
สถานที่เก็บตัวอย่าง : โครงการบึงจอมเทียน  
Sampling Site :  
ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง  
Sample Type :  
วันที่เก็บตัวอย่าง : 21 สิงหาคม 2567  
Sampling Date :

ผู้เก็บตัวอย่าง : บริษัท กรีนโอ จำกัด  
Sampling by :  
วันที่รับตัวอย่าง : 22 สิงหาคม 2567  
Received Date :  
วันที่วิเคราะห์ : 22 - 28 สิงหาคม 2567  
Analysis Date :  
วันที่รายงานผล : 29 สิงหาคม 2567  
Reported Date :  
เลขที่วิเคราะห์ : 220824/00479/1 เลขที่ตัวอย่าง : S04838/67  
Analysis No. : Sample No. :

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.*
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
pH	-	Electrometric	7.2	5.0 - 9.0
TDS	mg/l	Dried at 103-105°C	430	≤ 500
TSS	mg/l	Dried at 103-105°C	38	≤ 40
BOD	mg/l	5-Day BOD Test,Azide Modification	27	≤ 30
Sulfide	mg/l	ZnS Precipitation, Iodometric	<0.2	≤ 1.0
TKN	mg/l	Macro Kjeldahl	34.72	≤ 35
Oil & Grease	mg/l	Liquid-Liquid, partition-Gravimetric	<5	≤ 20

## หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2548



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full , without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-2

ผู้ส่งวิเคราะห์ : บริษัท กรีนโอ จำกัด  
Client : 600/54 ซอยรามคำแหง 39 (เทพศิลา 1)  
ที่อยู่ : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310  
Address : โครงการบึงจอมเทียน  
สถานที่เก็บตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง  
Sampling Site : บ่อตรวจคุณภาพน้ำทิ้ง  
ประเภทตัวอย่าง :  
Sample Type :  
วันที่เก็บตัวอย่าง : 21 สิงหาคม 2567  
Sampling Date :  
วันที่รับตัวอย่าง : 22 สิงหาคม 2567  
Received Date :  
วันที่วิเคราะห์ : 22 - 28 สิงหาคม 2567  
Analysis Date :  
วันที่รายงานผล : 29 สิงหาคม 2567  
Reported Date :  
เลขที่วิเคราะห์ : 220824/00479/2 เลขที่ตัวอย่าง : S04838/67  
Analysis No. : Sample No. :

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.*
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
Settleable Solids	ml/hr	Imhoff Cone	0.1	≤ 0.5
Total Coliform Bacteria	MPN/100ml	MPN Test	$2.1 \times 10^3$	-

## หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2548



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full, without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-1


ผู้ส่งวิเคราะห์ : บริษัท กรีนีโอ จำกัด  
Client : 600/54 ซอยรามคำแหง 39 (เทพศิลา 1)  
ที่อยู่ : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310  
Address : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310  
สถานที่เก็บตัวอย่าง : โครงการบึงจอมเทียน  
Sampling Site : บ่อตรวจคุณภาพน้ำทิ้ง  
ประเภทตัวอย่าง :  
Sample Type :  
วันที่เก็บตัวอย่าง : 25 กันยายน 2567  
Sampling Date :

ผู้เก็บตัวอย่าง : บริษัท กรีนีโอ จำกัด  
Sampling by :  
วันที่รับตัวอย่าง : 26 กันยายน 2567  
Received Date :  
วันที่วิเคราะห์ : 26 กันยายน - 2 ตุลาคม 2567  
Analysis Date :  
วันที่รายงานผล : 3 ตุลาคม 2567  
Reported Date :  
เลขที่วิเคราะห์ : 250924/00531/1 เลขที่ตัวอย่าง : S05444/67  
Analysis No. : Sample No. :

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.*
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
pH	-	Electrometric	6.9	5.5 - 9.0
TDS	mg/l	Dried at 180°C	346	≤ 1,000
TSS	mg/l	Dried at 103-105°C	41	≤ 40
BOD	mg/l	5-Day BOD Test,Azide Modification	39	≤ 30
Sulfide	mg/l	ZnS Precipitation, Iodometric	0.2	≤ 1.0
TKN	mg/l	Macro Kjeldahl	42.00	≤ 35
Oil & Grease	mg/l	Liquid-Liquid, partition-Gravimetric	<5	≤ 20

หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2567



Reported results refer to submitted sample only.


Test report shall not be reproduced except in full , without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-2

ผู้ส่งวิเคราะห์ : บริษัท กรีนีโอ จำกัด	ผู้เก็บตัวอย่าง : บริษัท กรีนีโอ จำกัด
Client : 600/54 ซอยรามคำแหง 39 (เทพธิดา 1)	Sampling by : 26 กันยายน 2567
ที่อยู่ : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310	วันที่รับตัวอย่าง : 26 กันยายน 2567
Address : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310	Received Date : 26 กันยายน - 2 ตุลาคม 2567
สถานที่เก็บตัวอย่าง : โครงการปทุมอมเทียน	วันที่วิเคราะห์ : 26 กันยายน - 2 ตุลาคม 2567
Sampling Site : บ่อตรวจคุณภาพน้ำทิ้ง	Analysis Date : 3 ตุลาคม 2567
ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง	วันที่รายงานผล : 3 ตุลาคม 2567
Sample Type : 25 กันยายน 2567	Reported Date : 250924/00531/2 เลขที่ตัวอย่าง : S05444/67
วันที่เก็บตัวอย่าง : 25 กันยายน 2567	เลขที่วิเคราะห์ : 250924/00531/2 เลขที่ตัวอย่าง : S05444/67
Sampling Date : 25 กันยายน 2567	Analysis No. : Sample No.

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.*
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
Settleable Solids	ml/hr	Imhoff Cone	0.5	-
Total Coliform Bacteria	MPN/100ml	MPN Test	$2.1 \times 10^3$	-



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full , without approve of the laboratory.



รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-1

ผู้ส่งวิเคราะห์ : บริษัท กรีนีโอ จำกัด

Client

ที่อยู่ : 600/54 ซอยรามคำแหง 39 (เทพลีลา 1)

Address แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310

สถานที่เก็บตัวอย่าง : โครงการบึงจอมเทียน

Sampling Site

ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง

Sample Type

วันที่เก็บตัวอย่าง : 30 ตุลาคม 2567

Sampling Date

ผู้เก็บตัวอย่าง : บริษัท กรีนีโอ จำกัด

Sampling by

วันที่รับตัวอย่าง : 31 ตุลาคม 2567

Received Date

วันที่วิเคราะห์ : 31 ตุลาคม - 6 พฤศจิกายน 2567

Analysis Date

วันที่รายงานผล : 7 พฤศจิกายน 2567

Reported Date

เลขที่วิเคราะห์ : 311024/00581/1 เลขที่ตัวอย่าง : S06035/67


Analysis No.

Sample No.

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.* อาคารประเภท ข
			บ่อตรวจคุณภาพน้ำทิ้ง	
pH	-	Electrometric	7.0	5.5 - 9.0
TDS	mg/l	Dried at 180°C	308	≤ 1,000
TSS	mg/l	Dried at 103-105°C	36	≤ 40
BOD	mg/l	5-Day BOD Test, Azide Modification	48	≤ 30
Sulfide	mg/l	ZnS Precipitation, Iodometric	<0.2	≤ 1.0
TKN	mg/l	Macro Kjeldahl	51.52	≤ 35
Oil & Grease	mg/l	Liquid-Liquid, partition-Gravimetric	5.00	≤ 20

หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2567



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full, without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-2

ผู้ส่งวิเคราะห์ : บริษัท กรีนโอ จำกัด

Client

ที่อยู่ : 600/54 ซอยรามคำแหง 39 (เทพธิดา 1)

วันที่รับตัวอย่าง : 31 ตุลาคม 2567

Address แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310

Received Date

สถานที่เก็บตัวอย่าง : โครงการปทุมอมเทียน

วันที่วิเคราะห์ : 31 ตุลาคม - 6 พฤศจิกายน 2567

Sampling Site

Analysis Date

ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง

วันที่รายงานผล : 7 พฤศจิกายน 2567

Sample Type

Reported Date

วันที่เก็บตัวอย่าง : 30 ตุลาคม 2567

เลขที่วิเคราะห์ : 311024/00581/2 เลขที่ตัวอย่าง : S06035/67

Sampling Date

Analysis No.

Sample No.

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.* อาคารประเภท ข
			บ่อตรวจคุณภาพน้ำทิ้ง	
Settleable Solids	ml/hr	Imhoff Cone	0.2	-
Total Coliform Bacteria	MPN/100ml	MPN Test	$1.7 \times 10^3$	-
Appearance	-	Physical Test	ขุ่นเหลืองมีตะกอน	-

หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2567



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full , without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-1

ผู้ส่งวิเคราะห์ : บริษัท กรีนีโอ จำกัด

Client

ที่อยู่ : 600/54 ซอยรามคำแหง 39 (เทพลีลา 1)

Address : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310

สถานที่เก็บตัวอย่าง : โครงการบึงจอมเทียน

Sampling Site

ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง

Sample Type

วันที่เก็บตัวอย่าง : 18 พฤศจิกายน 2567

Sampling Date

ผู้เก็บตัวอย่าง : บริษัท กรีนีโอ จำกัด

Sampling by

วันที่รับตัวอย่าง : 19 พฤศจิกายน 2567

Received Date

วันที่วิเคราะห์ : 19 - 25 พฤศจิกายน 2567

Analysis Date

วันที่รายงานผล : 26 พฤศจิกายน 2567

Reported Date

เลขที่วิเคราะห์ : 191124/00477/1 เลขที่ตัวอย่าง : S06515/67

Analysis No.

Sample No.

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.*
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
pH	-	Electrometric	6.8	5.5 - 9.0
TDS	mg/l	Dried at 180°C	437	≤ 1,000
TSS	mg/l	Dried at 103-105°C	26	≤ 40
BOD	mg/l	5-Day BOD Test,Azide Modification	53	≤ 30
Sulfide	mg/l	ZnS Precipitation, Iodometric	0.3	≤ 1.0
TKN	mg/l	Macro Kjeldahl	49.28	≤ 35
Oil & Grease	mg/l	Liquid-Liquid, partition-Gravimetric	<5	≤ 20

หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2567



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full , without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-2

ผู้ส่งวิเคราะห์ : บริษัท กรีนโอ จำกัด

Client

ที่อยู่ : 600/54 ซอยรามคำแหง 39 (เทพธิดา 1)

วันที่รับตัวอย่าง : 19 พฤศจิกายน 2567

Address แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310

Received Date

สถานที่เก็บตัวอย่าง : โครงการบึงจอมเทียน

วันที่วิเคราะห์ : 19 - 25 พฤศจิกายน 2567

Sampling Site

ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง

Analysis Date

วันที่รายงานผล : 26 พฤศจิกายน 2567

Sample Type

วันที่เก็บตัวอย่าง : 19 พฤศจิกายน 2567

Reported Date

เลขที่วิเคราะห์ : 191124/00477/2 เลขที่ตัวอย่าง : S06515/67

Sampling Date


Analysis No.

Sample No.

รายการ parameters	หน่วย units	วิธีวิเคราะห์ methods	ผล/Result	Std.* อาคารประเภท ข
			บ่อตรวจคุณภาพน้ำทิ้ง	
Settleable Solids	ml/hr	Imhoff Cone	0.1	-
Total Coliform Bacteria	MPN/100ml	MPN Test	$2.1 \times 10^3$	-
Appearance	-	Physical Test	ุ่นมีตะกอนเล็กน้อย	-

หมายเหตุ

1. " \* " หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2567



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full , without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT

page 1/2-1

ผู้ส่งวิเคราะห์ : บริษัท กรีนีโอ จำกัด

Client

ที่อยู่ : 600/54 ซอยรามคำแหง 39 (เทพธิดา 1)

Address แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310

สถานที่เก็บตัวอย่าง : โครงการปืงจอมเทียน

Sampling Site

ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง

Sample Type

วันที่เก็บตัวอย่าง : 6 ธันวาคม 2567

Sampling Date

ผู้เก็บตัวอย่าง : บริษัท กรีนีโอ จำกัด

Sampling by

วันที่รับตัวอย่าง : 9 ธันวาคม 2567

Received Date

วันที่วิเคราะห์ : 9 - 15 ธันวาคม 2567

Analysis Date

วันที่รายงานผล : 16 ธันวาคม 2567

Reported Date

เลขที่วิเคราะห์ : 061224/00147/1 เลขที่ตัวอย่าง : S06806/67

Analysis No.

Sample No.

รายการ Parameters	หน่วย Units	วิธีวิเคราะห์ Methods <sup>(2)</sup>	ผล/Result	Std. <sup>(1)</sup>
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
pH	-	APHA, AWWA, Part 4500-H+ B. (Electrometric)	6.8	5.5 - 9.0
Total Dissolved Solids	mg/l	APHA, AWWA, Part 2540 C. (Dried at 180 °C)	450	≤ 1,000
Total Suspended Solids	mg/l	APHA, AWWA, Part 2540 D. (Dried at 103-105 °C)	29	≤ 40
Biochemical Oxygen Demand	mg/l	APHA, AWWA, Part 5210 B., 4500-O G. (5-Day BOD Test, Membrane-Electrode)	69	≤ 30
Sulfide	mg/l	APHA, AWWA, Part 4500-S <sup>2</sup> - F. (Iodometric)	1.0	≤ 1.0
Total Kjeldahl Nitrogen	mg/l	APHA, AWWA, Part 4500-Norg B. (Macro-Kjeldahl)	71.40	≤ 35
Oil & Grease	mg/l	APHA, AWWA, Part 5520 B. (Liquid-Liquid, partition-Gravimetric)	5.00	≤ 20

## หมายเหตุ

- "(1)" หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2567
- "(2)" APHA, AWWA, WEF. Standard Methods for the Examination of Water and Wastewater. 24<sup>th</sup> ed. Washington, DC: APHA, 2023
- ND = ( Non Detectable ) หมายถึง ตรวจไม่พบ



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full, without approve of the laboratory.

รายงานผลวิเคราะห์  
ANALYSIS REPORT


page 1/2-2

ผู้ส่งวิเคราะห์ : บริษัท กรีนโอ จำกัด  
Client : 600/54 ซอยรามคำแหง 39 (เทพศิลา 1)  
ที่อยู่ : แขวงวังทองหลาง เขตวังทองหลาง กรุงเทพฯ 10310  
Address : โครงการบึงจอมเทียน  
สถานที่เก็บตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง  
Sampling Site :  
ประเภทตัวอย่าง : บ่อตรวจคุณภาพน้ำทิ้ง  
Sample Type :  
วันที่เก็บตัวอย่าง : 6 ธันวาคม 2567  
Sampling Date :  
วันที่รับตัวอย่าง : 9 ธันวาคม 2567  
Received Date :  
วันที่วิเคราะห์ : 9 - 15 ธันวาคม 2567  
Analysis Date :  
วันที่รายงานผล : 16 ธันวาคม 2567  
Reported Date :  
เลขที่วิเคราะห์ : 061224/00147/2 เลขที่ตัวอย่าง : S06806/67  
Analysis No. : Sample No. :

รายการ Parameters	หน่วย Units	วิธีวิเคราะห์ Methods <sup>(2)</sup>	ผล/Result	Std. <sup>(1)</sup>
			บ่อตรวจคุณภาพน้ำทิ้ง	อาคารประเภท ข
Settleable Solids	ml/hr	APHA, AWWA, Part 2540 F. Imhoff Cone)	0.0	-
Total Coliform Bacteria	MPN/100ml	APHA, AWWA, Part 9221 B. (MPN Test)	$1.6 \times 10^4$	-
Appearance	-	Physical Test	สีเหลืองขุ่น	-

หมายเหตุ


- "(1)" หมายถึง ค่ามาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารประเภท ข. ตามประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม พ.ศ.2567
- "(2)" APHA , AWWA , WEF. Standard Methods for the Examination of Water and Wastewater. 24<sup>th</sup> ed. Washington, DC: APHA, 2023



Reported results refer to submitted sample only.

Test report shall not be reproduced except in full , without approve of the laboratory.

คามাত্রฐาน



---

ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม  
เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำจากอาคาร  
บางประเภทและบางขนาด พ.ศ. 2548





## ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม

เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้ง

จากอาคารบางประเภทและบางขนาด

โดยที่ได้มีการปฏิรูประบบราชการโดยให้มีการจัดตั้งกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อมขึ้นมา และให้โอนภารกิจของกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม ในส่วนที่เกี่ยวข้องกับพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ ไปเป็นของกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม ประกอบกับเป็นการสมควรให้คณะกรรมการควบคุมมลพิษ เป็นผู้พิจารณาเห็นชอบกับวิธีการตรวจหาค่ามาตรฐานการระบายน้ำทิ้ง นอกเหนือจากวิธีการที่กำหนดไว้ แทนกรมควบคุมมลพิษ จึงสมควรแก้ไขปรับปรุงประกาศกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด

อาศัยอำนาจตามความในมาตรา ๕๕ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ แก้ไขโดยมาตรา ๑๑๔ แห่งพระราชกฤษฎีกาแก้ไขบทบัญญัติให้สอดคล้องกับการโอนอำนาจหน้าที่ของส่วนราชการ ให้เป็นไปตามพระราชบัญญัติปรับปรุงกระทรวง ทบวง กรม พ.ศ. ๒๕๔๕ พ.ศ. ๒๕๔๕ อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการเกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา ๒๕ ประกอบกับมาตรา ๓๕ มาตรา ๔๘ มาตรา ๕๐ และมาตรา ๕๑ ของรัฐธรรมนูญแห่งราชอาณาจักรไทยบัญญัติให้กระทำได้ โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม โดยคำแนะนำของคณะกรรมการควบคุมมลพิษ และโดยความเห็นชอบของคณะกรรมการสิ่งแวดล้อมแห่งชาติ จึงออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิกประกาศกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด ลงวันที่ ๑๐ มกราคม พ.ศ. ๒๕๓๗

ข้อ ๒ ในประกาศนี้

“อาคาร” หมายความว่า อาคารที่ก่อสร้างขึ้น ไม่ว่าจะมิลักษณะเป็นอาคารหลังเดียว หรือเป็นกลุ่มของอาคารซึ่งตั้งอยู่ภายในพื้นที่ซึ่งเป็นบริเวณเดียวกัน และไม่ว่าจะมีที่ระบายน้ำท่อเดียว หรือมีหลายท่อที่เชื่อมติดต่อกันระหว่างอาคารหรือไม่ก็ตาม ซึ่งได้แก่

(๑) อาคารชุด ตามกฎหมายว่าด้วยอาคารชุด

(๒) โรงแรม ตามกฎหมายว่าด้วยโรงแรม

- (๓) หอพัก ตามกฎหมายว่าด้วยหอพัก
- (๔) สถานบริการประเภทสถานอาบน้ำ นวดหรืออบตัว ซึ่งมีผู้ให้บริการแก่ลูกค้า ตามกฎหมายว่าด้วยสถานบริการ
- (๕) โรงพยาบาลของทางราชการหรือสถานพยาบาล ตามกฎหมายว่าด้วยสถานพยาบาล
- (๖) อาคารโรงเรียนเอกชน ตามกฎหมายว่าด้วยโรงเรียนเอกชน โรงเรียนของทางราชการ อาคารสถาบันอุดมศึกษาของเอกชน ตามกฎหมายว่าด้วยสถาบันอุดมศึกษาของเอกชนและสถาบันอุดมศึกษาของทางราชการ
- (๗) อาคารที่ทำการของทางราชการ รัฐวิสาหกิจ หรือองค์การระหว่างประเทศและของเอกชน
- (๘) อาคารของศูนย์การค้าหรือห้างสรรพสินค้า
- (๙) ตลาด ตามกฎหมายว่าด้วยการสาธารณสุข แต่ไม่รวมถึง ท่าเทียบเรือประมง สะพานปลา หรือกิจการแพปลา
- (๑๐) ภัตตาคารหรือร้านอาหาร
- “น้ำทิ้ง” หมายความว่า น้ำเสียที่ผ่านระบบบำบัดน้ำเสียแล้วจนเป็นไปตามมาตรฐานควบคุมการระบายน้ำทิ้งตามที่กำหนดไว้ในประกาศนี้
- ข้อ ๓ ให้แบ่งประเภทของอาคารตามข้อ ๒ ออกเป็น ๕ ประเภท คือ
- (๑) อาคารประเภท ก.
- (๒) อาคารประเภท ข.
- (๓) อาคารประเภท ค.
- (๔) อาคารประเภท ง.
- (๕) อาคารประเภท จ.
- ข้อ ๔ อาคารประเภท ก. หมายความว่า อาคารดังต่อไปนี้
- (๑) อาคารชุดที่มีจำนวนห้องสำหรับใช้เป็นที่อยู่อาศัยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ตั้งแต่ ๕๐๐ ห้องนอนขึ้นไป
- (๒) โรงแรมที่มีจำนวนห้องสำหรับใช้เป็นห้องพักรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ตั้งแต่ ๒๐๐ ห้องขึ้นไป
- (๓) โรงพยาบาลของทางราชการ รัฐวิสาหกิจหรือสถานพยาบาล ตามกฎหมายว่าด้วยสถานพยาบาล ที่มีเตียงสำหรับผู้ป่วยไว้ค้างคืนรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๓๐ เตียงขึ้นไป

(๔) อาคารโรงเรียนเอกชน โรงเรียนของทางราชการ สถาบันอุดมศึกษาของเอกชน หรือสถาบันอุดมศึกษาของทางราชการที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๒๕,๐๐๐ ตารางเมตรขึ้นไป

(๕) อาคารที่ทำการของทางราชการ รัฐวิสาหกิจ องค์การระหว่างประเทศ หรือของเอกชน ที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๕๕,๐๐๐ ตารางเมตรขึ้นไป

(๖) อาคารของศูนย์การค้าหรือห้างสรรพสินค้าที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๒๕,๐๐๐ ตารางเมตรขึ้นไป

(๗) ตลาดที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๒,๕๐๐ ตารางเมตรขึ้นไป

(๘) ภัตตาคารหรือร้านอาหารที่มีพื้นที่ให้บริการรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๒,๕๐๐ ตารางเมตรขึ้นไป

ข้อ ๕ อาคารประเภท ข. หมายความว่า อาคารดังต่อไปนี้

(๑) อาคารชุดที่มีจำนวนห้องสำหรับใช้เป็นที่อยู่อาศัยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคารตั้งแต่ ๑๐๐ ห้องนอน แต่ไม่ถึง ๕๐๐ ห้องนอน

(๒) โรงแรมที่มีจำนวนห้องสำหรับใช้เป็นห้องพักรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคารตั้งแต่ ๖๐ ห้อง แต่ไม่ถึง ๒๐๐ ห้อง

(๓) หอพักที่มีจำนวนห้องสำหรับใช้เป็นที่อยู่อาศัยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคารตั้งแต่ ๒๕๐ ห้องขึ้นไป

(๔) สถานบริการที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคารตั้งแต่ ๕,๐๐๐ ตารางเมตรขึ้นไป

(๕) โรงพยาบาลของทางราชการ รัฐวิสาหกิจ หรือสถานพยาบาล ตามกฎหมายว่าด้วยสถานพยาบาล ที่มีเตียงสำหรับผู้ป่วยไว้ค้างคืนรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๑๐ เตียง แต่ไม่ถึง ๓๐ เตียง

(๖) อาคารโรงเรียนเอกชน โรงเรียนของทางราชการ สถาบันอุดมศึกษาของเอกชน หรือสถาบันอุดมศึกษาของทางราชการที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๕,๐๐๐ ตารางเมตร แต่ไม่ถึง ๒๕,๐๐๐ ตารางเมตร

(๙) อาคารที่ทำการของทางราชการ รัฐวิสาหกิจ องค์การระหว่างประเทศ หรือของเอกชน ที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๑๐,๐๐๐ ตารางเมตร แต่ไม่ถึง ๕๕,๐๐๐ ตารางเมตร

(๙) อาคารของศูนย์การค้าหรือห้างสรรพสินค้าที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๕,๐๐๐ ตารางเมตร แต่ไม่ถึง ๒๕,๐๐๐ ตารางเมตร

(๙) ตลาดที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๑,๕๐๐ ตารางเมตร แต่ไม่ถึง ๒,๕๐๐ ตารางเมตร

(๑๐) ภัตตาคารหรือร้านอาหารที่มีพื้นที่ให้บริการรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคาร ตั้งแต่ ๕๐๐ ตารางเมตร แต่ไม่ถึง ๒,๕๐๐ ตารางเมตร

ข้อ ๖ อาคารประเภท ก. หมายความว่า อาคารดังต่อไปนี้

(๑) อาคารชุดที่มีจำนวนห้องสำหรับใช้เป็นที่อยู่อาศัยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ไม่ถึง ๑๐๐ ห้องนอน

(๒) โรงแรมที่มีจำนวนห้องสำหรับใช้เป็นห้องพักรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ไม่ถึง ๖๐ ห้อง

(๓) หอพักที่มีจำนวนห้องสำหรับใช้เป็นที่อยู่อาศัยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ตั้งแต่ ๕๐ ห้อง แต่ไม่ถึง ๒๕๐ ห้อง

(๔) สถานบริการที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคารตั้งแต่ ๑,๐๐๐ ตารางเมตร แต่ไม่ถึง ๕,๐๐๐ ตารางเมตร

(๕) อาคารที่ทำการของทางราชการ รัฐวิสาหกิจ องค์การระหว่างประเทศ หรือของเอกชน ที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๕,๐๐๐ ตารางเมตร แต่ไม่ถึง ๑๐,๐๐๐ ตารางเมตร

(๖) ตลาดที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคารหรือกลุ่มของอาคารตั้งแต่ ๑,๐๐๐ ตารางเมตร แต่ไม่ถึง ๑,๕๐๐ ตารางเมตร

(๗) ภัตตาคารหรือร้านอาหารที่มีพื้นที่ให้บริการรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ตั้งแต่ ๒๕๐ ตารางเมตร แต่ไม่ถึง ๕๐๐ ตารางเมตร

ข้อ ๗ อาคารประเภท ง. หมายความว่า อาคารดังต่อไปนี้

(๑) หอพักที่มีจำนวนห้องสำหรับใช้เป็นที่อยู่อาศัยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ตั้งแต่ ๑๐ ห้อง แต่ไม่ถึง ๕๐ ห้อง

(๒) ตลาดที่มีพื้นที่ใช้สอยรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคารตั้งแต่ ๕๐๐ ตารางเมตร แต่ไม่ถึง ๑,๐๐๐ ตารางเมตร

(๓) ภัตตาคารหรือร้านอาหารที่มีพื้นที่ให้บริการรวมกันทุกชั้นของอาคาร หรือกลุ่มของอาคาร ตั้งแต่ ๑๐๐ ตารางเมตร แต่ไม่ถึง ๒๕๐ ตารางเมตร

ข้อ ๘ อาคารประเภท จ. หมายความว่า ภัตตาคารหรือร้านอาหารที่มีพื้นที่ให้บริการรวมกันทุกชั้นไม่ถึง ๑๐๐ ตารางเมตร

ข้อ ๙ มาตรฐานควบคุมการระบายน้ำทิ้งจากอาคาร ประเภท ก. ต้องมีค่าดังต่อไปนี้

(๑) ความเป็นกรดและด่าง (PH) ต้องมีค่าระหว่าง ๕-๙

(๒) บีโอดี (BOD) ต้องมีค่าไม่เกิน ๒๐ มิลลิกรัมต่อลิตร

(๓) สารแขวนลอย (Suspended Solids) ต้องมีค่าไม่เกิน ๓๐ มิลลิกรัมต่อลิตร

(๔) ซัลไฟด์ (Sulfide) ต้องมีค่าไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร

(๕) สารที่ละลายได้ทั้งหมด (Total Dissolved Solids) ต้องมีค่าเพิ่มขึ้นจากปริมาณสารละลายในน้ำใช้ตามปกติไม่เกิน ๕๐๐ มิลลิกรัมต่อลิตร

(๖) ตะกอนหนัก (Settleable Solids) ต้องมีค่าไม่เกิน ๐.๕ มิลลิกรัมต่อลิตร

(๗) น้ำมันและไขมัน (Fat Oil and Grease) ต้องมีค่าไม่เกิน ๒๐ มิลลิกรัมต่อลิตร

(๘) ทีเคเอ็น (TKN) ต้องมีค่าไม่เกิน ๓๕ มิลลิกรัมต่อลิตร

ข้อ ๑๐ มาตรฐานควบคุมการระบายน้ำทิ้งจากอาคาร ประเภท ข. ต้องเป็นไปตามข้อ ๙ เว้นแต่

(๑) บีโอดี ต้องมีค่าไม่เกิน ๓๐ มิลลิกรัมต่อลิตร

(๒) สารแขวนลอย ต้องมีค่าไม่เกิน ๔๐ มิลลิกรัมต่อลิตร

ข้อ ๑๑ มาตรฐานควบคุมการระบายน้ำทิ้งจากอาคาร ประเภท ค. ต้องเป็นไปตามข้อ ๙ เว้นแต่

(๑) บีโอดี ต้องมีค่าไม่เกิน ๔๐ มิลลิกรัมต่อลิตร

(๒) สารแขวนลอย ต้องมีค่าไม่เกิน ๕๐ มิลลิกรัมต่อลิตร

(๓) ซัลไฟด์ ต้องมีค่าไม่เกิน ๓.๐ มิลลิกรัมต่อลิตร

(๔) ค่าทีเคเอ็น ต้องมีค่าไม่เกิน ๔๐ มิลลิกรัมต่อลิตร

ข้อ ๑๒ มาตรฐานควบคุมการระบายน้ำทิ้งจากอาคาร ประเภท ง. ต้องเป็นไปตามข้อ ๕ เว้นแต่

(๑) บีโอดี ต้องมีค่าไม่เกิน ๕๐ มิลลิกรัมต่อลิตร

(๒) สารแขวนลอย ต้องมีค่าไม่เกิน ๕๐ มิลลิกรัมต่อลิตร

(๓) ซัลไฟด์ ต้องมีค่าไม่เกิน ๔.๐ มิลลิกรัมต่อลิตร

(๔) ค่าทีเคเอ็น ต้องมีค่าไม่เกิน ๔๐ มิลลิกรัมต่อลิตร

ข้อ ๑๓ มาตรฐานควบคุมการระบายน้ำทิ้งจากอาคาร ประเภท จ. ต้องมีค่าดังต่อไปนี้

(๑) ความเป็นกรดและด่างต้องมีค่าระหว่าง ๕-๙

(๒) บีโอดี ต้องมีค่าไม่เกิน ๒๐๐ มิลลิกรัมต่อลิตร

(๓) สารแขวนลอย ต้องมีค่าไม่เกิน ๖๐ มิลลิกรัมต่อลิตร

(๔) น้ำมันและไขมัน ต้องมีค่าไม่เกิน ๑๐๐ มิลลิกรัมต่อลิตร

ข้อ ๑๔ การตรวจสอบมาตรฐานการระบายน้ำทิ้งจากอาคาร ให้ใช้วิธีการดังต่อไปนี้

(๑) การตรวจสอบค่าความเป็นกรดและด่างให้กระทำโดยใช้เครื่องวัดความเป็นกรดและด่างของน้ำ (PH Meter)

(๒) การตรวจสอบค่าบีโอดีให้กระทำโดยใช้วิธีการอะไซด์โมดิฟิเคชัน (Azide Modification) ที่อุณหภูมิ ๒๐ องศาเซลเซียส เป็นเวลา ๕ วัน ติดต่อกันหรือวิธีการอื่นที่คณะกรรมการควบคุมมลพิษให้ความเห็นชอบ

(๓) การตรวจสอบค่าสารแขวนลอยให้กระทำโดยใช้วิธีการกรองผ่านกระดาษกรองใยแก้ว (Glass Fibre Filter Disc)

(๔) การตรวจสอบค่าซัลไฟด์ให้กระทำโดยใช้วิธีการไตเตรท (Titrate)

(๕) การตรวจสอบค่าสารที่ละลายได้ทั้งหมดให้กระทำโดยใช้วิธีการระเหยแห้งระหว่างอุณหภูมิ ๑๐๓ องศาเซลเซียส ถึงอุณหภูมิ ๑๐๕ องศาเซลเซียส ในเวลา ๑ ชั่วโมง

(๖) การตรวจสอบค่าตะกอนหนักให้กระทำโดยใช้วิธีการกรวยอิมฮอฟฟ์ (Imhoff cone) ขนาดบรรจุ ๑,๐๐๐ ลูกบาศก์เซนติเมตร ในเวลา ๑ ชั่วโมง

(๓) การตรวจสอบค่าน้ำมันและไขมันให้กระทำโดยใช้วิธีการสกัดด้วยตัวทำละลาย แล้วแยกหาน้ำมันของน้ำมันและไขมัน

(๔) การตรวจสอบค่าที่เคเอ็นให้กระทำโดยใช้วิธีการเจลดาล์ (Kjeldahl)

ข้อ ๑๕ การคิดคำนวณพื้นที่ใช้สอย จำนวนอาคารและจำนวนห้องของอาคาร หรือกลุ่มของอาคาร ให้เป็นไปตามวิธีการที่คณะกรรมการควบคุมมลพิษกำหนด โดยประกาศในราชกิจจานุเบกษา

ข้อ ๑๖ วิธีการเก็บตัวอย่างน้ำ ความถี่ และระยะเวลาในการเก็บตัวอย่างน้ำ ให้เป็นไปตามที่คณะกรรมการควบคุมมลพิษกำหนด โดยประกาศในราชกิจจานุเบกษา

ข้อ ๑๗ ประกาศนี้ให้ใช้บังคับตั้งแต่วันถัดจากวันประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๗ พฤศจิกายน พ.ศ. ๒๕๔๘

ยงยุทธ ดิยะไพรัช

รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม

---

ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม  
เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำจากอาคาร  
บางประเภทและบางขนาด พ.ศ. 2567





ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม  
เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด  
พ.ศ. ๒๕๖๗

โดยที่เป็นการสมควรปรับปรุงการกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคาร ให้เหมาะสมตามความก้าวหน้าในทางวิทยาศาสตร์ เทคโนโลยี และความเปลี่ยนแปลงทางเศรษฐกิจ สังคม ของประเทศ และให้สอดคล้องกับสภาพการณ์ปัจจุบัน

อาศัยอำนาจตามความในมาตรา ๕๕ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม โดยคำแนะนำของคณะกรรมการควบคุมมลพิษ และโดยความเห็นชอบของคณะกรรมการสิ่งแวดล้อมแห่งชาติ จึงออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิกประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางขนาด ฉบับลงวันที่ ๗ พฤศจิกายน พ.ศ. ๒๕๔๘

ข้อ ๒ ในประกาศนี้

“อาคาร” หมายความว่า อาคารที่ก่อสร้างขึ้น ไม่ว่าจะมียุทธศาสตร์เป็นอาคารหลังเดียวหรือเป็นกลุ่มของอาคารที่ตั้งอยู่ภายในพื้นที่ซึ่งเป็นบริเวณเดียวกัน และไม่มียุทธศาสตร์ระบายน้ำทิ้งเดียวหรือมีหลายท่อที่เชื่อมติดต่อกันระหว่างอาคารหรือไม่ก็ตาม

“น้ำทิ้ง” หมายความว่า น้ำที่เกิดจากกิจกรรมของอาคารที่ระบายหรือจะระบายลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อม

ข้อ ๓ ให้แบ่งอาคาร ออกเป็น ๓ ชนิด คือ

ชนิดที่ ๑ อาคารอยู่อาศัย หมายถึง อาคารที่มีวัตถุประสงค์ให้เป็นที่พักอาศัยของบุคคล ทั้งการอยู่อาศัยอย่างถาวรหรือชั่วคราว ได้แก่

(๑) อาคารชุด ตามกฎหมายว่าด้วยอาคารชุด

(๒) หอพัก ตามกฎหมายว่าด้วยหอพัก

(๓) หอพัก ห้องเช่า ห้องแบ่งเช่า หรือกิจการอื่นในทำนองเดียวกันตามกฎหมายว่าด้วยการสาธารณสุข

(๔) สถานรับเลี้ยงเด็ก ตามกฎหมายว่าด้วยคุ้มครองเด็ก

(๕) สถานดูแลผู้สูงอายุหรือผู้มีภาวะพึ่งพิง ตามกฎหมายว่าด้วยสถานประกอบการเพื่อสุขภาพ

(๖) ที่พักอาศัยสำหรับลูกจ้างประเภทกิจกรรมก่อสร้าง ตามกฎหมายว่าด้วยการคุ้มครองแรงงาน

ชนิดที่ ๒ อาคารพาณิชย์ หมายถึง อาคารที่ใช้ประโยชน์ในการพาณิชย์กรรม หรือบริการธุรกิจ อย่างเดียวหรือหลายอย่าง ได้แก่

(๑) โรงแรม ตามกฎหมายว่าด้วยโรงแรม

(๒) ศูนย์การค้าหรือห้างสรรพสินค้า

(๓) ตลาด ตามกฎหมายว่าด้วยการสาธารณสุข

(๔) สถานบริการประเภทสถานอาบน้ำ นวดหรืออบตัว ตามกฎหมายว่าด้วยสถานบริการ

(๕) ภัตตาคารหรือร้านอาหาร

(๖) อาคารที่ทำการของทางราชการ รัฐวิสาหกิจ หรือองค์การระหว่างประเทศและของเอกชน

(๗) อาคารโรงเรียนเอกชน ตามกฎหมายว่าด้วยโรงเรียนเอกชน โรงเรียนของทางราชการ

อาคารสถาบันอุดมศึกษาของเอกชน ตามกฎหมายว่าด้วยสถาบันอุดมศึกษาของเอกชนและสถาบันอุดมศึกษาของทางราชการ

ชนิดที่ ๓ อาคารสถานพยาบาล หมายถึง สถานพยาบาล ตามกฎหมายว่าด้วยสถานพยาบาล ประเภทที่รับผู้ป่วยไว้ค้างคืน

ข้อ ๔ ให้แบ่งขนาดของอาคาร ออกเป็น ๔ ประเภท ดังต่อไปนี้

ประเภทอาคาร	หน่วย	อาคาร ประเภท ก.	อาคาร ประเภท ข.	อาคาร ประเภท ค.	อาคาร ประเภท ง.
<b>๑. อาคารอยู่อาศัย</b>					
อาคารชุด	ห้องชุด	ตั้งแต่ ๕๐๐ ขึ้นไป	ตั้งแต่ ๑๐๐ แต่ไม่ถึง ๕๐๐	ไม่ถึง ๑๐๐	-
หอพัก	ห้อง	-	ตั้งแต่ ๒๕๐ ขึ้นไป	ตั้งแต่ ๕๐ แต่ไม่ถึง ๒๕๐	ไม่ถึง ๕๐
หอพัก ห้องเช่า ห้องแบ่งเช่า หรือกิจการอื่นในทำนอง เดียวกัน ตามกฎหมาย ว่าด้วยการสาธารณสุข	ห้อง	-	ตั้งแต่ ๒๕๐ ขึ้นไป	ตั้งแต่ ๕๐ แต่ไม่ถึง ๒๕๐	ไม่ถึง ๕๐
สถานรับเลี้ยงเด็ก	-	-	-	-	ทุกขนาด
สถานดูแลผู้สูงอายุหรือ ผู้มีภาวะพึ่งพิง	-	-	-	-	ทุกขนาด
ที่พักอาศัยสำหรับลูกจ้าง ประเภทกิจกรรมก่อสร้าง	-	-	-	-	ทุกขนาด
<b>๒. อาคารพาณิชย์</b>					
โรงแรม	ห้อง	ตั้งแต่ ๒๐๐ ขึ้นไป	ตั้งแต่ ๖๐ แต่ไม่ถึง ๒๐๐	ไม่ถึง ๖๐	-
สถานบริการประเภท สถานอาบน้ำ นวดหรืออบตัว	ตาราง เมตร	-	ตั้งแต่ ๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๑,๐๐๐ แต่ไม่ถึง ๕,๐๐๐	ไม่ถึง ๑,๐๐๐
โรงเรียนเอกชน โรงเรียนของ ทางราชการ สถาบันอุดมศึกษา ของเอกชนหรือสถาบัน อุดมศึกษาของทางราชการ		ตั้งแต่ ๒๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๕,๐๐๐ แต่ไม่ถึง ๒๕,๐๐๐	-	ไม่ถึง ๕,๐๐๐

ประเภทอาคาร	หน่วย	อาคาร ประเภท ก.	อาคาร ประเภท ข.	อาคาร ประเภท ค.	อาคาร ประเภท ง.
อาคารที่ทำการของทาง ราชการ รัฐวิสาหกิจ หรือ องค์การระหว่างประเทศและ ของเอกชน		ตั้งแต่ ๕๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๑๐,๐๐๐ แต่ไม่ถึง ๕๕,๐๐๐	ตั้งแต่ ๕,๐๐๐ แต่ไม่ถึง ๑๐,๐๐๐	ไม่ถึง ๕,๐๐๐
ศูนย์การค้า หรือห้างสรรพสินค้า		ตั้งแต่ ๒๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๕,๐๐๐ แต่ไม่ถึง ๒๕,๐๐๐	-	ไม่ถึง ๕,๐๐๐
ตลาด		ตั้งแต่ ๒,๕๐๐ ขึ้นไป	ตั้งแต่ ๑,๕๐๐ แต่ไม่ถึง ๒,๕๐๐	ตั้งแต่ ๑,๐๐๐ แต่ไม่ถึง ๑,๕๐๐	ไม่ถึง ๑,๐๐๐
ภัตตาคารหรือร้านอาหาร		ตั้งแต่ ๒,๕๐๐ ขึ้นไป	ตั้งแต่ ๕๐๐ แต่ไม่ถึง ๒,๕๐๐	ตั้งแต่ ๒๕๐ แต่ไม่ถึง ๕๐๐	ไม่ถึง ๒๕๐
๓. อาคารสถานพยาบาล	เตียง	ตั้งแต่ ๓๐ ขึ้นไป	ตั้งแต่ ๑๐ แต่ไม่ถึง ๓๐	-	ไม่ถึง ๑๐

ข้อ ๕ กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารไว้ ดังต่อไปนี้

พารามิเตอร์	ค่ามาตรฐาน			
	อาคาร ประเภท ก.	อาคาร ประเภท ข.	อาคาร ประเภท ค.	อาคาร ประเภท ง.
๑. ความเป็นกรดและด่าง (pH)	๕.๕ - ๙.๐	๕.๕ - ๙.๐	๕.๕ - ๙.๐	๕.๕ - ๙.๐
๒. บีโอดี (Biochemical Oxygen Demand)	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๓๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๔๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร สำหรับอาคารอยู่อาศัย
				ไม่เกิน ๑๐๐ มิลลิกรัมต่อลิตร สำหรับอาคารพาณิชย์ และอาคารสถานพยาบาล
๓. ของแข็งแขวนลอยทั้งหมด (Total Suspended Solids)	ไม่เกิน ๓๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๔๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๖๐ มิลลิกรัมต่อลิตร
๔. ของแข็งละลายน้ำทั้งหมด (Total Dissolved Solids)	ไม่เกิน ๑,๐๐๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑,๐๐๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑,๓๐๐ มิลลิกรัมต่อลิตร	-

พารามิเตอร์	ค่ามาตรฐาน			
	อาคาร ประเภท ก.	อาคาร ประเภท ข.	อาคาร ประเภท ค.	อาคาร ประเภท ง.
	สำหรับอาคารอยู่ อาศัยและอาคาร พาณิชย์	สำหรับอาคารอยู่ อาศัยและอาคาร พาณิชย์	สำหรับอาคารอยู่ อาศัยและอาคาร พาณิชย์	
	เพิ่มขึ้นจาก ปริมาณในน้ำใช้ ปกติไม่เกิน ๑,๐๐๐ สำหรับอาคาร สถานพยาบาล	เพิ่มขึ้นจาก ปริมาณในน้ำใช้ ปกติไม่เกิน ๑,๐๐๐ สำหรับอาคาร สถานพยาบาล	-	-
๕. ซัลไฟด์ (Sulfide)	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	-
๖. ทีเคเอ็น (Total Kjeldahl Nitrogen)	ไม่เกิน ๓๕ มิลลิกรัมต่อลิตร	ไม่เกิน ๓๕ มิลลิกรัมต่อลิตร	ไม่เกิน ๔๐ มิลลิกรัมต่อลิตร	-
๗. น้ำมันและไขมัน (Oil and Grease)	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร สำหรับอาคารอยู่อาศัย ไม่เกิน ๕๐ มิลลิกรัม ต่อลิตร สำหรับอาคาร พาณิชย์และอาคาร สถานพยาบาล
๘. แบคทีเรียกลุ่มโคลิฟอร์มทั้งหมด (Total Coliform Bacteria) (สำหรับอาคารสถานพยาบาล)	ไม่เกิน ๕,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิกรัม)	ไม่เกิน ๕,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิกรัม)	-	-
๙. แบคทีเรียกลุ่มฟีคอลโคลิฟอร์ม (Fecal Coliform Bacteria) (สำหรับอาคารสถานพยาบาล)	ไม่เกิน ๑,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิกรัม)	ไม่เกิน ๑,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิกรัม)	-	-
๑๐. คลอรีนอิสระ (Free Chlorine) (สำหรับอาคารสถานพยาบาล)	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	-	-

ข้อ ๖ การตรวจสอบมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารให้ใช้วิธีการ ดังต่อไปนี้

๖.๑ ความเป็นกรดและด่าง ให้ใช้เครื่องวัดความเป็นกรดและด่างของน้ำ (pH Meter) ที่มีความละเอียดไม่ต่ำกว่า ๐.๑ หน่วย

๖.๒ บีโอดี ให้ใช้วิธีบ่มตัวอย่างที่อุณหภูมิ ๒๐ องศาเซลเซียส เป็นเวลา ๕ วันติดต่อกัน และหาค่าออกซิเจนละลายด้วยวิธีเอไซด์มอดิฟิเคชัน (Azide Modification) หรือวิธีเมมเบรนอิเล็กโทรด (Membrane Electrode) หรือวิธีออปติคัลโพรบ (Optical Probe)

๖.๓ ของแข็งแขวนลอยทั้งหมด ให้ใช้วิธีการกรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter) และอบแห้งที่อุณหภูมิ ตั้งแต่ ๑๐๓ ถึง ๑๐๕ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

๖.๔ ของแข็งละลายน้ำทั้งหมด ให้ใช้วิธีระเหยตัวอย่างที่กรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter) และอบแห้งที่อุณหภูมิ ๑๘๐ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

๖.๕ ซัลไฟด์ ให้ใช้วิธีไอโอดิเมทริก (Iodometric Method) หรือวิธีเมทิลีนบลู (Methylene Blue Method)

๖.๖ ทีเคเอ็น ให้ใช้วิธีเจลดาล์ (Kjeldahl)

๖.๗ น้ำมันและไขมัน ให้ใช้วิธีสกัดด้วยตัวทำละลายแล้วแยกหาน้ำมันของน้ำมันและไขมัน

๖.๘ แบคทีเรียกลุ่มโคลิฟอร์มทั้งหมดและแบคทีเรียกลุ่มฟิคอลโคลิฟอร์ม ให้ใช้วิธีมัลติเพิล ทิวบ์ เฟอว์เมนเทชัน เทคนิค (Multiple Tube Fermentation Technique)

๖.๙ คลอรีนอิสระ ให้ใช้วิธีไทเทรต (Titrimetric method) หรือวิธีเทียบสี (Colorimetric method) หรือวิธีไอโอดิเมทริก อิเล็กโทรด (Iodometric Electrode Technique)

ข้อ ๗ การคิดคำนวณขนาดของอาคารตามข้อ ๔ ให้เป็นไปตามวิธีการที่คณะกรรมการควบคุมมลพิษกำหนด โดยประกาศในราชกิจจานุเบกษา

ข้อ ๘ การตรวจสอบค่ามาตรฐานน้ำทิ้งตามข้อ ๖ ต้องเป็นไปตามคู่มือวิเคราะห์น้ำและน้ำเสียของสมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย หรือ Standard Methods for the Examination of Water and Wastewater ซึ่ง American Public Health Association, American Water Works Association และ Water Environment Federation ของประเทศสหรัฐอเมริกา กำหนดฉบับล่าสุด หรือตามที่คณะกรรมการควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ข้อ ๙ การเก็บตัวอย่างน้ำทิ้งเพื่อการตรวจสอบมาตรฐานควบคุมการระบายน้ำทิ้งตามข้อ ๕ ให้เป็น ดังต่อไปนี้

๙.๑ ให้เก็บในจุดระบายทิ้งลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อมหรือจุดอื่นที่สามารถใช้เป็นตัวแทนของน้ำทิ้งที่ระบายออกจากอาคาร ในกรณีมีการระบายทิ้งหลายจุดให้เก็บทุกจุด

๙.๒ วิธีการเก็บตัวอย่างน้ำทิ้ง ณ จุดเก็บตัวอย่างตามข้อ ๙.๑ ให้เก็บแบบจ้วง (Grab Sampling)

ข้อ ๑๐ ประกาศนี้ให้ใช้บังคับตั้งแต่วันถัดจากวันประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๒๘ มิถุนายน พ.ศ. ๒๕๖๗

พลตำรวจเอก พัชรวาท วงษ์สุวรรณ

รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม

## ภาคผนวก

3-2

หนังสืออนุญาตขึ้นทะเบียน  
ห้องปฏิบัติการวิเคราะห์เอกชน

ที่ อก ๐๓๑๐(๑)/ ๕๐๖



กรมโรงงานอุตสาหกรรม  
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท  
เขตราชเทวี กรุงเทพฯ ๑๐๔๐๐

๑๘ มกราคม ๒๕๖๗

เรื่อง ต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

เรียน กรรมการผู้จัดการ บริษัท สเปเชียล แล็บ เอ็นไว แอนด์ คอนซัลแตนท์ จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และชนิดสารมลพิษของห้องปฏิบัติการวิเคราะห์เอกชน  
ลงวันที่ ๑ พฤศจิกายน ๒๕๖๖


สิ่งที่ส่งมาด้วย เอกสารแนบท้ายหนังสือต่ออายุรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

บริษัท สเปเชียล แล็บ เอ็นไว แอนด์ คอนซัลแตนท์ จำกัด จำนวน ๒ แผ่น


ตามหนังสือที่อ้างถึง บริษัท สเปเชียล แล็บ เอ็นไว แอนด์ คอนซัลแตนท์ จำกัด ห้องปฏิบัติการ  
วิเคราะห์เอกชน เลขทะเบียน ████████ สถานที่ตั้งเลขที่ ๔๗/๔๑-๔๓ หมู่ที่ ๓ ตำบลท่าอิฐ อำเภอปากเกร็ด  
จังหวัดนนทบุรี ต่อกรมโรงงานอุตสาหกรรม นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้บริษัท สเปเชียล แล็บ เอ็นไว แอนด์ คอนซัลแตนท์ จำกัด  
ต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน โดยมีองค์ประกอบดังนี้

ก. ผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์



ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์



ค. ขอบข่ายสารมลพิษที่ได้รับขึ้นทะเบียนให้วิเคราะห์ในน้ำเสีย ตามสิ่งที่ส่งมาด้วย



หนังสือฉบับนี้จะหมดอายุในวันที่ ๒๕ มกราคม ๒๕๗๐ หากประสงค์จะต่ออายุหนังสือ  
รับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ให้ยื่นคำขอต่ออายุพร้อมเอกสารประกอบคำขอต่อกรมโรงงาน  
อุตสาหกรรมภายใน ๓๐ วัน ก่อนวันสิ้นอายุของหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ทั้งนี้  
สามารถยื่นคำขอผ่านระบบอิเล็กทรอนิกส์ได้ที่หน้าเว็บไซต์กรมโรงงานอุตสาหกรรม

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ



(นายศิริระ จันทรเลิศ)

นักวิทยาศาสตร์เชี่ยวชาญ รักษาการแทน  
ผู้อำนวยการกองวิจัยและเตือนภัยมลพิษโรงงาน  
ปฏิบัติราชการแทนอธิบดีกรมโรงงานอุตสาหกรรม

กองวิจัยและเตือนภัยมลพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๐๓-๕

โทรสาร ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๔๙

ไปรษณีย์อิเล็กทรอนิกส์ saraban@diw.mail.go.th



เอกสารแนบท้ายหนังสือต่ออายุรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

บริษัท สเปเชียล แล็บ เอ็นไว แอนด์ คอนซัลแตนท์ จำกัด

เลขทะเบียน ว-๑๓๓

ที่ อก ๐๓๑๐(๑)/ ๕ ๐ ๖

ลงวันที่ ๑๘ มกราคม ๒๕๖๗

ขอขยายสารมลพิษที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๒๖ รายการ

น้ำเสีย จำนวน 26 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Arsenic	Digestion, Hydride Generation/Atomic Absorption Spectrometric Method <sup>[2]</sup>
2	Barium	Digestion, Direct Nitrous Oxide-Acetylene Flame Method <sup>[2]</sup>
3	Biochemical Oxygen Demand	1) 5-Day BOD Test, Azide Modification Method <sup>[2]</sup> 2) 5-Day BOD Test, Membrane Electrode Method <sup>[2]</sup>
4	Cadmium	Digestion, Direct Air-Acetylene Flame Method <sup>[2]</sup>
5	Chemical Oxygen Demand	Closed Reflux, Colorimetric Method <sup>[2]</sup>
6	Color	ADMI Weighted-Ordinate Spectrophotometric Method <sup>[2]</sup>
7	Copper	Digestion, Direct Air-Acetylene Flame Method <sup>[2]</sup>
8	Cyanide	Distillation, Colorimetric Method <sup>[2]</sup>
9	Formaldehyde	Distillation, Colorimetric Method <sup>[1]</sup>
10--	Free Chlorine	DPD Colorimetric Method <sup>[2]</sup>
11	Hexavalent Chromium	Colorimetric Method <sup>[2]</sup>
12	Lead	Digestion, Direct Air-Acetylene Flame Method <sup>[2]</sup>
13	Manganese	Digestion, Direct Air-Acetylene Flame Method <sup>[2]</sup>
14	Mercury	Digestion, Cold-Vapor Atomic Absorption Spectrometric Method <sup>[2]</sup>
15	Nickel	Digestion, Direct Air-Acetylene Flame Method <sup>[2]</sup>
16	Oil & Grease	Liquid-Liquid, Partition-Gravimetric Method <sup>[2]</sup>
17	pH	Electrometric Method <sup>[2]</sup>
18	Phenols	1) Distillation, Chloroform Extraction Method <sup>[2]</sup> 2) Distillation, Direct Photometric Method <sup>[2]</sup>
19	Selenium	Digestion, Hydride Generation/Atomic Absorption Spectrometric Method <sup>[2]</sup>
20	Sulfide	Iodometric Method <sup>[2]</sup>
21	Temperature	Laboratory and Field Methods <sup>[2]</sup>
22	Total Dissolved Solids	Dried at 180 °C <sup>[2]</sup>

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
23	Total Kjeldahl Nitrogen	Macro-Kjeldahl Method <sup>[2]</sup>
24	Total Suspended Solids	Dried from 103-105 °C <sup>[2]</sup>
25	Trivalent Chromium	Digestion, Direct Air-Acetylene Flame Method; Colorimetric Method; Calculation <sup>[2]</sup>
26	Zinc	Digestion, Direct Air-Acetylene Flame Method <sup>[2]</sup>

#### เอกสารอ้างอิง

1. สมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย. คู่มือวิเคราะห์น้ำเสีย. พิมพ์ครั้งที่ 4. กรุงเทพฯ: เรือนแก้วการพิมพ์, 2547.
2. APHA, AWWA, WEF. Standard Methods for the Examination of Water and Wastewater. 24<sup>th</sup> ed. Washington, DC: APHA, 2023.

เอกสารสอบเทียบเครื่องมือตรวจวัด





TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)  
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES  
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250  
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert.No.: 23CH951

Page.: 1 of 2

## Certificate of Calibration

Equipment : pH Meter  
Manufacturer : Eutech  
Model : pH 700  
Serial No. : 2858459  
ID No. : LB-Eq-027  
Condition As-Received: Used Item  
Received Date : 04 August 2023  
Calibration Date : 07 August 2023  
Reference : 2308-0115WN-1  
Submitted by : Special Lab Envi And Consultant Co.,Ltd  
47/91-93, 96 Moo 3 Thambon Tha-it, Pakkret  
Nonthaburi 11120  
Ambient Temperature : (25  $\pm$  2.5) °C  
Relative Humidity : (50  $\pm$  15) %  
Calibration Procedure : In - house method :  
- CP-CH5 by direct measurement with standard  
voltage calibrator and direct measurement  
with certified reference material (CRM)

Calibrated by : Warakorn Lerngagtrakul

Approved by :

Issue Date :

16 August 2023

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written  
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0057105



Cert. No.: 23CH951

Page.: 2 of 2

**Condition of this calibration result**

1. Reference Standard Instrument : -

<u>Instrument</u>	<u>Serial No.</u>	<u>ID No.</u>	<u>Cert. No.</u>	<u>Due Date</u>
1) Document Process Calibrator	54030049	130RC116	22E2769	24 Aug 2023

This certification is traceable to the International System of Unit maintained through:-

- Technology Promotion Association (Thailand-Japan)

2. Certified Reference Materials : The measurement results are traceable to SI through CPA chem Ltd.,  
ANSI-ASQ National Accreditation Board, Accredited No. AR-1835

<u>Buffer Solution</u>	<u>Manufacturer</u>	<u>Lot No.</u>	<u>Exp. date</u>
pH 4.008	CPA chem	863832	28 Dec 2024
pH 6.986	CPA chem	863833	28 Dec 2023
pH 10.010	CPA chem	863835	28 Dec 2023

3. This certificate is valid only to the item calibrated on date and place of calibration.

**Calibration Results**

**Function : mV Measurement**

Performing standard curve by Fluke at pH (4,7,10)

<u>Unit Under Calibration</u>	<u>Nominal Value</u>	<u>Standard Voltage Input</u>	<u>Actual Reading</u>		<u>Uncertainty of Measurement</u> ( ±mV )	<u>Coverage factor</u> <i>k</i>
	<u>pH</u>	<u>mV</u>	<u>mV</u>	<u>pH</u>		
pH Meter S/N.: 2858459	4.00	177.48	177.5	4.01	0.058	2.00
	7.00	0.00	0.1	7.00	0.058	2.00
	10.00	-177.48	-177.4	10.01	0.058	2.00

**Function : pH Measurement**

Performing three buffers standard curve by using buffer nominal pH (4,7,10)

<u>Unit Under Calibration</u>	<u>Standard pH Buffer Solution</u>	<u>Actual pH Reading</u>	<u>Actual mV Reading ( mV )</u>	<u>Uncertainty of pH measurement (±)</u>	<u>Coverage factor</u> <i>k</i>
pH Electrode S/N.: 3101624	4.008	4.01	170.7	0.0085	2.05
	6.986	6.99	-2.0	0.011	2.00
	10.010	10.01	-178.2	0.0096	2.00

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

a 1174396



TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)  
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES  
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250  
TEL. 0-2717-3000-29 FAX. 0-2719-9484



Cert. No.: 23LM132

Page.: 1 of 2

## Certificate of Calibration

**Equipment :** pH Meter with Sensor  
**Manufacturer :** Eutech  
**Model :** pH 700  
**Serial No. :** 2858459  
**ID No. :** LB-Eq-027  
**Submitted by :** Special Lab Envi And Consultant Co.,Ltd.  
47/91-93 Moo 3 Thambon Tha-it,  
Pakkret,  
Nonthaburi 11120  
**Location :** TPA On Site Calibration Laboratory  
**Received Order :** 04 August 2023  
**Calibrated Date :** 09 August 2023  
**Ambient Temperature :** (  $26 \pm 10$  ) °C  
**Relative Humidity :** (  $50 \pm 30$  ) %  
**AC Line Voltage :** (  $220 \pm 22$  ) V

**Calibrated by :** Preecha Hlahib

**Approved by :**



Approved Signatory

**Issue Date :** 17 August 2023

**The Uncertainties are for a confidence probability of approximately 95%**

This certificate may not be reproduced other than in full, except with the prior written  
Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

A 0057254



**Equipment :** pH Meter with Sensor  
**Condition As-Received :** New Item  
**Reference :** 2308-0115WN-2

**Cert. No.:** 23LM132  
**Page.:** 2 of 2

**Procedure Used :-**

Calibration were conducted using in-house calibration procedure CP-OT01 according to comparison with Industrial Platinum Resistance Thermometer ( IPRT ) into Temperature Bath.

The temperature scale used was based on ITS-90.

**Condition of this result of calibration**

1. Reference standard instrument:-

<u>Instrument</u>	<u>Serial No.</u>	<u>Cert. No.</u>	<u>Traceable</u>	<u>Due Date</u>
1) Digital Thermometer	2188080	2211285	TPA	21 Oct 2023

2. This certificate is valid only to the item calibrated on date and place of calibration.

3. This certification is traceable to the International System of Unit.

**Remark :** TPA : Technology Promotion Association ( Thailand - Japan )

**Result of Calibration :-** ( \* ) Without Adjustment

**Function :** Temperature measurement.

This instrument was connected with temperature sensor, S/N.: PH5TEMB01P

<u>Calibration Point</u> ( °C )	<u>Immersion Depth</u> ( mm )	<u>Standard Temperature</u> ( °C )	<u>UUC* Reading</u> ( °C )	<u>Error</u> ( °C )	<u>Uncertainty</u> ( ± °C )	<u>Coverage Factor</u> <i>k</i>
25.0	100	25.002	25.0	-0.002	0.16	2.00

**UUC\* :** Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

a 1175376





**TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)**  
**CORPORATE SERVICES 3 : EQUIPMENT CALIBRATION AND TESTING SERVICES**


534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250

TEL. 0-2717-3000 FAX. 0-2719-9484

**Cert.No.:** 23TW41

**Page.:** 1 of 2

## **Certificate of Testing**

<b>Equipment :</b>	DO Meter
<b>Manufacturer :</b>	Hanna
<b>Model :</b>	HI98193
<b>Serial No. :</b>	03030056991
<b>ID No. :</b>	LB-Eq-014
<b>Received Date :</b>	16 February 2023
<b>Test Date :</b>	17 February 2023
<b>Reference :</b>	2302-0616WN-1
<b>Submitted by :</b>	Special Lab Envi And Consultant Co.,Ltd 47/91 Moo 3 Thambon Tha-it, Pakkret, Nonthaburi 11120
<b>Laboratory Condition :</b>	Temperature ( $25 \pm 5$ ) °C Humidity ( $50 \pm 20$ ) %
<b>Test Procedure :</b>	In - house method : CP-CH9 by Comparison Technique with Azide Modification Method
<b>Tested by :</b>	Walalak Sirithean
<b>Approved by :</b>	 Approved Signatory
<b>Issue Date :</b>	20 February 2023

**B 0307483**



Cert.No.: 23TW41

Page.: 2 of 2

**Condition of this result of calibration**

1. Reference Standard Instruments :

This certification is traceable to the International System of Unit through the reference standards laboratory of Industrial Calibration Center, Technology Promotion Association (Thailand-Japan).

<u>Instruments</u>	<u>Serial No.</u>	<u>ID No.</u>	<u>Certificate No.</u>	<u>Due Date</u>
1) Burette	-	130BU10	21CG1389	25 Mar 2023
2) Balance	1126143764	140RC004	22MM50	20 Sep 2023

2. Standard Material :-

<u>Material</u>	<u>Manufacturer</u>	<u>Lot.No.</u>	<u>Assay</u>
Sodium Thiosulfate pentahydrate	Merck	AM1763316	100.2%

**Result :**      **Dissolved Oxygen Meter Adjustment With Air 100 %**

**Dissolved Oxygen Probe No.:**      KC1N20CDJ

<b>Titration Method (Azide Modification Method)</b> (mg/L)	<b>DO Meter Reading</b> (mg/L)	<b>Standard Deviation</b> (mg/L)
8.12	8.13	0.0045

This report was certified only for the instrument we tested. It is allowable to use for study the system efficiency, The environmental impact control and present to organization it may concerned. Intend to use for advertising and referral purpose is prohibited. This report may not be reproduced other in full, without written approval of the laboratory

-o0o-



**a 1148751**

## 1. Block Digestion

ผู้ผลิต HANON รุ่น SH 220F Serial No. SH 322290127 รหัสเครื่อง LB-EQ-011

วันที่ทวนสอบ 2 ธ.ค. 2562 ทวนสอบครั้งต่อไป 1 กรกฎาคม 2563

## 2. Digital Thermometer with TC Probe

ผู้ผลิต Thermo Scientific รุ่น Temp 10K Serial No. 4208853 รหัสเครื่อง LB-EQ-013

ความละเอียด 0.1 °C วันที่สอบเทียบ 8 เมษายน 2562 สอบเทียบครั้งต่อไป 7 เมษายน 2563

## 3. ผลการทวนสอบ (ช่วงเวลา 09.00 น. - 18.30 น.)

อุณหภูมิห้อง 25 - 27 °C ความชื้นสัมพัทธ์ 50 - 56 %

ว/ด/ป	Position No.	Set point (°C)	อุณหภูมิที่อ่านได้จากเครื่อง (°C)	อุณหภูมิที่อ่านได้เทอร์โมมิเตอร์ (°C)			Error	เกณฑ์การยอมรับ	สรุปผลการทวนสอบ		ผู้ทวนสอบ
				ครั้งที่ 1 (A)	ครั้งที่ 2 (B)	ค่าเฉลี่ยของอุณหภูมิ			ผ่าน	ไม่ผ่าน	
21/1/62	1	250	252	252.4	252.1	252.2	+2.2	±5	/		
	2			250.3	250.6	250.4	+0.4	±5	/		
	3			249.9	250.3	250.1	+0.1	±5	/		
	4			251.7	251.2	251.4	+1.4	±5	/		
	5			250.6	250.7	250.7	+0.7	±5	/		
	6			252.3	252.0	252.2	+2.2	±5	/		
	7			250.1	250.6	250.4	+0.4	±5	/		
	8			251.1	251.3	251.2	+1.2	±5	/		
	9			251.3	250.9	251.1	+1.1	±5	/		
	10			250.9	251.1	251.0	+1.0	±5	/		
	11			250.4	250.7	250.6	+0.6	±5	/		
	12			249.8	250.1	250.0	0.0	±5	/		
	13			249.9	250.1	250.0	0.0	±5	/		
	14			250.1	250.4	250.2	+0.2	±5	/		
	15			252.1	252.0	252.1	+2.1	±5	/		
	16			251.3	251.7	251.5	+1.5	±5	/		
	17			250.7	250.6	250.7	+0.7	±5	/		
	18			250.8	250.9	250.9	+0.9	±5	/		
	19			250.9	250.3	250.6	+0.6	±5	/		
	20			250.1	250.3	250.2	+0.2	±5	/		

## Certificate of Calibration

Certificate No. : 66-400192-1

Page : 1 of 2

Submitted by : Special Lab Envi and Consultant Co., Ltd.  
47/91 Moo 3, Tambol Tha-it, Pakkret, Nonthaburi 11120

Equipment : Digital Thermometer with Thermocouple probe Type K  
Temperature Indicator  
Manufacturer : Thermo Scientific Model : TEMP 10K  
Range : -250 °C to 1372 °C Resolution : 0.1 °C  
Serial No. : 4008958 ID No. : LB-Eq-013

Environment : Ambient Temperature :  $(23 \pm 2)$  °C  
Relative Humidity :  $(50 \pm 15)$  %  
Line Voltage :  $(220 \pm 22)$  VAC

Date of Received : 06 April 2023

Date of Calibration : 08 April to 10 April 2023

Date of Issue : 10 April 2023

Calibrated by : Chortip Samchusri

Calibration Method : This instrument was calibrated by In-house method comparison technique 'CAL-M4003  
by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No.	Cert. No.	Due Date	Traceability
400001	TT-0016-22	07 Feb 2024	National Institute of Metrology Thailand (NIMT)
400016	TT-0059-21	02 Jun 2023	National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No.	Cert. No.	Due Date	Traceability
400003	21E1850	14 Jun 2023	National Institute of Metrology Thailand (NIMT)
400004	21E1850	14 Jun 2023	National Institute of Metrology Thailand (NIMT)

Approved by

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



## Certificate of Calibration

**Certificate No. : 66-400192-1**

**Page : 2 of 2**

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

**Function :** Temperature measurement with Thermocouple probe Type K

Model : Type K                      Sheath Material : Teflon  
Diameter : 2 mm.                      Length : 1500 mm.  
Serial No. : N/A                      ID No. : SL-39

Immersion Depth ( mm. )	Standard Reading ( °C )	UUC Reading ( °C )	Correction ( °C )	Uncertainty ( ± °C )
130	3.0036	3.5	-0.5	0.18
130	20.0024	20.4	-0.4	0.18
130	104.0011	104.3	-0.3	0.45
130	150.0027	150.2	-0.2	0.58
130	180.0040	180.0	0.0	0.65

Model : AD-1218-230                      Sheath Material : Stainless  
Diameter : 3.5 mm.                      Length : 230 mm.  
Serial No. : N/A                      ID No. : SL-40

Immersion Depth ( mm. )	Standard Reading ( °C )	UUC Reading ( °C )	Correction ( °C )	Uncertainty ( ± °C )
124	379.9914	379.3	0.7	1.5
124	400.0011	399.2	0.8	1.6

### Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor providing a level of confidence of approximately 95%

- ๐0๐ -





## CALIBRATION CERTIFICATE

Date of Issue Jun 23, 2023

Cert No. 23/2342

Site Calibration

Order No. 23060302

Customer SPECIAL LAB ENVI AND CONSULTANT CO., LTD.  
47/91 Moo 3 Tha-It, Pak Kret, Nonthaburi, 11120.

Place of Calibration 1350, 1352 Sutthisarnwinitchai Rd, Dindaeng, Bangkok 10400. (Calibration Room)

Description Oven

Model UF30

Serial No. B123.0544

ID.No. -

Date of Receipt Jun 20, 2023

Date of Calibration Jun 20, 2023

### Environment

Temperature (Min) 23.1 °C (Max) 25.3 °C

Relative Humidity (Min) 46.3 %RH (Max) 78.9 %RH

### Calibration Method


WI-17 : The reference thermometer was placed into the chamber and measurement was performed based on AS-2853.

The temperature scale in use at this laboratory is the International Temperature Scale of 1990.

### Standard

1) Data Acquisition with Sensor Model 34972A S/N. MY49007789, Certificate No. QR23-0024, Calibrated by Quality Reborn Co., Ltd., ONAC Calibration No. 0292. Due Date Jan 10, 2024.

This certificate is traceable to SI unit.





## CALIBRATION CERTIFICATE


Date of Issue Jun 23, 2023

Cert No. 23/2342

Site Calibration

Order No. 23060302


Results (without adjustment)

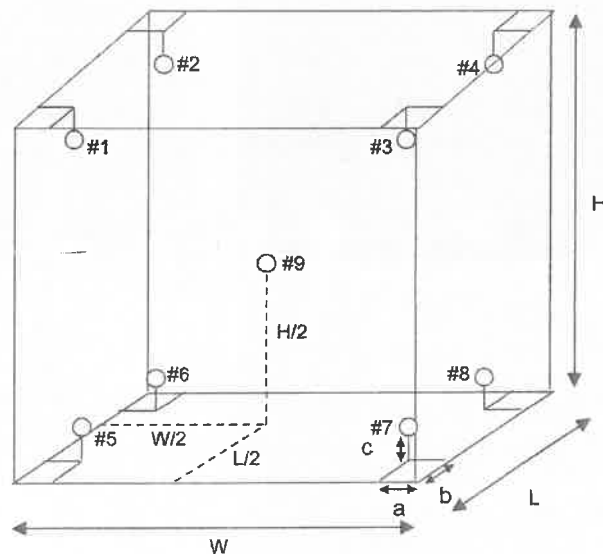

Position of reference thermometers were placed

### Note.

- 1). Dimension (W x L x H) is 40 x 25 x 32 cm.
- 2). Stability - greatest one half of difference between max peak and min peak of each reference probe measured temperature obtained during the calibration interval.
- 3). Uniformity - the maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady state conditions. The reference sensor should preferably be located at the geometric center of the chamber.





# Thermology Co., Ltd.

96/177-96/178 Moo 6, T. La-harn, A. Bangbuathong, Nonthaburi 11110  
Tel : 0 2191 6479 Fax : 0 2191 6480 website : [www.thermology.co](http://www.thermology.co)



## CALIBRATION CERTIFICATE

Date of Issue Jun 23, 2023

Cert No. 23/2342

Site Calibration

Order No. 23060302

Results (without adjustment)

UUC Setting ( °C )	UUC Reading ( °C )	Reference Thermometer (°C)		Stability ± ( °C )	Uniformity ( °C )	Uncertainty ± ( °C )
104.0	104.0	Position 1	104.544	0.058	0.704	0.30
		Position 2	103.789			
		Position 3	103.396			
		Position 4	103.886			
		Position 5	104.031			
		Position 6	103.886			
		Position 7	103.342			
		Position 8	103.939			
		Position 9	103.867			

UUC Setting ( °C )	UUC Reading ( °C )	Reference Thermometer (°C)		Stability ± ( °C )	Uniformity ( °C )	Uncertainty ± ( °C )
150.0	150.0	Position 1	151.388	0.052	1.248	0.41
		Position 2	150.037			
		Position 3	149.313			
		Position 4	149.849			
		Position 5	150.519			
		Position 6	150.188			
		Position 7	149.370			
		Position 8	150.383			
		Position 9	150.201			







# Thermology Co., Ltd.

96/177-96/178 Moo 6, T. La-harn, A. Bangbuathong, Nonthaburi 11110  
Tel : 0 2191 6479 Fax : 0 2191 6480 website : [www.thermology.co](http://www.thermology.co)



## CALIBRATION CERTIFICATE

Date of Issue Jun 23, 2023

Cert No. 23/2342

Site Calibration

Order No. 23060302

### Results (without adjustment)

UUC Setting ( °C )	UUC Reading ( °C )	Reference Thermometer ( °C )		Stability $\pm$ ( °C )	Uniformity ( °C )	Uncertainty $\pm$ ( °C )
180.0	180.0	Position 1	181.507	0.059	1.693	0.49
		Position 2	179.668			
		Position 3	178.772			
		Position 4	179.371			
		Position 5	180.334			
		Position 6	179.830			
		Position 7	178.855			
		Position 8	180.323			
		Position 9	179.876			

The stability and uniformity was taken into account in the measurement uncertainty stated.

The above results are valid exclusively for calibration samples as mentioned in the report.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k=2$ , providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with ONAC requirements.

APPROVED SIGNATORY :



## Certificate of Calibration

Certificate No. : 66-400220-2

Page : 1 of 2

Submitted by : Special Lab Envi and Consultant Co., Ltd.  
47/91 Moo 3 Thambol Tha-it, Pakkret, Nonthaburi 11120

Equipment : Air Chamber (Incubator)  
Manufacturer : Lovibond Model : FKU 1800  
Range : N/A °C Resolution : 0.1 °C  
Serial No. : 0914643-01 ID No. : LB-Eq-004

Environment : On site calibration was carried out at the Laboratory, Special Lab Envi and Consultant Co., Ltd.  
Ambient Temperature : (29.0 to 29.6) °C  
Relative Humidity : (40 to 45) %  
Line Voltage : (226.0 to 226.5) V

Date of Received : 24 April 2023

Date of Calibration : 24 April 2023

Date of Issue : 26 April 2023

Calibrated by : Permpon Chanpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units  
Standard Digital Thermometer with RTD Probe

ID No.	Cert. No.	Due Date	Traceability
400046 & 400042	66-400066-1	02 Aug 2023	National Institute of Metrology Thailand (NIMT)

Approved by :

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



## Certificate of Calibration

**Certificate No. : 66-400220-2**


**Page : 2 of 2**

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

**Function :** Temperature measurement

This instrument was setting air ventilation at position 0 (close)

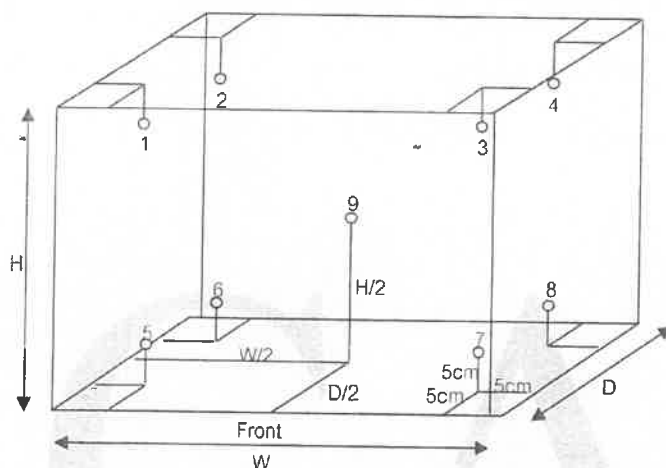

Inside of Chamber

W = 0.55 m

D = 0.73 m

H = 0.50 m

Capacity = 0.20 m<sup>3</sup>

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
20.0	19.9	19.9	20.35	20.35	20.23	20.25	20.12	20.12	20.14	20.28	20.08	0.42

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
20.0	19.9	19.9	0.37	0.16	0.6

**Remark** The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

- o0o -



## Certificate of Calibration

Certificate No. : 66-200145-1

Page : 1 of 2

Submitted by : Special Lab Envi and Consultant Co., Ltd.  
47/91 Moo 3, Tambol Tha-Irt, Pakkret, Nonthaburi 11120

Equipment : Electronic Balance  
Manufacturer : AND Model : GR-200  
Serial No. : 14245322 ID No. : LB-Eg-016  
Capacity : 210 g Resolution : 0.0001 g

Environment : On site calibration was carried out at the Laboratory, Special Lab Envi and Consultant Co., Ltd.  
Ambient Temperature : (29.4 to 29.7) °C  
Relative Humidity : (50.9 to 51.5) %  
Air Pressure : 1011.0 mbar

Date of Received : 24 April 2023

Date of Calibration : 24 April 2023

Date of Issue : 26 April 2023

Calibrated by : Akaradath Thippichai

Calibration Method : In-house method CAL-M2001 based on UKAS Publication ref : LAB 14  
Edition 7 - November 2022

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.	Cert. No.	Due Date	Traceability
E261-E2624	C02222345	10 Nov 2023	National Institute of Metrology (Thailand), (NIMT)

Approved by :



Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



## Certificate of Calibration

**Certificate No. : 66-200145-1**

**Page : 2 of 2**

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

Departure of indication from nominal value

Nominal Value (g)	Correction (g)	Uncertainty $\pm$ (g)
0.001	0.0000	0.00010
0.01	0.0000	0.00011
0.1	0.0000	0.00011
0.5	0.0000	0.00010
2	0.0000	0.00011
5	-0.0001	0.00011
10	0.0000	0.00012
50	-0.0001	0.00014
100	-0.0001	0.00020
200	0.0000	0.00038


This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2.06$ , providing a level of confidence of approximately 95%

Eccentric error

Load test : 50 g

A	B	C	D	E	
-0.0003	0.0001	0.0004	0.0000	0.0000	g




Repeatability

Load test : 200 g

Stddev. : 0.00005 g

- o0o -





**BECTHAI BANGKOK EQUIPMENT & CHEMICAL CO., LTD.**  
**CALIBRATION LABORATORY**

300 Phaholyothin Road, Phayathai, Bangkok 10400, Thailand Tel: +66 2615-2929 Fax: +66 2615-2350-1  
E-mail: bkk@becthai.com Website: www.becthai.com



Certificate No. : CAL-23-297

Page : 1 of 3

**CERTIFICATE OF CALIBRATION**

Equipment	:	Spectrophotometer
Manufacturer	:	Thermo Scientific
Model	:	Genesys 20
Serial No.	:	3SGT041007
ID No.	:	LB-Eq-029
Customer	:	Special Lab Envi And Consultant Co., Ltd. 47/91-93 Moo 3, Tambol Tait , Amphur Pakrad, Nonthaburi, 11120.
Location	:	Becthai Laboratory (Bangkok)
Date of Receipt	:	3 May 2023
Date of Calibration	:	3 May 2023
Date of Issue	:	3 May 2023
Ambient Temperature	:	(25±10) °C
Relative Humidity	:	(60±20) %
Condition As-Received	:	Used Item

Calibrated by



Calibration Engineer

Approved by



Calibration Manager

The reported expanded uncertainty of measurement was based on a combined standard uncertainty multiplied by a coverage factor  $k=2$ , providing a level of confidence of approximately 95%.

This certificate may not be reproduced other than in full, except with the prior written approval of the head of Calibration Laboratory.

Indicated values are valid for the state of the Spectrophotometer at the time of calibration only.



**BECTHAI BANGKOK EQUIPMENT & CHEMICAL CO., LTD.**  
**CALIBRATION LABORATORY**

300 Phaholyothin Road, Phayathai, Bangkok 10400, Thailand Tel: +66 2615-2929 Fax: +66 2615-2350-1  
E-mail: bkk@becthai.com Website: www.becthai.com



Certificate No. : CAL-23-297

Page : 2 of 3

## CALIBRATION REPORT

### Conditions of this result of calibration

#### 1. Reference Standard Material :

<u>Material</u>	<u>Model</u>	<u>Serial No.</u>	<u>Cert.No.</u>	<u>Due date</u>
Holmium Glass Filter	RM-HG	12705	98236	12 Feb 24
Didymium Glass Filter	RM-DG	13498	98233	12 Feb 24
Neutral Density Filter	RM-1N2N3N	8323	98259	13 Feb 24

#### 2. Traceability : This certification is traceable to the International System of Unit maintained at;

The Starna Scientific Ltd. Accredited Calibration Laboratory No. 0659.

#### 3. Method of calibration :

The calibration procedure was carried out according to ASTM E275-08 (2022) and ASTM E925-09 (2014).

#### 4. Result of calibration :

( ☒ ) without adjustment

( ☐ ) after adjustment

#### 5. Equipment Specifications:

Spectral Bandwidth :	5	nm
Data Interval :	1	nm
Scan Speed :	N/A	nm/min



**BECTHAI BANGKOK EQUIPMENT & CHEMICAL CO., LTD.**  
**CALIBRATION LABORATORY**

300 Phaholyothin Road, Phayathai, Bangkok 10400, Thailand Tel: +66 2615-2929 Fax: +66 2615-2350-1  
E-mail: bkk@becthai.com Website: www.becthai.com



Certificate No. : CAL-23-297

Page : 3 of 3

## CALIBRATION REPORT

### Wavelength Calibration

Certified Values of Reference Material (nm)	Nominal Value (nm)	UUC*Reading (nm)	Error (nm)	Uncertainty of Measurement ( $\pm$ nm)
418.40	418	418	-0.40	0.59
537.00	537	537	0.00	0.59
638.00	638	638	0.00	0.59

### Photometric Calibration for Visible

Wavelength (nm)	Certified Values of Reference Material (A)	UUC* Reading (A)	Error (A)	Uncertainty of Measurement ( $\pm$ A)
420.0	Zero	0.000	0.0000	0.0028
	0.5716	0.572	0.0004	0.0044
	0.7358	0.733	-0.0028	0.0040
	1.0713	1.073	0.0017	0.0039
440.0	Zero	0.000	0.0000	0.0028
	0.561	0.560	-0.0010	0.0042
	0.714	0.714	-0.0040	0.0037
	1.0459	1.044	-0.0019	0.0037
465.0	Zero	0.000	0.0000	0.0028
	0.5111	0.513	0.0019	0.0044
	0.6618	0.661	-0.0008	0.0035
	0.9635	0.966	0.0025	0.0034
546.1 (546.0)	Zero	0.000	0.0000	0.0028
	0.5222	0.523	0.0008	0.0036
	0.6687	0.668	-0.0007	0.0031
	0.9768	0.978	0.0012	0.0043
590.0	Zero	0.000	0.0000	0.0028
	0.5541	0.554	-0.0001	0.0035
	0.6975	0.696	-0.0015	0.0031
	1.0206	1.021	0.0004	0.0045
635.0	Zero	0.000	0.0000	0.0028
	0.5398	0.543	0.0032	0.0035
	0.6658	0.667	0.0012	0.0033
	0.9741	0.977	0.0029	0.0045

Remark : Each individual filter is measured against the empty filter holder (blank) used to zero the Spectrophotometer.

Note:

UUC\* : Unit Under Calibration

- End of Report -

ISSUE: 5 REV:4

FM-CAL-33/2

15/05/61



# CAL

**Calibratech Co.,Ltd.**

7/106-7 Moo 2, Sukhprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.com



NSC-TISI-TIS17025  
CALIBRATION 0030

## Certificate of Calibration

**Certificate No. :** 66-400240-1

**Page : 1 of 2**

**Submitted by :** Special Lab Envi and Consultant Co., Ltd.  
47/91-93 Moo 3, Tambol Tha-I, Pakkret, Nonthaburi 11120

**Equipment :** Air Chamber (Refrigerator)

Manufacturer : Frozen

Model : CC-2288F

Range : N/A °C

Resolution : 1 °C

Serial No. : CC-2288F-1163-003

ID No. : LB-Eq-046

**Environment :** On site calibration was carried out at the Laboratory, Special Lab Envi and Consultant Co., Ltd.

Ambient Temperature : (31.0 to 32.0) °C

Relative Humidity : (40 to 45) %

Line Voltage : (226.0 to 226.5) V

**Date of Received :** 02 May 2023

**Date of Calibration :** 02 May 2023

**Date of Issue :** 02 May 2023

**Calibrated by :** Permpon Chanpu

**Calibration Method :** CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

**Reference Standard Instruments :** This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No.

Cert. No.

Due Date

Traceability

400046 & 400047

66-400066-2

03 Aug 2023

National Institute of Metrology Thailand (NIMT)

Approved by :

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



CAL-F0031-03

## Certificate of Calibration

**Certificate No. : 66-400240-1**


**Page : 2 of 2**

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

**Function :** Temperature measurement

This instrument was setting air ventilation at position 0 (close)

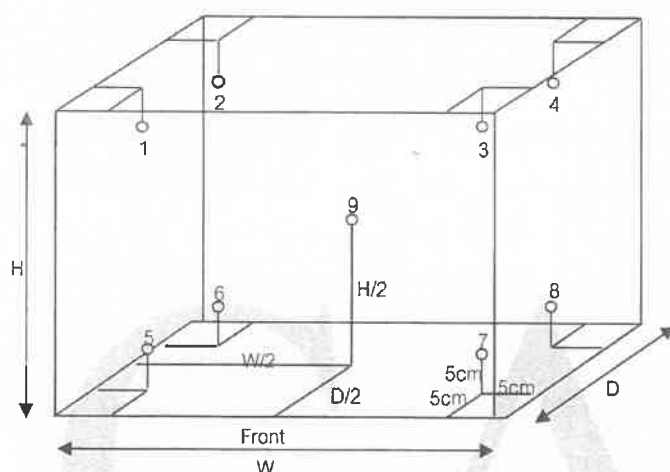

Inside of Chamber

W = 1.02 m

D = 0.47 m

H = 1.48 m

Capacity = 0.71 m<sup>3</sup>

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
3	3	3	3.21	2.53	2.23	2.38	3.74	4.12	2.20	2.05	3.01	0.83

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
3	3	3	1.17	0.25	2.5

**Remark** The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

- o0o -



## Certificate of Calibration

**Certificate No. :** 65-410141-1

**Page : 1 of 2**

**Submitted by :** Special Lab Envi and Consultant Co., Ltd.  
47/91 Moo 3, Tambol Tha-It, Pakkret, Nonthaburi 11120

**Equipment :** Digital Thermo-Hygrometer

Manufacturer :	Testo	Model :	608-H1
Range Temperature :	0 °C to 50 °C	Resolution :	0.1 °C
Range Humidity :	10 %R.H. to 95 %R.H.	Resolution :	0.1 %R.H.
Serial No. :	2083236817	ID No. :	LB-Eq-042

**Environment :** Ambient Temperature :  $(23 \pm 2) ^\circ\text{C}$   
Relative Humidity :  $(50 \pm 15) \%$

**Date of Received :** 07 December 2022

**Date of Calibration :** 09 December 2022

**Date of Issue :** 09 December 2022

**Calibrated by :** Chortip Samchusri

**Calibration Method :** This instrument was calibrated by In-house method comparison technique CAL-M4013 by compared with standard probe sensor humidity/temperature into humidity/temperature chamber.

**Reference Standard Instruments :** This certification is traceable to the International System of Units

Digital Indicator with Standard Probe Temp&Hum

<u>ID No.</u>	<u>Cert. No.</u>	<u>Due Date</u>	<u>Traceability</u>
400034 & 400035	SG-H-00713/65	07 Jan 2023	Success Gateway Co., Ltd., Accredited by TISI Calibration No.0268

Approved by



Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



# CAL

**Calibratech Co.,Ltd.**

7/106-7 Moo 2, Sukhaprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel (02) 964-6211 Fax (02) 964-5155. e-mail : calibratech\_cal@yahoo.com, calibratech\_cal@hotmail.com

## Certificate of Calibration

**Certificate No. :** 65-410141-1

**Page : 2 of 2**

**UUC Condition As-Received :** Good

**Result of Calibration :** Without Adjustment

**Function :** Temperature measurement

Reference Humidity @ 50 %R.H.

Standard Temperature ( °C )	UUC Reading ( °C )	Correction ( °C )	Uncertainty ( ± °C )
24.99	25.0	0.0	0.46

**Result of Calibration :** Without Adjustment

**Function :** Humidity measurement

Reference Temperature @ 25 °C

Standard Humidity ( %R.H. )	UUC Reading ( %R.H. )	Correction ( %R.H. )	Uncertainty ( ± %R.H. )
49.98	56.0	-6.0	2.2


### Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

- 23(1) -



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech\_cal@yahoo.com, calibratech\_cal@hotmail.com



NSC-TISI-TIS17025  
CALIBRATION 0030

## Certificate of Calibration

**Certificate No. :** 66-410081-1

**Page : 1 of 2**

**Submitted by :** Special Lab Envi and Consultant Co., Ltd.  
47/91-93,96 Moo 3.Tambol Tha-It, Pakkret, Nonthaburi 11120

**Equipment :** Digital Thermo-Hygrometer

Manufacturer :	Testo	Model :	608-H1
Range Temperature :	0 °C to 50 °C	Resolution :	0.1 °C
Range Humidity :	10 %R.H. to 95 %R.H.	Resolution :	0.1 %R.H.
Serial No. :	2083236817	ID No. :	LB-Eg-042

**Environment :** Ambient Temperature :  $(23 \pm 2) ^\circ\text{C}$   
Relative Humidity :  $(50 \pm 15) \%$

**Date of Received :** 03 August 2023

**Date of Calibration :** 09 August 2023

**Date of Issue :** 09 August 2023

**Calibrated by :** Chortip Samchusri

**Calibration Method :** This instrument was calibrated by In-house method comparison technique CAL-M4013 by compared with standard probe sensor humidity/temperature into humidity/temperature chamber.

**Reference Standard Instruments :** This certification is traceable to the International System of Units  
Digital Indicator with Standard Probe Temp&Hum

ID No.	Cert. No.	Due Date	Traceability
400034 & 400035	SG-H-00502/66	06 Jan 2024	Success Gateway Co., Ltd., Accredited by TISI Calibration No.0268

Approved by :

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



## Certificate of Calibration

**Certificate No. :** 66-410081-1

**Page : 2 of 2**

**UUC Condition As-Received :** Good

**Result of Calibration :** Without Adjustment

**Function :** Temperature measurement

Reference Humidity @ 50 %R.H.

Standard Temperature ( °C )	UUC Reading ( °C )	Correction ( °C )	Uncertainty ( ± °C )
25.01	25.0	0.0	0.46

**Result of Calibration :** Without Adjustment

**Function :** Humidity measurement

Reference Temperature @ 25 °C

Standard Humidity ( %R.H. )	UUC Reading ( %R.H. )	Correction ( %R.H. )	Uncertainty ( ± %R.H )
49.97	57.0	-7.0	2.2


### Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

- o()o -



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhaprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech\_cal@yahoo.com, calibratech\_cal@hotmail.com



NSC-TISI-TIS 17025  
CALIBRATION 0030

## Certificate of Calibration

**Certificate No. :** 66-300220-6

**Page : 1 of 2**

**Submitted by :** Special Lab Envi and Consultant Co.,Ltd.  
47/91 Moo 3, Tambol Tha-It, Pakkret, Nonthaburi 11120

**Equipment :** Buret  
Manufacturer : Witeg Class : A  
Capacity : 25 ml Graduation : 0.1 ml  
ID No. : LB-Gw-001

**Environment :** Ambient Temperature :  $(20 \pm 3)$  °C  
Relative Humidity :  $(60 \pm 15)$  %  
Air Pressure : 1009.7 mbar.

**Date of Received :** 06 April 2023

**Date of Calibration :** 18 April 2023

**Date of Issue :** 18 April 2023

**Calibrated by :** Areerat Sombun


**Calibration Method :** In-house method CAL-M3001 based on ASTM E 542-01

**Reference Standard Instruments :** This certification is traceable to the International System of Units

Electronic Balance

ID No.	Cert. No.	Due Date	Traceability
241005	65-200370-4	02 Jun 2023	National Institute of Metrology (Thailand) (NIMT)

Approved by :



Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.

CAL-F0031-03



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech\_cal@yahoo.com, calibratech\_cal@hotmail.com

## Certificate of Calibration

**Certificate No. :** 66-300220-6

**Page : 2 of 2**

**Result of Calibration :** This result of true Volume is referred to standard temperature at 20 °C

**UUC Condition As-Received :** Good

Delivery Time : 40.55 sec.

Nominal Volume ( ml )	Measuring Volume ( ml )
10	10.0121
20	20.0086
25	25.0116

Uncertainty of measurement with in  $\pm$  0.0066 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2.00$ , providing a level of confidence of approximately 95%

- o0o -





# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.com



NSC-TISI-TIS 17025  
CALIBRATION 0030

## Certificate of Calibration

**Certificate No. :** 66-210415-1

**Page : 1 of 2**

**Submitted by :** Special Lab Envi And Consultant Co, Ltd.  
47/91-93,96 Moo 3, Tambol Tha - It, Pakkret, Nonthaburi 11120

**Equipment :** Weight  
Manufacturer : LS Material : Stainless Steel  
Weight size : 1 g  
ID No. : LB-Eq-034  
Assumed density of weight : 7950 kg / m<sup>3</sup>  
Assumed Air density : 1.2 kg / m<sup>3</sup>

**Environment :** Ambient Temperature : ( 20 ± 2 ) °C  
Relative Humidity : ( 50 ± 10 ) %  
Air Pressure : 1005.9 mbar

**Date of Received :** 03 August 2023

**Date of Calibration :** 16 August 2023

**Date of Issue :** 16 August 2023

**Calibrated by :** Wuttichai Swatphong


**Calibration Method :** In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

**Reference Standard Instruments :** This certification is traceable to the International System of Units

Standard Weights

ID No.	Cert. No.	Due Date	Traceability
E221-E2210	MM-0042-22	21 Mar 2025	National Institute of Metrology (Thailand), (NIMT)

Approved by :



Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhaphrachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com. calibratech.cal@hotmail.com

## Certificate of Calibration

**Certificate No. : 66-210415-1**

**Page : 2 of 2**

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	1 g	none	1 g -0.017 mg	$\pm 0.023$ mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

-o0o-



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhaphrachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech\_cal@yahoo.com, calibratech\_cal@hotmail.com



NSC-TISI-TIS17025  
CALIBRATION 0030

## Certificate of Calibration

**Certificate No. :** 66-210415-2

**Page : 1 of 2**

**Submitted by :** Special Lab Envi And Consultant Co, Ltd.  
47/91-93,96 Moo 3, Tambol Tha - It, Pakkret, Nonthaburi 11120

**Equipment :** Weight  
Manufacturer : LS Material : Stainless Steel  
Weight size : 100 g  
ID No. : LB-Eq-035  
Assumed density of weight : 7950 kg / m<sup>3</sup>  
Assumed Air density : 1.2 kg / m<sup>3</sup>

**Environment :** Ambient Temperature : ( 20 ± 2 ) °C  
Relative Humidity : ( 50 ± 10 ) %  
Air Pressure : 1005.9 mbar

**Date of Received :** 03 August 2023

**Date of Calibration :** 16 August 2023

**Date of Issue :** 16 August 2023

**Calibrated by :** Wuttichai Swatphong

**Calibration Method :** In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

**Reference Standard Instruments :** This certification is traceable to the International System of Units

Standard Weights

ID No.	Cert. No.	Due Date	Traceability
E221-E2210	MM-0042-22	21 Mar 2025	National Institute of Metrology (Thailand), (NIMT)

Approved by :



Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.

CAL-F0031-03



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhaprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax (02) 964-5155, e-mail : calibratech\_cal@yahoo.com, calibratech\_cal@hotmail.com

## Certificate of Calibration

**Certificate No. : 66-210415-2**

**Page : 2 of 2**

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	100 g	none	100 g -0.20 mg	$\pm$ 0.11 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

- o0o -

# CAL



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhprachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.com



NSC-TISI-TIS 17025  
CALIBRATION 0030

## Certificate of Calibration

**Certificate No. :** 66-210415-3

**Page : 1 of 2**

**Submitted by :** Special Lab Envi And Consultant Co, Ltd.  
47/91-93,96 Moo 3, Tambol Tha - It, Pakkret, Nonthaburi 11120

**Equipment :** Weight

Manufacturer : LS

Material : Stainless Steel

Weight size : 200 g

ID No. : LBzEq-036

Assumed density of weight : 7950 kg / m<sup>3</sup>

Assumed Air density : 1.2 kg / m<sup>3</sup>

**Environment :** Ambient Temperature : ( 20 ± 2 ) °C

Relative Humidity : ( 50 ± 10 ) %

Air Pressure : 1005.9 mbar

**Date of Received :** 03 August 2023

**Date of Calibration :** 16 August 2023

**Date of Issue :** 16 August 2023

**Calibrated by :** Wuttichai Swatphong

**Calibration Method :** In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

**Reference Standard Instruments :** This certification is traceable to the International System of Units

Standard Weights

<u>ID No.</u>	<u>Cert. No.</u>	<u>Due Date</u>	<u>Traceability</u>
E221-E2210	MM-0042-22	21 Mar 2025	National Institute of Metrology (Thailand), (NIMT)

Approved by :



Laboratory Manager

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.

CAL-F0031-03



## Certificate of Calibration

**Certificate No. : 66-210415-3**

**Page : 2 of 2**

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

No.	Nominal Value	Id.Mark	Conventional mass Value		Measuring Uncertainty
1	200 g	none	200 g	+0.11 mg	$\pm$ 0.17 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

- o0o -



# CAL

Calibratech Co.,Ltd.

7/106-7 Moo 2, Sukhaphrachasan 3 Rd., Bangpood, Pakkred, Nonthaburi 11120

Tel.(02) 964-6211 Fax.(02) 964-5155, e-mail : calibratech.cal@yahoo.com, calibratech.cal@hotmail.com



NSC-TISI-TIS 17025  
CALIBRATION 0030

## Certificate of Calibration

**Certificate No.** : 66-300471-1

**Page** : 1 of 2

**Submitted by** : Special Lab Envi and Consultant Co., Ltd.  
47/91-93,96 Moo 3, Tambol Tha-It, Pakkret, Nonthaburi 11120

**Equipment** : Piston Pipette

Manufacturer : sartorius

Model : N/A

Serial No. : 4541601431

ID No. : LB-Eg-045

Capacity : 100  $\mu$ l to 1000  $\mu$ l Resolution : 5  $\mu$ l

**Environment** : Ambient Temperature : ( 20  $\pm$  3 )  $^{\circ}$ C

Relative Humidity : ( 55  $\pm$  10 ) %

Air Pressure : (1007.6 to 1007.7) mbar.

**Date of Received** : 03 August 2023

**Date of Calibration** : 07 August 2023

**Date of Issue** : 07 August 2023

**Calibrated by** : Areerat Sombun


**Calibration Method** : In-house method CAL-M3002 base on ISO 8655-6 : 2002-09

**Reference Standard Instruments** : This certification is traceable to the International System of Units

Electronic Balance

<u>ID No.</u>	<u>Cert. No.</u>	<u>Due Date</u>	<u>Traceability</u>
241005	66-200196-4	02 Dec 2023	National Institute of Metrology (Thailand) (NIMT)

Approved by :



Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



CAL-F0031-03

## Certificate of Calibration

**Certificate No. :** 66-300471-1

**Page :** 2 of 2

**Result of Calibration :** Without Adjustment

**UUC Condition As-Received :** Good

Test Volume ( $\mu\text{l}$ )	Measuring Volume at 20 °C ( $\mu\text{l}$ )	Systematic error ( $e_s$ %)	Coeff. of Variation ( CV% )	Uncertainty ( $\pm \mu\text{l}$ )
100	97.92	0.21	0.15	0.69
500	496.58	0.34	0.04	0.69
1000	997.55	0.24	0.01	0.69

$e_s$  : Systematic error (%)

CV : Coefficient of variation (%)

**UUC Calibrated by :** Blue Tip

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor  $k = 2.00$  ,  
providing a level of confidence of approximately 95%

- o0o -

