

PM10 HIGH VOLUME AIR SAMPLER CALIBRATION REPORT

Customer	ENVIR SERVICE CO., LTD.			Date	January 21, 2026
Address	42 Ramintra 14 Yeak 9, Tha Raeng, Bang Khen, Bangkok 10230			Start Time	11:30 AM
Sampler Number	PM10 No.7	Transfer Standard Type	Orifice	Stop Time	11:55 AM
Motor Serial Number	PM10 No.7	Calibrator Model	25A	Person	Mr.Pasagorn Samol
Recorder Serial Number	-	Calibrator Serial Number	307N		


Calibration Orifice

Manufacture:	Graseby GMW	Qstd Slope:	1.29243
Model:	25A	Qstd Intercept:	-0.01962
Serial#:	307N	Calibration Date:	14-Dec-26

Plate No.	(Delta H)			(A)	(X)	(I)	(Y)	Temperature	Barometric Pressure	Start Meter	Stop Meter
	Positive	Negative	ΔH_2O	$[\Delta H_2O(Pa/P_{std})(T_{std}/Ta)]^{1/2}$	Qstd = $(I/m)[(A-b)]$ (m ³ /min)	Sample Flow Rate Indication (ft ³ /min)	$IC = I[[(Pa/P_{std})(T_{std}/Ta)]^{1/2}]$	(°K = °C+273)	(mmHg)		
5	1.9	1.8	8.7	2.91917	1.42992	32.0	31.26	305.0	760.0	9:30	-
7	2.8	2.7	12.5	3.49455	1.70875	42.0	41.51	305.1	760.0	-	-
10	4.0	3.8	17.9	4.17971	2.04078	52.0	51.39	305.0	760.0	-	-
13	5.3	5.2	23.5	4.79548	2.33919	58.0	57.32	305.1	760.0	-	-
18	6.4	6.3	30.8	5.48144	2.67161	62.0	61.28	305.2	760.0	-	9:55

Linear Regression Y ON X : Y= mX + b

1	Slope (m)	2.0635	Linear Equation		r^2	0.982631	Pstd(mmHg)	760.0
2	Intercept(b)	-0.03151	Set Point Flow Rrate (X) (m ³ /min)	1.133	r	0.99127746	T _{NTP}	298.0
3	Correlation Coefficient (r)	0.99993	Final Set Flow Rate = (I)	0	(Pa/Pstd)*(Tstd/Ta)		0.976792972	
Result					C=(Pa/Pstd)*(Tstd/Ta)^0.5		0.988328373	

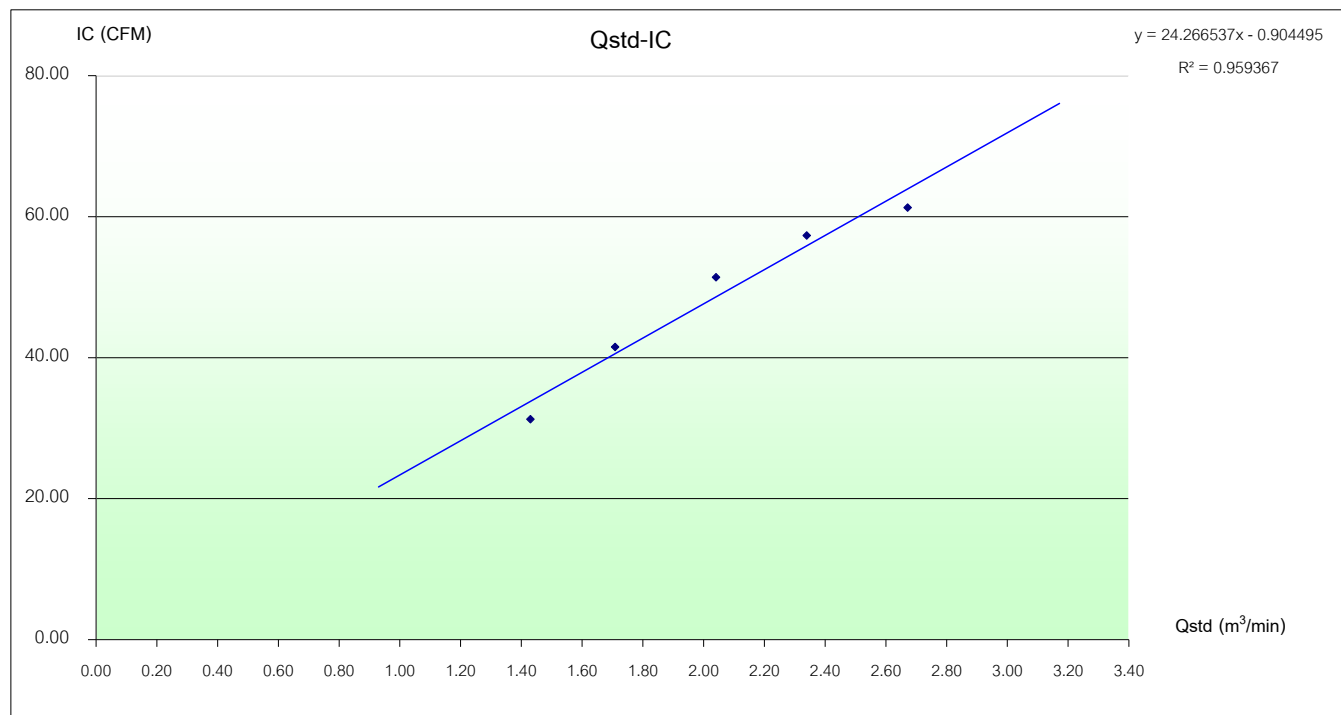

Calibrate By

Analyzer Performance Test

Calibrated Date: 15 January 2026

Instruments Information

Analyzer Type : CO Analyzer

Model : 300

Manufacturer : API

Serial Number : 1511

Calibrator Unit

Dilutor Model : Dasibi Model 5008

Serial Number : 705

ZERO AIR Generator : API MODEL 701

Serial Number : 1924

Standard Gas Concentration

Nitric Oxide (NO) 55.47 PPM

Sulphur Dioxide (SO₂) 55.11 PPM

Carbon Monoxide (CO) 4,535 PPM


Cylinder number EB0129027

Expire Date: 29 Oct. 2027


Environment : Temperature 25.5 °C Humidity: 51 %RH

Calibration Report

	Zero			Span		
	Reference (PPM)	Reading (PPM)	Drift (PPM)	Reference (PPM)	Reading (PPM)	Drift%
Before	0.0	0.2	0.2	45.0	44.2	-1.7
After	0.0	0.0	0.0	45.0	45.0	0.0

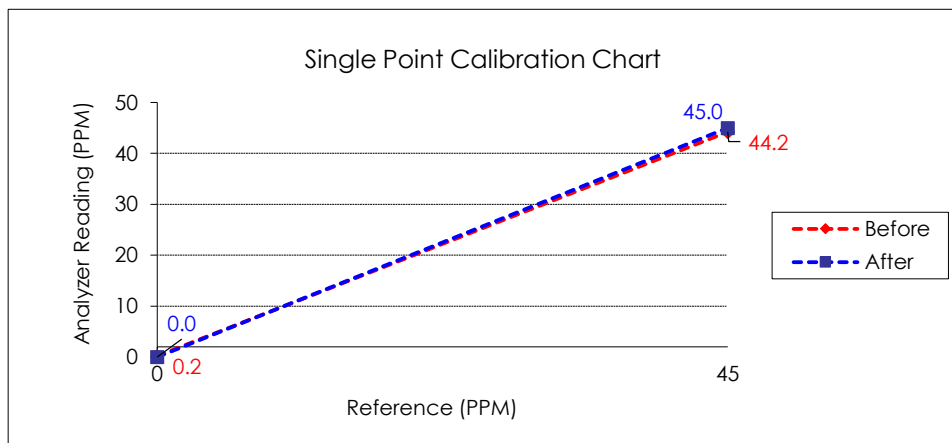

Calibrate By



Certificate No. EN-260120-03

Calibration & Test Certificate

FOR

Equipment Name : Sound Level Meter

Received Date : Jan 12, 2026

Manufacturer : Scarlet Tech

Calibration Date : Jan 20, 2026

Model : ST-21D

Recommended Due Date : N/A

Serial Number : 821154

Location of Calibration : In Lab

Customer Name : GREEN ENVI ENGINEERING CO., LTD.

153/393 Moo 1, Wat Pho-Bang Yai Road, Makham Tia,
Mueang Surat Thani, Surat Thani 84000

CONDITION AS RECIVED : Normal

Environmental Conditions

Ambient Temperature : $(25 \pm 2) ^\circ\text{C}$

Relative Humidity : $(50 \pm 15) \% \text{RH}$

Result : No Adjustment (See data attached in page 2 to the end of certificate)

1. The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor $K = 2$ providing a level of confidence of approximately 95%
2. The Unit Under Calibration (UUC) has been calibrated by using the working standard which is traceable to SI-Unit. The calibration procedure documented is intended to implement the requirements of ISO/IEC 17025 : 2005 (TAF)
3. The working standard is indicated in page 2 of this certificate.
4. The report applies to the item and shall not be reproduced except in full, without written approval by Calibration Laboratory, Envir Service Co., Ltd.

Date of C

Valid to :

Calibrated

(Technician)

(Technician Manager)

Certificate No. EN-260120-03

We hereby certify that the instrument under mentioned has been certainly calibrated according to our calibration standard and the testing result in the calibration procedure has been good enough within the tolerance regulated in our specification.

Reference Standard

Equipment Name	Model	Serial Number	Due Date
Standard SOUND LEVEL METER	B&K 2239	2449143	OCT/22/2026

The Standard generators used for calibration procedure are proofed once a year and cab be traceable to the standard authorized by public organization.

Result of Calibration

Calibration Range : 94 dB, 114 dB

Function : @ 1KHz

Select A Fast response

STD Setting	UUC Reading (dB)	Correction (dB)	Uncertainty (±)
94.01	93.9	0.11	0.88
114.04	113.8	0.24	0.88

Select A Slow response

STD Setting	UUC Reading (dB)	Correction (dB)	Uncertainty (±)
94.01	93.9	0.11	0.88
114.04	113.8	0.24	0.88

Select C Fast response

STD Setting	UUC Reading (dB)	Correction (dB)	Uncertainty (±)
94.01	94.0	0.01	0.88
114.04	113.8	0.24	0.88

Select C Slow response

STD Setting	UUC Reading (dB)	Correction (dB)	Uncertainty (±)
94.01	94.0	0.01	0.88
114.04	113.8	0.24	0.88

STD = Standard

UUC = Unit Under Calibration

Calibration Certificate

Part Number: 721A2601

Description: Micromate with DIN Geophone

Serial Number: UM16256

Calibration Date: NOV 30 2021

Calibration Reference Equipment: 714J7402

Instantel certifies that the above product was calibrated in accordance with the applicable Instantel procedures. These procedures are part of a quality system that is designed to assure that the product listed above meets or exceeds Instantel specifications.


Instantel further certifies that the measurement instruments used during the calibration of this product are traceable to the National Institute of Standards and Technology; or National Research Council of Canada. Evidence of traceability is on file at Instantel and is available upon request.

The environment in which this product was calibrated is maintained within the operating specifications of the instrument.

Please note that the sensor check function is intended to check that the sensors are connected to the unit, installed in the proper orientation and sufficiently level to operate properly. This function should not be confused with a formal calibration, which requires the sensors be checked against a reference that is traceable to a known standard.

Instantel recommends that products be returned to Instantel or an authorized service and calibration facility for annual calibration.







Calibrated By: _____

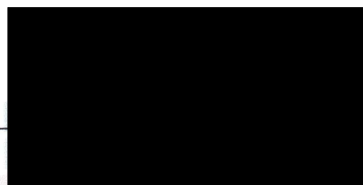

Instantel®

309 Legget Drive, Ottawa, Ontario, K2K 3A3, (613) 592-4642

Frequency Response of UM16256

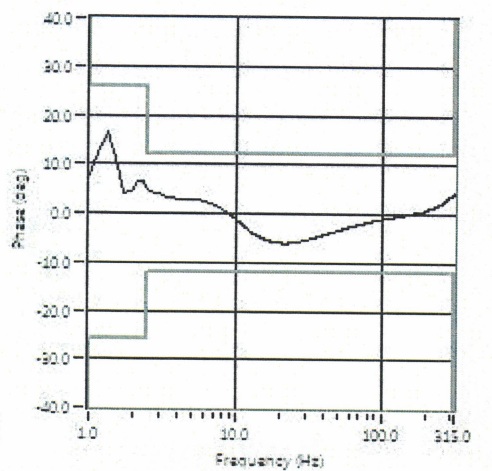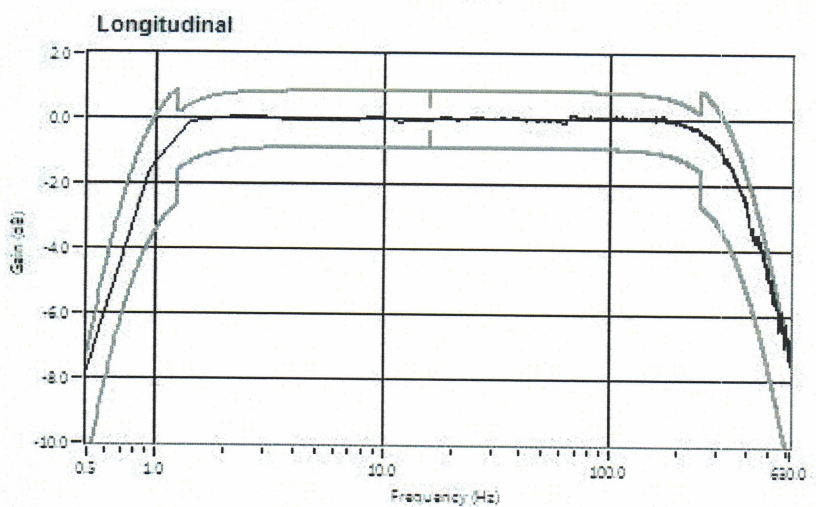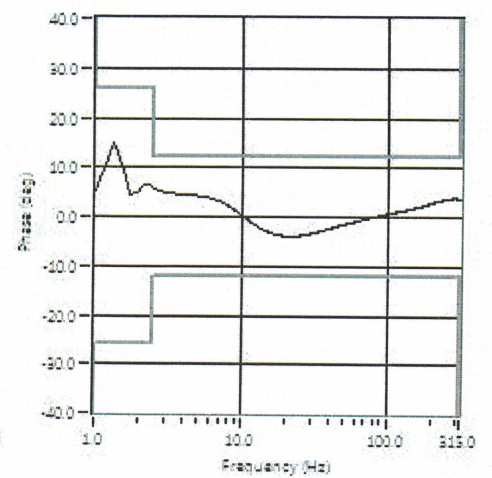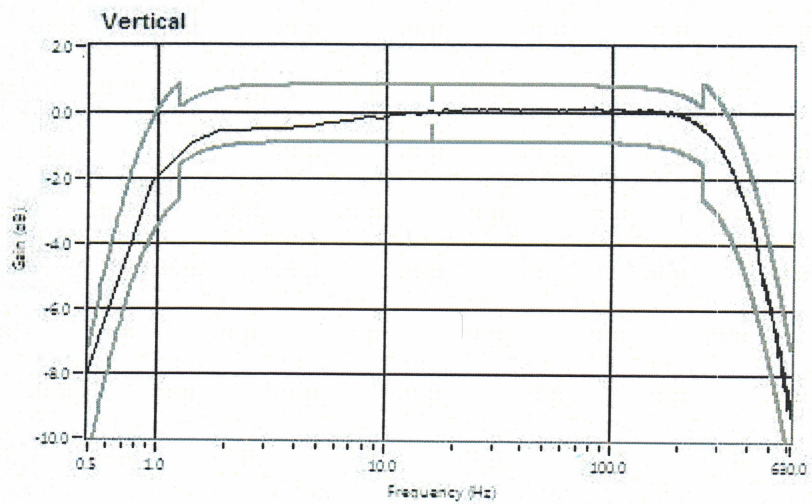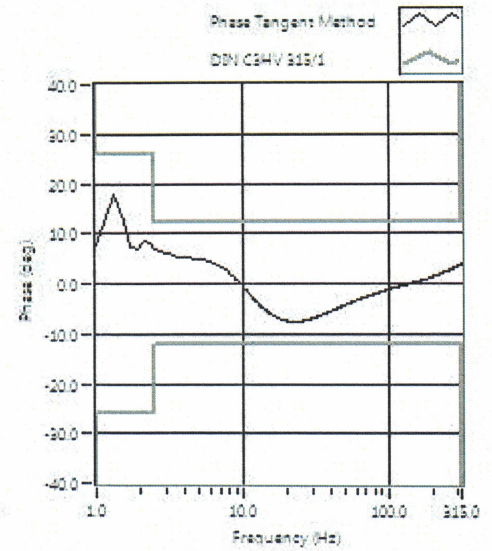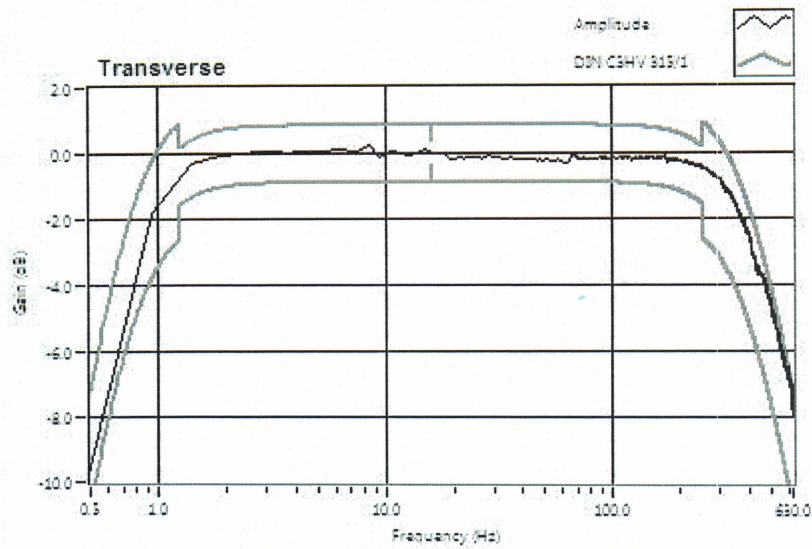

TSP HIGH VOLUME AIR SAMPLER CALIBRATION REPORT

Customer	Envir Service Co.,Ltd.			Date	January 22, 2026
Address	42 Raminthra 14 Yeak 9, Tha Raeng, Bangkhen, Bankok 10230			Start Time	11:30 AM
Sampler Number	TSP No.7	Transfer Standard Type	Orifice	Stop Time	11:55 AM
Motor Serial Number	TSP No.7	Calibrator Model	25A	Person	Mr.Pasagorn Samol
Recorder Serial Number	-	Calibrator Serial Number	307N		


Calibration Orifice


Manufacture:	Graseby GMW	Qstd Slope:	1.29243
Model:	25A	Qstd Intercept:	-0.01962
Serial#:	307N	Calibration Date:	14-Dec-26

Plate No.	(Delta H)			(A)	(X)	(I)	(Y)	Temperature	Barometric Pressure	Start Meter	Stop Meter
	Positive	Negative	ΔH_2O	$[\Delta H_2O(Pa/P_{std})(T_{std}/T_a)]^{1/2}$	Qstd = $(1/m)[(A-b)]$ (m ³ /min)	Sample Flow Rate Indication (ft ³ /min)	IC = $1/[(Pa/P_{std})(T_{std}/T_a)]^{1/2}$	(°K = °C+273)	(mmHg)		
5	1.9	1.8	8.7	2.92278	1.43167	32.0	31.26	305.0	760.0	10:40	-
7	2.8	2.7	12.5	3.50053	1.71165	42.0	41.51	305.1	760.0	-	-
10	4.0	3.9	17.9	4.18556	2.04362	52.0	51.39	305.0	760.0	-	-
13	5.3	5.2	23.5	4.79574	2.33932	58.0	57.32	305.1	760.0	-	-
18	6.4	6.3	30.7	5.47841	2.67014	62.0	61.28	305.1	760.0	-	10:35

Linear Regression Y ON X : Y= mX + b

1	Slope (m)	2.0635	Linear Equation		Average	305.1	760.0		
2	Intercept(b)	-0.03151	Set Point Flow Rate (X) (m ³ /min)		r ²	0.982631	0.982631	Pstd(mmHg)	760.0
3	Correlation Coefficient (r)	0.99993	Final Set Flow Rate = (I)		r	0.99127746	T _{NTP}		298.0
Result					0	(Pa/Pstd)*(Tstd/Ta)			0.976857012
						C=(Pa/Pstd)*(Tstd/Ta)^0.5			0.98836077

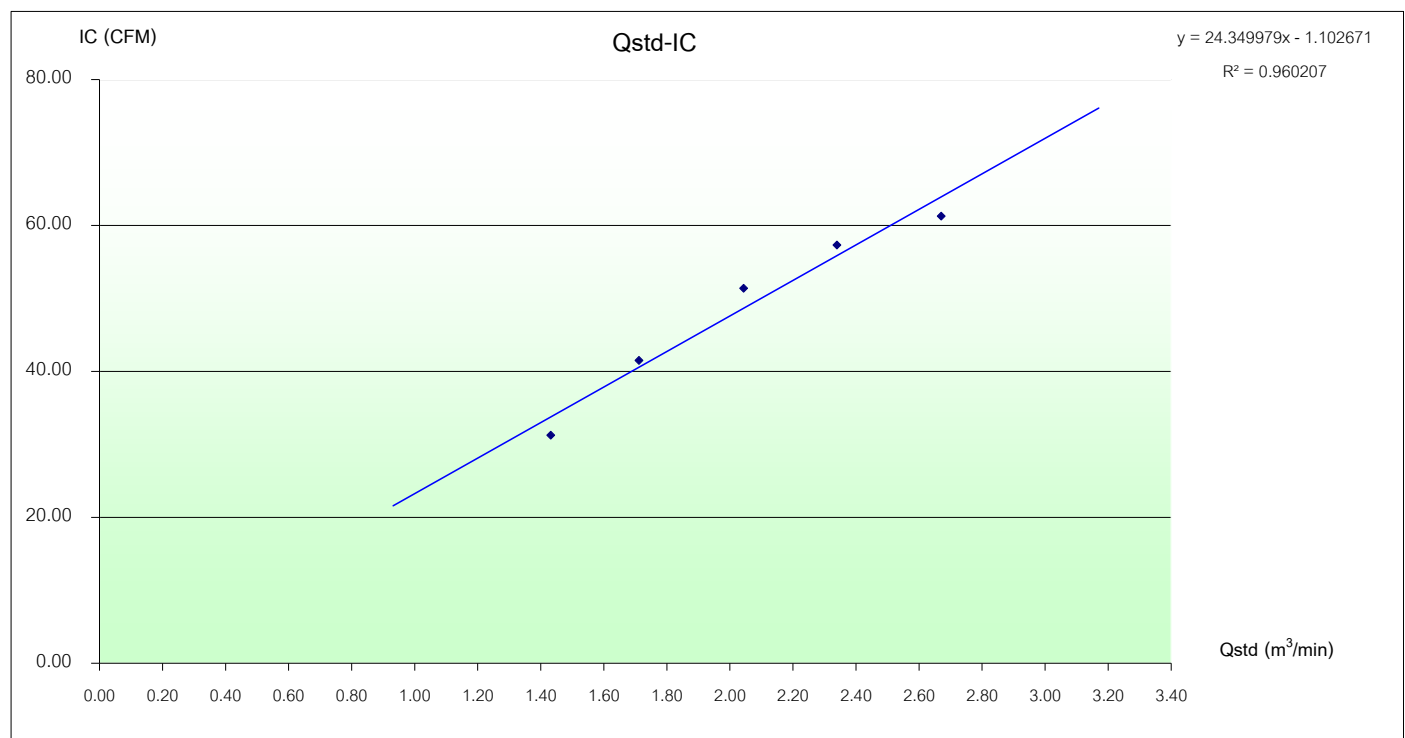



สภาวิศวกร

ตามพระราชบัญญัติวิศวกร พ.ศ. ๒๕๕๒
ออกโดยอนุบัญญัติไว้เพื่อแสดงว่า

บริษัท กรีน เอ็นไว เอนจิเนียริง จำกัด

ได้รับอนุญาตประกอบวิชาชีพวิศวกรรมควบคุม

เลขทะเบียน ๑๕๖๕/๖๒

ตั้งแต่วันที่ ๑๖ สิงหาคม ๒๕๖๗ ถึงวันที่ ๑๕ สิงหาคม ๒๕๗๐

นายกสภาวิศวกร