ภาคผนวก ง

กฎหมายที่เกี่ยวข้อง



กฎกระทรวง

กำหนดมาตรฐานในการบริหาร จัดการ และดำเนินการด้านความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงานเกี่ยวกับความร้อน แสงสว่าง และเสียง พ.ศ. ๒๕๕๙

อาศัยอำนาจตามความในมาตรา ๕ วรรคหนึ่ง และมาตรา ๘ วรรคหนึ่ง แห่งพระราชบัญญัติความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงาน พ.ศ. ๒๕๕๔ รัฐมนตรีว่าการกระทรวงแรงงานออกกฎกระทรวงไว้ ดังต่อไปนี้

ข้อ ๑ ในกฎกระทรวงนี้

"อุณหภูมิเวตบัลบ์โกลบ" (Wet Bulb Globe Temperature - WBGT) หมายความว่า

(๑) อุณหภูมิที่วัดเป็นองศาเซลเซียสซึ่งวัดนอกอาคารที่ไม่มีแสงแดดหรือในอาคารมีระดับความร้อนเท่ากับ ๐.๗ เท่าของอุณหภูมิที่อ่านค่าจากเทอร์โมมิเตอร์กระเปาะเปียกตามธรรมชาติ (natural wet bulb thermometer) บวก ๐.๓ เท่าของอุณหภูมิที่อ่านค่าจากโกลบเทอร์โมมิเตอร์ (globe thermometer) หรือ

(๒) อุณหภูมิที่วัดเป็นองศาเซลเซียสซึ่งวัดนอกอาคารที่มีแสงแดด มีระดับความร้อนเท่ากับ ๐.๗ เท่าของอุณหภูมิที่อ่านค่าจากเทอร์โมมิเตอร์กระเปาะเปียกตามธรรมชาติ บวก ๐.๒ เท่าของอุณหภูมิที่อ่านค่าจากโกลบเทอร์โมมิเตอร์ และบวก ๐.๑ เท่าของอุณหภูมิที่อ่านค่าจากเทอร์โมมิเตอร์กระเปาะแห้ง (dry bulb thermometer)

"ระดับความร้อน" หมายความว่า อุณหภูมิเวตบัลบ์โกลบในบริเวณที่ลูกจ้างทำงานตรวจวัดโดยค่าเฉลี่ยในช่วงเวลาสองชั่วโมงที่มีอุณหภูมิเวตบัลบ์โกลบสูงสุดของการทำงานปกติ

"สภาวะการทำงาน" หมายความว่า สภาวะแวดล้อมซึ่งปรากฏอยู่ในบริเวณที่ทำงานของลูกจ้าง ซึ่งรวมถึงสภาพต่าง ๆ ในบริเวณที่ทำงาน เครื่องจักร อาคาร สถานที่ การระบายอากาศ ความร้อน แสงสว่าง เสียง ตลอดจนสภาพและลักษณะการทำงานของลูกจ้างด้วย

"งานเบา" หมายความว่า ลักษณะงานที่ใช้แรงน้อยหรือใช้กำลังงานที่ทำให้เกิดการเผาผลาญอาหารในร่างกายไม่เกิน ๒๐๐ กิโลแคลอรีต่อชั่วโมง เช่น งานเขียนหนังสือ งานพิมพ์ดีด งานบันทึกข้อมูล งานเย็บจักร งานนั่งตรวจสอบผลิตภัณฑ์ งานประกอบชิ้นงานขนาดเล็ก งานบังคับเครื่องจักรด้วยเท้า การยืนคุมงาน

"งานปานกลาง" หมายความว่า ลักษณะงานที่ใช้แรงปานกลางหรือใช้กำลังงานที่ทำให้เกิดการเผาผลาญอาหารในร่างกายเกิน ๒๐๐ กิโลแคลอรีต่อชั่วโมง ถึง ๓๕๐ กิโลแคลอรีต่อชั่วโมง เช่น งานยก ลาก ดัน หรือเคลื่อนย้ายสิ่งของด้วยแรงปานกลาง งานตอกตะปู งานตะไบ งานขับรถบรรทุก งานขับรถแทรกเตอร์

"งานหนัก" หมายความว่า ลักษณะงานที่ใช้แรงมากหรือใช้กำลังงานที่ทำให้เกิดการเผาผลาญอาหารในร่างกายเกิน ๓๕๐ กิโลแคลอรีต่อชั่วโมง เช่น งานที่ใช้พลั่วตักหรือเครื่องมือลักษณะคล้ายกัน งานขุด งานเลื่อยไม้ งานเจาะไม้เนื้อแข็ง งานทุบโดยใช้ค้อนขนาดใหญ่ งานยก หรือเคลื่อนย้ายของหนักขึ้นที่สูงหรือที่ลาดชัน

หมวด ๑
ความร้อน

ข้อ ๒ ให้นายจ้างควบคุมและรักษาระดับความร้อนภายในสถานประกอบกิจการที่มีลูกจ้างทำงานอยู่มิให้เกินมาตรฐาน ดังต่อไปนี้

(๑) งานที่ลูกจ้างทำในลักษณะงานเบาต้องมีมาตรฐานระดับความร้อนไม่เกินค่าเฉลี่ยอุณหภูมิเวตบัลบ์โกลบ ๓๔ องศาเซลเซียส

(๒) งานที่ลูกจ้างทำในลักษณะงานปานกลางต้องมีมาตรฐานระดับความร้อนไม่เกินค่าเฉลี่ยอุณหภูมิเวตบัลบ์โกลบ ๓๒ องศาเซลเซียส

(๓) งานที่ลูกจ้างทำในลักษณะงานหนักต้องมีมาตรฐานระดับความร้อนไม่เกินค่าเฉลี่ยอุณหภูมิเวตบัลบ์โกลบ ๓๐ องศาเซลเซียส

ข้อ ๓ ในกรณีที่ภายในสถานประกอบกิจการมีแหล่งความร้อนที่อาจเป็นอันตรายให้นายจ้างติดป้ายหรือประกาศเตือนอันตรายในบริเวณดังกล่าว โดยให้ลูกจ้างสามารถมองเห็นได้ชัดเจน

ในกรณีที่บริเวณการทำงานตามวรรคหนึ่งมีระดับความร้อนเกินมาตรฐานที่กำหนดในข้อ ๒ ให้นายจ้างดำเนินการปรับปรุงหรือแก้ไขสภาวะการทำงานทางด้านวิศวกรรม เพื่อควบคุมระดับความร้อนให้เป็นไปตามมาตรฐาน และจัดให้มีการปิดประกาศและเอกสารหรือหลักฐานในการดำเนินการปรับปรุงหรือแก้ไขดังกล่าวไว้ เพื่อให้พนักงานตรวจความปลอดภัยสามารถตรวจสอบได้

ในกรณีที่ไม่สามารถดำเนินการให้เป็นไปตามวรรคสองได้ ให้นายจ้างจัดให้มีมาตรการควบคุมหรือลดภาระงาน และต้องจัดให้ลูกจ้างสวมใส่อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลตามที่กำหนดไว้ในหมวด ๔ ตลอดเวลาที่ทำงาน

หมวด ๒
แสงสว่าง

ข้อ ๔ นายจ้างต้องจัดให้สถานประกอบกิจการมีความเข้มของแสงสว่างไม่ต่ำกว่ามาตรฐานที่อธิบดีประกาศกำหนด

ข้อ ๕ นายจ้างต้องใช้หรือจัดให้มีฉาก แผ่นฟิล์มกรองแสง หรือมาตรการอื่นที่เหมาะสมและเพียงพอเพื่อป้องกันมิให้แสงตรงหรือแสงสะท้อนจากแหล่งกำเนิดแสงหรือดวงอาทิตย์ที่มีแสงจ้าส่องเข้านัยน์ตาลูกจ้างโดยตรงในขณะทำงาน ในกรณีที่ไม่อาจป้องกันได้ ต้องจัดให้ลูกจ้างสวมใส่อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลตามที่กำหนดไว้ในหมวด ๔ ตลอดเวลาที่ทำงาน

ข้อ ๖ ในการณีที่ลูกจ้างต้องทำงานในสถานที่มืด ทึบ และคับแคบ เช่น ในถ้ำ อุโมงค์ หรือในที่ที่มีลักษณะเช่นว่านั้น นายจ้างต้องจัดให้มีอุปกรณ์ส่องแสงสว่างที่เหมาะสมแก่ลภาพและลักษณะงาน โดยอาจเป็นชนิดที่ติดอยู่ในพื้นที่ทำงานหรือติดที่ตัวบุคคลได้ หากไม่สามารถจัดหาหรือดำเนินการได้ ต้องจัดให้ลูกจ้างสวมใส่อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลตามที่กำหนดไว้ในหมวด ๔ ตลอดเวลาที่ทำงาน

หมวด ๓
เสียง

ข้อ ๗ นายจ้างต้องควบคุมระดับเสียงมิให้ลูกจ้างได้รับสัมผัสเสียงในบริเวณสถานประกอบกิจการที่มีระดับเสียงสูงสุด (peak sound pressure level) ของเสียงกระทบหรือเสียงกระแทก (impact or impulse noise) เกิน ๑๔๐ เดซิเบล หรือได้รับสัมผัสเสียงที่มีระดับเสียงดังต่อเนื่องแบบคงที่ (continuous steady noise) เกินกว่า ๑๑๕ เดซิเบลเอ

ข้อ ๘ นายจ้างต้องควบคุมระดับเสียงที่ลูกจ้างได้รับเฉลี่ยตลอดเวลาการทำงานในแต่ละวัน (Time Weighted Average-TWA) มิให้เกินมาตรฐานตามที่อธิบดีประกาศกำหนด

ข้อ ๙ ภายในสถานประกอบกิจการที่สภาวะการทำงานมีระดับเสียงเกินมาตรฐานที่กำหนดในข้อ ๗ หรือมีระดับเสียงที่ลูกจ้างได้รับเกินมาตรฐานที่กำหนดในข้อ ๘ นายจ้างต้องให้ลูกจ้างหยุดทำงานจนกว่าจะได้ปรับปรุงหรือแก้ไขให้ระดับเสียงเป็นไปตามมาตรฐานที่กำหนด และให้นายจ้างดำเนินการปรับปรุงหรือแก้ไขทางด้านวิศวกรรม โดยการควบคุมที่ต้นกำเนิดของเสียงหรือทางผ่านของเสียง หรือบริหารจัดการเพื่อควบคุมระดับเสียงที่ลูกจ้างจะได้รับให้ไม่เกินมาตรฐานที่กำหนด และจัดให้มีการปิดประกาศและเอกสารหรือหลักฐานในการดำเนินการปรับปรุงหรือแก้ไขดังกล่าวไว้ เพื่อให้พนักงานตรวจความปลอดภัยสามารถตรวจสอบได้

ในการณีที่ไม่สามารถดำเนินการตามวรรคหนึ่งได้ นายจ้างต้องจัดให้ลูกจ้างสวมใส่อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลตามที่กำหนดไว้ในหมวด ๔ ตลอดเวลาที่ทำงาน เพื่อลดระดับเสียงที่สัมผัสในหูเมื่อสวมใส่อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลแล้ว โดยให้อยู่ในระดับที่ไม่เกินมาตรฐานตามที่กำหนดไว้ในข้อ ๗ และข้อ ๘

การคำนวณระดับเสียงที่สัมผัสในหูเมื่อสวมใส่อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลตามวรรคสองให้เป็นไปตามที่อธิบดีประกาศกำหนด

ข้อ ๑๐ ในบริเวณที่มีระดับเสียงเกินมาตรฐานที่กำหนดในข้อ ๗ หรือข้อ ๘ นายจ้างต้องจัดให้มีเครื่องหมายเตือนให้ใช้อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลติดไว้ให้ลูกจ้างเห็นได้โดยชัดเจน

ข้อ ๑๑ ในกรณีที่สภาวะการทำงานในสถานประกอบกิจการมีระดับเสียงที่ลูกจ้างได้รับเฉลี่ยตลอดระยะเวลาการทำงานแปดชั่วโมงตั้งแต่ ๘๕ เดซิเบลเอขึ้นไป ให้นายจ้างจัดให้มีมาตรการอนุรักษ์การได้ยินในสถานประกอบกิจการตามหลักเกณฑ์และวิธีการที่อธิบดีประกาศกำหนด

หมวด ๔
อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคล

ข้อ ๑๒ นายจ้างต้องจัดให้มีและดูแลให้ลูกจ้างใช้อุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลตามความเหมาะสมกับลักษณะงานตลอดเวลาที่ทำงาน ดังต่อไปนี้

(๑) งานที่มีระดับความร้อนเกินมาตรฐานที่กำหนด ให้สวมใส่ชุดแต่งกาย รองเท้า และถุงมือสำหรับป้องกันความร้อน

(๒) งานที่มีแสงตรงหรือแสงสะท้อนจากแหล่งกำเนิดแสงหรือดวงอาทิตย์ที่มีแสงจ้าส่องเข้านัยน์ตาโดยตรง ให้สวมใส่แว่นตาลดแสงหรือกระบังหน้าลดแสง

(๓) งานที่ทำในสถานที่มืด ทึบ และคับแคบ ให้สวมใส่หมวกนิรภัยที่มีอุปกรณ์ส่องแสงสว่าง

(๔) งานที่มีระดับเสียงเกินมาตรฐานที่กำหนด ให้สวมใส่ปลั๊กลดเสียงหรือที่ครอบหูลดเสียง

ข้อ ๑๓ ให้นายจ้างบำรุงรักษาอุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคลให้อยู่ในสภาพที่ใช้งานได้อย่างปลอดภัย รวมทั้งจัดให้ลูกจ้างได้รับการฝึกอบรมเกี่ยวกับวิธีการใช้และบำรุงรักษาอุปกรณ์คุ้มครองความปลอดภัยส่วนบุคคล และเก็บหลักฐานการฝึกอบรมไว้ ณ สถานประกอบกิจการ เพื่อให้พนักงานตรวจความปลอดภัยสามารถตรวจสอบได้

หมวด ๕
การตรวจวัดและวิเคราะห์สภาวะการทำงาน และการรายงานผล

ข้อ ๑๔ นายจ้างต้องจัดให้มีการตรวจวัดและวิเคราะห์สภาวะการทำงานเกี่ยวกับระดับความร้อน แสงสว่าง หรือเสียงภายในสถานประกอบกิจการ

หลักเกณฑ์ วิธีการตรวจวัด และการวิเคราะห์สภาวะการทำงานเกี่ยวกับระดับความร้อน แสงสว่าง หรือเสียง รวมทั้งระยะเวลาและประเภทกิจการที่ต้องดำเนินการให้เป็นไปตามที่อธิบดีประกาศกำหนด

ในกรณีที่นายจ้างไม่สามารถตรวจวัดและวิเคราะห์สภาวะการทำงานตามวรรคหนึ่งได้ ต้องให้ผู้ที่ขึ้นทะเบียนตามมาตรา ๙ หรือนิติบุคคลที่ได้รับใบอนุญาตตามมาตรา ๑๑ แห่งพระราชบัญญัติความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงาน พ.ศ. ๒๕๕๔ เพื่อเป็นผู้ให้บริการในการตรวจวัดและวิเคราะห์สภาวะการทำงานเกี่ยวกับระดับความร้อน แสงสว่าง หรือเสียงภายในสถานประกอบกิจการ แล้วแต่กรณี เป็นผู้ดำเนินการแทน

ให้นายจ้างเก็บผลการตรวจวัดและวิเคราะห์สภาวะการทำงานดังกล่าวไว้ ณ สถานประกอบกิจการ เพื่อให้พนักงานตรวจความปลอดภัยสามารถตรวจสอบได้

ข้อ ๑๕ ให้นายจ้างจัดทำรายงานผลการตรวจวัดและวิเคราะห์สภาวะการทำงานตามแบบที่อธิบดีประกาศกำหนด พร้อมทั้งส่งรายงานผลดังกล่าวต่ออธิบดีหรือผู้ซึ่งอธิบดีมอบหมายภายในสามสิบวันนับแต่วันที่เสร็จสิ้นการตรวจวัด และเก็บรายงานผลการตรวจวัดและวิเคราะห์สภาวะการทำงานดังกล่าวไว้ ณ สถานประกอบกิจการ เพื่อให้พนักงานตรวจความปลอดภัยสามารถตรวจสอบได้

หมวด ๖
การตรวจสุขภาพและการรายงานผล

ข้อ ๑๖ ให้นายจ้างจัดให้มีการตรวจสุขภาพลูกจ้างที่ทำงานในสภาวะการทำงานที่อาจได้รับอันตรายจากความร้อน แสงสว่าง หรือเสียง และรายงานผล รวมทั้งดำเนินการที่เกี่ยวข้องกับการตรวจสุขภาพของลูกจ้างตามพระราชบัญญัติความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงาน พ.ศ. ๒๕๕๔

บทเฉพาะกาล

ข้อ ๑๗ ให้ผู้ซึ่งขึ้นทะเบียนเป็นผู้รับรองรายงานการตรวจวัดและวิเคราะห์สภาวะการทำงานกับกรมสวัสดิการและคุ้มครองแรงงานตามกฎกระทรวงกำหนดมาตรฐานในการบริหารและการจัดการด้านความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงานเกี่ยวกับความร้อน แสงสว่าง และเสียง พ.ศ. ๒๕๔๙ มีสิทธิดำเนินการตรวจวัดและวิเคราะห์สภาวะการทำงานเกี่ยวกับระดับความร้อน แสงสว่าง หรือเสียงภายในสถานประกอบกิจการตามข้อ ๑๔ ต่อไปจนกว่าการขึ้นทะเบียนจะสิ้นอายุ

ในกรณีที่ไม่มีผู้ซึ่งขึ้นทะเบียนตามวรรคหนึ่ง และยังไม่มีการออกกฎกระทรวงกำหนดรายละเอียดของบุคคลที่จะขอขึ้นทะเบียนหรือนิติบุคคลที่จะขอรับใบอนุญาตตามมาตรา ๙ หรือมาตรา ๑๑ แห่งพระราชบัญญัติความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงาน พ.ศ. ๒๕๕๔ เพื่อเป็นผู้ให้บริการในการตรวจวัดและวิเคราะห์สภาวะการทำงานเกี่ยวกับระดับความร้อน แสงสว่าง

หรือเสียงภายในสถานประกอบกิจการ แล้วแต่กรณี ให้ผู้ซึ่งสำเร็จการศึกษาไม่ต่ำกว่าระดับปริญญาตรี สาขาอาชีวอนามัย หรือเทียบเท่า ที่เคยขึ้นทะเบียนตามกฎกระทรวงกำหนดมาตรฐานในการบริหารและการจัดการด้านความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงานเกี่ยวกับความร้อน แสงสว่าง และเสียง พ.ศ. ๒๕๔๙ หรือให้ผู้ซึ่งสำเร็จการศึกษาไม่ต่ำกว่าระดับปริญญาตรี สาขาอาชีวอนามัย หรือเทียบเท่า และมีประสบการณ์เป็นผู้รับรองรายงานการตรวจวัดและวิเคราะห์สภาวะการทำงานไม่น้อยกว่าสามปี สามารถดำเนินการตรวจวัดแทนผู้ทำการตรวจวัดตามกฎกระทรวงนี้ได้ตลอดเวลาก่อนได้

ข้อ ๑๘ กรณีที่นายจ้างทำการตรวจวัดและวิเคราะห์สภาวะการทำงานเกี่ยวกับระดับความร้อน แสงสว่าง หรือเสียงภายในสถานประกอบกิจการตามกฎกระทรวงกำหนดมาตรฐานในการบริหารและการจัดการด้านความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงานเกี่ยวกับความร้อน แสงสว่าง และเสียง พ.ศ. ๒๕๔๙ ก่อนที่กฎกระทรวงนี้จะมีผลใช้บังคับ และมีระยะเวลายังไม่ครบหนึ่งปีนับแต่วันที่ทำการตรวจวัด ให้ถือว่านายจ้างได้ดำเนินการตรวจวัดตามกฎกระทรวงนี้แล้ว จนกว่าจะครบระยะเวลาหนึ่งปี

ให้ไว้ ณ วันที่ ๗ ตุลาคม พ.ศ. ๒๕๕๙
พล.อ.ท ศิริชัย ติษฐกุล
รัฐมนตรีว่าการกระทรวงแรงงาน

หมายเหตุ :- เหตุผลในการประกาศใช้กฎกระทรวงฉบับนี้ คือ โดยที่มาตรา ๘ วรรคหนึ่ง แห่งพระราชบัญญัติความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงาน พ.ศ. ๒๕๕๙ บัญญัติให้รัฐมนตรีว่าการกระทรวงแรงงานมีอำนาจออกกฎกระทรวงกำหนดให้นายจ้างบริหาร จัดการ และดำเนินการด้านความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงาน ซึ่งในการทำงานเกี่ยวกับความร้อน แสงสว่าง และเสียง สมควรจะต้องมีระบบการบริหาร จัดการ และดำเนินการด้านความปลอดภัย อาชีวอนามัย และสภาพแวดล้อมในการทำงานที่ได้มาตรฐาน อันจะทำให้ลูกจ้างมีความปลอดภัยในการทำงานเกี่ยวกับความร้อน แสงสว่าง และเสียงยิ่งขึ้น จึงจำเป็นต้องออกกฎกระทรวงนี้

ประกาศกระทรวงอุตสาหกรรม

เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงาน

พ.ศ. ๒๕๖๐

โดยที่เป็นการสมควรปรับปรุงการกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากการประกอบกิจการโรงงาน เพื่อให้มีค่ามาตรฐานและวิธีการตรวจสอบน้ำทิ้งจากโรงงานให้เหมาะสมและเป็นไปตามมาตรฐานสากล รวมถึงเป็นการควบคุมการระบายน้ำทิ้งจากโรงงาน อาศัยอำนาจตามความในข้อ ๑๔ แห่งกฎกระทรวงฉบับที่ ๒ (พ.ศ. ๒๕๓๕) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. ๒๕๓๕ ที่ระบุว่า "ห้ามระบายน้ำทิ้งออกจากโรงงาน เว้นแต่ได้ทำการอย่างใดอย่างหนึ่งหรือหลายอย่างจนน้ำทิ้งนั้นมีลักษณะเป็นไปตามที่รัฐมนตรีกำหนดโดยประกาศในราชกิจจานุเบกษา แต่ทั้งนี้ต้องไม่ใช้วิธีทำให้เจือจาง (dilution)" รัฐมนตรีว่าการกระทรวงอุตสาหกรรมจึงออกประกาศ ดังต่อไปนี้

ข้อ ๑ ประกาศนี้เรียกว่า "ประกาศกระทรวงอุตสาหกรรม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากโรงงาน พ.ศ. ๒๕๖๐"

ข้อ ๒ ประกาศนี้ใช้บังคับตั้งแต่วันที่ ๗ มิถุนายน พ.ศ. ๒๕๖๐ เป็นต้นไป

ข้อ ๓ ให้ยกเลิกประกาศกระทรวงอุตสาหกรรม ฉบับที่ ๒ (พ.ศ. ๒๕๓๙) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. ๒๕๓๕ เรื่อง กำหนดคุณลักษณะของน้ำทิ้งที่ระบายออกจากโรงงาน ลงวันที่ ๑๔ มิถุนายน พ.ศ. ๒๕๓๙

ข้อ ๔ ในประกาศนี้

"โรงงาน" หมายความว่า โรงงานจำพวกที่ ๑ จำพวกที่ ๒ จำพวกที่ ๓ ตามกฎหมายว่าด้วยโรงงาน

"น้ำทิ้ง" หมายความว่า น้ำที่เกิดจากการประกอบกิจการโรงงาน น้ำจากการใช้น้ำของคนงานหรือน้ำจากกิจกรรมอื่นในโรงงาน ที่จะระบายออกจากโรงงาน หรือเขตประกอบการอุตสาหกรรม

ข้อ ๕ มาตรฐานน้ำทิ้ง ต้องมีคุณภาพ ดังต่อไปนี้

๕.๑ ความเป็นกรดและด่าง (pH) ตั้งแต่ ๕.๕ ถึง ๙.๐

๕.๒ อุณหภูมิ (Temperature) ไม่เกิน ๔๐ องศาเซลเซียส

๕.๓ สี (Color) ไม่เกิน ๓๐๐ เอดีเอ็มไอ

๕.๔ ของแข็งละลายน้ำทั้งหมด (Total Dissolved Solids หรือ TDS) มีค่าดังนี้

(๑) กรณีระบายลงแหล่งน้ำ ต้องไม่เกิน ๓,๐๐๐ มิลลิกรัมต่อลิตร

(๒) กรณีระบายลงแหล่งน้ำที่มีค่าของแข็งละลายน้ำทั้งหมดเกินกว่า ๓,๐๐๐ มิลลิกรัมต่อลิตร ค่าของแข็งละลายน้ำทั้งหมดในน้ำทิ้งที่จะระบายได้ต้องมีค่าเกินกว่าค่าของแข็งละลายน้ำทั้งหมดที่มีอยู่ในแหล่งน้ำนั้นไม่เกิน ๕,๐๐๐ มิลลิกรัมต่อลิตร

๕.๕ ของแข็งแขวนลอยทั้งหมด (Total Suspended Solids) ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร

๕.๖ บีโอดี (Biochemical Oxygen Demand) ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร

๕.๗ ซีโอดี (Chemical Oxygen Demand) ไม่เกิน ๑๒๐ มิลลิกรัมต่อลิตร

๕.๘ ซัลไฟด์ (Sulfide) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

๕.๙ ไซยาไนด์ (Cyanides CN) ไม่เกิน ๐.๒ มิลลิกรัมต่อลิตร

๕.๑๐ น้ำมันและไขมัน (Oil and Grease) ไม่เกิน ๕ มิลลิกรัมต่อลิตร

๕.๑๑ ฟอร์มาลดีไฮด์ (Formaldehyde) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

๕.๑๒ สารประกอบฟีนอล (Phenols) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

๕.๑๓ คลอรีนอิสระ (Free Chlorine) ไม่เกิน ๑ มิลลิกรัมต่อลิตร

๕.๑๔ สารฆ่าศัตรูพืชและสัตว์ (Pesticide) ต้องตรวจไม่พบ

๕.๑๕ ทีเคเอ็น (Total Kjeldahl Nitrogen) ไม่เกิน ๑๐๐ มิลลิกรัมต่อลิตร

๕.๑๖ โลหะหนัก มีค่าดังนี้

(๑) สังกะสี (Zn) ไม่เกิน ๕.๐ มิลลิกรัมต่อลิตร

(๒) โครเมียมเฮกซะวาเลนท์ (Hexavalent Chromium) ไม่เกิน ๐.๒๕ มิลลิกรัมต่อลิตร

(๓) โครเมียมไตรวาเลนท์ (Trivalent Chromium) ไม่เกิน ๐.๗๕ มิลลิกรัมต่อลิตร

(๔) สารหนู (As) ไม่เกิน ๐.๒๕ มิลลิกรัมต่อลิตร

(๕) ทองแดง (Cu) ไม่เกิน ๒.๐ มิลลิกรัมต่อลิตร

(๖) ปรอท (Hg) ไม่เกิน ๐.๐๐๕ มิลลิกรัมต่อลิตร

(๗) แคดเมียม (Cd) ไม่เกิน ๐.๐๓ มิลลิกรัมต่อลิตร

(๘) แบเรียม (Ba) ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร

(๙) ซีลีเนียม (Se) ไม่เกิน ๐.๐๒ มิลลิกรัมต่อลิตร

(๑๐) ตะกั่ว (Pb) ไม่เกิน ๐.๒ มิลลิกรัมต่อลิตร

(๑๑) นิกเกิล (Ni) ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร

(๑๒) แมงกานีส (Mn) ไม่เกิน ๕.๐ มิลลิกรัมต่อลิตร

ข้อ ๖ การตรวจสอบค่ามาตรฐานน้ำทิ้งจากโรงงาน ตามข้อ ๕ ให้ใช้วิธีดังต่อไปนี้

๖.๑ ความเป็นกรดและด่าง ให้ใช้เครื่องวัดความเป็นกรดและด่างของน้ำ (pH Meter) ที่มีความละเอียดไม่ต่ำกว่า ๐.๑ หน่วย

๖.๒ อุณหภูมิ ให้ใช้เครื่องวัดอุณหภูมิวัดขณะทำการเก็บตัวอย่าง

๖.๓ สี ให้ใช้วิธีเอดีเอ็มไอ (ADMI Method)

๖.๔ ของแข็งละลายน้ำทั้งหมด ให้ใช้วิธีระเหยตัวอย่างที่กรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter Disk) และอบแห้งที่อุณหภูมิ ๑๘๐ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

๖.๕ ของแข็งแขวนลอยทั้งหมด ให้ใช้วิธีกรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter) และอบแห้งที่อุณหภูมิ ๑๐๓ - ๑๐๕ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

๖.๖ บีโอดี ให้ใช้วิธีบ่มตัวอย่างที่อุณหภูมิ ๒๐ องศาเซลเซียส เป็นเวลา ๕ วันติดต่อกัน และหาค่าออกซิเจนละลายด้วยวิธีเอไซด์โมดิฟิเคชั่น (Azide Modification) หรือวิธีเมมเบรนอิเลคโทรด (Membrane Electrode)

๖.๗ ซีโอดี ให้ใช้วิธีย่อยสลายโดยใช้โพแทสเซียมไดโครเมต (Potassium Dichromate)

๖.๘ ซัลไฟด์ ให้ใช้วิธีไอโอโดเมตริก (Iodometric Method) หรือวิธีเมทิลีนบลู (Methylene Blue Method)

๖.๙ ไซยาไนด์ ให้ใช้การกลั่น (Distillation) และตรวจวัดด้วยวิธีเทียบสี (Colorimetric Method) หรือวิธี Flow Injection Analysis

๖.๑๐ น้ำมันและไขมัน ให้ใช้วิธีสกัดด้วยเทคนิค Liquid – Liquid Extraction หรือ Soxhlet Extraction ด้วยตัวทำละลายแล้วนยกหาน้ำหนักของน้ำมันและไขมัน

๖.๑๑ ฟอร์มาลดีไฮด์ ให้ใช้วิธีเทียบสี (Colorimetric Method)

๖.๑๒ สารประกอบฟีนอล ให้ใช้การกลั่น (Distillation) และตรวจวัดด้วยวิธีเทียบสี (Colorimetric Method)

๖.๑๓ คลอรีนอิสระ ให้ใช้วิธีไตเตรท (Titrimetric Method) หรือวิธีเทียบสี (Colorimetric Method)

๖.๑๔ สารฆ่าศัตรูพืชและสัตว์ ให้ใช้วิธีก๊าซโครมาโตกราฟิค (Gas-Chromatographic Method) หรือวิธีไฮเพอร์ฟอร์แมนซ ลิควิด โครมาโตกราฟิค (High-Performance Liquid Chromatographic Method)

๖.๑๕ ทีเคเอ็น ให้ใช้วิธีเจลดาห์ล (Kjeldahl)

๖.๑๖ โลหะหนัก

(๑) สังกะสี ทองแดง แคดเมียม แบเรียม ตะกั่ว นิกเกิลและแมงกานีส ให้ใช้วิธีย่อยสลายตัวอย่างด้วยกรด (Acid digestion) และวัดหาปริมาณโลหะด้วยวิธีอะตอมมิคแอบซอพชั่นสเปคโตรเมตตรี (Atomic Absorption Spectrometry : AAS) หรือวิธีอินดักทีฟลีคัพเพิลพลาสม่า (Inductively Coupled Plasma)

(๒) โครเมียม

ก) โครเมียมทั้งหมด ให้ใช้วิธีย่อยสลายตัวอย่างด้วยกรด (Acid digestion) และวัดหาปริมาณโลหะด้วยวิธีอะตอมมิคแอบซอพชั่นสเปคโตรเมตตรี (Atomic Absorption Spectrometry : AAS) หรือวิธีอินดักทีฟลีคัพเพิลพลาสม่า (Inductively Coupled Plasma)

ข) โครเมียมเฮกซะวาเลนท์ ให้ใช้วิธีเทียบสี (Colorimetric Method) หรือวิธีสกัดและตรวจวัดด้วยวิธีอะตอมมิคแอบซอพชั่นสเปคโตรเมตตรี (Atomic Absorption Spectrometry : AAS) หรือวิธีสกัดและตรวจวัดด้วยวิธีอินดักทีฟลีคัพเพิลพลาสม่า (Inductively Coupled Plasma)

ค) โครเมียมไตรวาเลนท์ ให้ใช้วิธีคำนวณจากค่าส่วนต่างของโครเมียมทั้งหมดกับโครเมียมเฮกซะวาเลนท์

(๓) สารหนูและซีลีเนียม ให้ใช้วิธีอะตอมมิคแอบซอพชั่นสเปคโตร์โฟโตเมตตรี (Atomic Absorption Spectrophotometry) ชนิดไฮไดรด์เจนเนอเรชั่น (Hydride Generation) หรือวิธีอินดักทีฟลี คัพเพิลพลาสม่า (Inductively Coupled Plasma)

(๔) ปรอท ให้ใช้วิธีโคลด์เวเปอร์อะตอมมิคแอบซอพชั่นสเปคโตรเมตตรี (Cold Vapor Atomic Absorption Spectrometry) หรือวิธีโคลด์เวเปอร์อะตอมมิคฟลูออเรสเซนซ์สเปคโตรเมตตรี (Cold Vapor Atomic Fluorescence Spectrometry) หรือวิธีอินดักทีฟลีคัพเพิลพลาสม่า (Inductively Coupled Plasma)

ข้อ ๗ การตรวจสอบค่ามาตรฐานน้ำทิ้งจากโรงงาน ตามข้อ ๖ ให้เป็นไปตามคู่มือวิเคราะห์น้ำและน้ำเสียของสมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย หรือ Standard Methods for the Examination of Water and Wastewater ซึ่ง American Public Health Association, American Water Work Association และ Water Environment Federation ของประเทศสหรัฐอเมริกากำหนด หรือตามที่กรมโรงงานอุตสาหกรรมกำหนด

ข้อ ๘ การเก็บตัวอย่างน้ำทิ้งเพื่อการตรวจสอบค่ามาตรฐาน ตามข้อ ๕ ให้เป็นดังต่อไปนี้

๘.๑ จุดเก็บตัวอย่าง ให้เก็บในจุดระบายทิ้งออกจากโรงงาน ไม่ว่าจะมีจุดเดียวหรือหลายจุดก็ตาม หรือจุดอื่นที่สามารถใช้เป็นตัวแทนของน้ำทิ้งที่ระบายออกจากโรงงาน กรณีมีการระบายทิ้งหลายจุดให้เก็บทุกจุด

๘.๒ วิธีการเก็บตัวอย่างน้ำทิ้ง ณ จุดเก็บตัวอย่างตาม ๘.๑ ให้เก็บแบบจ้วง (Grab Sample)

ข้อ ๙ การกำหนดค่ามาตรฐานน้ำทิ้งให้แตกต่างไปจากข้อ ๕ สำหรับโรงงานในประเภทหรือชนิดใดเป็นการเฉพาะให้เป็นไปตามประกาศกรมโรงงานอุตสาหกรรม

ข้อ ๑๐ ให้ประกาศกรมโรงงานอุตสาหกรรม (พ.ศ. ๒๕๓๙) เรื่อง กำหนดคุณลักษณะน้ำทิ้งที่ระบายออกนอกโรงงานให้มีค่าแตกต่างจากที่กำหนดไว้ในประกาศกระทรวงอุตสาหกรรม ฉบับที่ ๒ (พ.ศ. ๒๕๓๙) เรื่อง กำหนดคุณลักษณะของน้ำทิ้งที่ระบายออกจากโรงงาน ลงวันที่ ๑๘ กุมภาพันธ์ พ.ศ. ๒๕๔๐ ยังคงบังคับใช้ต่อไปจนกว่าจะได้มีการยกเลิก

ประกาศ ณ วันที่ ๓๐ พฤษภาคม พ.ศ. ๒๕๖๐
อุตตม สาวนายน
รัฐมนตรีว่าการกระทรวงอุตสาหกรรม

ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ

เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป

พ.ศ. ๒๕๖๙

โดยที่เป็นการสมควรปรับปรุงการกำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป ให้เหมาะสมตามความก้าวหน้าในทางวิทยาศาสตร์ เทคโนโลยี และความเปลี่ยนแปลงทางเศรษฐกิจและสังคมของประเทศ เพื่อเป็นเกณฑ์ทั่วไปสำหรับการส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมตามพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕

อาศัยอำนาจตามความในมาตรา ๓๒ (๔) และมาตรา ๓๔ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ และตามคำสั่งสำนักนายกรัฐมนตรี ที่ ๓๐๒/๒๕๖๘ ลงวันที่ ๒๔ กันยายน พ.ศ. ๒๕๖๘ เรื่อง มอบหมายและมอบอำนาจให้รองนายกรัฐมนตรีและรัฐมนตรีประจำสำนักนายกรัฐมนตรี ปฏิบัติหน้าที่ประธานกรรมการ และมอบหมายให้รองนายกรัฐมนตรีและรัฐมนตรีประจำสำนักนายกรัฐมนตรีปฏิบัติหน้าที่ประธานกรรมการ รองประธานกรรมการ และกรรมการในคณะกรรมการต่าง ๆ ตามกฎหมาย และระเบียบสำนักนายกรัฐมนตรี ประกอบกับมติคณะกรรมการสิ่งแวดล้อมแห่งชาติ ในการประชุมครั้งที่ ๕/๒๕๖๘ เมื่อวันที่ ๑๕ ตุลาคม พ.ศ. ๒๕๖๘ จึงออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิก

๑.๑ ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๑๐ (พ.ศ. ๒๕๓๘) ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป ลงวันที่ ๑๗ เมษายน พ.ศ. ๒๕๓๘

๑.๒ ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๑๒ (พ.ศ. ๒๕๓๘) ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ เรื่อง กำหนดมาตรฐานค่าก๊าซซัลเฟอร์ไดออกไซด์ในบรรยากาศโดยทั่วไป ในเวลา ๑ ชั่วโมง ลงวันที่ ๒๖ มิถุนายน พ.ศ. ๒๕๓๘

๑.๓ ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๒๑ (พ.ศ. ๒๕๔๔) ออกตามความในพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ เรื่อง กำหนดมาตรฐานค่าก๊าซซัลเฟอร์ไดออกไซด์ในบรรยากาศโดยทั่วไป ในเวลา ๑ ชั่วโมง ลงวันที่ ๙ เมษายน พ.ศ. ๒๕๔๔

๑.๔ ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๒๔ (พ.ศ. ๒๕๔๗) เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป ลงวันที่ ๙ สิงหาคม พ.ศ. ๒๕๔๓

๑.๕ ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๒๘ (พ.ศ. ๒๕๕๐) เรื่อง กำหนดมาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไป ลงวันที่ ๑๐ เมษายน พ.ศ. ๒๕๕๐

๑.๖ ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ ฉบับที่ ๓๓ (พ.ศ. ๒๕๕๒) เรื่อง กำหนดมาตรฐานค่าก๊าซไนโตรเจนไดออกไซด์ในบรรยากาศโดยทั่วไป ลงวันที่ ๑๗ มิถุนายน พ.ศ. ๒๕๕๒

๑.๗ ประกาศคณะกรรมการสิ่งแวดล้อมแห่งชาติ เรื่อง กำหนดมาตรฐานฝุ่นละอองขนาดไม่เกิน ๒.๕ ไมครอน ในบรรยากาศโดยทั่วไป ลงวันที่ ๒๓ มิถุนายน พ.ศ. ๒๕๖๕

ข้อ ๒ กำหนดค่ามาตรฐานคุณภาพอากาศในบรรยากาศโดยทั่วไปไว้ ดังนี้

๒.๑ ก๊าซซัลเฟอร์ไดออกไซด์

(๑) ค่าเฉลี่ยของก๊าซซัลเฟอร์ไดออกไซด์ ในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๑๐๐ ส่วนในพันล้านส่วน

(๒) ค่าเฉลี่ยของก๊าซซัลเฟอร์ไดออกไซด์ ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๕๐ ส่วนในพันล้านส่วน

๒.๒ ก๊าซไนโตรเจนไดออกไซด์

(๑) ค่าเฉลี่ยของก๊าซไนโตรเจนไดออกไซด์ ในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๑๒๐ ส่วนในพันล้านส่วน

(๒) ค่าเฉลี่ยของก๊าซไนโตรเจนไดออกไซด์ในเวลา ๑ ปี จะต้องไม่เกิน ๓๐ ส่วนในพันล้านส่วน

๒.๓ ก๊าซคาร์บอนมอนอกไซด์

(๑) ค่าเฉลี่ยของก๊าซคาร์บอนมอนอกไซด์ ในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๓๐ ส่วนในล้านส่วน

(๒) ค่าเฉลี่ยของก๊าซคาร์บอนมอนอกไซด์ ในเวลา ๘ ชั่วโมง จะต้องไม่เกิน ๙ ส่วนในล้านส่วน

๒.๔ ก๊าซโอโซน

(๑) ค่าเฉลี่ยของก๊าซโอโซน ในเวลา ๑ ชั่วโมง จะต้องไม่เกิน ๑๐๐ ส่วนในพันล้านส่วน

(๒) ค่าเฉลี่ยของก๊าซโอโซน ในเวลา ๘ ชั่วโมง จะต้องไม่เกิน ๗๐ ส่วนในพันล้านส่วน

๒.๕ ฝุ่นรวมหรือฝุ่นละอองขนาดไม่เกิน ๑๐๐ ไมครอน

(๑) ค่าเฉลี่ยของฝุ่นรวมหรือฝุ่นละอองขนาดไม่เกิน ๑๐๐ ไมครอน ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๒๐๐ ไมโครกรัมต่อลูกบาศก์เมตร

(๒) ค่าเฉลี่ยของฝุ่นรวมหรือฝุ่นละอองขนาดไม่เกิน ๑๐๐ ไมครอน ในเวลา ๑ ปี จะต้องไม่เกิน ๘๐ ไมโครกรัมต่อลูกบาศก์เมตร

๒.๖ ฝุ่นละอองขนาดไม่เกิน ๑๐ ไมครอน

(๑) ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๑๐ ไมครอน ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๑๐๐ ไมโครกรัมต่อลูกบาศก์เมตร

(๒) ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๑๐ ไมครอน ในเวลา ๑ ปี จะต้องไม่เกิน ๕๐ ไมโครกรัมต่อลูกบาศก์เมตร

๒.๗ ฝุ่นละอองขนาดไม่เกิน ๒.๕ ไมครอน

(๑) ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๒.๕ ไมครอน ในเวลา ๒๔ ชั่วโมง จะต้องไม่เกิน ๓๗.๕ ไมโครกรัมต่อลูกบาศก์เมตร

(๒) ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๒.๕ ไมครอน ในเวลา ๑ ปี จะต้องไม่เกิน ๑๕ ไมโครกรัมต่อลูกบาศก์เมตร

๒.๘ สารตะกั่ว ค่าเฉลี่ยของสารตะกั่ว ในเวลา ๑ เดือน จะต้องไม่เกิน ๑ ไมโครกรัมต่อลูกบาศก์เมตร

ข้อ ๓ วิธีการตรวจวัดค่าเฉลี่ยของสารมลพิษทางอากาศ ดังนี้

๓.๑ ค่าเฉลี่ยของก๊าซซัลเฟอร์ไดออกไซด์ในเวลา ๑ ชั่วโมง หรือค่าเฉลี่ยในเวลา ๒๔ ชั่วโมง ให้ใช้วิธีพาราโรซานิลีน (Pararosaniline) หรือวิธีอุลตร้าไวโอเลต ฟลูออเรสเซน (Ultraviolet Fluorescence)

๓.๒ ค่าเฉลี่ยของก๊าซไนโตรเจนไดออกไซด์ในเวลา ๑ ชั่วโมง หรือค่าเฉลี่ยในเวลา ๑ ปี ให้ใช้วิธีเคมีลูมิเนสเซน (Chemiluminescence) หรือวิธีคาวิตี แอทเทนนูเอเต็ด เฟสชิฟ สเปกโทรสโกปี (Cavity Attenuated Phase Shift Spectroscopy : CAPS)

๓.๓ ค่าเฉลี่ยของก๊าซคาร์บอนมอนอกไซด์ในเวลา ๑ ชั่วโมง หรือค่าเฉลี่ยในเวลา ๘ ชั่วโมง ให้ใช้วิธีนันดีสเปอร์ซีฟ อินฟราเรด ดีเทคชัน (Non-dispersive Infrared Detection) หรือวิธีนันดีสเปอร์ซีฟ อินฟราเรด ดีเทคชัน ก๊าซฟิลเตอร์คอริเรชัน (Non-dispersive Infrared Detection Gas Filter Correlation)

๓.๔ ค่าเฉลี่ยของก๊าซโอโซนในเวลา ๑ ชั่วโมง หรือค่าเฉลี่ยของก๊าซโอโซนในเวลา ๘ ชั่วโมง ให้ใช้วิธีเคมีลูมิเนสเซน (Chemiluminescence) หรือวิธีอุลตร้าไวโอเลต แอ็บซอบชัน โฟโตเมตตริก (Ultraviolet Absorption Photometry)

๓.๕ ค่าเฉลี่ยของฝุ่นรวมหรือฝุ่นละอองขนาดไม่เกิน ๑๐๐ ไมครอน ในเวลา ๒๔ ชั่วโมง หรือค่าเฉลี่ย ในเวลา ๑ ปี ให้ใช้วิธีตรวจวัดอ้างอิง คือวิธีกราวิเมตริก (Gravimetric)

๓.๖ ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๑๐ ไมครอน ในเวลา ๒๔ ชั่วโมง หรือค่าเฉลี่ยในเวลา ๑ ปี ให้ใช้วิธีตรวจวัดอ้างอิง คือวิธีกราวิเมตริก (Gravimetric) หรือวิธีตรวจวัดเทียบเท่า ได้แก่ วิธีเบต้าเรดิเอชัน แอทเทนนูเอชัน (Beta Radiation Attenuation) วิธีเทปเปอร์ อิลิเมนต์ ออสซิเลติง ไมโครบาลานซ์ (Tapered Element Oscillating Microbalance : TEOM) วิธีการกระเจิงของแสง (Light Scattering) และวิธีเก็บตัวอย่างด้วยเครื่องเก็บตัวอย่างอากาศแบบไดโคโตมัส (Dichotomous Air Sampler)

๓.๗ ค่าเฉลี่ยของฝุ่นละอองขนาดไม่เกิน ๒.๕ ไมครอน ในเวลา ๒๔ ชั่วโมง หรือค่าเฉลี่ยในเวลา ๑ ปี ให้ใช้วิธีตรวจวัดอ้างอิง คือวิธีกราวิเมตริก (Gravimetric) หรือวิธีตรวจวัดเทียบเท่า ได้แก่ วิธีเบต้า เรดิเอชัน แอทเทนนูเอชัน (Beta Radiation Attenuation) วิธีเทปเปอร์ อิลิเมนต์ ออสซิเลติง ไมโครบาลานซ์ (Tapered Element Oscillating Microbalance : TEOM) วิธีการกระเจิงของแสง (Light Scattering) และวิธีเก็บตัวอย่างด้วยเครื่องเก็บตัวอย่างอากาศแบบไดโคโตมัส (Dichotomous Air Sampler)

๓.๘ ค่าเฉลี่ยของสารตะกั่ว ในเวลา ๑ เดือน ให้ใช้วิธีอะตอมมิก แอบซอพชัน สเปคโตรมิเตอร์ (Atomic Absorption Spectrometer)

ข้อ ๔ วิธีการตรวจวัดค่าเฉลี่ยของสารมลพิษทางอากาศตามข้อ ๓ ให้ใช้วิธีตรวจวัดอ้างอิง หรือวิธีตรวจวัดเทียบเท่า ตามที่องค์การพิทักษ์สิ่งแวดล้อมแห่งสหรัฐอเมริกา (United States Environmental Protection Agency : US EPA) หรือมาตรฐานของสหภาพยุโรป (European Union : EU) กำหนด หรือวิธีอื่นตามที่อธิบดีกรมควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ข้อ ๕ การตรวจวัดค่าเฉลี่ยของสารมลพิษทางอากาศให้ดำเนินการ ดังนี้

๕.๑ การตรวจวัดค่าเฉลี่ยของสารมลพิษทางอากาศในข้อ ๓.๑ ถึงข้อ ๓.๔ ให้ทำในบรรยากาศโดยทั่วไป และต้องสูงจากพื้นดินอย่างน้อย ๓ เมตร แต่ไม่เกิน ๖ เมตร ตามวัตถุประสงค์ของการตรวจวัด การคำนวณค่าความเข้มข้นของสารมลพิษทางอากาศให้เทียบที่อุณหภูมิ ๒๕ องศาเซลเซียส และความดัน ๑ บรรยากาศ

๕.๒ การตรวจวัดค่าเฉลี่ยของสารมลพิษทางอากาศในข้อ ๓.๕ ข้อ ๓.๖ และข้อ ๓.๘ ให้ทำในบรรยากาศโดยทั่วไป และต้องสูงจากพื้นดินอย่างน้อย ๑.๕๐ เมตร แต่ไม่เกิน ๖ เมตร ตามวัตถุประสงค์ของการตรวจวัด การคำนวณค่าความเข้มข้นของสารมลพิษทางอากาศให้เทียบที่อุณหภูมิ ๒๕ องศาเซลเซียส และความดัน ๑ บรรยากาศ

๕.๓ การตรวจวัดค่าเฉลี่ยของสารมลพิษทางอากาศในข้อ ๓.๗ ให้ทำในบรรยากาศโดยทั่วไป และต้องสูงจากพื้นดินอย่างน้อย ๑.๕๐ เมตร แต่ไม่เกิน ๑๕ เมตร ตามวัตถุประสงค์ของการตรวจวัด การคำนวณค่าความเข้มข้นของสารมลพิษทางอากาศให้เทียบที่อุณหภูมิและความดันบรรยากาศสภาวะจริง

ข้อ ๖ การคำนวณค่าความเข้มข้นของสารมลพิษทางอากาศตามข้อ ๕ ต้องมีความครบถ้วนสมบูรณ์ของข้อมูล ไม่น้อยกว่าร้อยละ ๗๕

ข้อ ๗ การกำหนดดัชนีคุณภาพอากาศของประเทศไทยสำหรับสารมลพิษทางอากาศตามประกาศนี้ ให้เป็นไปตามหลักเกณฑ์ วิธีการ และเงื่อนไข ที่อธิบดีกรมควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ข้อ ๘ ประกาศนี้ให้ใช้บังคับนับแต่วันถัดจากวันประกาศในราชกิจจานุเบกษา

ประกาศ ณ วันที่ ๖ มกราคม พ.ศ. ๒๕๖๙
สุชาติ ชมกลิ่น
รองนายกรัฐมนตรี
ประธานกรรมการสิ่งแวดล้อมแห่งชาติ



ประกาศกระทรวงอุตสาหกรรม

เรื่อง มาตรการคุ้มครองความปลอดภัยในการประกอบกิจการโรงงานเกี่ยวกับสภาวะแวดล้อมในการทำงาน

พ.ศ. 2546

อาศัยอำนาจตามความในข้อ 18 แห่งกฎกระทรวงฉบับที่ 2 (พ.ศ. 2535) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. 2535 อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการที่เกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา 29 ประกอบกับมาตรา 35 มาตรา 48 กับมาตรา 50 ของรัฐธรรมนูญแห่งราชอาณาจักรไทย บัญญัติให้กระทำได้โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย รัฐมนตรีว่าการกระทรวงอุตสาหกรรมออกประกาศไว้ดังต่อไปนี้

ข้อ 1. ในประกาศนี้

"ระดับความร้อน" หมายความว่า อุณหภูมิความร้อนในบริเวณที่ปฏิบัติงาน ตรวจวัดเป็นอุณหภูมิเวทบัลบ์โกลบ (Wet Bulb Globe Temperature : WBGT) เฉลี่ยในช่วงเวลาสองชั่วโมงที่มีอุณหภูมิเวทบัลบ์โกลบสูงสุดของการทำงานปกติ

"อุณหภูมิเวทบัลบ์โกลบ" หมายความว่า อุณหภูมิซึ่งวัดเป็นองศาเซลเซียส คำนวณได้จากสูตร ต่อไปนี้

WBGT = 0.7 NWB + 0.3 GT (ในกรณีไม่มีแสงแดด)

WBGT = 0.7 NWB + 0.2 GT + 0.1 DB (ในกรณีมีแสงแดด)

โดยที่ NWB (Natural Wet Bulb Temperature) คืออุณหภูมิที่อ่านค่าจากเทอร์โมมิเตอร์กระเปาะเปียกตามธรรมชาติ วัดเป็นองศาเซลเซียส

GT (Globe Temperature) คืออุณหภูมิที่อ่านค่าจากโกลเทอร์โมมิเตอร์ วัดเป็นองศาเซลเซียส

DB (Dry Bulb Temperature) คือ อุณหภูมิที่อ่านค่าจากเทอร์โมมิเตอร์กระเปาะแห้ง วัดเป็นองศาเซลเซียส

"งานเบา" หมายความว่า ลักษณะงานที่ใช้แรงน้อยหรือใช้กำลังงานที่ทำให้เกิดการเผาผลาญอาหารในร่างกายไม่เกิน 200 กิโลแคลอรี/ชั่วโมง เช่น งานเขียนหนังสือ งานพิมพ์ดีด งานบันทึกข้อมูล งานเย็บจักร งานนั่งตรวจสอบผลิตภัณฑ์ งานประกอบชิ้นงานขนาดเล็ก งานบังคับเครื่องจักรด้วยเท้าการยืนคุมงาน เป็นต้น หรืองานที่เทียบเคียงได้กับงานดังกล่าว

"งานปานกลาง" หมายความว่า ลักษณะงานที่ใช้แรงปานกลางหรือใช้กำลังงานที่ทำให้เกิดการเผาผลาญอาหารในร่างกายเกินกว่า 200 กิโลแคลอรี/ชั่วโมง ถึง 350 กิโลแคลอรี/ชั่วโมง เช่น

ประกาศในราชกิจจานุเบกษา ฉบับประกาศทั่วไป
เล่ม 120 ตอน พิเศษ 138ง เมื่อวันที่ 3 ธันวาคม 2546

งานยก ลาก ดัน หรือเคลื่อนย้ายสิ่งของด้วยแรงปานกลาง งานตอกตะปู งานตะไบ งานขัดกบบรรทุก งานขับรถแทรกเตอร์ เป็นต้น หรืองานที่เทียบเคียงได้กับงานดังกล่าว

"งานหนัก" หมายความว่า ลักษณะงานที่ใช้แรงมาก หรือใช้กำลังงานที่ทำให้เกิดการเผาผลาญอาหารในร่างกายเกินกว่า 350 กิโลแคลอรี/ชั่วโมง ถึง 500 กิโลแคลอรี/ชั่วโมง เช่น งานที่ใช้หลั่วหรือเสียม ขุดดิน งานเลื่อยไม้ งานเจาะไม้เนื้อแข็ง งานขุนโดยใช้ล้อแบบขนาดใหญ่ งานยกหรือเคลื่อนย้ายของหนักขึ้นที่สูงหรือที่ลาดชัน เป็นต้น หรืองานที่เทียบเคียงได้กับงานดังกล่าว

หมวด 1

ความร้อน

ข้อ 2. บริเวณที่ปฏิบัติงานต้องมีระดับความร้อนไม่เกินกว่ามาตรฐานที่กำหนดไว้ในตารางท้ายหมวดนี้

ข้อ 3. บริเวณปฏิบัติงานที่มีระดับความร้อนเกินกว่ามาตรฐานตามข้อ 2 ผู้ประกอบกิจการโรงงานต้องปิดประกาศเตือนให้ทราบถึงบริเวณที่มีความร้อนสูงเกินมาตรฐานที่กำหนด

ข้อ 4. ในกรณีที่ภายในบริเวณปฏิบัติงานมีระดับความร้อนเกินมาตรฐาน ตามข้อ 2 ผู้ประกอบกิจการโรงงานต้องดำเนินการปรับปรุงหรือแก้ไขให้บริเวณปฏิบัติงานมีระดับความร้อนอยู่ในเกณฑ์มาตรฐาน หากได้ดำเนินการปรับปรุงหรือแก้ไขแล้ว ไม่สามารถควบคุมให้เป็นไปตามมาตรฐานดังกล่าวได้ ผู้ประกอบกิจการโรงงานต้องจัดหาอุปกรณ์ป้องกันอันตรายส่วนบุคคล เช่น ชุดแต่งกาย รองเท้า และถุงมือเพื่อป้องกันความร้อน สำหรับผู้ที่จะเข้าไปในบริเวณดังกล่าว ตลอดจนต้องจัดให้มีการอบรมการใช้อุปกรณ์ป้องกันอันตรายส่วนบุคคลด้วย

ตารางแสดงมาตรฐานระดับความร้อน

ความหนักเบาของงาน	มาตรฐานระดับความร้อน ค่าเฉลี่ยอุณหภูมิเวทบัลบ์โกลบ (WBGT) กำหนดเป็นองศาเซลเซียส
เบา	34.0
ปานกลาง	32.0
หนัก	30.0

หมวด 2
แสงสว่าง

ข้อ 5 ผู้ประกอบกิจการโรงงานต้องป้องกันมิให้มีแสงตรง หรือแสงสะท้อนส่องเข้าตาคนงานในการปฏิบัติงาน

ข้อ 6. ผู้ประกอบกิจการโรงงานต้องจัดให้มีแสงสว่างเพียงพอแก่การทำงานอย่างทั่วถึง สามารถมองเห็นสิ่งกีดขวาง และส่วนที่อาจก่อให้เกิดอันตรายจากการเคลื่อนไหวของเครื่องจักร หรืออันตรายจากไฟฟ้า ตลอดจนทันได้ขึ้นลงและทางออก ในเวลามีเหตุฉุกเฉินอย่างชัดเจน ตามหลักเกณฑ์ดังต่อไปนี้

(1) ถนนถนนและทางเดินนอกอาคารโรงงาน ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 20 ลักซ์ (LUX) หรือ 2 ฟุต-แคนเดิล (Foot Candle)

(2) บริเวณทางเดินในอาคารโรงงาน ระเบียง บันได ห้องพักผ่อน ห้องพักฟื้นของพนักงาน ห้องเก็บของที่มิได้มีการเคลื่อนย้าย ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 50 ลักซ์

(3) บริเวณการปฏิบัติงานที่ไม่ต้องการความละเอียด ได้แก่ บริเวณการสีข้าว สางฝ้าย หรือการปฏิบัติงานขั้นแรกในกระบวนการอุตสาหกรรมต่าง ๆ และบริเวณจุดขนถ่ายสินค้า ป้อมยาม ลิฟท์ ห้องเปลี่ยนเสื้อผ้าและบริเวณตู้เก็บของ ห้องน้ำและห้องส้วม ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 100 ลักซ์

(4) บริเวณการปฏิบัติงานที่ต้องการความละเอียดน้อยมาก ได้แก่ งานหยาบที่ทำที่โต๊ะ หรือเครื่องจักร ชิ้นงานมีขนาดใหญ่กว่า 750 ไมโครเมตร(0.75 มิลลิเมตร) การตรวจงานหยาบด้วยสายตา การนับ การตรวจเช็คสิ่งของที่มีขนาดใหญ่ และบริเวณพื้นที่ในโกดัง ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 200 ลักซ์

(5) บริเวณการปฏิบัติงานที่ต้องการความละเอียดน้อย ได้แก่ บริเวณที่ปฏิบัติงานเกี่ยวกับงานรับจ่ายเสื้อผ้า การทำงานไม้ที่มีชิ้นงานขนาดปานกลาง งานบรรจุน้ำลงขวดหรือกระป๋อง งานเจาะรู ทากาว หรือเย็บเล่มหนังสือ ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 300 ลักซ์

ในบริเวณการปฏิบัติงานที่มีขนาดของชิ้นงานตั้งแต่ 125 ไมโครเมตร (0.125 มิลลิเมตร) ได้แก่งานเกี่ยวกับงานประจำในสำนักงาน เช่น งานพิมพ์ดีด เขียนและอ่าน งานประกอบอิเล็กทรอนิกส์และตัวถัง การทำงานไม้อย่างละเอียด ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 400 ลักซ์

(6) บริเวณการปฏิบัติงานที่ต้องการความละเอียดปานกลาง ได้แก่ งานเขียนแบบ งานระบายสี พ่นสีและตกแต่งสีอย่างละเอียด งานพิสูจน์อักษร งานตรวจสอบขั้นสุดท้ายในโรงงานผลิตรถยนต์ ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 600 ลักซ์

(7) บริเวณการปฏิบัติงานที่ต้องการความละเอียดสูง โดยมีขนาดของชิ้นงานตั้งแต่ 25 ไมโครเมตร (0.025 มิลลิเมตร) ได้แก่ บริเวณที่ปฏิบัติงานเกี่ยวกับการตรวจสอบงานละเอียด เช่น การปรับเทียบมาตรฐานความถูกต้องและความแม่นยำของอุปกรณ์ การระบายสี พ่นสี และตกแต่งชิ้นงานที่ต้องการความละเอียดมากเป็นพิเศษ งานย้อมสี ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 800 ลักซ์ ในบริเวณการปฏิบัติงานเกี่ยวกับการตรวจสอบ การตัดเย็บเสื้อผ้าด้วยมือ การตรวจสอบและตกแต่งสินค้าสิ่งทอ สิ่งถักหรือเสื้อผ้าที่มีสีอ่อนขั้นสุดท้ายด้วยมือ การคัดแยกและเทียบสีหนังที่มีสีเข้ม การเทียบสีในงานย้อมผ้า ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 1200 ลักซ์

(8) บริเวณการปฏิบัติงานที่ต้องการความละเอียดสูงมาก ได้แก่ งานละเอียดที่ต้องทำบนโต๊ะหรือเครื่องจักร เช่น ทำเครื่องมือและแม่พิมพ์ที่มีรายละเอียดขนาดเล็กกว่า 25 ไมโครเมตร (0.025 มิลลิเมตร) งานตรวจสอบตรวจวัดชิ้นส่วนที่มีขนาดเล็กหรือชิ้นงานที่มีส่วนประกอบขนาดเล็ก งานซ่อมแซมสินค้า สิ่งทอ สิ่งถักที่มีสีอ่อน งานตรวจสอบและตกแต่งชิ้นส่วนของสินค้าสิ่งทอ สิ่งถักที่มีสีเข้มด้วยมือ ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 1600 ลักซ์

(9) บริเวณการปฏิบัติงานที่ต้องการความละเอียดสูงมากเป็นพิเศษ ได้แก่ การปฏิบัติงานเกี่ยวกับการตรวจสอบชิ้นงานที่มีขนาดเล็กมาก การเจียระไนเพชร การทำนาฬิกาข้อมือในกระบวนการที่มีขนาดเล็ก การถัก ซ่อมแซมเสื้อผ้า ถุงเท้าที่มีสีเข้ม ความเข้มของการส่องสว่างต้องไม่น้อยกว่า 2400 ลักซ์

ข้อ 7. ความเข้มของการส่องสว่าง ณ ที่ปฏิบัติงานหรือลักษณะการปฏิบัติงานนอกเหนือจากที่กำหนดไว้ในข้อ 6 ผู้ประกอบกิจการโรงงานต้องจัดให้มีความเข้มของการส่องสว่าง เทียบเคียงไม่ต่ำกว่าหลักเกณฑ์ที่ได้กำหนดไว้

หมวด 3
เสียง

ข้อ 8. ผู้ประกอบกิจการโรงงานต้องควบคุมมิให้การปฏิบัติงานในโรงงานมีระดับเสียงเกินกว่ามาตรฐานที่ได้กำหนดไว้ในตารางท้ายหมวดนี้

ข้อ 9. ห้ามมิให้บุคคลเข้าไปในบริเวณที่มีเสียงดังเกินกว่า 140 เดซิเบลเอ

ข้อ 10. บริเวณปฏิบัติงานที่มีระดับเสียงเกินกว่ามาตรฐานตามข้อ 8 ผู้ประกอบกิจการโรงงานต้องจัดประกาศเตือนให้ทราบถึงบริเวณที่มีเสียงดังเกินมาตรฐานที่กำหนด

ตารางแสดงมาตรฐานปริมาณระดับเสียงเฉลี่ยที่ยอมรับได้กับเวลาการทำงานในแต่ละวัน

เวลาการทำงานที่ได้รับเสียงใน 1 วัน (ชม.)	ระดับเสียงเฉลี่ยตลอดเวลาการทำงานไม่เกิน (เดซิเบลเอ)
12	87
8	90
6	92
4	95
3	97
2	100
1 ½	102
1	105
½	110
¼ หรือน้อยกว่า	115

หมายเหตุ หากเวลาการปฏิบัติงานไม่มีค่ามาตรฐานที่กำหนดตรงตามตารางข้างต้น ให้คำนวณ โดยใช้สูตร $T = \frac{8}{2^{(L-90)/5}}$

เมื่อ T หมายถึง เวลาการทำงานที่ยอมให้ได้รับเสียง (ชั่วโมง)

L หมายถึง ระดับเสียง (เดซิเบลเอ)

ในการมีค่าระดับเสียงเฉลี่ยตลอดเวลาการทำงาน ที่ได้จากการคำนวณมีเศษทศนิยมให้ตัดเศษทศนิยมออก

หมวด 4
การตรวจวัดและวิเคราะห์สภาวะแวดล้อมในการทำงาน

ข้อ 11. ผู้ประกอบกิจการโรงงาน ต้องจัดให้มีการตรวจวัด วิเคราะห์ และจัดทำรายงานสภาพแวดล้อมในการทำงานเกี่ยวกับระดับความร้อน แสงสว่างและเสียงอย่างน้อยปีละ 1 ครั้ง โดยมีเจ้าหน้าที่ความปลอดภัยในการทำงานระดับวิชาชีพหรือผู้สำเร็จการศึกษาไม่ต่ำกว่าปริญญาตรีทางด้านวิทยาศาสตร์เป็นผู้รับรองรายงาน และให้เก็บรายงานดังกล่าวไว้ ณ ที่ตั้งโรงงานให้พร้อมสำหรับการตรวจสอบของพนักงานเจ้าหน้าที่

ข้อ 12. การตรวจวัดความร้อน บริเวณที่ทำการตรวจวัดต้องเป็นบริเวณที่มีการปฏิบัติงานอยู่ในสภาพการทำงานปกติ การตรวจวัดต้องเป็นบริเวณที่มีระดับเสความร้อนสูง และต้องตรวจวัดในเดือนที่มีอากาศร้อนของปี ประเภทหรือชนิดของโรงงานที่ต้องดำเนินการตรวจวัดความร้อนตามที่กำหนดไว้ในบัญชีที่ 1 ท้ายประกาศนี้

ข้อ 13. การตรวจวัดแสงสว่าง บริเวณที่ทำการตรวจวัดต้องเป็นบริเวณที่มีการปฏิบัติงานในสภาพการทำงานปกติ การตรวจวัดต้องเป็นบริเวณที่มีความเข้มของการส่องสว่างต่ำ โดยกำหนดให้โรงงานจำพวกที่ 3 ทุกประเภทต้องทำการตรวจวัดแสงสว่าง

ข้อ 14. การตรวจวัดระดับเสียง บริเวณที่ทำการตรวจวัดต้องเป็นบริเวณที่มีการปฏิบัติงานในสภาพการทำงานปกติ การตรวจวัดต้องเป็นบริเวณที่มีระดับเสียงสูง ประเภทหรือชนิดของโรงงานที่ต้องดำเนินการตรวจวัดเสียงตามที่กำหนดไว้ในบัญชีที่ 2 ท้ายประกาศนี้

ข้อ 15. วิธีการตรวจวัดและวิเคราะห์ให้เป็นไปตามหลักมาตรฐานสากล เช่น มาตรฐานของ Occupational Safety & Health Administration (OSHA) มาตรฐานของ National Institute Occupational Safety and Health (NIOSH) เป็นต้น หรือวิธีอื่นใดที่กรมโรงงานอุตสาหกรรมเห็นชอบ

หมวด 5
เบ็ดเตล็ด

ข้อ 16. ประกาศฉบับนี้ให้ใช้บังคับเมื่อพ้นกำหนดหนึ่งร้อยแปดสิบวัน นับแต่วันที่ประกาศในราชกิจจานุเบกษา เป็นต้นไป

ประกาศ ณ วันที่ 6 พฤศจิกายน พ.ศ. 2546

(นายสมศักดิ์ เทพสุทิน)
รัฐมนตรีว่าการกระทรวงอุตสาหกรรม

บัญชีท้ายประกาศกระทรวงอุตสาหกรรม
เรื่อง มาตรการคุ้มครองความปลอดภัยในการประกอบกิจการโรงงานเกี่ยวกับสภาวะแวดล้อมในการทำงาน
พ.ศ. 2546

บัญชีที่ 1 ประเภทหรือชนิดของโรงงานที่ต้องทำการตรวจวัดความร้อน

ลำดับที่	ตามประเภทหรือชนิดของโรงงานในบัญชีท้ายกฎกระทรวง (พ.ศ. 2535) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. 2535
11(3)(4)	โรงงานผลิตน้ำตาลทรายดิบ น้ำตาลทรายขาว หรือการทำให้บริสุทธิ์
22(3)	โรงงานสิ่งทอที่ทำการฟอก ย้อมสี หรือแต่งสำเร็จด้วยหรือสิ่งทอ
38(1)(2)	โรงงานผลิตเยื่อกระดาษจากไม้หรือวัสดุอื่น การทำกระดาษ กระดาษแข็ง หรือกระดาษที่ใช้ในการก่อสร้างชนิดที่ทำจากเส้นใย หรือแผ่นกระดาษไฟเบอร์
51	โรงงานผลิต ซ่อม หล่อ หรือหล่อดอกยางนอก หรือยางในสำหรับยานพาหนะที่เคลื่อนที่ด้วยเครื่องกล คน หรือสัตว์
54	โรงงานผลิตแก้ว เส้นใยแก้วหรือผลิตภัณฑ์แก้ว
57(1)	โรงงานทำซีเมนต์ ปูนขาว หรือปูนปลาสเตอร์
59	โรงงานประกอบกิจการเกี่ยวกับการถลุง หลอม หล่อ รีด ดึง ผลิตเหล็ก หรือเหล็กกล้าในขั้นต้น
60	โรงงานประกอบกิจการเกี่ยวกับการถลุง ผสมทำให้บริสุทธิ์ หลอม หล่อ รีด ดึง หรือผลิตโลหะขั้นต้น ซึ่งมิใช่เหล็กหรือเหล็กกล้า
61	โรงงานผลิต ตบแต่ง ดัดแปลง หรือซ่อมแซมเครื่องมือ หรือเครื่องใช้ที่ทำด้วยเหล็กหรือเหล็กกล้า และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องมือหรือเครื่องใช้ดังกล่าว
62	โรงงานผลิต ตบแต่ง ดัดแปลง หรือซ่อมแซมเครื่องเรือน หรือเครื่องตบแต่งภายในอาคารที่ทำจากโลหะหรือโลหะเป็นส่วนใหญ่ และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องเรือน หรือเครื่องตกแต่งดังกล่าว
63	โรงงานประกอบกิจการเกี่ยวกับผลิตภัณฑ์โลหะสำหรับใช้ในการก่อสร้าง
64	โรงงานประกอบกิจการเกี่ยวกับผลิตภัณฑ์โลหะ
65	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมเครื่องยนต์ เครื่องกังหัน และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องยนต์ หรือเครื่องกังหันดังกล่าว

บัญชีที่ 1 ประเภทหรือชนิดของโรงงานที่ต้องทำการตรวจวัดความร้อน

ลำดับที่	ตามประเภทหรือชนิดของโรงงานในบัญชีท้ายกฎกระทรวง (พ.ศ. 2535) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. 2535
66	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมเครื่องจักร สำหรับใช้ในการกสิกรรมหรือการเลี้ยงสัตว์ และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องจักรดังกล่าว
67	โรงงานประกอบกิจการเกี่ยวกับเครื่องจักร ส่วนประกอบ หรืออุปกรณ์ของเครื่องจักรสำหรับประดิษฐ์โลหะ หรือไม้
68	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมเครื่องจักรสำหรับอุตสาหกรรมหรือตามเคมี อาหาร การปั่นทอ การพิมพ์ การผลิตซีเมนต์หรือผลิตภัณฑ์ดินเหนียว การก่อสร้าง การทำเหมืองแร่ การเจาะหาปิโตรเลียม หรือการกลั่นน้ำมัน และรวมถึงส่วนประกอบของเครื่องจักรดังกล่าว
74(1)	โรงงานประกอบกิจการเกี่ยวกับการทำหลอดไฟฟ้า หรือตาโคมไฟฟ้า
77	โรงงานประกอบกิจการเกี่ยวกับรถยนต์ หรือรถพ่วง
78	โรงงานประกอบกิจการเกี่ยวกับจักรยานยนต์ จักรยานสามล้อ หรือจักรยานสองล้อ
79	โรงงานประกอบกิจการเกี่ยวกับอากาศยาน หรือเรือโลเวอร์คราฟท์
80	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมล็อกเตื่อน ที่ขับเคลื่อนด้วยแรงคน หรือสัตว์ ซึ่งมิใช่จักรยาน และรวมถึงส่วนประกอบหรืออุปกรณ์ของผลิตภัณฑ์ดังกล่าว
88	โรงงานผลิต ส่ง หรือจำหน่ายพลังงานไฟฟ้า
98	โรงงานซักรีด ซักแห้ง ซักฟอก อบ ตัด หรือย้อมผ้า เครื่องนุ่งห่ม พรม หรือขนสัตว์
100(6)	โรงงานประกอบกิจการเกี่ยวกับการตบแต่งหรือเปลี่ยนแปลงคุณลักษณะของผลิตภัณฑ์ หรือส่วนประกอบของผลิตภัณฑ์โดยไม่มีการผลิต ด้วยวิธีการอบชุบด้วยความร้อน
102	โรงงานประกอบกิจการเกี่ยวกับการผลิต และหรือจำหน่ายไอน้ำ

หมายเหตุ : โรงงานลำดับที่ 61-68 และ 77-80 เฉพาะโรงงานที่มีการหล่อหลอมโลหะเท่านั้น
โรงงานลำดับที่ 98 เฉพาะโรงงานที่มีการฟอก ย้อมสีเท่านั้น

บัญชีที่ 2 ประเภทหรือชนิดของโรงงานที่ต้องทำการตรวจวัดเสียง

ลำดับที่	ตามประเภทหรือชนิดของโรงงานในบัญชีท้ายกฎกระทรวง (พ.ศ. 2535) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. 2535
3(1)	โรงงานที่ประกอบกิจการเกี่ยวกับการโม่ บด หรือย่อยหิน
11(3)(4)	โรงงานผลิตน้ำตาลทรายดิบ น้ำตาลทรายขาว หรือการทำให้บริสุทธิ์
14	โรงงานประกอบกิจการเกี่ยวกับการทำน้ำแข็ง หรือตัด ซอย บด หรือย่อยน้ำแข็ง
20(3)	โรงงานประกอบกิจการเกี่ยวกับการทำน้ำอัดลม (เฉพาะที่บรรจุขวดแก้ว)
22(2)	โรงงานประกอบกิจการเกี่ยวกับการทอ หรือการเตรียมเส้นด้ายยืนสำหรับการทอ
34(1)(2)(3)(4)	โรงงานประกอบกิจการเกี่ยวกับการเลื่อย ไส ซอย เซาะร่อง การทำวงกบ ขอบประตู ขอบหน้าต่าง บานหน้าต่าง บานประตู หรือส่วนประกอบที่ทำด้วยไม้ของอาคาร การทำไม้วีเนียร์ หรือไม้อัดทุกชนิด การทำฝอยไม้ กาวบด ปั่น หรือย่อยไม้
38(1)	โรงงานผลิตเยื่อจากไม้ หรือวัสดุอื่น
53(9)	โรงงานประกอบกิจการเกี่ยวกับการล้าง บด หรือย่อยพลาสติก
61	โรงงานผลิต ตบแต่ง ดัดแปลง หรือซ่อมแซมเครื่องมือ หรือเครื่องใช้ที่ทำด้วยเหล็กหรือเหล็กกล้า และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องมือหรือเครื่องใช้ดังกล่าว
62	โรงงานผลิต ตบแต่ง ดัดแปลง หรือซ่อมแซมเครื่องเรือน หรือเครื่องตบแต่งภายในอาคารที่ทำจากโลหะหรือโลหะเป็นส่วนใหญ่ และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องเรือน หรือเครื่องตบแต่งดังกล่าว
63	โรงงานประกอบกิจการเกี่ยวกับผลิตภัณฑ์โลหะสำหรับใช้ในการก่อสร้าง
64	โรงงานประกอบกิจการเกี่ยวกับผลิตภัณฑ์โลหะ
65	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมเครื่องยนต์ เครื่องถังหัน และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องยนต์ หรือเครื่องถังหันดังกล่าว
66	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมเครื่องจักร สำหรับใช้ในการกสิกรรมหรือการเลี้ยงสัตว์ และรวมถึงส่วนประกอบหรืออุปกรณ์ของเครื่องจักรดังกล่าว
67	โรงงานประกอบกิจการเกี่ยวกับเครื่องจักร ส่วนประกอบ หรืออุปกรณ์ของเครื่องจักรสำหรับประดิษฐ์โลหะ หรือไม้

บัญชีที่ 2 ประเภทหรือชนิดของโรงงานที่ต้องทำการตรวจวัดเสียง

ลำดับที่	ตามประเภทหรือชนิดของโรงงานในบัญชีท้ายกฎกระทรวง (พ.ศ. 2535) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. 2535
68	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมเครื่องจักรสำหรับอุตสาหกรรมกระดาษ เคมี อาหาร การปั่นหอ การพิมพ์ การผลิตซีเมนต์หรือผลิตภัณฑ์ดินเหนียว การก่อสร้าง การทำเหมืองแร่ การเจาะหาปิโตรเลียม หรือการกลั่นน้ำมัน และรวมถึงส่วนประกอบของเครื่องจักรดังกล่าว
77	โรงงานประกอบกิจการเกี่ยวกับรถยนต์ หรือรถพ่วง
78	โรงงานประกอบกิจการเกี่ยวกับจักรยานยนต์ จักรยานสามล้อ หรือจักรยานสองล้อ
79	โรงงานประกอบกิจการเกี่ยวกับอากาศยาน หรือเรือไฮเวอร์คราฟท์
80	โรงงานผลิต ประกอบ ดัดแปลง หรือซ่อมแซมล้อเลื่อน ที่ขับเคลื่อนด้วยแรงคน หรือสัตว์ ซึ่งมิใช่จักรยาน และรวมถึงส่วนประกอบหรืออุปกรณ์ของผลิตภัณฑ์ดังกล่าว
88	โรงงานผลิต ส่ง หรือจำหน่ายพลังงานไฟฟ้า

หมายเหตุ : โรงงานลำดับที่ 61-68 และ 77-80 เฉพาะโรงงานที่มีการปั๊มและเจียรโลหะเท่านั้น

ประกาศกระทรวงอุตสาหกรรม

เรื่อง กำหนดค่าระดับเสียงการรบกวนและระดับเสียงที่เกิดจากการประกอบกิจการโรงงาน

พ.ศ. ๒๕๔๘

อาศัยอำนาจตามความในข้อ ๑๗ แห่งกฎกระทรวง ฉบับที่ ๒ (พ.ศ. ๒๕๓๕) ออกตามความในพระราชบัญญัติโรงงาน พ.ศ. ๒๕๓๕ อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการเกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา ๒๘ ประกอบกับมาตรา ๓๕ มาตรา ๔๘ และมาตรา ๕๐ ของรัฐธรรมนูญแห่งราชอาณาจักรไทย บัญญัติให้กระทำได้โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย รัฐมนตรีว่าการกระทรวงอุตสาหกรรมจึงได้ออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

"เสียงรบกวน" หมายความว่า ระดับเสียงตรวจวัดนอกบริเวณโรงงาน ที่เกิดจากการประกอบกิจการโรงงาน ขณะมีการรบกวน ซึ่งมีระดับเสียงสูงกว่าระดับเสียงพื้นฐาน และมีระดับการรบกวนเกินกว่าค่าที่กำหนดไว้ในประกาศนี้

"ระดับเสียงพื้นฐาน" หมายความว่า ระดับเสียงที่ตรวจวัดในสิ่งแวดล้อมเดิม ขณะยังไม่มีเสียงรบกวนจากการประกอบกิจการโรงงานเป็นระดับเสียงเปอร์เซ็นไทล์ที่ ๙๐ (Percentile Level 90 , L_{90})

"ระดับเสียงเปอร์เซ็นไทล์ที่ ๙๐ (L_{90})" หมายความว่า ระดับเสียงที่ร้อยละ ๙๐ ของเวลาที่ตรวจวัดจะมีระดับเสียงเกินระดับนี้

"ระดับเสียงขณะมีการรบกวน" หมายความว่า ระดับเสียงที่ตรวจวัดหรือคำนวณจากการประกอบกิจการโรงงานขณะเกิดเสียงรบกวน

"ระดับการรบกวน" หมายความว่า ระดับความแตกต่างของระดับเสียงขณะมีการรบกวนกับระดับเสียงพื้นฐาน

"ระดับเสียงเฉลี่ย ๒๔ ชั่วโมง" หมายความว่า ระดับเสียงคงที่นอกบริเวณโรงงานที่มีพลังงานเพียงพอกับระดับเสียงที่เกิดขึ้นจริง ซึ่งมีระดับเสียงเปลี่ยนแปลงตามเวลาในช่วง ๒๔ ชั่วโมง (24 hours A-weighted Equivalent Continuous Sound Level) ซึ่งเรียกโดยย่อว่า Leq 24 hr โดยมีหน่วยเป็นเดซิเบลเอ หรือ dB(A)

"ระดับเสียงสูงสุด" หมายความว่า ระดับเสียงสูงสุดนอกบริเวณโรงงาน ที่เกิดขึ้นในขณะใดขณะหนึ่งระหว่างการตรวจวัดระดับเสียง โดยมีหน่วยเป็นเดซิเบลเอ หรือ dB(A)

"มาตรระดับเสียง" หมายความว่า เครื่องวัดระดับเสียงตามมาตรฐาน IEC 60804 หรือ IEC 61672 ของคณะกรรมาธิการระหว่างประเทศว่าด้วยเทคนิคไฟฟ้า (International Electrotechnical Commission , IEC)

ข้อ ๒ ค่าระดับการรบกวน ที่เกิดจากการประกอบกิจการโรงงาน ไม่เกิน ๑๐ เดซิเบลเอ

ข้อ ๓ ค่าระดับเสียงเฉลี่ย ๒๔ ชั่วโมง ที่เกิดจากการประกอบกิจการโรงงาน ไม่เกิน ๗๐ เดซิเบลเอ

ข้อ ๔ ค่าระดับเสียงสูงสุด ที่เกิดจากการประกอบกิจการโรงงาน ไม่เกิน ๑๑๕ เดซิเบลเอ

ข้อ ๕ วิธีการตรวจวัดระดับเสียงการรบกวน ระดับเสียงเฉลี่ย ๒๔ ชั่วโมง และระดับเสียงสูงสุดที่เกิดจากการประกอบกิจการโรงงาน ให้เป็นไปตามที่กรมโรงงานอุตสาหกรรมกำหนด

ทั้งนี้ ให้ใช้บังคับตั้งแต่วันถัดจากวันประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๒๗ ธันวาคม พ.ศ. ๒๕๔๘

สุริยะ จึงรุ่งเรืองกิจ

รัฐมนตรีว่าการกระทรวงอุตสาหกรรม



ประกาศกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม
เรื่อง กำหนดมาตรฐานควบคุมการปล่อยทิ้งอากาศเสียจากโรงงานเหล็ก

อาศัยอำนาจตามความในมาตรา ๕๕ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ อันเป็นพระราชบัญญัติที่มีบทบัญญัติบางประการเกี่ยวกับการจำกัดสิทธิและเสรีภาพของบุคคล ซึ่งมาตรา ๒๕ ประกอบกับมาตรา ๓๕ มาตรา ๔๘ มาตรา ๕๐ และมาตรา ๕๑ ของรัฐธรรมนูญแห่งราชอาณาจักรไทย บัญญัติให้กระทำได้โดยอาศัยอำนาจตามบทบัญญัติแห่งกฎหมาย รัฐมนตรีว่าการกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม โดยคำแนะนำของคณะกรรมการควบคุมมลพิษ และโดยความเห็นชอบของคณะกรรมการสิ่งแวดล้อมแห่งชาติออกประกาศกระทรวงวิทยาศาสตร์ เทคโนโลยีและสิ่งแวดล้อม กำหนดมาตรฐานควบคุมการปล่อยทิ้งอากาศเสียจากโรงงานเหล็กไว้ ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

"โรงงานเหล็ก" หมายความว่า โรงงานประกอบกิจการเกี่ยวกับการถลุง หลอม หล่อ รีด ดึง หรือผลิตเหล็ก หรือเหล็กกล้าในขั้นต้น (Iron and Steel Basic Industries) ที่ใช้แร่เหล็กหรือเศษเหล็กเป็นวัตถุดิบตามกฎหมายว่าด้วยโรงงานที่มีกำลังผลิตรวมตั้งแต่ ๑๐๐ ตันต่อวัน ขึ้นไป

"โรงงานเหล็กเก่า (Existing Source)" หมายความว่า โรงงานเหล็กที่ได้รับใบอนุญาตประกอบกิจการโรงงานหรือใบอนุญาตขยายโรงงานก่อนวันที่ประกาศนี้ประกาศในราชกิจจานุเบกษา

"โรงงานเหล็กใหม่ (New Source)" หมายความว่า โรงงานเหล็กที่ได้รับ

ใบอนุญาตประกอบกิจการโรงงาน หรือใบอนุญาตขยายโรงงานหลังจากวันที่ประกาศนี้ประกาศในราชกิจจานุเบกษา

"กำลังการผลิตต่อวัน" หมายความว่า ปริมาณของน้ำเหล็กทั้งหมดที่ได้จากการหลอมในหนึ่งชั่วโมงคูณด้วยยี่สิบสี่ หรือปริมาณผลิตภัณฑ์เหล็กทั้งหมดที่ผลิตได้ในหนึ่งวัน มีหน่วยน้ำหนักเป็นตัน

"สภาวะแห้ง (Dry Basis)" หมายความว่า สภาวะที่ความชื้นของตัวอย่างอากาศเป็นศูนย์

ข้อ ๒ อากาศเสียที่ปล่อยทิ้งจากโรงงานเหล็กออกสู่สิ่งแวดล้อมต้องมีค่าเฉลี่ยของก๊าซซัลเฟอร์ไดออกไซด์ ก๊าซออกไซด์ของไนโตรเจน ซึ่งคำนวณผลในรูปของก๊าซไนโตรเจนไดออกไซด์หรือฝุ่นละอองไม่เกินมาตรฐานควบคุมการปล่อยทิ้งอากาศเสียจากโรงงานเหล็กที่กำหนดไว้ ดังต่อไปนี้

แหล่งกำเนิดมลพิษประเภท	อากาศเสียที่ปล่อยทิ้ง		
	ก๊าซซัลเฟอร์ไดออกไซด์ (ส่วนในล้านส่วน)	ก๊าซออกไซด์ของไนโตรเจน ซึ่งคำนวณผลในรูปของก๊าซไนโตรเจนไดออกไซด์ (ส่วนในล้านส่วน)	ฝุ่นละออง (มิลลิกรัมต่อลูกบาศก์เมตร)
โรงงานเหล็กใหม่ (New Source)	๘๐๐	๑๘๐	๑๒๐
โรงงานเหล็กเก่า (Existing Source)	๘๐๐	๒๐๐	๒๔๐

ข้อ ๓ การตรวจวัดอากาศเสียที่ปล่อยทิ้งจากโรงงานเหล็กตามข้อ ๒ ให้คำนวณผลที่ความดัน ๑ บรรยากาศ หรือที่ ๗๖๐ มิลลิเมตรปรอท อุณหภูมิ ๒๕ องศาเซลเซียส ที่สภาวะแห้ง (Dry Basis) โดยมีปริมาตรอากาศส่วนเกินในการเผาไหม้ (Excess Air) ร้อยละ ๕๐ หรือที่ออกซิเจน (Oxygen) ร้อยละ ๗ เว้นแต่โรงงานเหล็กที่ใช้เตาหลอมประเภท Electric Furnace ให้คำนวณผลที่ความดัน ๑ บรรยากาศ หรือที่ ๗๖๐ มิลลิเมตรปรอท อุณหภูมิ ๒๕ องศาเซลเซียสที่สภาวะแห้ง

ข้อ ๔ การตรวจวัดอากาศเสียที่ปล่อยทิ้งจากโรงงานเหล็กตามข้อ ๒ ให้ใช้วิธีดังต่อไปนี้

(๑) การตรวจวัดค่าก๊าซซัลเฟอร์ไดออกไซด์ให้ใช้วิธี Determination of Sulfur Dioxide Emissions From Stationary Sources หรือวิธี Determination of Sulfuric Acid Mist and Sulfur Dioxide Emissions From Stationary Sources ที่องค์การพิทักษ์สิ่งแวดล้อมแห่งประเทศสหรัฐอเมริกา (United States Environmental Protection Agency) กำหนดไว้

(๒) การตรวจวัดค่าก๊าซออกไซด์ของไนโตรเจน ซึ่งคำนวณผลในรูปของก๊าซไนโตรเจนไดออกไซด์ให้ใช้วิธี Determination of Nitrogen Oxide Emissions From Stationary Sources ที่องค์การพิทักษ์สิ่งแวดล้อมแห่งประเทศสหรัฐอเมริกา (United States Environmental Protection Agency) กำหนดไว้

(๓) การตรวจวัดฝุ่นละออง ให้ใช้วิธี Determination of Particulate Emissions From Stationary Sources ที่องค์การพิทักษ์สิ่งแวดล้อมแห่งประเทศสหรัฐอเมริกา (United States Environmental Protection Agency) กำหนดไว้ และ

(๔) วิธีการตรวจวัดอื่นนอกเหนือจาก (๑) (๒) และ (๓) ให้เป็นไปตามที่กรมควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ข้อ ๕ รายละเอียดของวิธีการตรวจวัดตามข้อ ๔ (๑), (๒) และ (๓) ให้เป็นไปตามที่กรมควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ประกาศ ณ วันที่ ๘ มีนาคม พ.ศ. ๒๕๔๔

สนธยา คุณปลื้ม

รัฐมนตรีว่าการกระทรวงวิทยาศาสตร์

เทคโนโลยีและสิ่งแวดล้อม

(ประกาศในราชกิจจานุเบกษา เล่ม ๑๑๘ ตอนที่ ๓๗ ง วันที่ ๘ พฤษภาคม ๒๕๔๔)

ประกาศกระทรวงอุตสาหกรรม

เรื่อง กำหนดค่าปริมาณของสารเจือปนในอากาศที่ระบายออกจากโรงงานผลิตเหล็กเส้นเสริมคอนกรีต และโรงงานผลิตเหล็กแท่งเล็กสำหรับเหล็กเส้นเสริมคอนกรีต

พ.ศ. ๒๕๖๔

โดยที่เป็นการสมควรกำหนดค่าปริมาณของสารเจือปนในอากาศที่ระบายออกจากโรงงานผลิตเหล็กเส้นเสริมคอนกรีตและโรงงานผลิตเหล็กแท่งเล็กสำหรับเหล็กเส้นเสริมคอนกรีตให้แตกต่างจากค่าปริมาณของสารเจือปนในอากาศจากโรงงานทั่วไปหรือโรงงานผลิตเหล็กประเภทอื่น เพื่อประโยชน์ในการรักษาคุณภาพสิ่งแวดล้อม อีกทั้ง เพื่อให้เกิดการปรับปรุงเปลี่ยนแปลงการใช้เชื้อเพลิงหรือระบบขจัดมลพิษอากาศใช้เทคโนโลยีที่ทันสมัยพัฒนารูปแบบการผลิตหรือกระบวนการผลิต เพื่อลดต้นทุนการผลิตและเพื่อให้ได้คุณภาพเหล็กดีมีคุณภาพ สามารถแข่งขันได้ทั้งตลาดภายในประเทศและตลาดโลก

อาศัยอำนาจตามความในข้อ ๑๖ ของกฎกระทรวงฉบับที่ ๒ (พ.ศ. ๒๕๓๕) ออกตามความในมาตรา ๘ แห่งพระราชบัญญัติโรงงาน พ.ศ. ๒๕๓๕ รัฐมนตรีว่าการกระทรวงอุตสาหกรรมออกประกาศไว้ดังต่อไปนี้

ข้อ ๑ ในประกาศนี้

"โรงงานผลิตเหล็กเส้นเสริมคอนกรีต" หมายถึง โรงงานผลิตเหล็กเส้นที่มีลักษณะหน้าตัดกลมหรือเหล็กเส้นกลมที่มีบั้ง หรือครีบ ซึ่งอาจนำไปใช้เสริมคอนกรีตสำหรับงานก่อสร้างทั่วไปได้

"โรงงานผลิตเหล็กแท่งเล็กสำหรับเหล็กเส้นเสริมคอนกรีต" หมายถึง โรงงานผลิตเหล็กแท่งเล็กสี่เหลี่ยมจัตุรัสที่มีภาคตัดขวางเป็นรูปสี่เหลี่ยมจัตุรัส หรือเหล็กแท่งเล็กสี่เหลี่ยมผืนผ้าที่มีภาคตัดขวางเป็นรูปสี่เหลี่ยมผืนผ้า ที่มีด้านยาวไม่เกิน ๑.๒๕ เท่าของด้านกว้าง โดยมีความยาวด้าน ๕๐ มิลลิเมตร ถึง ๑๕๐ มิลลิเมตร

ข้อ ๒ อากาศที่ระบายออกจากแหล่งที่มาของอากาศเสียของโรงงานผลิตเหล็กเส้นเสริมคอนกรีตและโรงงานผลิตเหล็กแท่งเล็กสำหรับเหล็กเส้นเสริมคอนกรีต ต้องมีค่าปริมาณของสารเจือปนในอากาศแต่ละชนิดไม่เกินตามมาตรฐานที่กำหนดไว้ ดังต่อไปนี้

(๑) ฝุ่นละออง (Total Suspended Particulate) ๕๐ มิลลิกรัมต่อลูกบาศก์เมตร

(๒) ก๊าซซัลเฟอร์ไดออกไซด์ (Sulfur Dioxide) ๕๐๐ ส่วนในล้านส่วน

(๓) ก๊าซออกไซด์ของไนโตรเจน ซึ่งคำนวณในรูปของก๊าซไนโตรเจนไดออกไซด์ (Oxides of Nitrogen as Nitrogen Dioxide) ๑๘๐ ส่วนในล้านส่วน

ข้อ ๓ การตรวจวัดค่าปริมาณของสารเจือปนในอากาศแต่ละชนิดที่ระบายออกนอกโรงงานผลิตเหล็กตามข้อ ๒ ให้ใช้วิธี ดังต่อไปนี้

(๑) การตรวจวัดค่าฝุ่นละอองให้ใช้วิธี Determination of Particulate Matter Emission from Stationary Sources ที่องค์การพิทักษ์สิ่งแวดล้อมแห่งประเทศสหรัฐอเมริกา (United States Environmental Protection Agency : U.S. EPA) กำหนดไว้ หรือวิธีอื่นที่กรมโรงงานอุตสาหกรรมเห็นชอบโดยประกาศในราชกิจจานุเบกษา

(๒) การตรวจวัดค่าก๊าซซัลเฟอร์ไดออกไซด์ ให้ใช้วิธี Determination of Sulfur Dioxide Emission from Stationary Sources หรือวิธี Determination of Sulfuric Acid and Sulfur Dioxide Emission from Stationary Sources ที่องค์การพิทักษ์สิ่งแวดล้อมแห่งประเทศสหรัฐอเมริกา (United States Environmental Protection Agency : U.S. EPA) กำหนดไว้ หรือวิธีอื่นที่กรมโรงงานอุตสาหกรรมเห็นชอบโดยประกาศในราชกิจจานุเบกษา

(๓) การตรวจวัดค่าก๊าซออกไซด์ของไนโตรเจนในรูปของก๊าซไนโตรเจนไดออกไซด์ ให้ใช้วิธี Determination of Nitrogen Oxide Emission from Stationary Sources ที่องค์การพิทักษ์สิ่งแวดล้อมแห่งประเทศสหรัฐอเมริกา (United States Environmental Protection Agency : U.S. EPA) กำหนดไว้ หรือวิธีอื่นที่กรมโรงงานอุตสาหกรรมเห็นชอบโดยประกาศในราชกิจจานุเบกษา

ข้อ ๔ การตรวจวัดค่าปริมาณของสารเจือปนในอากาศจากเตาหลอม (Furnace) เตาอบ (Reheat Furnace/Annealing Process) และหม้อน้ำ (Boiler) ให้คำนวณผลที่ความดัน ๑ บรรยากาศ หรือที่ ๗๖๐ มิลลิเมตรปรอท อุณหภูมิ ๒๕ องศาเซลเซียส ที่สภาวะแห้ง (Dry Basis) และมีปริมาตรออกซิเจนในอากาศเสียร้อยละ ๗

การตรวจวัดค่าปริมาณของสารเจือปนในอากาศจากเตาหลอมประเภท Electric Furnace และกระบวนการที่ไม่มีการเผาไหม้ ให้คำนวณผลที่ความดัน ๑ บรรยากาศ หรือที่ ๗๖๐ มิลลิเมตรปรอท อุณหภูมิ ๒๕ องศาเซลเซียส ที่สภาวะแห้ง (Dry Basis) และมีปริมาตรออกซิเจนในอากาศเสียเป็นสภาวะจริงขณะตรวจวัด

ข้อ ๕ ประกาศฉบับนี้ให้ใช้บังคับตั้งแต่วันที่ ๑๑ มกราคม พ.ศ. ๒๕๖๘ เป็นต้นไป

ประกาศ ณ วันที่ ๑๘ พฤษภาคม พ.ศ. ๒๕๖๔
สุริยะ จึงรุ่งเรืองกิจ
รัฐมนตรีว่าการกระทรวงอุตสาหกรรม

ภาคผนวก จ

เอกสารสอบเทียบเครื่องมือที่ใช้ในการตรวจวิเคราะห์

ตารางการสอบเทียบเครื่องมือที่ใช้ในการตรวจวัดและวิเคราะห์

Item	Description	Parameter	List of Equipment	Equipment No.	Calibration	Next Calibration
1.	Stack Air	Particulate	Dry Gas Meter/SK25EX	S/N 604	08/01/2026	January 2027
			Digital Barometer/PH8-318	S/N B011414	10/04/2026	April 2027
			Digital Thermometer/DP-52	S/N L411635	27/04-06/05/2026	April 2027
			Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
		NO_x as NO_2	Gas Analyzer (E-instrument/4400S)	S/N 2763	01/12/2025	December 2026
2.	Ambient Air	ORIFICE	ORIFICE TRANSFER STANDARD/Tisch	S/N 0068	17/03/2026	March 2027
		TSP	High Volume Air Sampler/TET	S/N TSP-16	25/05/2026	May 2027
			High Volume Air Sampler/TET	S/N TSP-35	26/05/2026	May 2027
			High Volume Air Sampler/TET	S/N TSP-37	26/05/2026	May 2027
			Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
		ORIFICE	ORIFICE TRANSFER STANDARD/Tisch	S/N 0068	17/03/2026	March 2027
		PM-10	High Volume Air Sampler/TET	S/N PM10-28	25/05/2026	May 2027
			High Volume Air Sampler/TET	S/N PM10-30	25/05/2026	May 2027
			High Volume Air Sampler/TET	S/N PM10-16	25/05/2026	May 2027
			Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
		Std. Gas	CERTIFICATE OF ANALYSIS : Linde	S/N A00917SK	05/07/2023	July 2026
		NO_2	NO_x Analyzer/API 200A	S/N 80	13/03/2026	September 2026
			NO_x Analyzer/API 200E	S/N 1281	19/03/2026	September 2026
			NO_x Analyzer/API 200E	S/N 731	19/03/2026	September 2026
		WS & WD	Wind speed and wind direction/Weather Wizard III	S/N WC21014A92	09/01/2026	January 2027

ตารางการสอบเทียบเครื่องมือที่ใช้ในการตรวจวัดและวิเคราะห์ (ต่อ)

Item	Description	Parameter	List of Equipment	Equipment No.	Calibration	Next Calibration
3.	Wastewater	pH	pH Meter/Horiba	S/N B06D0012	28/10/2025	October 2026
		TSS	Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
		TDS	Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
		BOD	BOD Incubator/Model i250	S/N 0408-0115-0008	09/03/2026	March 2027
		Oil & Grease	Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
		Cr^{+6}	Spectrophotometer/Perkin Elmer	S/N 365K9042909	07/11/2025	November 2026
		Hg, As	Atomic Absorption Spectrophotometer Model/AAnalyst 100	S/N 040S0110503	17/03/2026	September 2026
		Cu, Fe	ICP394/PerkinElmer/OPTIMA8000	S/N 078S1310024C	17/03/2026	September 2026
		Mn, Pb	ICP394/PerkinElmer/OPTIMA8000	S/N 078S1310024C	17/03/2026	September 2026
4.	Sound Level	Leq 24 hr	Sound Level Calibrator/ST-120	S/N ST120C1204E	08/04/2026	April 2027
			Sound Level Meter/ACO 6226	S/N 160204	11/06/2026	10/07/2026
			Sound Level Meter/ACO 6226	S/N 160212	11/06/2026	10/07/2026
			Sound Level Meter/ACO 6226	S/N 160099	11/06/2026	10/07/2026
			Sound Level Meter/ACO 6226	S/N 130127	11/06/2026	10/07/2026
			Sound Level Meter/ACO 6226	S/N 160211	11/06/2026	10/07/2026
			Sound Level Meter/ACO 6226	S/N 110104	11/06/2026	10/07/2026
5.	Soil	pH	pH Meter/Horiba	S/N B06D0012	28/10/2025	October 2026
		Cr^{+6}	Spectrophotometer/Perkin Elmer	S/N 365K9042909	07/11/2025	November 2026
		Hg, As	Atomic Absorption Spectrophotometer Model/AAnalyst 100	S/N 040S0110503	17/03/2026	September 2026
		Cd, Fe	Atomic Absorption Spectrophotometer Model/AAnalyst 100	S/N 040S0110503	17/03/2026	September 2026
		Mn, Pb	Atomic Absorption Spectrophotometer Model/AAnalyst 100	S/N 040S0110503	17/03/2026	September 2026

ตารางการสอบเทียบเครื่องมือที่ใช้ในการตรวจวัดและวิเคราะห์ (ต่อ)

Item	Description	Parameter	List of Equipment	Equipment No.	Calibration	Next Calibration
6.	Working Air	Total Dust	Personal Air Sampler/Gilian	S/N 20180802084	10/07/2026	August 2026
			Personal Air Sampler/Gilian	S/N 20180802087	10/07/2026	August 2026
			Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
		Respirable Dust	Personal Air Sampler/Gilian	S/N 20180803003	10/07/2026	August 2026
			Personal Air Sampler/Gilian	S/N 20180806025	10/07/2026	August 2026
			Electronic Balance/METTLER TOLEDO	S/N C531025159	03/09/2025	September 2026
7.	Occupational	Calibrator	Sound Level Calibrator/ST-120	S/N ST120C1204E	08/04/2026	April 2027
	Health and Safety	Leq 8 hr	Sound Level Meter/ACO TYPE 6226	S/N 160204	11/06/2026	10/07/2026
			Sound Level Meter/ACO TYPE 6236	S/N 152076	11/06/2026	10/07/2026
			Sound Level Meter/ACO TYPE 6226	S/N 160212	11/06/2026	10/07/2026
			Sound Level Meter/ACO TYPE 6226	S/N 130128	11/06/2026	10/07/2026
			Sound Level Meter/ACO TYPE 6226	S/N 160216	11/06/2026	10/07/2026
		Noise Dose	Noise Dose Meter/TENMARS SOUNDTEK/ST-130	S/N 220100051	15/06/2026	14/07/2026
			Noise Dose Meter/TENMARS SOUNDTEK/ST-130	S/N 220100056	15/06/2026	14/07/2026
			Noise Dose Meter/TENMARS SOUNDTEK/ST-130	S/N 170400177	15/06/2026	14/07/2026
			Noise Dose Meter/TENMARS SOUNDTEK/ST-130	S/N 170800207	15/06/2026	14/07/2026
			Noise Dose Meter/TENMARS SOUNDTEK/ST-130	S/N 200300134	15/06/2026	14/07/2026
		Heat	Area Heat Stress Monitors/JANTYTECH/JT2011-E2A	S/N 3522210141	17/03/2026	March 2027
			Area Heat Stress Monitors/JANTYTECH/JT2011-E2A	S/N 3522210145	08/03/2026	March 2027

eurofins

CONTROL UNIT CALIBRATION

(Metric units , mm)

Date: 8-Jan-26

	Initial	Final	Average	
Barometric press, Pb	757.70	757.50	757.60	mmHg

Dry Gas Meter Data

Console No.	M50-06
Metering System ID	
DGM Number	604
DGM Model	SK25EX

Reference Dry Gas Meter Data

Serial No.	913428
Model.	S-110
Correction factor(Yr)	0.9983
Last Calibration Data	16-Feb-26

Orifice manometer setting ΔH mm H2O	Ref . DMG Volume V_r Liters	DGM Volume V_m Liters	Temperature (°C) Ref DGM T_r	Dry Gas Meter Inlet T_i	Outlet T_o	Avg T_m	Time min	DGM Correction factor (Y)	ΔH@ mm H_2O
15.00	100.00	99.76	30.00	30.00	29.00	29.50	7.92	0.9991	46.0024
25.00	100.00	99.90	30.00	30.00	29.00	29.50	6.12	0.9975	46.3896
50.00	100.00	99.91	30.00	29.00	28.00	28.50	4.32	0.9929	46.4948
80.00	100.00	99.89	30.00	29.00	28.00	28.50	3.43	0.9962	46.6082
100.00	100.00	100.10	30.00	29.00	28.00	28.50	3.10	0.9921	46.5046
							Average	0.9956	46.3999

Dued Date of Calibrate: 9-Feb-27

Calibrated by : _____ Approved : _____

Note: For Calibration Factor Y, the ratio of the reading of the calibration meter to the dry gas meter, acceptable tolerance of individual values from the average is +-0.02.

Note: For ΔH@, Orifice pressure differential that equates to 0.75cfm (0.021$2m^3$/min) at standard temperature and pressure, acceptable tolerance of individual values from the averge is +-0.2inches (5.1mm)H_2O.

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Certificate No. : 26P1410

Equipment :	Digital Barometer
Manufacturer:	Lutron
Model :	PHB-318
Serial No.:	B011414
ID No.:	NO.7
Condition As-Received:	Used Item
Received Date:	31 March 2026
Calibration Date:	10 April 2026
Reference:	2603-0991DSC
Ambient Temperature:	(23 ± 2) °C
Relative Humidity:	(50 ± 15) %

This certificate may not be reproduced other than in full, except with the prior written approval of the head of Corporate Services 3: Equipment Calibration and Testing Services.

Submitted by: Thai Environmental Technic Limited

1/6 Soi Ramkhamhaeng 145, Khwaeng/Khet Saphan Sung, Bangkok 10240

Procedure used: The calibration was conducted by direct comparison method against Pressure Measuring Instruments Standard according to calibration procedure CP-P10, using " DKD-R 6-1 ; Calibration of Pressure Gauges " as a guidelines.

Condition of this result of calibration

1.Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Pressure Indicator	DPI142	1422505046	MP-0150-25	20 May 2026

2.This result of calibration was made on requested at the point specified by customer.

3.The certificate is valid only to the item calibrated on date and place of calibration.

4.This measurement result is traceable to the International System of Unit maintained through:-

-National Institute of Metrology Thailand (NIMT)

Calibrated by : Suksan Khankaew
Issue Date : 16 April 2026

Approved Signatory : Attapol P.

[ ] Phalinee Prabpaipal
[ ] Sura Suwannasri
[✓] Attapol Panurach

Technical information and UUC* settings during calibration:

Result of calibration	: Without adjustment	**Range**	: 730 mmHg to 790 mmHg
Pressure type	: Absolute Pressure	**Resolution**	: 0.1 mmHg
Installation	: Vertical Orientation	**Pressure medium**	: Clean air
Atmospheric pressure	: (1009 ± 10) mbar	**Reference level**	: at the center of the instrument body

Increasing Pressure

Applied Pressure (mmHg)	729.75	739.75	749.74	759.74	769.74	779.74	789.74
UUC* Indication (mmHg)	730.1	740.2	750.2	760.1	770.2	780.2	790.1
Error (mmHg)	0.35	0.45	0.46	0.36	0.46	0.46	0.36

Decreasing Pressure

Applied Pressure (mmHg)	789.74	779.74	769.74	759.74	749.74	739.75	729.75
UUC* Indication (mmHg)	790.1	780.2	770.2	760.1	750.2	740.1	730.1
Error (mmHg)	0.36	0.46	0.46	0.36	0.46	0.35	0.35

The uncertainty of measurement was ± 0.18 mmHg
Conversion factor : 1 mmHg = 0.1333224 kPa (based on SI units).

* UUC = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 %.

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG, BANGKOK 10250
TEL. 0-2717-3000-24 FAX. 0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Certificate No. : 26T635

Equipment :	Digital Thermometer With Sensor
Manufacturer:	Digicon
Model :	DP-52
Serial No.:	I.411635
ID No.:	No.10
Condition As-Received:	Used Item
Received Date:	31 March 2026
Calibration Date:	27 April 2026 to 06 May 2026
Reference:	2603-0991DSC
Ambient Temperature:	(25 ± 3) °C
Relative Humidity:	(50 ± 20) %

This certificate may not be reproduced other than in full, except with the prior written approval of the head of Corporate Services 3: Equipment Calibration and Testing Services.

Submitted by: Thai Environmental Technic Limited

1/6 Soi Ramkhamhaeng 145, Khwaeng/Khet Saphan Sung, Bangkok 10240

Procedure used: Calibration were conducted using in-house calibration procedure CP-T01 according to comparison with Industrial Platinum Resistance Thermometer (IPRT) into liquid bath temperature controller and comparison with Standard Thermocouple (Type R/S) into high temperature furnace.
The temperature scale used was based on ITS-90.

Condition of this result of calibration

1.Reference standards instruments :

Instrument	Model	Serial No.	Certificate No.	Due Date
1) Digital Thermometer	1529	A66176	26I89	22 Jan 2027
2) Industrial Platinum Resistance Thermometer	5627	739437	26I89	22 Jan 2027
3) Digital Thermometer	1529	A4B760	25I1048	29 Sep 2026
4) Industrial Platinum Resistance Thermometer	5627	824302	25I1048	29 Sep 2026
5) Digital Multimeter	2700	4016315	25EH27	16 Oct 2026
6) Standard Thermocouple Probe (Type S)	TCS	TCS-001	TT-5004-26	13 Jan 2027

2.The certificate is valid only to the item calibrated on date and place of calibration.

3.This measurement result is traceable to the International System of Unit maintained through:-

-Technology Promotion Association (Thailand-Japan), NSC-ONSC Accredited No. Calibration 0008

-National Institute of Metrology Thailand (NIMT)

Calibrated by : Thatchanan Chankong
Issue Date : 11 May 2026

Approved Signatory :

[ ] Phalinee Prabpaipal
[ ] Chatchawan Khunpliuek
[✓] Wanlop Larpkern

Result of Calibration:- Without Adjustment

Function: Temperature measurement for Channel T1

This equipment was connected with Thermocouple Type K S/N. 11005001/02-64 ID No. No.10

Dimension of probe : Diameter 8 mm, Length 1030 mm Sheath material : Stainless Steel

Immersion Depth (mm)	Standard Temperature (°C)	UUC* Reading (°C)	Error (°C)	Uncertainty of Measurement (±°C)
180	200.0044	199.6	-0.4044	0.74
180	400.0043	399.7	-0.3043	1.4
180	600.01	602.1	2.0900	2.7

UUC* : Unit Under Calibration

The reported uncertainty of measurement was based on standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%.

-o0o-

Portable Gas Calibration Report

Manufacturer : E-instruments
Instrument Model : 4400S
Instrument serial no. : 2763
Instrument ID : 2

Date of Calibration: 1-Dec-25
Ambient Condition
Temperature (23±5 °C) : 25.0 ° C
Humidity (55±15 % RH) : 52.0 % RH
Barometer (mmHg) : 758.0 mmHg

Standard gas References

Standard gas	Cylinder No.	Traceability	Due date
Oxygen (O_2)	36232	Linde	June 26, 2031
Nitric Oxide(NO)	D824463	Linde	June 5, 2026
	CC742426	Airgas	March 22, 2029
Sulfer Dioxide (SO_2)	D621725	Linde	October 4, 2032
	D025783	Linde	October 4, 2032
Carbon Monoxide(CO)	D621725	Linde	October 4, 2032
	D025783	Linde	October 4, 2032

Calibration Results

Parameter	Standard gas	Reading	Actual Error	Test Limit	Results
O_2 (%vol)	**0.0**	**0.1**	0.1	±0.2 % vol	**PASS**
	14.0	**14.2**	0.2		
NO (ppm)	**0.0**	**0.1**	0.1	±5.0 ppm 0...100 ppm ±5% measured Value 101....5000 ppm	**PASS**
	198.0	**196.0**	-2.0		
	402.3	**399.7**	-2.6		
SO_2 (ppm)	**0.0**	**0.0**	0.0		**PASS**
	404.0	**402.6**	-1.4		
	792.0	**789.4**	-2.6		
CO (ppm)	**0.0**	**0.0**	0.0		**PASS**
	406.0	**404.3**	-1.7		
	788.0	**786.0**	-2.0		

Calibrate by: _____ Approved by : _____

Jiranatee Associates Co.,Ltd
63/14-15, 62/35-36
Petchkasem 7, 7/1, Rd. Watthapra, Bangkoknoi,
Bangkok 10800(Thailand)
Tel: +6629080812
Mobile: +6686 3999455
E-mail: jnac-calibration@jiranatee.com
Web site: www.jiranatee.com

Accredited calibration laboratory
ISO/IEC 17025:2017
NSC-TISI TIS 17025
CALIBRATION 0367

Flow measurement laboratory
Calibration services department

NSC – TISI – TIS 17025
CALIBRATION 0367

CERTIFICATE OF CALIBRATION

Certificate No. : COF-010-69

MEASUREMENT ITEM	: Top Load Orifice
MANUFACTURER	: TISCH
MODEL/TYPE	: TE-5025A
SERIAL NUMBER	: 0068
ID NUMBER	: -
CONDITION AS-RECEIVED	: Used item
CUSTOMER	: Thai Environmental Technic Limited. 1/6 Soi Ramkhamhaeng 145, Khwaeng/Khet Saphan Sung, Bangkok 10240
RECEIVED DATE	: 12 Mar 2026
MEASUREMENT DATE	: 17 Mar 2026
ISSUE DATE	: 17 Mar 2026

Calibration procedure:
The Orifice gas flow device was calibrated against Standard Rotary Displacement Meter (Roots Meter) Model G65/MC/W2-ap. The WI-CI-004 was used as a calibration guideline.

Traceability:
This certificate provides traceability of the measurement to recognized the national standards, and to realization of the international system of units (SI) through the NIMT (National Metrology Institute of Thailand) via Certificate number: MW-0005-26.

Uncertainty of Measurement:
The reported uncertainty of measurement is based on the standard uncertainty multiplied by a coverage factor k=2, Which for a normal distribution corresponds to a coverage probability of approximately 95%. The standard uncertainty has been determined in accordance with the GUM "Evaluation of measurement data - Guide to the expression of uncertainty in measurement"

ENVIRONMENTAL CONDITIONS:
Ambient condition in the laboratory are as follow:

Temperature	: 23.0 ± 3.0	°C
Relative Humidity	: 55.0 ± 15.0	%RH
Atmospheric Pressure	: 1010 ± 10	hPa

CALIBRATION CONDITION:

Preconditioning	: 24 hours at ambient conditions.
Measurement Condition	: The average values during measurement are 23.8 °C and 48.0 %RH.

NOTED: *The certificate is valid only to the item calibrated on date and place of calibration.*

TABULATION OF RESULTS:
The table on next page give the measured values.

Calibrated by:
1. Mr. Sorawit Thachalac
2. Miss Bhichaporn Lertsomgrod

JIRANATEE ASSOCIATES CO.,LTD.

Approved signatory:
Mr. Pairoj Boonthanom
Calibration Department Manager

THIS CERTIFICATE OF CALIBRATION MAY NOT BE REPRODUCED EXCEPT IN FULL UNLESS PERMISSION FOR REPRODUCTION HAS BEEN OBTAINED IN WRITING FROM THE LABORATORY

Continuation of Certificate of Calibration Number COF-010-69

MEASUREMENT RESULTS:

The Orifice gas flow device was calibrated by direct comparison method with the Standard Rotary Displacement Meter (Roots Meter). The humid air was used as a medium in the system. The standard conditions are 25°C (298.15 K) and 760 mmHg for standard temperature and standard pressure respectively.

Table 1: The results of Q Standard calibration data

Plate	Flow rate m^3/min	Pressure [Pa] mmHg	Temperature [Ta] °C	Temperature [Tm] °C	Δp_meter mmH₂O	Δp_Orifice inH₂O	Y	Standard Flow [Q_s] m^3/min
1	0.705	757.085	23.72	22.84	51.734	1.704	1.806	0.659
2	0.998	757.085	23.72	23.18	94.876	3.388	1.841	0.928
3	1.120	757.007	23.72	23.18	37.899	4.466	2.114	1.066
4	1.170	757.082	25.71	23.16	27.798	5.041	2.246	1.130
5	1.418	757.025	25.67	23.12	27.451	7.428	2.725	1.370

Slope (m):	1.99819	
Intercept (b):	-0.01290	
Correlation coefficient (r):	0.99988	
Uncertainty (k=2):	0.015	m^3/min

Table 2: The results of Q actual calibration data

Plate	Flow rate m^3/min	Pressure [Pa] mmHg	Temperature [Ta] °C	Temperature [Tm] °C	Δp_meter mmH₂O	Δp_Orifice inH₂O	Y	Standard Flow [Q_a] m^3/min
1	0.705	757.085	23.72	22.84	51.734	1.704	0.817	0.659
2	0.998	757.085	23.72	23.18	94.876	3.388	1.168	0.928
3	1.120	757.007	23.72	23.18	37.899	4.466	1.924	1.066
4	1.170	757.082	25.71	23.16	27.798	5.041	1.406	1.129
5	1.418	757.025	25.67	23.12	27.451	7.428	1.707	1.369

Slope (m):	1.25154	
Intercept (b):	-0.00807	
Correlation coefficient (r):	0.99988	
Uncertainty (k = 2):	0.015	m^3/min

End of Certificate of Calibration

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

High Volume TSP&PM-10 Calibration Report

Location : Thai Environmental Tech | Site ID : Bangkok | Date : 25-May-26
ITEM : TSP | Serial No : (No.16) | Calibrate By : Pipat

Site Conditions

Barometric Pressure (mm Hg) :	760.00	Corrected Pressure (mm Hg) :	760.0
Temperature (°C) :	25.0	Temperature (deg K) :	298.0
Average Press. (mm Hg) :	754.8	Corrected Average (mm Hg) :	-
Average Temp (°C) :	33.2	Average Temp: (Deg K) :	-

Calibration Orifice

Make : Tisch	Qstd Slope : 1.99819
Model : TE-5025A	Qstd Intercept : -0.01290
Serial# : 0068	Calibration Due Date : 17-Mar-27

Calibration Information

Plate or Test #	ORIFICE (in H_2O)	Qstd (m3/min)	Indicate (CFM)	IC (corrected)	Linear Regression
1	12.30	1.762	58.0	58.00	Slope : 32.2408
2	9.30	1.533	54.0	54.00	Intercept : 3.5693
3	7.20	1.349	50.0	50.00	Corr. Coeff : 0.9822
4	5.00	1.126	40.0	40.00	
5	3.00	0.873	30.0	30.00	# of Observations: 5

Calculations

Qstd = 1/m[Sqrt(H2O{Pa/Pstd}{Tstd/Ta})-b]
IC =I[Sqrt(Pa/Pstd}{Tstd/Ta)]

Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg

m = sampler slope
b = sampler intercept
I = chart response
Tav = daily average temperature
Pav = daily average pressure

Calibrate By : _____

Approve By : _____

For subsequent calculation of sampler flow:
1/m{(I)[Sqrt(298/Tav){Pav/760)]-b}

NOTE: Ensure calibration orifice has been certified within 12 months of use

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

High Volume TSP&PM-10 Calibration Report

Location : Thai Environmental Tech Site ID : Bangkok Date : 26-May-26
ITEM : TSP Serial No : (No.35) Calibrate By : Pipat

Site Conditions

Barometric Pressure (mm Hg) :	760.00	Corrected Pressure (mm Hg) :	760.0
Temperature (°C) :	25.0	Temperature (deg K) :	298.0
Average Press. (mm Hg) :	754.8	Corrected Average (mm Hg) :	-
Average Temp (°C) :	29.8	Average Temp: (Deg K) :	-

Calibration Orifice

Make : Tisch	Qstd Slope : 1.99819
Model : TE-5025A	Qstd Intercept : -0.01290
Serial# : 0068	Calibration Due Date : 17-Mar-27

Calibration Information

Plate or Test #	ORIFICE (in H_2O)	Qstd (m3/min)	Indicate (CFM)	IC (corrected)	Linear Regression
1	12.30	1.762	60.0	57.00	Slope : 30.4241
2	9.20	1.524	54.0	52.00	Intercept : 5.1470
3	7.00	1.331	50.0	48.00	Corr. Coeff : 0.9864
4	5.00	1.126	40.0	40.00	
5	3.00	0.873	30.0	30.00	# of Observations: 5

Calculations

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]
IC =I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg
For subsequent calculation of sampler flow:
1/m{(I)[Sqrt(298/Tav)(Pav/760)]-b}

m = sampler slope
b = sampler intercept
I = chart response
Tav = daily average temperature
Pav = daily average pressure

Calibrate By : _____

Approve By : _____

NOTE: Ensure calibration orifice has been certified within 12 months of use

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

High Volume TSP&PM-10 Calibration Report

Location : Thai Environmemtal Tech | Site ID : Bangkok | Date : 26-May-26
ITEM : TSP | Serial No : (No.37) | Calibrate By : Pipat

Site Conditions

Barometric Pressure (mm Hg) :	760.00	Corrected Pressure (mm Hg) :	760.0
Temperature (°C) :	25.0	Temperature (deg K) :	298.0
Average Press. (mm Hg) :	754.6	Corrected Average (mm Hg) :	-
Average Temp (°C) :	30.9	Average Temp: (Deg K) :	-

Calibration Orifice

Make : Tisch	Qstd Slope : 1.99819
Model : TE-5025A	Qstd Intercept : -0.01290
Serial# : 0068	Calibration Due Date : 17-Mar-27

Calibration Information

Plate or Test #	ORIFICE (in H_2O)	Qstd (m3/min)	Indicate (CFM)	IC (corrected)
1	12.30	1.762	60.0	57.00
2	9.40	1.541	54.0	52.00
3	7.20	1.349	50.0	48.00
4	5.00	1.126	40.0	40.00
5	3.00	0.873	30.0	30.00

Linear Regression
Slope : 30.2915
Intercept : 5.1092
Corr. Coeff : 0.9896
# of Observations: 5

Calculations

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]
IC =I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg
For subsequent calculation of sampler flow:
1/m{(I)[Sqrt(298/Tav)(Pav/760)]-b}

m = sampler slope
b = sampler intercept
I = chart response
Tav = daily average temperature
Pav = daily average pressure

Calibrate By : _____

Approve By : _____

NOTE: Ensure calibration orifice has been certified within 12 months of use

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

High Volume TSP&PM-10 Calibration Report

Location : Thai Environmemtal Tech Site ID : Bangkok Date : 25-May-26

ITEM : PM10 Serial No : (No. 28) Calibrate By : Pipat

Site Conditions

Barometric Pressure (mm Hg) :	760.00	Corrected Pressure (mm Hg) :	760.0
Temperature (°C) :	25.0	Temperature (deg K) :	298.0
Average Press. (mm Hg) :	754.6	Corrected Average (mm Hg) :	-
Average Temp (°C) :	32.8	Average Temp: (Deg K) :	-

Calibration Orifice

Make : Tisch	Qstd Slope : 1.99819
Model : TE-5025A	Qstd Intercept : -0.01290
Serial# : 0068	Calibration Due Date : 17-Mar-27

Calibration Information

Plate or Test #	ORIFICE (in H_2O)	Qstd (m3/min)	Indicate (CFM)	IC (corrected)
1	12.20	1.754	60.0	60.00
2	9.20	1.524	54.0	54.00
3	7.20	1.349	50.0	50.00
4	5.00	1.126	40.0	40.00
5	3.00	0.873	30.0	30.00

Linear Regression
Slope : 34.4138
Intercept : 1.1884
Corr. Coeff : 0.9913
# of Observations: 5

Calculations

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]
IC =I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg

m = sampler slope
b = sampler intercept
I = chart response
Tav = daily average temperature
Pav = daily average pressure

For subsequent calculation of sampler flow:
1/m{(I)[Sqrt(298/Tav)(Pav/760)]-b}

Calibrate By : _____

Approve By : _____

NOTE: Ensure calibration orifice has been certified within 12 months of use

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

High Volume TSP&PM-10 Calibration Report

Location : Thai Environmental Tech Site ID : Bangkok Date : 25-May-26
ITEM : PM10 Serial No : (No. 30) Calibrate By : Pipat

Site Conditions

Barometric Pressure (mm Hg) : 760.00
Temperature (°C) : 25.0
Average Press. (mm Hg) : 754.8
Average Temp (°C) : 31.2

Corrected Pressure (mm Hg) : 760.0
Temperature (deg K) : 298.0
Corrected Average (mm Hg) : -
Average Temp: (Deg K) :

Calibration Orifice

Make : Tisch
Model : TE-5025A
Serial# : 0068

Qstd Slope : 1.99819
Qstd Intercept : -0.01290
Calibration Due Date : 17-Mar-27

Calibration Information

Plate or Test #	ORIFICE (in H_2O)	Qstd (m3/min)	Indicate (CFM)	IC (corrected)
1	12.30	1.762	62.0	62.00
2	9.80	1.573	56.0	56.00
3	7.40	1.368	52.0	52.00
4	5.20	1.148	42.0	42.00
5	3.20	0.902	32.0	32.00

Linear Regression
Slope : 34.6830
Intercept : 1.9646
Corr. Coeff : 0.9914
# of Observations: 5

Calculations

Qstd = 1/m{Sqrt(H2O(Pa/Pstd){Tstd/Ta})-b]
IC =I{Sqrt(Pa/Pstd){Tstd/Ta)]

Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg
For subsequent calculation of sampler flow:
1/m{(I)[Sqrt(298/Tav){Pav/760)]-b)

m = sampler slope
b = sampler intercept
I = chart response
Tav = daily average temperature
Pav = daily average pressure

Calibrate By : _____

Approve By : _____

NOTE: Ensure calibration orifice has been certified within 12 months of use

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

High Volume TSP&PM-10 Calibration Report

Location : Thai Environmemtal Tech
Site ID : Bangkok
Date : 25-May-26
ITEM : PM10
Serial No : (No. 16)
Calibrate By : Pipat

Site Conditions

Barometric Pressure (mm Hg) :	760.00	Corrected Pressure (mm Hg) :	760.0
Temperature (°C) :	25.0	Temperature (deg K) :	298.0
Average Press. (mm Hg) :	754.6	Corrected Average (mm Hg) :	-
Average Temp (°C) :	32.6	Average Temp: (Deg K) :	-

Calibration Orifice

Make : Tisch	Qstd Slope : 1.99819
Model : TE-5025A	Qstd Intercept : -0.01290
Serial# : 0068	Calibration Due Date : 17-Mar-27

Calibration Information

Plate or Test #	ORIFICE (in H_2O)	Qstd (m3/min)	Indicate (CFM)	IC (corrected)
1	12.20	1.754	60.0	60.00
2	9.20	1.524	54.0	54.00
3	7.00	1.331	50.0	50.00
4	5.20	1.148	40.0	40.00
5	3.00	0.873	30.0	30.00

Linear Regression
Slope : 34.6227
Intercept : 0.8881
Corr. Coeff : 0.9878
# of Observations: 5

Calculations

Qstd = 1/m{Sqrt(H2O(Pa/Pstd)(Tstd/Ta)}-b]
IC =I[Sqrt(Pa/Pstd)(Tstd/Ta)]

Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg
For subsequent calculation of sampler flow:
1/m{(I)[Sqrt(298/Tav)(Pav/760)]-b}

m = sampler slope
b = sampler intercept
I = chart response
Tav = daily average temperature
Pav = daily average pressure

Calibrate By : _____

Approve By : _____

NOTE: Ensure calibration orifice has been certified within 12 months of use

THE LINDE GROUP

Linde

Certificate Of Analysis

Special Gases Mixture

Customer Details

Name:	Address:	Customer Tag No.:
Thai Environmental Technic Limited	1/6 Soi Ramkhamhaeng 45, Sapansoong, Khet Saphan Sung , Bangkok 10240	

Certificate Details

Number	1754/23	Date of Issue:	5-Jul-2023	Expiry date:	5-Jul-2026

Material Details

Production Order	90178560	Material Code:	640300-SK-44	Cylinder No.:	A00917SK
Gas content:	5 520 M^3	Filling pressure	145.0 bar	Valve:	CGA 660 SS
Cylinder Owner:	LINDE	Cylinder Material	Spectra seal	Cylinder Size:	40 L

Laboratory Report

Analytical Result

Component	Norminal Concentration	Analysis Result[1]	Uncertainty[2]	Method of Analysis[3]	Assay Date
Nitric Oxide	40.0 ppm	40.5 ppm	± 1% relative	(6) I-PB-352	28-Jun & 5-Jul-2023
Other NOx impurity in Nitrogen		Less than 2.0 ppm			

Reference Standard used in Assay

Reference Standard	Cylinder number	Concentration	Expiry date
Nitric Oxide In Nitrogen	258013SG	25.32 ± 0.25 ppm	13-Dec-2024

Analytical Instruments used in Assay

Instrument / Make / Model	Analytical Principle	Last Multipoint Calibration
FTIR Spectrometers Nicolet iS50	FTIR-NO	28-Jun-2023

Recommend usage condition

Minimum utilization: 5% of actual content or before expire date whichever comes first.

Storage condition: Keep in well ventilation and secure area.

Comments

When reordering, please quote the material number

Note:

1. All results expressed in this report are on mole/mole basis, unless otherwise specified. Assay of this Standard has been performed in accordance with the EPA Traceability Protocol EPA-600/R-12/531 for the Assay of Gaseous Calibration Standards using procedure G1
2. The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%. The measurement of the materials traceable to the SI through the following NMI or other recognised national metrology institutes: is traceable to Swiss National Standard of Mass at
3. (1) Gas Chromatography, (2) Paramagnetic Oxygen Analyzer, (3) Electrochemical Oxygen Analyzer, (4) Electrochemical Moisture Analyzer, (5) Total Hydrocarbon Analyzer, (6) Other - Specified

Sukanya Parinyasoontorn
Signatory for and on behalf of Linde (Thailand) Co., Ltd.

This report shall not be reproduced except in full

บริษัท ลินเด้ (ประเทศไทย) จำกัด (มหาชน)
อาคารแบงกอกแกรนด์ ทาวเวอร์ ชั้น 15 เลขที่ 2/3 หมู่ 14 ถนนแสมดำ แขวงบางคอแหลม เขตบางคอแหลม
กรุงเทพมหานคร 10540 โทรศัพท์ (66) 2338-6100 โทรสาร (66) 2338-6333
โรงงานบางปลา 105 หมู่ 5 ตำบลบางเสาธง อำเภอบางบ่อ สมุทรปราการ 24180
โทรศัพท์ (66) 38 570-479-93 โทรสาร (66) 38 570 323

Linde (Thailand) Public Company Limited
15th Floor, Bangna Tower A, 2/3 Moo 14, Bangna Trad KM. 6.5 Road, Bangkaew
Bangplee, Samutprakarn 10540, Tel (66) 2338-6100 Fax (66) 2338-6333
Wellgrow Plant: 105 Moo 5, T.Bangsamak, A.Bangpakong, Chachoengsao 24180
Thailand, Tel (66) 38.570-479-93 Fax (66) 38.570-323

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

NOx Analyzer Calibration Report


Calibrate Date	: 13-Mar-26	Temperature (°C)	: 25°C
Analyzer Type	: NOx	Barometer (mmHg)	: 759.9
Brand	: API	Humidity (50=15 %)	50.0%RH
Model	: 200 A	Dilutor	: API M700 S/N 625
Serial Number	: 80 (No.7)	Zero Air	: API M701 S/N 1926
Range	: 500 ppb	Standard gas	: A00917 SK

Calibration of Span

Supply Gas	Ref Value(ppb)	Before of Span.(ppb)			After of Span.(ppb)			% diff of Span
		NOx	NO	NO_2	NOx	NO	NO_2	
Zero	0.0	2.5	2.1	0.4	0.0	0.0	0.0	0.0
Span	400.0	376.0	377.0	-1.0	400.0	400.0	0.0	0.0

Multi Point Calibration

Ref Value(ppb)	Analyzer Disp.(ppb)			Output Difference		
	NOx	NO	NO_2	Diff(ppb)	% Diff	Abs (%) Diff
0.0	0.3	0.1	0.2	0.10	0.000	0.025
100.0	98.8	98.2	0.6	-1.80	-0.018	1.80
200.0	199.1	198.7	0.4	-1.30	-0.007	0.65
400.0	399.4	399.1	0.3	-0.90	-0.002	0.22
Average Diff (%)						0.67

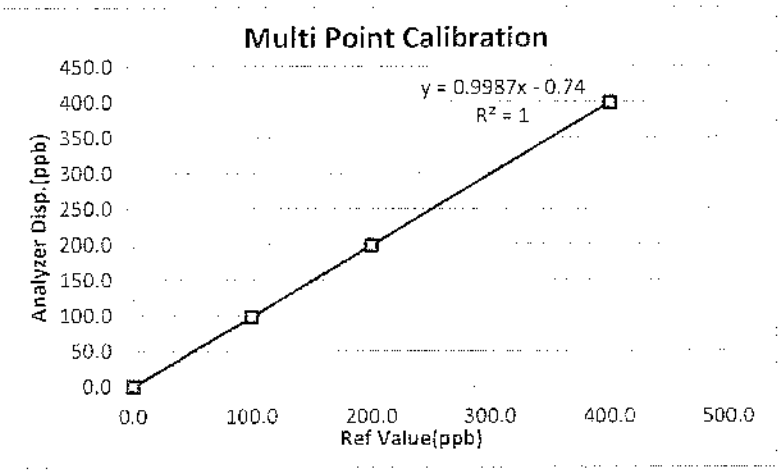

Calibrate by: _____ Approved by : Pramua / M

Thai Environmental Technic Limited 1/6 Soi Ramkhamhaeng 145 Khwaeng/Khet Saphan Sung Bangkok 10240 Thailand
• Tel : +66(0)2373-7799(Auto) Fax : +66(0)2373-7979 • admin@tet1995.com • www.tet1995.com

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

NOx Analyzer Calibration Report


Calibrate Date	: 19-Mar-26	Temperature (°C)	: 25°C
Analyzer Type	: NOx	Barometer (mmHg)	: 762.7
Brand	: API	Humidity (504.15 %)	56.0%RH
Model	: 200 E	Dilutor	: API M700 S/N 625
Serial Number	: 1281(No.20)	Zero Air	: API M701 S/N 1926
Range	: 500 ppb	Standard gas	: A00917 SK

Calibration of Span

Supply Gas	Ref Value(ppb)	Before of Span.(ppb)			After of Span.(ppb)			% diff of Span
		NOx	NO	NO_2	NOx	NO	NO_2	
Zero	0.0	2.9	2.2	0.7	0.0	0.0	0.0	0.0
Span	400.0	384.0	380.0	4.0	400.0	400.0	0.0	0.0

Multi Point Calibration

Ref Value(ppb)	Analyzer Disp.(ppb)			Output Difference		
	NOx	NO	NO_2	Diff(ppb)	% Diff	Abs (%) Diff
0.0	0.6	0.4	0.2	0.40	0.001	0.10
100.0	99.1	99.0	0.1	-0.97	-0.010	0.97
200.0	199.7	198.8	0.9	-1.20	-0.006	0.60
400.0	399.1	398.5	0.6	-1.50	-0.004	0.38
Average Diff (%)						0.51

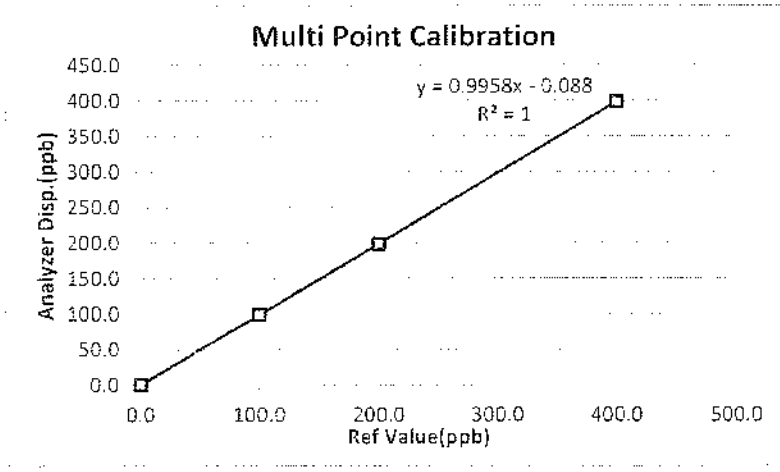

Calibrate by: _____ Approved by : Ramida/M

Thai Environmental Technic Limited 1/5 Soi Ramkhamhaeng 145 Khwaeng/Khet Saphan Sung Bangkok 10240 Thailand
• Tel : +66(0)2373-7795(Auto) Fax : +66(0)2373-7979 • admin@tet1995.com • www.tet1995.com

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

NOx Analyzer Calibration Report


Calibrate Date	: 19-Mar-26	Temperature (°C)	: 25°C
Analyzer Type	: NOx	Barometer (mmHg)	: 762.7
Brand	: API	Humidity (50±15 %)	56.0%RH
Model	: 200 E	Dilutor	: API M700 S/N 625
Serial Number	: 731(No.28)	Zero Air	: API M701 S/N 1926
Range	: 500 ppb	Standard gas	: A00917 SK

Calibration of Span

Supply Gas	Ref Value(ppb)	Before of Span.(ppb)			After of Span.(ppb)			% diff of Span
		NOx	NO	NO_2	NOx	NO	NO_2	
Zero	0.0	3.4	3.1	0.3	0.0	0.0	0.0	0.0
Span	400.0	384.5	381.2	3.3	400.0	400.0	0.0	0.0

Multi Point Calibration

Ref Value(ppb)	Analyzer Disp.(ppb)			Output Difference		
	NOx	NO	NO_2	Diff(ppb)	% Diff	Abs (%) Diff
0.0	0.8	0.4	0.4	0.40	0.001	0.10
100.0	99.8	99.1	0.7	-0.90	-0.009	0.90
200.0	199.7	198.5	1.2	-1.50	-0.008	0.75
400.0	398.5	398.4	0.1	-1.60	-0.004	0.40
Average Diff (%)						0.54

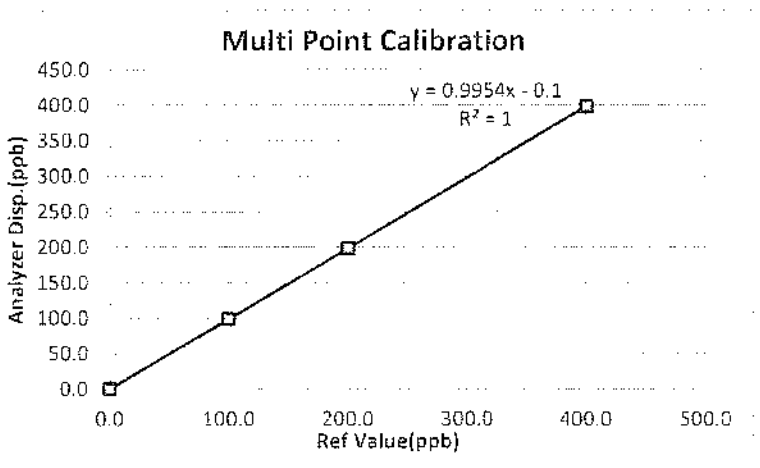

Calibrate by: _____ Approved by : _____

Thai Environmental Technic Limited 1/6 Soi Ramkhamhaeng 145 Khwaeng/Khet Saphan Sung Bangkok 10240 Thailand
• Tel : +66(0)2373-7799(Auto) Fax : +66(0)2373-7979 • admin@tet1995.com • www.tet1995.com

THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

Calibration Certificate

Issued by : Calibration & Test Section : Meteorological Instruments Bureau

Date of Issue 9 January, 2026 Certification No. 027/26

Object : Wind speed and wind direction

Manufacturer : Davis Instruments Inc.

Type : Weather Wizard III

Serial No. : WC21014A92 ID No. : No.17

Customer : Thai Environmental Technic Limited.
1/6 Soi Ramkhamhaeng 145,
Khwaeng/Khet Saphan Sung, Bangkok 10240.

Calibration Condition : Temperature 25.1 °C Barometric Pressure 1007.2 hPa

NATIONAL STANDARD WIND TUNNEL :

: Micromanometer Theodor Friedrichs FC014 Serial No. 9310119

: HOOK GAGE NO 1425 Pitot Tube Theodor Friedrichs Type 0800.0000 serial 9023

N.I.S.T. Test Reference Number 731/241460 : Standard Velocity at 20 - 30 m/sec

: Ultrasonic Anemometer Model DA-650-3TV (sensor TR-90AH)

Serial Number 110730029 (sensor 120629586)

JAPAN QUALITY ASSURANCE ORGANIZATION : Standard Velocity at 9 - 20 m/sec

Calibrated by : Watcharapol Subwat
Mr. Watcharapol Subwat
Mechanical Engineer

Signed :
Mr. Pisood Promsut

(Authorised Signatory)
for the Chief
Sub-Standard Instrument

THAI METEOROLOGICAL DEPARTMENT

4353 Sukhumvit, Bangna, Bangkok 10260 Tel. 081-454-2804,0-2399-0469

The Result of Calibration

Certification No. 027/26

9 January, 2026

Standard	HOOK GAGE NO. 1425			TESTED ANEMOMETER	
Ultrasonic Anemometer	Pressure	Vacumm	Velocity	Velocity	Correction
m/sec	inches H2O	inches H2O	m/sec	m/sec	m/sec
1.00	-	-	-	0.4	0.60
3.02	-	-	-	2.2	0.82
5.00	-	-	-	4.5	0.50
7.00	-	-	-	6.3	0.70
9.02	-	-	-	8.5	0.52
11.01	-	-	-	10.3	0.71
13.01	-	-	-	12.5	0.51
15.01	-	-	-	14.7	0.31
17.02	-	-	-	16.5	0.52
20.02	-	-	-	19.7	0.32

Vane Angel Bench Stand Model 18112 Young Meteorological Instruments	
WIND DIRECTION	TESTED WIND DIRECTION
0	0
90	90
180	180
270	270

Calibrated by :

Mr. Watcharapol Subwat

Mechanical Engineer

Calibration & Test Section

Meteorological Instruments Bureau

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

ilac-MRA

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert.No.: 25CHO573
Page.: 1 of 2

Equipment :	pH Meter
Manufacturer :	Horiba
Model :	LAQUA-PH1300
Serial No. :	B06D0012
ID No. :	Ins-LAB-026
Condition As-Received:	Used Item
Received Date :	28 October 2025
Calibration Date :	28 October 2025
Reference :	2510-0662OC-2
Submitted by :	Thai Environmental Technic Limited 1/6 Soi Ramkhamhaeng 145, Khwaeng/Khet Saphan Sung, Bangkok 10240
Calibration Place :	Laboratory (Thai Environmental Technic Limited)
Ambient Temperature :	(26.3 to 26.3) °C (On-Site)
Relative Humidity :	(58 to 58) % (On-Site)
Calibration Procedure :	In - house method : - CP-OCH2 by direct measurement with DC voltage standard and direct measurement with certified reference material (CRM)
Calibrated by :	Uthen Kankawi
Approved by :	Saithip Approved Signatory

( ) Chakrit Waewwanjua
( ) Ponpan Paipim
(✓) Saithip Meangmai

Issue Date : 30 October 2025

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Condition of this calibration result

1. Reference Standard Instrument

Instrument	Serial No.	ID No.	Cert. No.	Due Date
1) Document Process Calibrator	58440003	130RC120	24E3731	14 Nov 2025
2) Digital Thermometer	-	130RC017	25T625	23 Apr 2026

- This measurement result is traceable to SI through Technology Promotion Association (Thailand - Japan)

2. Certified Reference Materials : The measurement results are traceable to SI through CPA chem Ltd., ANSI-ASQ National Accreditation Board, Accredited No. AR-1835
:The measurement results are traceable to SI through Hach Lenge GmbH Ltd., Deutsche Akkreditierungsstelle, Accredited No.D-RM-15184-01-00

Buffer Solution	Manufacturer	Lot No.	Exp. date
pH 1.685	CPA chem	1005300	15 Jun 2026
pH 4.007	CPA chem	1114384	12 Jun 2027
pH 6.876	CPA chem	1005301	15 Jun 2026
pH 9.180	CPA chem	1135356	16 Aug 2026
*pH 12.42	Hach Lenge GmbH	C03178	07 Jun 2026

3. This certificate is valid only to the item calibrated on date and place of calibration.

Calibration Results

Function : mV Measurement

Performing standard curve by Document Process Calibrator at pH (1.7,4,7,10,12)

Unit Under Calibration	Nominal Value	Standard Voltage Input	Actual Reading		Uncertainty of Measurement	Coverage factor
	pH	mV	mV	pH	(±mV)	*k*
pH Meter	1.680	314.73	314.7	1.680	0.058	2.00
S/N.: B06D0012	4.000	177.48	177.5	4.000	0.058	2.00
	6.860	8.28	8.3	6.860	0.058	2.00
	7.000	0.00	0.0	7.000	0.058	2.00
	9.180	-128.97	-128.9	9.180	0.058	2.00
	10.000	-177.48	-177.4	10.000	0.058	2.00
	12.000	-295.80	-295.8	12.000	0.058	2.00

Function : pH Measurement

Performing five buffers standard curve by using buffer nominal pH (1.7,4,7,9,12.4)

Unit Under Calibration	Standard pH Buffer Solution	Actual pH Reading	Actual mV Reading (mV)	Uncertainty of pH Measurement (±)	Coverage factor *k*
pH Electrode	1.685	1.687	296.5	0.0068	2.11
S/N.: 9X3D0537	4.007	4.011	158.3	0.0065	2.11
	6.876	6.875	-9.3	0.0093	2.00
	9.180	9.184	-144.3	0.015	2.00
	*12.42	12.419	-334.7	0.067	2.00

Remark - * = Not NSC-ONSC Accredited.

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k*, providing a level of confidence of approximately 95 %.

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert.No.: 25MM381

Equipment :	Electronic Balance
Manufacturer :	Mettler Toledo
Model :	MR204
Serial No. :	C531025159
ID No. :	-
Submitted by :	Thai Environmental Technic Limited 1/6 Soi Ramkhamhaeng 145, Khwaeng/Khet Saphan Sung, Bangkok 10240
Location :	Balance Room
Received order :	03 September 2025
Calibration Date :	03 September 2025
Ambient Temperature :	15 °C to 40 °C
Relative Humidity :	30 % to 90 %
Calibrated by :	Tawatchai Pama
Approved by :	Kunchit Approved Signatory

( ) Chakrit Waewwanjua
( ) Suwit Imjai
(✓) Kunchit Promprat

Issue Date : 04 September 2025

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Equipment : Electronic Balance **Cert.No.:** 25MM381
Condition As-Received : New Item
Reference : 2509-0005OC-2

Procedure used :-

Calibration were conducted using in-house calibration procedure CP-OB01 based on UKAS LAB 14 according to direct measurement method against standard weight.

Condition of this result of calibration

1. Reference standard instruments:-

Instruments	Serial No.	Cert. No.	Traceable	Due date
1) Standard Weight Set (E2)	G0602134	MM-0066-24	NIMT	25 Apr 2026
2) Standard Weight Set (E2)	-	MM-0067-24	NIMT	23 Apr 2026

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This result of calibration was made on requested at the point specified by customer.
4. This certificate is not certified for any commercial transaction.
5. This measurement result is traceable to the International System of Unit maintained through :

Remark : NIMT : National Institute of Metrology Thailand

Result of calibration ( ) Without Adjustment (*) After Adjustment by Internal Calibration

Range capacity : 0 g to 220 g **Resolution** 0.0001 g

Before Adjustment :

Applied Weight (g)	Balance Reading (g)	Correction (g)	Measurement Uncertainty (± mg)	Coverage Factor (k)
100	99.9999	+0.0001	0.18	2
200	199.9996	+0.0004	0.31	2


After Adjustment :

1. **Determination of the standard deviation of weighing machine** (n = 10)

Applied Weight (g)	Standard Deviation of Reading (g)
100	0.00005
200	0.00008

Equipment : Electronic Balance
Condition As-Received : New Item
Reference : 2509-0005OC-2

Result of calibration

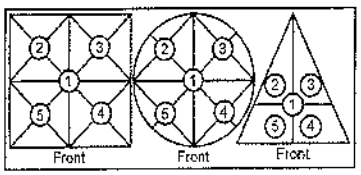

2. Effect of off center loading

A mass of 100 g was placed to various position on the pan.
The weighing machine reading error obtained is given in the table

Position 1 (g)	Position 2 (g)	Position 3 (g)	Position 4 (g)	Position 5 (g)	Maximum difference between off-center and central loading (g)
-0.0003	-0.0003	-0.0004	-0.0004	-0.0002	0.0001

3. Departure from nominal value

Applied Weight (g)	Balance Reading (g)	Correction (g)	Measurement Uncertainty (± mg)	Coverage Factor (k)
Unload	0.0000	0.0000	0.12	2.06
0.01	0.0100	0.0000	0.12	2.06
0.1	0.1000	0.0000	0.12	2.06
0.5	0.5000	0.0000	0.12	2.06
1	1.0000	0.0000	0.12	2.06
5	5.0000	0.0000	0.12	2.06
10	10.0000	0.0000	0.12	2.06
25	24.9999	+0.0001	0.13	2.04
50	49.9999	+0.0001	0.14	2.03
100	99.9998	+0.0002	0.18	2
200	199.9997	+0.0003	0.31	2

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

ilac-MRA

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert. No.: 26TM425
Page : 1 of 3

Equipment :	BOD Incubator
Manufacturer :	Accuplus
Model :	I250
Serial No. :	0408-0115-0008
ID No. :	Ins-LAB-046
Submitted by :	Thai Environmental Technic Limited 1/6 Soi Ramkhamhaeng 145, Khwaeng/Khet Saphan Sung, Bangkok 10240
Location :	Laboratory (Thai Environmental Technic Limited)
Received Order :	09 March 2026
Calibration Date :	09 March 2026
Ambient Temperature :	(26 ± 10) °C
Relative Humidity :	(50 ± 30) %
AC Line Voltage :	(220 ± 22) V

Calibrated by : Preecha Hlahib

Approved by : Kunchit

Approved Signatory

( ) Chakrit Waewwanjua
( ) Suwit Imjai
(✓) Kunchit Promprat

Issue Date : 21 March 2026

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Equipment : BOD Incubator **Cert. No.:** 26TM425

Condition As-Received : Used Item

Reference : 2603-0127OC-10

Procedure Used :-

Calibration were conducted using calibration procedure CP-OT02 based on TLAS G-20 according to direct measurement method with Data Acquisition which connected with Resistance Temperature Detector (RTD).

The temperature scale used was based on ITS-90.

Condition of this result of calibration

1. Reference standard instrument:-

Instrument	Serial No.	Cert. No.	Traceable	Due Date
1) Data Acquisition	MY49023932	25LM121	TPA,	27 Jul 2026

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This measurement result is traceable to the International System of Unit maintained through :


Remark : TPA : Technology Promotion Association (Thailand - Japan)

Result of Calibration :- (*) Without Adjustment

Function of UUC* : Temperature Source

Fresh air setting : Not Available

Environment during calibration		
	Beginning	Finished
Temp. (°C)	27	26
REL.Humid. (%)	56	59
AC Supply (Volt)	220	220

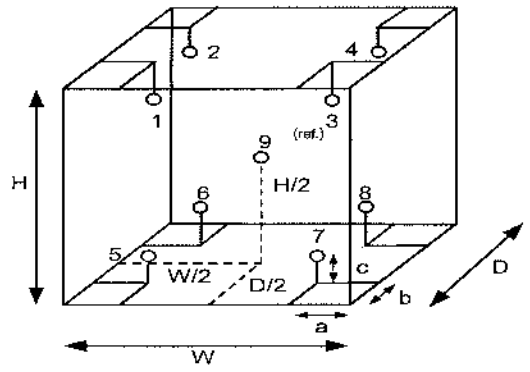

Position :	Ref. Std. ID No.:
1	19-16RTD-01
2	19-16RTD-02
3	19-16RTD-03
4	23-16RTD-04
5	19-16RTD-05
6	19-14RTD-06
7	21-16RTD-07
8	19-16RTD-08
9 (ref.)	19-16RTD-09

Probe Installation Details :

a =	10	cm
b =	10	cm
c =	10	cm

Dimension of Chamber :

D =	0.48	m
W =	0.50	m
H =	1.1	m
Capacity =	0.26	m^3

Equipment : BOD Incubator **Cert. No.:** 26TM425
Condition As-Received : Used Item **Page :** 3 of 3
Reference : 2603-0127OC-10
Result of Calibration :- (*) Without Adjustment
Function of UUC* : Temperature Source
Fresh air setting : Not Available

Calibration Point (°C)	UUC* Setting (°C)	UUC* Reading (°C)	Temperature stability (± °C)	Temperature uniformity (°C)	Overall Variation (°C)	Coverage Factor *k*
20.0	20.0	20.0	0.48	0.48	1.1	2

Calibration Point	Measured Temperature (°C) Position									Uncertainty
(°C)	1	2	3	4	5	6	7	8	9 (ref.)	(±°C)
20.0	20.313	20.256	20.108	20.244	20.183	20.157	19.969	19.986	20.121	0.64

Average* : The average of 30 values in each position.
Temperature stability : One-half of the greatest maximum difference of measured temperature at any one sensor.
Temperature uniformity : The maximum difference of measured temperatures at any sensors and the measured temperature at the reference location which are observed at the same time or at as close an observation time as possible to determine the temperature pattern or homogeneity within the chamber under steady-state conditions.
Overall Variation : The Difference of the maximum and minimum measured temperatures throughout observation.
UUC* : Unit Under Calibration
Note : The reported uncertainty of measurement was included stability and excluded uniformity .

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor ***k***, providing a level of confidence of approximately 95 %.

-o0o-

TECHNOLOGY PROMOTION ASSOCIATION (THAILAND-JAPAN)
CORPORATE SERVICES 3: EQUIPMENT CALIBRATION AND TESTING SERVICES
534/4 PATTANAKARN ROAD SOI 18, SUANLUANG, SUANLUANG BANGKOK 10250
TEL.0-2717-3000-29 FAX.0-2719-9484

NSC-TISI-TIS17025
CALIBRATION 0008

Certificate of Calibration

Cert.No.: 25CHO582

Equipment :	Spectrophotometer
Manufacturer :	Perkin Elmer
Model :	Lambda 365
Serial No. :	365K9042909
ID No. :	-
Condition As-Received:	Used Item
Received Date :	07 November 2025
Calibration Date :	07 November 2025
Reference :	2511-0009OC-1
Submitted by :	Thai Environmental Technic Limited 1/6 Soi Ramkhamhaeng 145, Khwaeng/Khet Saphan Sung, Bangkok 10240
Calibration Place :	Laboratory (Thai Environmental Technic Limited)
Ambient Temperature :	(26.4 to 26.5) °C (On-Site)
Relative Humidity :	(64.1 to 62.9) % (On-Site)
Calibration Procedure :	In - house method : CP-OCH4 based on ASTM E 275-08
Calibrated by :	Uthen Kankawi
Approved by :	Saithip Approved Signatory

( ) Chakrit Waewwanjua
( ) Ponpan Palpim
(✓) Saithip Meangmai

Issue Date : 07 November 2025

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full, except with the prior written Approval of the head of Corporate Services 3 : Equipment Calibration and Testing Services.

Condition of calibration result

1. Reference Standard Material :

Material	Serial No.	Certificate No.	Due date
1. Absorbance Standard set	44487	122584	31 May 2026
2. Wavelength Standard set	29829	135831	06 Oct 2027
3. Wavelength Standard set	29829	135832	06 Oct 2027
4. Stray Light Standard set	45507	126055	04 Oct 2026

2. This certificate is valid only to the item calibrated on date and place of calibration.
3. This certificate is traceable to the International System of Unit maintained through :
   - Starna Scientific Ltd.
4. Spectral BandWidth : 1 nm
   Scan Speed : 30 nm/min

Calibration Results : without adjustment

Wavelength Accuracy

Certified Values of Reference Material (nm)	UUC Reading (nm)	Uncertainty of Measurement (± nm)	Coverage Factor *k*
418.53	418.35	0.12	2.00
536.52	536.15	0.13	2.00
638.00	637.90	0.13	2.00
684.50	684.49	0.12	2.00
879.41	879.18	0.12	2.00

Calibration Results : without adjustment

Photometric Accuracy

Wavelength (nm)	Certified Values of Reference Material (Abs)	UUC Reading (Abs)	Uncertainty of Measurement (±Abs)	Coverage Factor *k*
420.0	Zero	0.0000	0.0028	2.00
	0.5750	0.5726	0.0028	2.00
	0.7156	0.7138	0.0028	2.00
	1.0176	1.0140	0.0028	2.00
546.1	Zero	0.0000	0.0028	2.00
	0.5234	0.5217	0.0028	2.00
	0.7007	0.6985	0.0028	2.00
	0.9992	0.9957	0.0028	2.00
635.0	Zero	0.0000	0.0028	2.00
	0.5648	0.5638	0.0028	2.00
	0.7654	0.7651	0.0028	2.00
	1.0961	1.0939	0.0028	2.00

Stray Light

* Straylight at 260.57 ± 0.11 nm	Reading at 260.57 ± 0.11 nm
Abs	1.7208
%T	0.7459

Remark

- Each individual filter is measured against the empty filter holder (blank) used to zero the spectrophotometer
- The Potassium Dichromate filled cells are measured against a Perchloric acid blank.
- Cut-off wavelength of stray light reference material (Potassium Iodide) at Wavelength 260.57 ± 0.11 nm
- Result = Pass, If Absorbance > 2.00 Abs and Transmission < 1.0 %T at Wavelength 260.57 ± 0.11 nm
- * : Not NSC-ONSC Accredited
- UUC = Unit Under Calibration

The reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor *k* , providing a level of confidence of approximately 95 %.

-o0o-

MAINTENANCE REPORT

ATOMIC ABSORPTION SPECTROPHOTOMETER MODEL

AAnalyst 100

Customer :	บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด	Date Tested:	17-มี.ค.-69
		Recommendation Recertification Period	6 Months
Address :	1/6 ซอยรามคำแหง 145, แขวงสะพานสูง, เขตสะพานสูง, กรุงเทพฯ 10240 TH	Recertification Due:	17-ก.ย.-69
		Date Last Certified:	19-ก.ย.-68
User Name:	คุณ กิตติศักดิ์ เมืองงาม	Visit Number:	ONE
Phone:	02-3737799	TH ONE SOURCE Phone:	081-7316733
E-mail:	Ketsarin.Chuayphin@eurofinsasia.com	E-mail:	thonesource@gmail.com

CONFIGURATION TESTED

MODEL	SERIAL NUMBER	SOFTWARE
AAnalyst 100	040S0110503	AA WinLab 3.2

TEST STANDARD USED	PART NUMBER	
Copper	N9300183	
Filter 0.2 %	MG0-057	

MAINTENANCE REPORT

ATOMIC ABSORPTION SPECTROPHOTOMETER MODEL

AAnalyst 100

SERIAL NUMBER 040S0110503 **DATE TESTED** 17-มี.ค.-69

1. OPTIC CHECKS

A. Optical alignment condition (if necessary)	OK
B. Condition of Mirrors,Lenses etc.(if necessary)	OK

2. GAS SYSTEM CHECKS

A. Leak test all internal and extenal gas box joints	OK
B. All gas box safety features	OK
C. Burner system including nebulizer and all o-ring and gasket	OK
D. Drain system (safety)	F

3. ELECTRONICS CHECKS

A. Power Supplies

+ 5.00 Vdc ± 0.2 Vdc	+ 5.02	Vdc
+ 11.50 Vdc ± 0.2 Vdc	+ 11.41	Vdc
+ 15.00 Vdc ± 1.0 Vdc	+14.98	Vdc
- 15.00 Vdc ± 1.0 Vdc	-15.03	Vdc
+ 35.00 Vdc ± 3.0 Vdc	+35.2	Vdc

4. WAVELENGTH ACCURACY TEST

A. Zn Lamp wavelength 213.9 nm ± 0.3 nm.	213.9	nm.
B. Fe Lamp wavelength 248.3 nm ± 0.3 nm.	248.24	nm.
C. Cu Lamp wavelength 324.8 nm ± 0.3 nm.	324.84	nm.

TH ONE SOURCE Co.,Ltd. 33/119, T.Ladsawai, A.Lam Luk Ka, Pathum Thani 12150, Thailand

MAINTENANCE REPORT

ATOMIC ABSORPTION SPECTROPHOTOMETER MODEL

AAnalyst 100

SERIAL NUMBER 040S0110503	DATE TESTED	17-มี.ค.-69
5. PERFORMANCE TESTS	**SPEC.**	**RESULTS**
*A. Neutral density filter checks with Copper (324.8 nm)		
Neutral Density Filter 0.2 Abs.	**0.180 ± 10%**	0.171 Abs.
B. AA Baseline noise test with Copper (324.8 nm)		
Integration time = 0.5 seconds		
Replicates = 99 times		
Standard Deviation	**≤ 0.001**	0.000
C. Flame sensitivity with Copper (324.8nm)		
(5 mg/L Cu Standard a read time of 10 seconds		
10 replicates, standard burner)		
Stainless steel nebulizer	**≥ 0.25**	0.305 Abs.
%RSD		0.56 %
Measured Characteristic Concentration :		0.072 mg/L

TH ONE SOURCE Co.,Ltd. 33/119, T.Ladsawai, A.Lam Luk Ka, Pathum Thani 12150, Thailand

MAINTENANCE REPORT

ATOMIC ABSORPTION SPECTROPHOTOMETER MODEL

AAnalyst 100

SERIAL NUMBER 040S0110503 **DATE TESTED** 17-มี.ค.-69

Remarks :

This is to certify that the above tests have been performed and the configuration tested

- [x] meets
- [ ] does not meet

This certificate does not modify PerkinElmer's standard terms and condition of sale, including warranty terms.

Service Department TH ONE SOURCE CO., LTD.

Krungchai T.

(**Krungchai Treevichien**)

Customer Support Engineer

TH ONE SOURCE Co.,Ltd. 33/119, T.Ladsawai, A.Lam Luk Ka, Pathum Thani 12150, Thailand

MAINTENANCE REPORT

OPTIMA 8000

Customer :	บริษัท เทคนิกสิ่งแวดล้อมไทย จำกัด	Date Tested:	March 17, 2026
		Recommendation Recertification Period	6 Months
Address :	1/6 ซอยรามคำแหง 145, แขวงสะพานสูง, เขตสะพานสูง, กรุงเทพฯ 10240 TH	Recertification Due:	September 17, 2026
		Date Last Certified:	September 19, 2025
User Name:	คุณ ณัฐพงศ์ โคตะมา	Visit Number:	ONE
Phone:	02-3737799, 081-1303495	TH ONE SOURCE Phone:	081-7316733
E-mail:	Ketsarin.Chuayphan@eurofinsasia.com Phorntip.phethshee@eurofinsasia.com	E-mail :	thonesource@gmail.com

CONFIGURATION TESTED

MODEL	SERIAL NUMBER	ACCESSORIES/COMPONENT NOT INCLUDED
OPTIMA 8000	078S1310024C	WinLab32 Version 5.5.0
N0772045	1F1380368	PN:6150T21E4Q1E

TESTED EQUIPMENT

IPV Methods

TEST STANDARD USED	PE NUMBER
Mixed standard 1/10	N0691579
Mixed standard 1/100	N9300221

CUSTOMER SUPPLIED	COMMENTS
2 % HNO3	
10 % HNO3	

MAINTENANCE REPORT

OPTIMA 8000

SERIAL NUMBER 078S1310024C **DATE TESTED** March 17, 2026

1. MECHANICAL CHECKS

A. Inspect and clean all fans and filters.	OK
B. Inspect and replace as necessary, all torch components including the RF Flat coil	OK
C. Inspect all tubing for sign of clacking or leaking.	OK
D. Adjust water and gas pressure regulator settings.	OK
E. Inspect and leak check pneumatics drawers.	OK
F. Clean the exterior of the instrument.	OK

2. OPTICAL CHECKS

A. Inspect and clean all optical components.	OK
B. As reqiured, check and replace all purge filters.	OK
C. Recheck optical alignment.	OK

3. COOLING SYSTEM CHECKS

A. Perform preventive maintenance on chiller.	OK
B. Flush out water the chiller and replace with coolant mix30plus every twelve months	OK

4. PERFORMANCE CHECKS

A. Torch View Alignment.	OK
B. Wavelength Calibration.	OK

MAINTENANCE REPORT

OPTIMA 8000

SERIAL NUMBER 078S1310024C	DATE TESTED	March 17, 2026
PARAMETER	SPECIFICATION	FINAL VAULE
Precision		
Zn 213.856	% RSD ≤ 1.0	0.79
Mg 280.260	% RSD ≤ 1.0	0.68
Mg 285.207	% RSD ≤ 1.0	0.38
Ba 455.403	% RSD ≤ 1.0	0.43
Detection Limits: Axial		
	As 193 nm, 3(sd) ≤ 10.0 ppb	0.81
	Se 196 nm, 3(sd) ≤ 5.0 ppb	5.0
	Tl 190 nm, 3(sd) ≤ 10.0 ppb	0.48
	Pb 220 nm, 3(sd) ≤ 3.0 ppb	0.40
BEC: Axial	Mn 257 nm, ≤ 30 ppb	2.61
Detection Limits: Radial		
	As 193 nm, 3(sd) ≤ 60.0 ppb	4.95
	Zn 213 nm, 3(sd) ≤ 2.0 ppb	0.12
	Mn 257 nm, 3(sd) ≤ 1.0 ppb	0.03
	La 379 nm, 3(sd) ≤ 3.0 ppb	0.27
	Ba 455 nm, 3(sd) ≤ 0.3 ppb	0.02
	Ba 493 nm, 3(sd) ≤ 0.6 ppb	0.02
BEC: Radial	Mn 257 nm, ≤ 30 ppb	7.13
Spectral Resolution: UV		
	As 193 nm, ≤ 0.009	0.00759
	Ni 231 nm, ≤ 0.011	0.00841
	Ni 341 nm, ≤ 0.015	0.01266
Spectral Resolution: VIS		
	Ba 455 nm, ≤ 0.020	0.01585

MAINTENANCE REPORT

OPTIMA 8000

SERIAL NUMBER 078S1310024C **DATE TESTED** March 17, 2026

Remarks :

Commissioning follow as commissioning performance sheets.

Calculate MnBEC = IB * STD Conc / IS-IB , where standard conc = 1000 ug/L

IB = Intensity of blank

IS = Intensity of Standard

Used Mira Mist Nebulizer

This is to certify that the above tests have been perfomed and the configuration tested

[✔] meets

[ ] does not meet

This certificate does not modify PerkinElmer's standard terms and condition of sale, including warranty terms.

Service Department TH One Source Co., Ltd.

Krungchai T.

(**Krungchai Treevichien**)

Customer Support Engineer

TH One Source Co.,Ltd. 33/119 Moo 10, Ladsawai, Lam Luk Ka, Pathum Thani 12150, Thailand

Personal Pump Calibration Report

Equipment Type : Personal Pump/Parameter

Equipment Range : 0.5-7.0 l/min

Calibration Range : 0.5-4.0 l/min

Calibration Type : Drycal

Calibration S/N : 4491

Item	Personal Pump S/N	Hi Flow/Low Flow	ครั้งที่ 1	ครั้งที่ 2	ครั้งที่ 3	Average	Uncertainty
1.	20180803003	2.5	2.4940	2.4980	2.4970	2.4960	±0.0021
2.	20180806025	2.5	2.4950	2.4960	2.4990	2.4970	±0.0021
3.	20180802087	2.0	1.9960	1.9980	1.9970	1.9970	±0.0010
4.	20180802084	2.0	1.9920	1.9980	1.9980	1.9960	±0.0035

Calibration Date 10 / 07 / 69

Calibration By กัลยาณวัฒ์

Remark : Uncertainty Type A = $\sigma = \frac{SD}{\sqrt{n}}$

: SD = Standard deviation

: $\overline{X}$ = Mean

THAILAND INSTITUTE OF SCIENTIFIC AND TECHNOLOGICAL RESEARCH (TISTR)

Request No. 21-69/0297 **MTC No.** EEL. BP. 10469

CALIBRATION CERTIFICATE

Submitted by : Thai Environmental Technic Limited.

Address : 1/6 Soi Ramkhamhaeng 145, Saphan Sung, Saphan Sung, Bangkok, 10240.

Calibrated at : Electrical and Electronic Standards Laboratory, Industrial Metrology and Testing Service Centre, Soi 1C, Bangpoo Industrial Estate, Sukhumvit Rd., Muang, Samutprakan 10280.

Instrument Calibrated :

Description : Sound Calibrator

Manufacturer : Scarlet Tech

Model : ST-120

Serial No. : ST120C1204E

Ambient Environment

Temperature : (23 ± 3) °C

Relative Humidity : (50 ± 15) %

Ambient Pressure : (101.325 ± 1.500) kPa

Standards used :

1. Digital Function Synthesizer NF Electronic DF-193A S/N 122037.
2. Measuring Amplifier Bruel&Kjaer 2636 S/N 1537484.
3. Programmable Attenuator Tamagawa TPA-303A S/N OF 2214.
4. Digital Multimeter Agilent 34401A S/N MY44005560.
5. Pressure Transmitter Vaisala PTB202AD S/N T0650001.
6. Audio Analyzer Keithley 2015-P S/N 4106495.
7. Condenser Microphone Bruel&Kjaer 4180 S/N 2889871.

Calibration Procedure: CP-102-04 based on IEC 60942-2003. The sound pressure level of instrument was measured by standard microphone using an insert voltage technique.

This instrument has been calibrated against standards maintained at Electrical and Electronic Standards Laboratory (EEL), which are traceable to the International System of Units through the National Institute of Metrology (Thailand).

The information on actual reading is attached herewith and the uncertainty limits quoted refer to the measured values only.

Date of Receipt : 1 Apr. 2026

Date of Calibration : 8 Apr. 2026

The results relate only to the items tested/calibrated or value assigned.
Advertising the Report/Certificate and publicity of the results except in full, are prohibited unless written permission is obtained from the governor of TISTR.

Head Office
35 Mu 3 Tambon Khlong Ha, Amphoe Khlong Luang, Changwat Pathumthani 12120, Thailand
Tel. (66) 0 2577 9036
Fax. (66) 0 2577 9009

Office/Laboratory
668 Mu 2 Tambon Bangpoomai, Amphoe Muang Samutprakan, Changwat Samutprakan 10280, Thailand
Tel. (66) 0 2323 1672 80 ext. 115, 116
(66) 08 5219 9449
E-mail : mtc@tistr.or.th Website : www.tistr.or.th

Office
196 Phahonyothin Road, Ladyao, Chatuchak, Bangkok 10900, Thailand
Tel. (66) 0 2579 1121-30 ext. 5219, 5225, 5237
(66) 08 1889 6827

THAILAND INSTITUTE OF SCIENTIFIC AND TECHNOLOGICAL RESEARCH (TISTR)

Request No. 21-69/0297 **MTC No.** EEL. BP. 1:0469

The reported expanded uncertainty is based upon a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%.

Nominal Output of Unit Under Test = 94 dB re 20μPa at 1000 Hz

Acoustic Output in dB re 20μPa , Corrected to Reference Conditions : 101.325 kPa , 23.0°C and 50 %RH

1. Sound Pressure Level

Standard Microphone Type	Measured Sound Pressure Level (dB)	Deviated value (dB)	Uncertainty (dB)	Tolerance limit IEC60942:2003 Class 1
1/2 inch Bruel&Kjaer 4180	94.17	0.17	± 0.10	±0.40 dB

2. Frequency

Standard Microphone Type	Measured Frequency (Hz)	Deviated value (Hz)	Uncertainty (Hz)	Tolerance limit IEC60942:2003 Class 1
1/2 inch Bruel&Kjaer 4180	998.7	-1.3	± 1.5	±1.0%

3. Total distortion

Standard Microphone Type	Measured Total distortion (%)	Uncertainty (%)	Tolerance limit IEC60942:2003 Class 1
1/2 inch Bruel&Kjaer 4180	1.00	± 0.50	±3.0%

Note : 1. No adjustment.

2. The calibrator pressure correction was not included.

3. The microphone volume correction was not included.

Date of Calibration : 8 Apr. 2026

The results relate only to the items tested/calibrated or value assigned.
Advertising the Report/Certificate and publicity of the results except in full are prohibited unless written permission is obtained from the governor of TISTR.

Head Office
35 Mu 3 Tambon Khlong Sa, Amphoe Khlong Luang,
Changwat Pathumthani 12120, Thailand
Tel. (66) 0 2577 9036
Fax. (66) 0 2577 9009

Office/Laboratory
668 Mu 2 Tambon Bangpoomai, Amphoe Mueang Samutprakan,
Changwat Samutprakan 10280 Thailand
Tel. (66) 0 2525 6672-89 ext. 115, 116
(66) 06 5219 9460
E-mail : mtc@tistr.or.th Website : www.tistr.or.th

Office
196 Phetchaburi Road, Ladyao, Chatuchak,
Bangkok 10900, Thailand
Tel. (66) 0 2579 1121-30 ext. 2219, 2225, 5217
(66) 08 1889 6827

THAILAND INSTITUTE OF SCIENTIFIC AND TECHNOLOGICAL RESEARCH (TISTR)

Request No. 21-69/0297 **MTC No.** EEL. BP. 1/0469

Nominal Output of Unit Under Test = 114 dB re 20µPa at 1000 Hz

Acoustic Output in dB re 20µPa , Corrected to Reference Conditions : 101.325 kPa , 23.0 °C and 50 %RH

1. Sound Pressure Level

Standard Microphone Type	Measured Sound Pressure Level (dB)	Deviated value (dB)	Uncertainty (dB)	Tolerance limit IEC60942:2003 Class 1
1/2 inch Bruel&Kjaer 4180	114.11	0.11	± 0.10	±0.40 dB

2. Frequency

Standard Microphone Type	Measured Frequency (Hz)	Deviated value (Hz)	Uncertainty (Hz)	Tolerance limit IEC60942:2003 Class 1
1/2 inch Bruel&Kjaer 4180	998.8	-1.2	± 1.5	±1.0%

3. Total Distortion

Standard Microphone Type	Measured Total Distortion (%)	Uncertainty (%)	Tolerance limit IEC60942:2003 Class 1
1/2 inch Bruel&Kjaer 4180	0.20	± 0.50	±3.0%

Note : 1. No adjustment.

2. The calibrator pressure correction was not included.

3. The microphone volume correction was not included.

Calibrated by : .....

(Mr.Weerachai Deechaiyae)

Approved by : .....

(Mr.Prawate Kluaypa)

Director

Electrical and Electronic Standards Laboratory

Industrial Metrology and Testing Service Centre

Date of Calibration : 8 Apr. 2026

Date of Issue : 9 Apr. 2026

Ref : 20112690401014150O1

End of Certificate 3 3

The results relate only to the items tested/calibrated or value assigned.
Advertising the Report/Certificate and publicity of the results except in full are prohibited unless written permission is obtained from the Director of TISTR

Head Office
35 Moo 3 Tambon Khlong Ha, Amphoe Khlong Luang,
Changwat Pathumthani 12120, Thailand
Tel. (66) 0 2577 9030
Fax. (66) 0 2577 9009

Office/Laboratory
668 Moo 3 Tambon Bangpoomai, Amphoe Muang Samutprakarn,
Changwat Samutprakarn 10280, Thailand
Tel. (661) 2525 1612 30 ext. 115, 116
(66) 68 5219 6440
E-mail : mtc@tistr.or.th Website : www.tistr.or.th

Office
196 Phahonyothin Road, Ladyao, Chatuchak,
Bangkok 10900, Thailand
Fax. (66) 0 2579 1121 30 ext. 5219, 5225, 5217
(66) 06 1889 6527

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

Sound Level Meter Calibration Report

Equipment Type	: Sound Level Meter	**Calibration Date**	: 11-June-2026
Calibrator	: SCARLET ST-120	**Barometric pressure (mmHg)**	: 759.0 mmHg
Standard	: IEC 60942:2017 CLASS1	**Temperature (23±3)°C**	: 25 °C
Accuracy	: 94.0 ±0.3 dB and 114.0±0.5 dB	**Relative Humidity(50±15 %)**	: 50 % RH
Frequency	: at 1,000 Hz ±1%	**Dued Date of Calibrate**	: 10-July-2026
Calibrator Serial NO.	: ST120C1204E		

Item	Instrument Calibrated			Reference	Before Adjust				After Adjust	Deviation	Result
	Brand	Model	Serial NO.	Acoustic dB	ครั้งที่1	ครั้งที่ 2	ครั้งที่ 3	เฉลี่ย	± dB	± dB	Calibrate
57	ACO	6226	160099	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.1	114.1	114.1	114.1			
58	ACO	6226	160143	94.0	94.2	94.2	94.2	94.2	94.0	0.2	PASS
				114.0	114.1	114.1	114.1	114.1			
59	ACO	6226	160203	94.0	94.2	94.2	94.2	94.2	94.0	0.2	PASS
				114.0	114.0	114.0	114.0	114.0			
60	ACO	6226	160204	94.0	94.2	94.2	94.2	94.2	94.0	0.2	PASS
				114.0	114.0	114.0	114.0	114.0			
61	ACO	6226	160205	94.0	93.8	93.8	93.8	93.8	94.0	0.2	PASS
				114.0	113.8	113.8	113.8	113.8			
62	ACO	6226	160211	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.1	114.1	114.1	114.1			
63	ACO	6226	160212	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			
64	ACO	6226	160213	94.0	93.7	93.7	93.7	93.7	94.0	0.3	PASS
				114.0	113.7	113.7	113.7	113.7			
66	ACO	6226	160215	94.0	94.2	94.2	94.2	94.2	94.0	0.2	PASS
				114.0	114.1	114.1	114.1	114.1			
67	ACO	6226	160216	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
				114.0	113.9	113.9	113.9	113.9			

Calibration By :

Approve by : Bannad M

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

Sound Level Meter Calibration Report

Equipment Type	: Sound Level Meter	**Calibration Date**	: 11-June-2026
Calibrator	: SCARLET ST-120	**Barometric pressure (mmHg)**	: 759.0 mmHg
Standard	: IEC 60942:2017 CLASS1	**Temperature (23±3)°C**	: 25 °C
Accuracy	: 94.0 ±0.3 dB and 114.0±0.5 dB	**Relative Humidity(50±15 %)**	: 50 % RH
Frequency	: at 1,000 Hz ±1%	**Dued Date of Calibrate**	: 10-July-2026
Calibrator Serial NO.	: ST120C1204E		

Item	Instrument Calibrated			Reference	Before Adjust				After Adjust	Deviation	Result
	Brand	Model	Serial NO.	Acoustic dB	ครั้งที่1	ครั้งที่ 2	ครั้งที่ 3	เฉลี่ย	± dB	± dB	Calibrate
35	ACO	6226	110097	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.1	114.1	114.1	114.1			
36	ACO	6226	110102	94.0	93.9	93.9	93 9	93.9	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			
37	ACO	6226	110101	94.0	93.7	93.7	93.7	93.7	94.0	0.3	PASS
				114.0	113.7	113.7	113.7	113.7			
38	ACO	6226	110106	94.0	94.2	94.2	94.2	94.2	94.0	0.2	PASS
				114.0	114.1	114.1	114.1	114.1			
39	ACO	6226	110104	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			
40	ACO	6226	110100	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.1	114.1	114.1	114.1			
41	ACO	6226	130127	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			
42	ACO	6226	130128	94.0	93.7	93.7	93.7	93.7	94.0	0.3	PASS
				114.0	113.7	113.7	113.7	113.7			
44	ACO	6226	130130	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.1	114.1	114.1	114.1			
45	ACO	6226	130131	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			

Calibration By :

Approve by :

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

Sound Level Meter Calibration Report

Equipment Type : Sound Level Meter
Calibrator : SCARLET ST-120
Standard : IEC 60942:2017 CLASS1
Accuracy : 94.0 ±0.3 dB and 114.0±0.5 dB
Frequency : at 1,000 Hz ±1%
Calibrator Serial NO. : ST120C1204E

Calibration Date : 11-June-2026
Barometric pressure (mmHg) : 759.0 mmHg
Temperature (23±3)°C : 25 °C
Relative Humidity(50±15 %) : 50 % RH
Dued Date of Calibrate : 10-July-2026

Item	Instrument Calibrated			Reference	Before Adjust				After Adjust	Deviation	Result
	Brand	Model	Serial NO.	Acoustic dB	ครั้งที่1	ครั้งที่ 2	ครั้งที่ 3	เฉลี่ย	± dB	± dB	Calibrate
46	ACO	6236	112029	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.1	114.1	114.1	114.1			
49	ACO	6236	152075	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			
50	ACO	6236	152076	94.0	93.7	93.7	93.7	93.7	94.0	0.3	PASS
				114.0	113.7	113.7	113.7	113.7			
51	ACO	6236	152077	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
				114.0	113.9	113.9	113.9	113.9			
52	ACO	6226	150142	94.0	94.2	94.2	94.2	94.2	94.0	0.2	PASS
				114.0	114.1	114.1	114.1	114.1			
53	ACO	6226	160095	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.1	114.1	114.1	114.1			
54	ACO	6226	160096	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			
55	ACO	6226	160097	94.0	93.7	93.7	93.7	93.7	94.0	0.3	PASS
				114.0	113.7	113.7	113.7	113.7			
56	ACO	6226	160098	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
				114.0	114.0	114.0	114.0	114.0			

Calibration By :

Approve by :

Personal Pump Calibration Report

Equipment Type : Personal Pump/Parameter

Equipment Range : 0.5-7.0 l/min

Calibration Range : 0.5-4.0 l/min

Calibration Type : Drycal

Calibration S/N : 4491

Item	Personal Pump S/N	Hi Flow/Low Flow	ครั้งที่ 1	ครั้งที่ 2	ครั้งที่ 3	Average	Uncertainty
1.	20180803003	2.5	2.4940	2.4980	2.4970	2.4960	±0.0021
2.	20180806025	2.5	2.4950	2.4960	2.4990	2.4970	±0.0021
3.	20180802087	2.0	1.9960	1.9980	1.9970	1.9970	±0.0010
4.	20180802084	2.0	1.9920	1.9980	1.9980	1.9960	±0.0035

Calibration Date 10 / 07 / 69

Calibration By _____

Remark : Uncertainty Type A = $\frac{\sigma}{\sqrt{n}}$ = SD

: SD = Standard deviation

: $\overline{X}$ = Mean

SITHIPORN
Associates

Revised: 2023/01/04

Nozzle Calibration

Nozzle Information		Calibration Conditions		Calibration Reference	
Manufacturer	Apex	Bar. Pressure (mm Hg):	759.6	Calibration No.:	SA2026NZ013
Type	Stainless Steel	Ambient Temperature (°C):	25.1	Work No.	SVO51869
Identification	-	Relative Humidity (%):	55	Units:	Metric

Reference Equipment	Serial No	Cal No.:	Cal.due:
Vernier, 0-250mm 0.01 mm increments model Mitutoyo	EPD1-VER-57-1-CEN-02	L202503373-0001	26/Mar/26

Calibration Method

Follow the USEPA Method 5 nozzle size calibration procedure. (ref. 40 CFR PART 60).

Calibration Result


ID No.	Sizes	measured every 60° nozzle			$(D_1 + D_2 + D_3) / 3$	Different ≤ 0.100 mm.	
	mm.	D_1	D_2	D_3	Davg	△ D	Judgment
4	3.1	3.13	3.12	3.12	3.123	0.010	PASS
6	4.6	4.31	4.32	4.31	4.313	0.010	PASS
8	6.2	6.22	6.21	6.22	6.217	0.010	PASS
10	7.8	7.72	7.71	7.71	7.713	0.010	PASS
12	9.4	9.39	9.39	9.40	9.393	0.010	PASS
14	10.9	10.90	10.90	10.90	10.900	0.000	PASS
16	12.6	12.57	12.57	12.58	12.573	0.010	PASS

Where :

D1, D2, D3 = There difference nozzle diamiters at 60 degrees to each other, each measured to the nearest 0.025 mm or 0.001 inch

△ D = Maximum difference between any two diameters, must be ≤ 0.100 mm or 0.004 inch

D avg = $(D_1 + D_2 + D_3) / 3$

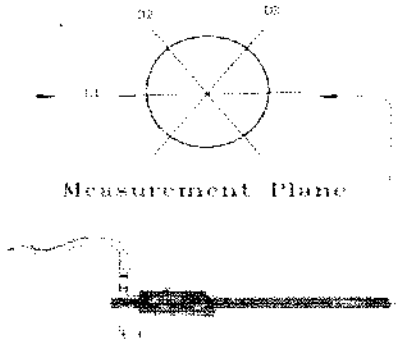

Signature _____ Date : 26/Jan/26

บริษัท สิทธิพรอโซซิเอส จำกัด
SITHIPORN ASSOCIATES COMPANY LIMITED

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

Noise Dose Meter Calibration Report

Calibrator	: TENMARS Sound Calibrator TM-100	**Calibration Date**	: 15-June-2026
Standard	: IEC 60942	**Barometric pressure (mmHg)**	: 759.0 mmHg
Accuracy	: 94.0 ±0.3 dB and 114.0±0.5 dB	**Temperature (23±3)°C**	: 25 °C
Frequency	: at 1,000 Hz ±1%	**Relative Humidity(50±15 %)**	: 50 % RH
Calibrator Serial NO.	: 180501628	**Dued Date of Calibrate**	: 14-July-2026

Item	Instrument Calibrated			Reference	Before Adjust				After Adjust	Deviation	Result
	Brand	Model	Serial NO.	Acoustic dB	ครั้งที่1	ครั้งที่ 2	ครั้งที่ 3	เฉลี่ย	± dB	± dB	Calibrate
20	Tenmars	ST-130	170400163	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS
21	Tenmars	ST-130	170400165	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
22	Tenmars	ST-130	170400177	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
23	Tenmars	ST-130	170800191	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
24	Tenmars	ST-130	170800193	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS
26	Tenmars	ST-130	170800207	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
27	Tenmars	ST-130	170800208	94.0	93.9	93.9	93.9	93.9	94.0	0.1	PASS
28	Tenmars	ST-130	200300133	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS
29	Tenmars	ST-130	200300134	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS

Calibration By :

Approve by :

Thai Environmental Technic Limited
บริษัท เทคนิคสิ่งแวดล้อมไทย จำกัด

Noise Dose Meter Calibration Report

Calibrator	: TENMARS Sound Calibrator TM-100	**Calibration Date**	: 15-June-2026
Standard	: IEC 60942	**Barometric pressure (mmHg)**	: 759.0 mmHg
Accuracy	: 94.0 ±0.3 dB and 114.0±0.5 dB	**Temperature (23±3)°C**	: 25 °C
Frequency	: at 1,000 Hz ±1%	**Relative Humidity(50±15 %)**	: 50 % RH
Calibrator Serial NO.	: 180501628	**Dued Date of Calibrate**	: 14-July-2026

Item	Instrument Calibrated			Reference	Before Adjust				After Adjust	Deviation	Result
	Brand	Model	Serial NO.	Acoustic dB	ครั้งที่1	ครั้งที่ 2	ครั้งที่ 3	เฉลี่ย	± dB	± dB	Calibrate
30	Tenmars	ST-130	220100050	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
31	Tenmars	ST-130	220100051	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS
32	Tenmars	ST-130	220100052	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
33	Tenmars	ST-130	220100053	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS
34	Tenmars	ST-130	220100054	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
35	Tenmars	ST-130	220100055	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS
36	Tenmars	ST-130	220100056	94.0	94.1	94.1	94.1	94.1	94.0	0.1	PASS
37	Tenmars	ST-130	220100057	94.0	94.0	94.0	94.0	94.0	94.0	0.0	PASS

Calibration By :

Approve by :

METROLOGY SYSTEM (THAILAND) CO.,LTD.
A Trescal company

Certificate of Calibration

Certificate Number : SPR26070192-3 Page : 1 of 3

Customer : Thai Environmental Technic Limited.
1/6 Soi Ramkhamhaeng 145, Khwaeng Saphan Sung, Khet Saphan Sung, Bangkok 10240, Thailand.

Equipment Name	:	Lux Meter			
Manufacturer	:	Digicon			
Model	:	LX-50			
Serial Number	:	AC.76003			
ID. Number	:	No.06			
Environmental Conditions					
Ambient Temperature	:	23 °C ± 3 °C	Received Date	:	10 Jul 2026
Relative Humidity	:	50 % ± 15 %	Calibration Date	:	14 Jul 2026
Location of Calibration	:	In-Lab	Recommend Due Date	:	14 Jul 2027
Calibration Procedure	:	SP-CPE-04-32	Date of Issue	:	15 Jul 2026

Method of Calibration

This certifies that the above instrument was calibrated in compliance with the calibration system requirement of ISO/IEC 17025:2017 in accordance with reference procedure. Standards used to perform this calibration are certified by to NIST or equivalent, National metrology institute, Natural physical constants, consensus standards. The result reported herein apply only to the calibration of the item described above as received.Our decision rule is to contact the customer if the item pass and fail calibration when the results include the uncertainties and the customer must determine if the results meets their needs. The calibration certificate shall not be reproduced except in full,without written approval of SP Metrology System (Thailand).

Calibrated by : Mr.Nanthawat Wanasit
Calibration Officer

Approved by

(Mr.Poothipong A.)
Authorized Signatory

SP-FM-04-15 rev.0

69/29 Moo 1 Klongsi Klongluang Pathumthani 12120 Tel: (662) 193-2217-20 www.spmetrology.co.th www.สปมเทรซอล.com

METROLOGY SYSTEM (THAILAND) CO.,LTD.
A Trescal company

Calibration Report

Certificate Number : SPR26070192-3

Reference Standards

Equipment Name	Model	Serial No.	Certificate No.	Due. Date
Illuminance Meter	T-10A /T-10MA	20023158/3102317	25PH505	21 Oct 2026

Traceability

This certification is traceable to the International System of Unit maintained at :

TPA - Technology Promotion Association (Thailand-Japan)

69/29 Moo 1 Klongsi Klongluang Pathumthani 12120 Tel: (662) 193-2217-20 www.spmetrology.co.th www.สยามเมตรอโลยี.com

METROLOGY SYSTEM (THAILAND) CO.,LTD.
A Trescal company

Result of Calibration

Certificate Number : SPR26070192-3

Function: Illumination Measurement

Unit : Lux

Calibration Point	Standard Reading	UUC Reading	Error	Uncertainty (±)
35	35.00	35	0	1.2
50	50.0	50	0	1.3
100	100.0	100	0	1.7
500	500	497	-3	6.7
1000	1000	996	-4	13
1500	1500	1494	-6	20
2000	2000	1989	-11	26
3000	3000	3010	10	41
4000	4000	4020	20	53
5000	5000	5020	20	67

Note :

The result of calibration was found accurate as show on date and place of calibration only. This Certificate is not certified for any commercial transaction.

Measurement Uncertainty

The reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor k = 2.00. providing a level of confidence approximately 95 %

- End of Certificate -

69/29 Moo 1 Khongsi Khlongluang Pathumthani 12120 Tel: (662) 193-2217-20 www.spmetrology.co.th www.spmetrology.com

METROLOGY SYSTEM (THAILAND) CO.,LTD.

A Trescal company

69/29 Moo 1 Klongsi Klongluang Pathumthani 12120 Tel: (66) 193-2217-20 www.spmetrology.co.th www.aanuwatmas@gmail.com

Certificate of Calibration

Certificate Number : SPR26030212-1 Page : 1 of 3

Customer : Thai Environmental Technic Limited.
1/6 Soi Ramkhamhaeng 145, Khwaeng Saphan Sung, Khet Saphan Sung, Bangkok 10240, Thailand.

Equipment Name	:	Area Heat Stress Monitors			
Manufacturer	:	JANTYTECH			
Model	:	JT2011-E2A			
Serial Number	:	3522210141			
ID. Number	:	HD 3			
Environmental Conditions					
Ambient Temperature	:	23 °C ± 2 °C	Received Date	:	12 Mar 2026
Relative Humidity	:	50 % ± 15 %	Calibration Date	:	17 Mar 2026
Location of Calibration	:	In-Lab	Recommend Due Date	:	17 Mar 2027
Calibration Procedure	:	SP-CPT-04-13	Date of Issue	:	18 Mar 2026

Method of Calibration

This certifies that the above instrument was calibrated in compliance with the calibration system requirement of ISO/IEC 17025:2017 in accordance with reference procedure. Standards used to perform this calibration are certified by to NIST or equivalent, National metrology institute, Natural physical constants, consensus standards. The result reported herein apply only to the calibration of the item described above as received.Our decision rule is to contact the customer if the item pass and fail calibration when the results include the uncertainties and the customer must determine if the results meets their needs. The calibration certificate shall not be reproduced except in full,without written approval of SP Metrology System (Thailand).

Calibrated by : Mr.Navaporn Uengseng
Calibration Officer

Approved by

(Mr.Pootthipong A.)
Authorized Signatory

SPM A Trescal SP Metrology System (Thailand) Co., Ltd.

Calibration Report

Certificate Number : SPR26030212-1

Reference Standards

Equipment Name	Model	Serial No.	Certificate No.	Due. Date
THERMO-HYGROMETER	5020A	A47046	TMU2600443	01 Feb 2027
Temp & Humidity Test Chamber	TEMI1500-01/SD/N/N/	S7110ZL742 1014	SPR25040010-13	20 Apr 2026

Traceability

This certification is traceable to the International System of Unit maintained at :

NA - NA Caltechnologies Co., Ltd.

SP Metrology - SP Metrology system (Thailand) Co.Ltd.

69/29 Moo 1 Klongsi Klongluang Pathumthani 12120 Tel: (662) 193-2217-20 www.spmetrology.co.th www.เอสพีเมทรอโลยี.com

METROLOGY SYSTEM (THAILAND) CO.,LTD.
A Trescal company

Result of Calibration

Certificate Number : SPR26030212-1

Temperature Accuracy in the Measurement. (Tnw)

Unit : °C

Temperature Setting	Standard Reading	UUC Reading	Error	Uncertainty (±)
20.0	20.008	20.1	0.092	0.20
30.0	30.010	30.1	0.090	0.20
40.0	40.013	40.1	0.087	0.20

Temperature Accuracy in the Measurement. (Ta)

Unit : °C

Temperature Setting	Standard Reading	UUC Reading	Error	Uncertainty (±)
20.0	20.008	20.0	-0.008	0.20
30.0	30.010	30.0	-0.010	0.20
40.0	40.013	40.0	-0.013	0.20

Temperature Accuracy in the Measurement. (Tg)

Unit : °C

Temperature Setting	Standard Reading	UUC Reading	Error	Uncertainty (±)
20.0	20.008	19.9	-0.108	0.20
30.0	30.010	29.9	-0.110	0.20
40.0	40.013	39.9	-0.113	0.20

Note :

The result of calibration was found accurate as show on date and place of calibration only. This Certificate is not certified for any commercial transaction.

Measurement Uncertainty

The reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor k = 2, providing a level of confidence approximately 95%.

- End of Certificate -

69/29 Moo 1 Klongluang Pathumthani 12120 Tel: (662) 193-2274-20 www.spmetrology.co.th www.spmetrology.com

METROLOGY SYSTEM (THAILAND) CO.,LTD.
A Trescal company
69/29 Moo 1 Klongsi Klongluang Pathumthani 12120 Tel: (662) 193-2217-20 www.spmetrology.co.th www.สปม.com

Certificate of Calibration

Certificate Number : SPR26030094-4

Customer : Thai Environmental Technic Limited.
1/6 Soi Ramkhamhaeng 145, Khwaeng Saphan Sung, Khet Saphan Sung, Bangkok 10240, Thailand.

Equipment Name : Area Heat Stress Monitors

Manufacturer : JANTYTECH

Model : JT2011-E2A

Serial Number : 3522210145

ID. Number : HD 7

Environmental Conditions

Ambient Temperature	: 23 °C ± 2 °C	Received Date	: 05 Mar 2026
Relative Humidity	: 50 % ± 15 %	Calibration Date	: 08 Mar 2026
Location of Calibration	: In-Lab	Recommend Due Date	: 08 Mar 2027
Calibration Procedure	: SP-CPT-04-13	Date of Issue	: 09 Mar 2026

Method of Calibration

This certifies that the above instrument was calibrated in compliance with the calibration system requirement of ISO/IEC 17025:2017 in accordance with reference procedure. Standards used to perform this calibration are certified by to NIST or equivalent, National metrology institute, Natural physical constants, consensus standards. The result reported herein apply only to the calibration of the item described above as received.Our decision rule is to contact the customer if the item pass and fail calibration when the results include the uncertainties and the customer must determine if the results meets their needs. The calibration certificate shall not be reproduced except in full,without written approval of SP Metrology System (Thailand).

Calibrated by : Mr.Chatchai Kittisopha
Calibration Officer

Approved by

(Mr.Pootthipong A.)
Authorized Signatory

SPM A Trescal SP Metrology System (Thailand) Co., Ltd.

METROLOGY SYSTEM (THAILAND) CO.,LTD.
A Trescal company

Calibration Report

Certificate Number : SPR26030094-4

Reference Standards

Equipment Name	Model	Serial No.	Certificate No.	Due. Date
THERMO-HYGROMETER	5020A	A47046	TMU2600443	01 Feb 2027
Temp & Humidity Test Chamber	TEMI1500-01/SD/N/N/	S7110ZL742 1014	SPR25040010-13	20 Apr 2026

Traceability

This certification is traceable to the International System of Unit maintained at :

NA - NA Caltechnologies Co., Ltd.

SP Metrology - SP Metrology system (Thailand) Co.Ltd.

69/29 Moo 1 Klongsi Klongluang Pathumthani 12120 Tel: (662) 193-2217-20 www.spmetrology.co.th www.สปเมโทรโลยี.com

METROLOGY SYSTEM (THAILAND) CO.,LTD.
A Trescal company

Result of Calibration

Certificate Number : SPR26030094-4 Page : 3 of 3

Temperature Accuracy in the Measurement. (Tnw) Unit : °C

Temperature Setting	Standard Reading	UUC Reading	Error	Uncertainty (±)
20.0	20.015	20.2	0.185	0.20
30.0	30.013	30.2	0.187	0.20
40.0	40.011	40.2	0.189	0.20

Temperature Accuracy in the Measurement. (Ta) Unit : °C

Temperature Setting	Standard Reading	UUC Reading	Error	Uncertainty (±)
20.0	20.015	20.2	0.185	0.20
30.0	30.013	30.2	0.187	0.20
40.0	40.011	40.2	0.189	0.20

Temperature Accuracy in the Measurement. (Tg) Unit : °C

Temperature Setting	Standard Reading	UUC Reading	Error	Uncertainty (±)
20.0	20.015	20.1	0.085	0.20
30.0	30.013	30.1	0.087	0.20
40.0	40.011	40.1	0.089	0.20

Note:

The result of calibration was found accurate as show on date and place of calibration only. This Certificate is not certified for any commercial transaction.

Measurement Uncertainty

The reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor k = 2, providing a level of confidence approximately 95%.

- End of Certificate -

69/29 Moo 1 Klongsi Klongluang Pathumthani 12120 Tel: (662) 193-2217-20 www.spmetrology.co.th www.สปเมตรอโลยี.co.th