

ภาคผนวก ง

หนังสือรับรองห้องปฏิบัติการฯ



ที่ อก ๐๓๐๐(๑)/ ๑๙ ๑๓ ๐

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๔๐๐

๒๑ ธันวาคม ๒๕๖๕

เรื่อง ต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
เรียน กรรมการผู้จัดการ บริษัท เอ็ม กรีน กรุ๊ป จำกัด
อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงสมุดผลการ และชนิดสารเคมีของห้องปฏิบัติการวิเคราะห์เอกชน
ลงวันที่ ๖ พฤศจิกายน ๒๕๖๕

สิ่งที่ส่งมาด้วย เอกสารแนบท้ายหนังสือรับรองขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอ็ม กรีน กรุ๊ป จำกัด จำนวน ๑ แผ่น

ตามหนังสือที่อ้างถึง บริษัท เอ็ม กรีน กรุ๊ป จำกัด ขอต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการ
วิเคราะห์เอกชน เลขทะเบียน ๖-๒๕๕๕ สถานที่ตั้งเลขที่ ๑๘๘/๔๖ ถนนประชาอุทิศ แขวงทุ่งครุ เขตทุ่งครุ
กรุงเทพมหานคร ต่อกรมโรงงานอุตสาหกรรม นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้บริษัท เอ็ม กรีน กรุ๊ป จำกัด ต่ออายุหนังสือรับขึ้นทะเบียน
ห้องปฏิบัติการวิเคราะห์เอกชน โดยมีองค์ประกอบดังนี้

ก. ผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์

๑) นางสาวรุณฤกษ์รัตน์ ศิริสุนทรพงษ์

๒) นางสาวอารีรัตน์ ปิตาภูมิพัชร

ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์

๑) นางสาวพลินพรหม บุญศักดิ์

๒) นางสาวฉัตรนา มหอน

๓) นายมะลิษฐ์ รอดมน

๔) นางสาวดัสสิม ดอนิ

๕) นายธีรรัตน์ ฉายศรีศิริ

๖) นายธีรวิช เล่าวิจารณ์

ค. ขอบข่ายสารเคมีที่ได้รับขึ้นทะเบียนให้วิเคราะห์ในน้ำเสีย ตามสิ่งที่ส่งมาด้วย

หนังสือฉบับนี้จะหมดอายุในวันที่ ๖ ธันวาคม ๒๕๖๘ หากประสงค์จะต่ออายุหนังสือ
รับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ให้ยื่นคำขอต่ออายุพร้อมเอกสารประกอบคำขอต่อ
กรมโรงงานอุตสาหกรรม ภายใน ๓๐ วัน ก่อนวันสิ้นสุดของหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
ทั้งนี้ สามารถยื่นคำขอผ่านระบบอิเล็กทรอนิกส์ได้ที่เว็บไซต์กรมโรงงานอุตสาหกรรม ตาม QR Code
ท้ายหนังสือฉบับนี้

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

๒๕๖๕ ๑๓๖๖

(นายประสม ดำรงพงษ์)

ผู้อำนวยการกองวิจัยและเชื่อมโยงกับองค์กร

ผู้บริหารการแผนงานส่งเสริมโรงงานอุตสาหกรรม

ยื่นคำขอผ่านระบบอิเล็กทรอนิกส์



กองวิจัยและเตือนภัยมลพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบแลพและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๕๕๐ ๖๓๐๒ ต่อ ๒๐๓๕-๕

โทรสาร ๐ ๒๕๕๐ ๖๓๐๒ ต่อ ๒๑๔๙

ไปรษณีย์อิเล็กทรอนิกส์ saraban@dlw.mail.go.th



"อุตสาหกรรมก้าวไกล ประเทศไทยก้าวหน้า ร่วมกันพัฒนา อุตสาหกรรมสีเขียว"



เอกสารแนบท้ายหนังสือรับรองขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอ็ม กรีน กรุ๊ป จำกัด
ที่ อก ๐๓๐๐(๑)/ ๑๙ ๑๓ ๐ ลงวันที่ ๒๑ ธันวาคม ๒๕๖๕

ขอขยายสารเคมีที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๔ รายการ

น้ำเสีย จำนวน ๘ รายการ

ลำดับที่	สารเคมี	วิธีวิเคราะห์
1	Biochemical Oxygen Demand	5-Day, BOD Test, Azide Modification Method
2	Chemical Oxygen Demand	Closed Reflux, Titrimetric Method
3	Oil & Grease	Soxhlet Extraction Method
4	pH	Electrometric Method
5	Sulfide	Iodometric Method
6	Temperature	Laboratory and Field Methods
7	Total Dissolved Solids	Dried at 180 °C
8	Total Suspended Solids	Dried at 103-105 °C

เอกสารอ้างอิง

APHA, AWWA, WEF. Standard Methods for the Examination of Water and Wastewater.

23rd ed. Washington, DC: APHA, 2017.

ที่ อก ๐๓๑๐(๑)/ ๖ ๑ ๑ ๘

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๕๐๐

๒ ๓ มีนาคม ๒๕๖๖

เรื่อง เปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์
เรียน กรรมการผู้จัดการ บริษัท เอ็ม กรีน กรุ๊ป จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และชนิดสารเคมีของห้องปฏิบัติการวิเคราะห์เอกชน
ลงวันที่ ๘ มีนาคม ๒๕๖๖

ตามหนังสือที่อ้างถึง บริษัท เอ็ม กรีน กรุ๊ป จำกัด ห้องปฏิบัติการวิเคราะห์เอกชน
เลขทะเบียน ว-๒๕๕๙ สถานที่ตั้งเลขที่ ๑๘๘/๔๖ ถนนประชาอุทิศ แขวงทุ่งครุ เขตทุ่งครุ กรุงเทพมหานคร
ขอเปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์ ความละเอียดแจ้งแล้ว นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้ยกเลิกเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์
จำนวน ๒ ราย ได้แก่

- ๑) นางสาวจินตนา มหาอ้น ทะเบียนเลขที่ ว-๒๕๕๙-จ-๐๐๐๒
- ๒) นายธีรทัศน์ ฉายศรีศิริ ทะเบียนเลขที่ ว-๒๕๕๙-จ-๐๐๐๕

ทั้งนี้ หากท่านมีความประสงค์จะยื่นคำขอใดๆ สามารถยื่นคำขอผ่านระบบอิเล็กทรอนิกส์
ได้ที่หน้าเว็บไซต์กรมโรงงานอุตสาหกรรม ตาม QR Code หายหนังสือฉบับนี้

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

จร ๑๗

— (นายประสม คำรุ่งพงษ์)

ผู้อำนวยการโรงงานและเตือนภัยมลพิษโรงงาน
ปฏิบัติการตามหนังสือกรมโรงงานอุตสาหกรรม

กองวิจัยและเตือนภัยมลพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๐๓-๕

โทรสาร ๐ ๒๔๓๐ ๖๓๑๒ ต่อ ๒๑๕๙

ไปรษณีย์อิเล็กทรอนิกส์ saraban@diw.mail.go.th



ยื่นคำขอผ่านระบบอิเล็กทรอนิกส์



“อุตสาหกรรมก้าวไกล ประเทศไทยก้าวหน้า ร่วมกันพัฒนา อุตสาหกรรมสีเขียว”



ที่ อก ๐๓๑๐(๑)/ ๑ ๗ ๑ ๓

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ เขตราชเทวี
กรุงเทพมหานคร ๑๐๕๐๐

๐ ๖ ธันวาคม ๒๕๖๒

เรื่อง ขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

เรียน กรรมการผู้จัดการ บริษัท เอ็ม กรีน กรุ๊ป จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และชนิดสารเคมีของห้องปฏิบัติการวิเคราะห์เอกชน
ลงวันที่ ๒๓ กันยายน ๒๕๖๒

สิ่งที่ส่งมาด้วย เอกสารแบบท้ายหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอ็ม กรีน กรุ๊ป จำกัด จำนวน ๑ แผ่น

ตามหนังสือที่อ้างถึง บริษัท เอ็ม กรีน กรุ๊ป จำกัด ขอขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
พร้อมรายชื่อผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์ เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ และรายการสาร
เคมีที่จะทำการวิเคราะห์ ต่อกรมโรงงานอุตสาหกรรม นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้บริษัท เอ็ม กรีน กรุ๊ป จำกัด ขึ้นทะเบียน
ห้องปฏิบัติการวิเคราะห์เอกชน มีเลขทะเบียน ว-๒๕๕๙ สถานที่ตั้งเลขที่ ๑๘๘/๔๖ ถนนประชาอุทิศ แขวงทุ่งครุ
เขตทุ่งครุ กรุงเทพมหานคร โดยมีองค์ประกอบดังนี้

ก. ผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์

นางสาวจริญรัตน์ ศิริสุนทรพงษ์

ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์

๑) นางสาววิริยา สมตัว

๒) นายหริทร วงศ์ธานี

ค. ขอบข่ายสารเคมีที่ได้รับขึ้นทะเบียนไว้วิเคราะห์ในน้ำเสีย จำนวน ๔ รายการ
ตามสิ่งที่ส่งมาด้วย

ทะเบียนเลขที่ ว-๒๕๕๙-ค-๘๒๒๔

ทะเบียนเลขที่ ว-๒๕๕๙-จ-๘๒๒๕

ทะเบียนเลขที่ ว-๒๕๕๙-จ-๘๒๒๖

หนังสือฉบับนี้ มีอายุ ๓ ปี นับจากวันที่กรมโรงงานอุตสาหกรรมออกหนังสือ

หากประสงค์ต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ให้ยื่นคำขอต่ออายุพร้อม
เอกสารประกอบคำขอต่อกรมโรงงานอุตสาหกรรมภายใน ๓๐ วัน ก่อนวันสิ้นอายุของหนังสือรับ
ขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ซึ่งคำขอต่ออายุดังกล่าวขอรับได้ที่กรมโรงงานอุตสาหกรรม

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

นางจินดา เตชะศรีรินทร์
ผู้อำนวยการโรงงานและเตือนภัยมลพิษโรงงาน
ปฏิบัติการตามหนังสือกรมโรงงานอุตสาหกรรม

กองวิจัยและเตือนภัยมลพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๒๐๒ ๔๔๖๖ ๐ ๒๒๐๒ ๔๐๐๒

โทรสาร ๐ ๒๒๕๕ ๓๒๐๘ ๐ ๒๒๕๕ ๓๔๑๕

เอกสารแนบท้ายหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอ็ม กรีน กรุ๊ป จำกัด เลขทะเบียน ๖-๒๕๕๙
ที่ อก ๐๓๑๐(๑)/ ๑๗ ๓๑ ๑๖ ธันวาคม ๒๕๖๒

ขอขยายสารมลพิษที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๔ รายการ
น้ำเสีย จำนวน 4 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	pH	Electrometric Method
2	Temperature	Laboratory and Field Methods
3	Total Dissolved Solids	Dried at 180 °C
4	Total Suspended Solids	Dried at 103-105 °C

เอกสารอ้างอิง

APHA, AWWA, WEF. Standard Methods for the Examination of Water and Wastewater. 23rd ed. Washington, DC: APHA, 2017.

วิมล
(นางวิภาญจน์ ฉัตรสกุลวิไล)
ผู้อำนวยการกลุ่มตรวจวิเคราะห์และประเมินห้องปฏิบัติการ
และทะเบียนห้องปฏิบัติการ

สำเนา

ที่ อก ๐๓๑๐(๑)/ ๑๗ ๓๑ ๑๖

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ เขตราชเทวี
กรุงเทพมหานคร ๑๐๔๐๐

๑๖ ธันวาคม ๒๕๖๒

เรื่อง ขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

เรียน กรรมการผู้จัดการ บริษัท เอ็ม กรีน กรุ๊ป จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ปล่อยมลพิษ/เปลี่ยนแปลงผลการ และชนิดสารมลพิษของห้องปฏิบัติการวิเคราะห์เอกชน
ลงวันที่ ๒๓ กันยายน ๒๕๖๒

สิ่งที่ส่งมาด้วย เอกสารแนบท้ายหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอ็ม กรีน กรุ๊ป จำกัด จำนวน ๑ แผ่น

ตามหนังสือที่ยังถึงบริษัท เอ็ม กรีน กรุ๊ป จำกัด ขอขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
พร้อมรายชื่อผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์ เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ และรายการสาร
มลพิษที่จะทำการวิเคราะห์ ต่อกรมโรงงานอุตสาหกรรม นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้บริษัท เอ็ม กรีน กรุ๊ป จำกัด ขึ้นทะเบียน
ห้องปฏิบัติการวิเคราะห์เอกชน มีเลขทะเบียน ๖-๒๕๕๙ สถานที่ตั้งเลขที่ ๑๔๘/๔๖ ถนนประชาอุทิศ แขวงทุ่งครุ
เขตทุ่งครุ กรุงเทพมหานคร โดยมีองค์ประกอบดังนี้

ก. ผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์

นางสาววิภาญจน์ ฉัตรสกุลวิไล

ทะเบียนเลขที่ ๖-๒๕๕๙-๑-๕๒๕๔

ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์

๑) นางสาววิริยา สมด้

ทะเบียนเลขที่ ๖-๒๕๕๙-๑-๕๒๕๕


๒) นายพริทพร วงศ์ธานี

ทะเบียนเลขที่ ๖-๒๕๕๙-๑-๕๒๕๖

ค. ขอบข่ายสารมลพิษที่ได้รับขึ้นทะเบียนให้วิเคราะห์ไม่น้อยกว่า จำนวน ๔ รายการ
ตามสิ่งที่ส่งมาด้วย

หนังสือฉบับนี้มีอายุ ๓ ปี นับจากวันที่กรมโรงงานอุตสาหกรรมออกหนังสือ
หากประสงค์จะต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ให้ยื่นคำขอต่ออายุพร้อม
เอกสารประกอบคำขอต่อกรมโรงงานอุตสาหกรรมภายใน ๓๐ วัน ก่อนวันสิ้นอายุของหนังสือรับ
ขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน ซึ่งคำขอต่ออายุดังกล่าวขอรับได้ที่กรมโรงงานอุตสาหกรรม
จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ


(นางจิติมา เดษศรีจันทร์)

ผู้อำนวยการกลุ่มตรวจวิเคราะห์และประเมินห้องปฏิบัติการ
ปฏิบัติการทางเทคนิคของกรมโรงงานอุตสาหกรรม

กองวิจัยและพัฒนาระบบห้องปฏิบัติการ

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๖๖๐๖ ๔๔๖๖ ๐ ๖๖๐๖ ๔๐๐๖

โทรสาร ๐ ๖๖๕๕ ๓๖๐๕ ๐ ๖๖๕๕ ๓๔๑๕

เอกสารแนบท้ายหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน
บริษัท เอ็ม กรีน กรุ๊ป จำกัด
ที่ อก ๐๓๑๐(๑)/ ๐๒๒๖๓๓ ลงวันที่ ๐๖ กันยายน ๒๕๖๒

ขอขยายสารมลพิษที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๔ รายการ

น้ำเสีย จำนวน 4 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	pH	Electrometric Method
2	Temperature	Laboratory and Field Methods
3	Total Dissolved Solids	Dried at 180 °C
4	Total Suspended Solids	Dried at 103-105 °C

เอกสารอ้างอิง

APHA, AWWA, WEF. Standard Methods for the Examination of Water and Wastewater. 23rd ed. Washington, DC: APHA, 2017.

วิฑูโร
(นางริกาญจน์ อัครสฤทธิไ)

ผู้อำนวยการศูนย์มาตรฐานวิธีการวิเคราะห์ทดสอบพิษ
และระบบห้องปฏิบัติการ

สำเนา

ที่ อก ๐๓๑๐(๑)/ ๐๒ ๒ ๐ ๗ ๔

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ เขตราชเทวี
กรุงเทพมหานคร ๑๐๕๐๐

๒๘ ตุลาคม ๒๕๖๒

เรื่อง เปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์
เรียน กรรมการผู้จัดการ บริษัท เอ็ม กรีน กรุ๊ป จำกัด

อ้างถึง หนังสือบริษัท เอ็ม กรีน กรุ๊ป จำกัด ที่ MG ๐๐๑/๒๕๖๓ ลงวันที่ ๒ ตุลาคม ๒๕๖๓
ตามที่เขียน ๖-๒๕๕๕ สถานที่ตั้งเลขที่ ๑๘๘/๔๖ ถนนประชาอุทิศ แขวงทุ่งครุ เขตทุ่งครุ กรุงเทพมหานคร
ของห้องปฏิบัติการวิเคราะห์ ความละเอียดแจ้งแล้ว นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้อยกเลิกเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์
จำนวน ๑ ราย ได้แก่ นางสาววิริยา สมด้ว ทะเบียนเลขที่ ๖-๒๕๕๕-๖-๔๔๒๕

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ
นางจินดา เดชะศรีนทร์
ผู้อำนวยการศูนย์และห้องปฏิบัติการ
ปฏิบัติการระบบห้องปฏิบัติการ

กองวิจัยและเตือนภัยมลพิษโรงงาน
กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ
โทร. ๐ ๒๖๖๒ ๔๐๐๒ ๐ ๒๖๖๒ ๔๑๔๖
โทรสาร ๐ ๒๖๕๔ ๓๖๐๘ ๐ ๒๖๕๔ ๓๔๑๕



ที่ อก ๐๓๑๐(๑)/ ๙๗ ๘๙

กรมโรงงานอุตสาหกรรม
ถนนพระรามที่ ๖ แขวงทุ่งพญาไท
เขตราชเทวี กรุงเทพฯ ๑๐๔๐๐

๑๔ ตุลาคม ๒๕๖๕

เรื่อง เปลี่ยนแปลงบุคลากรของห้องปฏิบัติการวิเคราะห์

เรียน กรรมการผู้จัดการ บริษัท เอ็ม กรีน กรุ๊ป จำกัด

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และชนิดสารเคมีของห้องปฏิบัติการวิเคราะห์เอกทณ
ลงวันที่ ๑ ตุลาคม ๒๕๖๔

ตนหนังสือที่อ้างถึง บริษัท เอ็ม กรีน กรุ๊ป จำกัด ห้องปฏิบัติการวิเคราะห์เอกทณ เลขทะเบียน ๖-๒๙๙
สถานที่ตั้งเลขที่ ๑๘๘/๔๖ ถนนประชาอุทิศ แขวงทุ่งครุ เขตทุ่งครุ กรุงเทพมหานคร ขอเปลี่ยนแปลงบุคลากร
ของห้องปฏิบัติการวิเคราะห์ ความละเอียดแจ้งแล้ว นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว มีความเห็นดังนี้

๑. ใหยกเลิกเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๑ ราย
นายหริทร วงศ์ธานี ทะเบียนเลขที่ ๖-๒๙๙-จ-๘๔๒๖
๒. ให้เพิ่มเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๒ ราย
 - ๑) นางสาวอารีรัตน์ ปัตตานุมิพัชร ทะเบียนเลขที่ ๖-๒๙๙-จ-๙๖๔๙
 - ๒) นางสาวเพลินพรพรณ นุณย์ศักดิ์ ทะเบียนเลขที่ ๖-๒๙๙-จ-๙๖๕๐

อนึ่ง หนังสือฉบับนี้แจ้งหมดอายุพร้อมหนังสือขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกทณ
ที่ อก ๐๓๑๐(๑)/๑๙๙๑๓ ลงวันที่ ๖ ธันวาคม ๒๕๖๒ คือในวันที่ ๖ ธันวาคม ๒๕๖๕

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

(นางอินตา เคษะศรีนทร์)

ผู้อำนวยการอาวุโสและผู้อำนวยการฝ่ายโรงงาน
ปฏิบัติการงานสนับสนุนโรงงานอุตสาหกรรม

กองวิจัยและพัฒนาผลิตภัณฑ์โรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบผลิตภัณฑ์และทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๒๐๒ ๔๐๐๒ ๐ ๒๒๐๒ ๔๑๕๖

โทรสาร ๐ ๒๒๔๔ ๓๔๑๕

ไปรษณีย์อิเล็กทรอนิกส์ saraban@dlw.goil.go.th



ที่ อก ๐๓๑๐(๑)/๗๓๔

กรมโรงงานอุตสาหกรรม

ถนนพระรามที่ ๖ แขวงทุ่งพญาไท

๒ ๖ มกราคม ๒๕๖๗

เขตราชเทวี กรุงเทพฯ ๑๐๕๐๐

เรื่อง คออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

เรียน กรรมการผู้จัดการ บริษัท เทสท์ เทคโนโลยี

อ้างถึง คำขอขึ้นทะเบียน/ต่ออายุ/เปลี่ยนแปลงบุคลากร และชนิดสารเคมีของห้องปฏิบัติการวิเคราะห์เอกชน
ลงวันที่ ๒๗ ธันวาคม ๒๕๖๖

สิ่งที่ส่งมาด้วย ๑. รายชื่อควบคุมดูแลห้องปฏิบัติการวิเคราะห์ จำนวน ๑ แผ่น

๒. รายชื่อเจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๒ แผ่น

๓. ขอบข่ายสารเคมีที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๑๔ แผ่น

ตามหนังสือที่อ้างถึง บริษัท เทสท์ เทคโนโลยี ขอต่ออายุหนังสือรับขึ้นทะเบียนห้องปฏิบัติการ
วิเคราะห์เอกชน เลขทะเบียน ๖-๒๔๕ สถานที่ตั้งเลขที่ ๓๐,๓๒ ซอยพระรามที่ ๒ ซอย ๖๓ แขวงสามเิน เขตบางขุนเทียน
กรุงเทพมหานครต่อกรมโรงงานอุตสาหกรรม นั้น

กรมโรงงานอุตสาหกรรมพิจารณาแล้ว ให้บริษัท เทสท์ เทคโนโลยี ต่ออายุหนังสือรับขึ้นทะเบียน
ห้องปฏิบัติการวิเคราะห์เอกชน โดยมีองค์ประกอบดังนี้

ก. ควบคุมดูแลห้องปฏิบัติการวิเคราะห์ จำนวน ๕ ราย ตามสิ่งที่ส่งมาด้วย ๑

ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ ๔๔ ราย ตามสิ่งที่ส่งมาด้วย ๒

ค. ขอบข่ายสารเคมีที่ได้รับขึ้นทะเบียนไว้วิเคราะห์ในน้ำเสีย น้ำใต้ดิน สิ่งปฏิกูลหรือวัสดุที่
ไม่ใช้แล้ว และดิน ตามสิ่งที่ส่งมาด้วย ๓

หนังสือฉบับนี้จะหมดอายุในวันที่ ๒๘ มกราคม ๒๕๗๐ หากประสงค์จะต่ออายุหนังสือ
รับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน สามารถยื่นคำขอผ่านระบบอิเล็กทรอนิกส์ได้ที่หน้าเว็บไซต์
กรมโรงงานอุตสาหกรรม

จึงเรียนมาเพื่อทราบ

ขอแสดงความนับถือ

(นายประสม ดำรงพงษ์)

ผู้อำนวยการวิจัยและเตือนภัยมลพิษโรงงาน

บริหารราชการแทนอธิบดีกรมโรงงานอุตสาหกรรม

กองวิจัยและเตือนภัยมลพิษโรงงาน

กลุ่มมาตรฐานวิธีการวิเคราะห์ทดสอบมลพิษและทะเบียนห้องปฏิบัติการ

โทร. ๐ ๒๕๓๐ ๖๓๑๒ ต่อ ๒๑๐๓-๕

โทรสาร ๐ ๒๕๓๐ ๖๓๑๒ ต่อ ๒๑๕๙

ไปรษณีย์อิเล็กทรอนิกส์ saraban@diw.mail.go.th



“อุตสาหกรรมก้าวไกล ประเทศไทยก้าวหน้า ร่วมกันพัฒนา อุตสาหกรรมสีเขียว”



เอกสารแนบหนังสือต่ออายุรับขึ้นทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

บริษัท เทสท์ เทคโนโลยี

เลขทะเบียน ๖-๒๔๕

ที่ อก ๐๓๑๐(๑)/ ๗ ๓ ๕

ลงวันที่ ๒ ๖ มกราคม ๒๕๖๗

ก. ผู้ควบคุมดูแลห้องปฏิบัติการวิเคราะห์ จำนวน ๕ ราย

๑) นางสาวเรวดี ศรีมงคล

ทะเบียนเลขที่ ๖-๒๔๕-ค-๐๐๐๑

๒) นางสาวอรสา อยู่บัว

ทะเบียนเลขที่ ๖-๒๔๕-ค-๐๐๐๒

๓) นางสาวณัฐิกา อ่อนจัน

ทะเบียนเลขที่ ๖-๒๔๕-ค-๐๐๐๓

๔) นางสาวดวงกมล บุญยั้ง

ทะเบียนเลขที่ ๖-๒๔๕-ค-๐๐๐๔

๕) นางสาวจิตรา ลิ้มสืบพงษ์

ทะเบียนเลขที่ ๖-๒๔๕-ค-๐๐๐๕

3/๗๗

เอกสารแนบท้ายหนังสือต่ออายุรับทะเบียนห้องปฏิบัติการวิเคราะห์เอกชน

บริษัท เทสท์ เพค จำกัด

เลขทะเบียน ว-๒๔๕

ที่ อก ๐๓๑๐(๑)/

ลงวันที่

ข. เจ้าหน้าที่ประจำห้องปฏิบัติการวิเคราะห์ จำนวน ๔๔ ราย

๑) นางสาวปรางค์ทิพย์ รักษาสุข	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๐๔
๒) นางสาวบุษยา ศรีสว่าง	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๐๕
๓) นางสาวมินตรา ทัญญา	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๐๗
๔) นายเฉลิมชัย เจริญยิ่ง	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๐๘
๕) นายอภิสิทธิ์ คุณมาศ	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๐๙
๖) นายชัชวาลย์ อุทัยเลี้ยง	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๐
๗) นางสาวบุญลิดา พรหมมณีนุช	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๑
๘) นางสาวณัฐนิชา ทองลอย	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๒
๙) นางสาววิจิตพร เขื่อนรพ	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๓
๑๐) นางสาวกนกพร มั่นนิยม	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๔
๑๑) นางสาวนันทิกา ลิ้มพริกซ์	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๕
๑๒) นางสาวเบญจมาศ เชื้อหงษ์	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๖
๑๓) นางสาวสุกิมม ดวงอินทร์	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๗
๑๔) นางสาวสุนทร สุคนธ์ภักดี	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๘
๑๕) นางสาวธนพรทิพย์ สุขประทุมเนตร	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๑๙
๑๖) นางสาวพลอยรุ่ง สุทนต์มา	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๐
๑๗) นางสาวธิดยา ตีมาภ	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๑
๑๘) นางสาวรณิภา ลือเฟื่อง	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๒
๑๙) นางสาวศรินดา คำดี	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๓
๒๐) นางสาวลลิตา เสนาบุษ	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๔
๒๑) นางสาวไฉกังธรา ใจดีเฉย	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๕
๒๒) นายวัฒนา พันธเดช	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๖
๒๓) นางสาวอ้อยใจ สระจันทร์	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๗
๒๔) นางสาวมาริสา วิเศษสังข์	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๘
๒๕) นายณัฐจิ ใจสุภาพ	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๒๙
๒๖) นายกิตติพงษ์ เยนงาม	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๐
๒๗) นายไกรทอง สีขอนแก่น	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๑
๒๘) นายสุริยา ชื่นบาน	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๒
๒๙) นางสาวรัตนพร ก้องสุรินทร์	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๓
๓๐) นางสาวนุสรา สุระเวก	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๔
๓๑) นางสาวนริศรา สอนบุญชู	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๕
๓๒) นางสาวทองอำไพ ยางงาม	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๖
๓๓) นางสาวนิตาชล อึ้งเกลี้ยง	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๗
๓๔) นางสาวนริศรา ผงพิลา	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๘
๓๕) นางสาวทิตยา ท้าวหาญ	ทะเบียนเลขที่	ว-๒๔๕-จ-๐๐๓๙

รับ

๓๖) นางสาวกนก...

- ๓๖) นางสาวกนก กุณพิทักษ์
 ๓๗) นางสาวดวงหทัย เจริญวิทย์
 ๓๘) นางสาวจุไรรัตน์ จงประกอบกิจ
 ๓๙) นายกิตติพิชญ์ ไขเกตุ
 ๔๐) นางสาวเจนจิรา พลดี
 ๔๑) นางสาวลลิตาภรณ์ สิทธิพรหม
 ๔๒) นางสาวณัฐการ์ณ ขวัญศรี
 ๔๓) นายดิษฐ์วัฒน์ นราวิทย์ธำรงค์
 ๔๔) นายธนพล สะเอียดคง

รับ

- ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๐
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๑
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๒
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๓
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๔
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๕
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๖
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๗
 ทะเบียนเลขที่ ว-๒๔๕-จ-๐๐๔๘

เอกสารแนบท้ายหนังสือติดต่อyarbunเพื่อบริการวิเคราะห์เอกชน
บริษัท เทสท์ เทคโนโลยี เลขาเขียน ว-๒๔๔
ที่ อก ๐๓๑๐(๑)/ ลงวันที่
ค. ขอความช่วยเหลือที่ได้รับขึ้นทะเบียนจากกรมโรงงานอุตสาหกรรม จำนวน ๑๓๘ รายการ
นี้เสีย จำนวน 45 รายการ

ลำดับที่	สารเคมี	วิธีวิเคราะห์
1	Aldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
2	Arsenic	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
3	Barium	1) Digestion, Direct Nitrous Oxide-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
4	α-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
5	β-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
6	δ-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
7	γ-BHC	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
8	Biochemical Oxygen Demand	1) 5-Day BOD Test, Azide Modification Method ^[3] 2) 5-Day BOD Test, Membrane Electrode Method ^[3]
9	Cadmium	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
10	Chemical Oxygen Demand	1) Open Reflux, Titrimetric Method ^[3] 2) Closed Reflux, Colorimetric Method ^[3] 3) Closed Reflux, Titrimetric Method ^[3]
11	Chlordane	Liquid-Liquid Extraction, Gas Chromatographic/Mass Spectrometric Method ^[3]
12	Chromium	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]

30 Lead...

ลำดับที่	สารเคมี	วิธีวิเคราะห์
13	Color	ADMI Weighted-Ordinate Spectrophotometric Method ^[3]
14	Copper	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
15	Cyanide	Distillation, Colorimetric Method ^[3]
16	4,4'-DDD	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
17	4,4'-DDE	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
18	4,4'-DDT	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
19	Dieldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
20	Endosulfan I	Mass Spectrometric Method ^[3]
21	Endosulfan II	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
22	Endosulfan Sulfate	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
23	Endrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
24	Endrin Aldehyde	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
25	Formaldehyde	Distillation, Colorimetric Method ^[2]
26	Free Chlorine	1) Iodometric Method ^[3] 2) DPD Colorimetric Method ^[3]
27	Heptachlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
28	Heptachlor Epoxide	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
29	Hexavalent Chromium	Mass Spectrometric Method ^[3] Colorimetric Method ^[3]

30 Lead...

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
30	Lead	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
31	Manganese	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
32	Mercury	Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ^[3]
33	Methoxychlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
34	Nickel	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
35	Oil & Grease	1) Liquid-Liquid, Partition-Gravimetric Method ^[3] 2) Soxhlet Extraction Method ^[3]
36	pH	Electrometric Method ^[3]
37	Phenols	Distillation, Direct Photometric Method ^[3]
38	Selenium	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
39	Sulfide	1) Iodometric Method ^[3] 2) Methylene blue Method ^[3]
40	Temperature	Laboratory and Field Methods ^[3]
41	Total Dissolved Solids	Dried at 180 °C ^[3]
42	Total Kjeldahl Nitrogen	Macro-Kjeldahl Method ^[3]
43	Total Suspended Solids	Dried from 103 to 105 °C ^[3]
44	Trivalent Chromium	1) Digestion, Direct Air-Acetylene Flame Method; Colorimetric Method; Calculation ^[3] 2) Digestion, Inductively Coupled Plasma Method; Colorimetric Method; Calculation ^[3]
45	Zinc	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]

หน้าถัดไป...

หน้าถัดไป จำนวน 56 รายการ

ลำดับที่	สารมลพิษ	วิธีวิเคราะห์
1	Aldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
2	Antimony	Digestion, Inductively Coupled Plasma Method ^[3]
3	Arsenic	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
4	Barium	1) Digestion, Direct Nitrous Oxide-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
5	Benzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
6	Beryllium	1) Digestion, Direct Nitrous Oxide-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
7	Bromodichloromethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
8	Bromoform	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
9	Cadmium	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
10	Carbon tetrachloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
11	Chlordane	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
12	Chloroform	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
13	Chlorodibromomethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
14	Chromium	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]

15 Chromium (III)...

ลำดับที่	สารเคมี	วิธีวิเคราะห์
15	Chromium (III)	1) Digestion, Direct Air-Acetylene Flame Method; Colorimetric Method; Calculation ^[3] 2) Digestion, Inductively Coupled Plasma Method; Colorimetric Method; Calculation ^[3] .
16	Chromium (VI)	Colorimetric Method ^[3] .
17	Cyanide	Distillation, Colorimetric Method ^[3]
18	1,1-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
19	1,2-Dichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
20	cis-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
21	trans-1,2-Dichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
22	DDD	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
23	DDE	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
24	DDT	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
25	Dieldrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
26	Endosulfan	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
27	Endrin	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
28	Ethylbenzene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
29	Heptachlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
30	Heptachlor epoxide	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]

31 Hexachlorobenzene...

ลำดับที่	สารเคมี	วิธีวิเคราะห์
31	Hexachlorobenzene	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
32	α-HCH	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
33	β-HCH	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
34	γ-HCH	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
35	Lead	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
36	Manganese	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
37	Mercury	Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ^[3]
38	Methoxychlor	Liquid-Liquid Extraction, Gas Chromatographic/ Mass Spectrometric Method ^[3]
39	Methylene chloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
40	Nickel	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
41	pH	Electrometric Method ^[3]
42	Phenol	Distillation, Direct Photometric Method ^[3]
43	Selenium	1) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[3]
44	Silver	2) Digestion, Inductively Coupled Plasma Method ^[3] 1) Digestion, Direct Air-Acetylene Flame Method ^[3]
45	Styrene	2) Digestion, Inductively Coupled Plasma Method ^[3] Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
46	Tetrachloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]

47 Toluene...

ลำดับที่	สารเคมี	วิธีวิเคราะห์
47	Toluene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
48	1,1,1-Trichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
49	1,1,2-Trichloroethane	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
50	Trichloroethylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
51	Vanadium	1) Digestion, Direct Nitrous Oxide-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]
52	Vinyl chloride	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
53	m-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
54	o-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
55	p-Xylene	Purge and Trap, Gas Chromatographic/ Mass Spectrometric Method ^[3]
56	Zinc	1) Digestion, Direct Air-Acetylene Flame Method ^[3] 2) Digestion, Inductively Coupled Plasma Method ^[3]

สิ่งปฏิกูลหรือวัสดุที่ไม่ใช้แล้ว จำนวน 20 รายการ

ลำดับที่	สารเคมี	วิธีวิเคราะห์
1	Antimony	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1,4,7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1,4,8] 3) Digestion, Inductively Coupled Plasma Method ^[5,7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5,8]

2 Arsenic...

ลำดับที่	สารเคมี	วิธีวิเคราะห์
2	Arsenic	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1,4,7] 2) Waste Extraction, Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[1,4,9] 3) Digestion, Inductively Coupled Plasma Method ^[5,7] 4) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[5,9]
3	Barium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1,4,7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1,4,8] 3) Digestion, Inductively Coupled Plasma Method ^[5,7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5,8]
4	Beryllium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1,4,7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1,4,8] 3) Digestion, Inductively Coupled Plasma Method ^[5,7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5,8]
5	Cadmium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1,4,7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1,4,8] 3) Digestion, Inductively Coupled Plasma Method ^[5,7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5,8]
6	Chromium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1,4,7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1,4,8]

3) Digestion...

ลำดับที่	สารเคมี	วิธีวิเคราะห์
17	Silver	4) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[5.13] 1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1.4.7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1.4.8] 3) Digestion, Inductively Coupled Plasma Method ^[5.7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
18	Thallium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1.4.7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1.4.8] 3) Digestion, Inductively Coupled Plasma Method ^[5.7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
19	Vanadium	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1.4.7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1.4.8] 3) Digestion, Inductively Coupled Plasma Method ^[5.7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
20	Zinc	1) Waste Extraction, Digestion, Inductively Coupled Plasma Method ^[1.4.7] 2) Waste Extraction, Digestion, Flame Atomic Absorption Spectrometric Method ^[1.4.8] 3) Digestion, Inductively Coupled Plasma Method ^[5.7] 4) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]

สรุป

ต้น...

ต้น จำนวน 17 รายการ

ลำดับที่	สารเคมี	วิธีวิเคราะห์
1	Antimony	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
2	Arsenic	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^[5.9]
3	Barium	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
4	Beryllium	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
5	Cadmium	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
6	Chromium	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
7	Chromium (III)	1) Digestion, Inductively Coupled Plasma Method; Alkaline Digestion, Colorimetric Method; Calculation Method ^[5.6.7.10] 2) Digestion, Flame Atomic Absorption Spectrometric Method; Alkaline Digestion, Colorimetric Method; Calculation Method ^[5.6.7.10]
8	Chromium (VI)	1) Digestion, Inductively Coupled Plasma Method; Alkaline Digestion, Colorimetric Method; Calculation Method ^[5.6.7.10] 2) Digestion, Flame Atomic Absorption Spectrometric Method; Alkaline Digestion, Colorimetric Method; Calculation Method ^[5.6.7.10]
9	Cyanide	Alkaline Digestion, Colorimetric Method ^[6.10] Extraction, Distillation, Colorimetric Method ^[1.4.15.16]
10	Lead	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]
11	Manganese	1) Digestion, Inductively Coupled Plasma Method ^[5.7] 2) Digestion, Flame Atomic Absorption Spectrometric Method ^[5.8]

สรุป

12 Mercury ...

ลำดับที่	สารเคมี	วิธีวิเคราะห์
12	Mercury	Digestion, Cold-Vapor Atomic Absorption Spectrometric Method ^(1,2)
13	Nickel	1) Digestion, Inductively Coupled Plasma Method ^(5,7) 2) Digestion, Flame Atomic Absorption Spectrometric Method ^(5,8)
14	Selenium	1) Digestion, Inductively Coupled Plasma Method ^(5,7) 2) Digestion, Hydride Generation/Atomic Absorption Spectrometric Method ^(5,13)
15	Silver	1) Digestion, Inductively Coupled Plasma Method ^(5,7) 2) Digestion, Flame Atomic Absorption Spectrometric Method ^(5,8)
16	Vanadium	1) Digestion, Inductively Coupled Plasma Method ^(5,7) 2) Digestion, Flame Atomic Absorption Spectrometric Method ^(5,8)
17	Zinc	1) Digestion, Inductively Coupled Plasma Method ^(5,7) 2) Digestion, Flame Atomic Absorption Spectrometric Method ^(5,8)

เอกสารอ้างอิง

- กระทรวงอุตสาหกรรม. ประกาศกระทรวงอุตสาหกรรม, พ.ศ. 2566. เรื่อง การจัดการสิ่งปฏิกูลหรือวัสดุที่ไม่ใช้แล้ว. ราชกิจจานุเบกษา. 31 พฤษภาคม 2566. เล่มที่ 140 ตอนพิเศษ 126 ง.
- สมาคมวิศวกรสิ่งแวดล้อมแห่งประเทศไทย. คู่มือวิเคราะห์น้ำเสีย. พิมพ์ครั้งที่ 4. กรุงเทพฯ: เรือนแก้วการพิมพ์, 2547.
- APHA, AWWA, WEF. Standard Methods for the Examination of Water and Wastewater. 24th ed. Washington, DC: APHA, 2023.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. SW-846, 2014.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Acid Digestion of Sediments, Sludges, and Soils. SW-846 Method 3050B, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Alkaline Digestion for Hexavalent Chromium. SW-846 Method 3060A, 1996.

7. United States...

- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Inductively Coupled Plasma-Optical Emission Spectrometry. SW-846 Method 6010C, 2000.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Flame Atomic Absorption Spectrophotometry. SW-846 Method 7000B, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Antimony and Arsenic (Atomic Absorption, Borohydride Reduction). SW-846 Method 7062, 1994.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Chromium, Hexavalent (Colorimetric). SW-846 Method 7196A, 1992.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Mercury in Liquid Waste (Manual Cold-Vapor Technique). SW-846 Method 7470A, 1994.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Mercury in Solid or Semisolid Waste (Manual Cold-Vapor Technique). SW-846 Method 7471B, 2007.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Selenium (Atomic Absorption, Borohydride Reduction). SW-846 Method 7742, 1994.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Total and Amenable Cyanide: Distillation. SW-846 Method 9010C, 2004.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Cyanide Extraction Procedure for Solids and Oil. SW-846 Method 9013A, 1996.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Cyanide in Waters and Extracts Using Titrimetric and Manual Spectrophotometric Procedures. SW-846 Method 9014, 2014.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. pH Electrometric Measurement. SW-846 Method 9040C, 2004.
- United States Environmental Protection Agency. Test Methods for Evaluation Solid Waste Physical/Chemical Methods. Soil and Waste pH. SW-846 Method 9045D, 2004.

ภาคผนวก จ

สำเนาเอกสารรับรองเครื่องมือการตรวจวัด

Certificate of Calibration

Certificate No. : 67-420106-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatuesukhaklon 25, Pracha-Uttd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

pH Meter with electrode

pH meter

Manufacturer : Eutech

Model : pH 700

Range : N/A

Resolution : 0.01 pH

Serial No. : 2884323

ID No. : N/A

Electrode

Model : ECF7252101B Serial No. : 01X099320

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 26.7) °C

Relative Humidity : (40 to 45) %

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Permpon Chanpu

Calibration Method : In-house method CAL-M4201 direct measurement by using standard voltage calibrator and using certified reference material (CRM)

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Multiproduct Calibrator

ID No.	Cert. No.	Due Date	Traceability
400005	SG-E-00307/66	23 Aug 2025	National Institute of Metrology Thailand (NIMT)

2. Standard Buffer Solution

pH	Cert. No.	Lot No.	Exp. Date	Traceability
4.008	61293328	1027612	15 Sep 2026	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
6.987	61297593	1027614	15 Sep 2025	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025
10.010	61306165	1027613	15 Sep 2025	CPA Chem Ltd. Accredited to ISO 17034 and ISO/IEC 17025

Approved by :

(Permpon Chanpu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd



Certificate of Calibration

Certificate No. : 67-420106-1

Page : 2 of 2

Result of Calibration :

UUC Condition As-Received : Good

Function : Electrical measurement

pH meter

Performing standard curve by Multiproduct Calibrator at pH (4,7,10)

Adjustment Curve at nominal pH	Applied Voltage (mV)	Nominal Value (pH)	UUC Reading		Correction (mV)	Uncertainty (± mV)
			(pH)	(mV)		
4, 7, 10	177.4800	4	4.00	177.5	0.0	0.12
	0.0000	7	7.00	0.0	0.0	0.086
	-177.4800	10	10.00	-177.4	-0.1	0.12

Function : pH meter with electrode

Performing a three - buffer standard curve using buffer nominal pH (4,7,10)

Adjustment Curve at nominal pH	Standard Buffer (pH)	UUC Reading (pH)	Correction (pH)	Uncertainty (± pH)
4, 7, 10	4.008	4.01	0.00	0.0097
	6.987	7.00	-0.01	0.011
	10.010	10.01	0.00	0.014

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-



Certificate of Calibration

Certificate No. : 67-410112-1

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Digital Thermo-Hygrometer

Manufacturer : Digicon

Model : TH-02A

Range Temperature : 0 °C to 50 °C Resolution : 0.1 °C

Range Humidity : 20 %R.H. to 99 %R.H. Resolution : 1 %R.H.

Serial No. : 1819A0771796

ID No. : N/A

Environment : Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Date of Received : 20 September 2024

Date of Calibration : 23 September to 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Chortip Samchusiri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4013

by compared with standard probe sensor humidity/temperature into humidity/temperature chamber.

Reference Standard Instruments : This certification is traceable to the International System of Units

Digital Indicator with Standard Probe Temp&Hum

ID No. Cert.No. Due Date Traceability

400034 & 400035 SG-H-00611/67 04 Jan 2025 Success Gateway Co., Ltd., Accredited by TISI Calibration No.0268

Approved by :

(Permon Champu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-410112-1

Page : 2 of 2

UUC Condition As-Received : Good

Result of Calibration : Without Adjustment

Function : Temperature measurement

Reference Humidity @ 50 %R.H.

Standard Temperature (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
19.99	19.7	0.3	0.46
25.00	24.7	0.3	0.46
30.01	29.7	0.3	0.46

Result of Calibration : Without Adjustment

Function : Humidity measurement

Reference Temperature @ 25 °C

Standard Humidity (%R.H.)	UUC Reading (%R.H.)	Correction (%R.H.)	Uncertainty (± %R.H.)
40.01	38	2	2.2
60.00	56	4	2.3

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-oOo-

P





Certificate of Calibration

Certificate No. : 67-200334-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatsuknakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Electronic Balance

Manufacturer : SHIMADZU

Model : AP225WD

Serial No. : D316300690

Capacity : 220 g Resolution : 0.0001g/102g, 0.0001g/220g

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (24.9 to 26.3) °C

Relative Humidity : (40.8 to 55.4) %

Air Pressure : 1003.0 mbar

Date of Received :

20 September 2024

Date of Calibration :

20 September 2024

Date of Issue :

21 September 2024

Calibrated by :

Akaradath Thippichai

Calibration Method :

In-house method CAL-M2001 based on UKAS Publication ref : LAB 14

Edition 7 - November 2022

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID.No.

Cert.No.

Due Date

Traceability

E261-E2624

C02232088

08 Nov 2024

National Institute of Metrology (Thailand), (NIMT)

Approved by :

(Satja Sangkhum)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co. Ltd



Certificate of Calibration

Certificate No. : 67-200334-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Departure of indication from nominal value

Nominal Value (g)	Correction (g)	Uncertainty ± (g)
0.001	0.00000	0.000015
0.01	0.00000	0.000016
0.1	0.00000	0.000018
1	0.00000	0.000026
10	0.00000	0.000053
20	-0.00003	0.000071
50	0.00006	0.00011
100	0.00004	0.00020
150	0.0001	0.00038
200	0.0000	0.00038

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.13 , providing a level of confidence of approximately 95%

Eccentric error

Load test : 50 g

A


B

C

D

E

-0.00005 0.00001 0.00002 0.00000 0.00000 g



Repeatability

Load test

:

200 g

Sidev.

:

0.000000 g

-0.00 -





Certificate of Calibration

Certificate No. : 67-400560-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisutesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Liquid in Glass Thermometer

Manufacturer : N/A Model : N/A

Range : 0 °C to 100 °C Resolution : 1 °C

Serial No. : N/A Immersion : Total

ID No. : 94-49747

Environment : Ambient Temperature : (23 ± 2) °C

Relative Humidity : (50 ± 15) %

Line Voltage : (220 ± 22) VAC

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Chortip Samchusri

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4001 based on ASTM E77-07 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert. No. Due Date Traceability

400001 TT-0023-24 16 Feb 2026

National Institute of Metrology Thailand (NIMT)

2. Standard Digital Thermometer

ID No. Cert. No. Due Date Traceability

400003 23E1866 01 Jun 2025

National Institute of Metrology Thailand (NIMT)

400004 23E1866 01 Jun 2025 National Institute of Metrology Thailand (NIMT)

Approved by :

(Permpon Chanpu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-400560-1

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Ice point check : UUC* reading 0 °C Standard reading -0.0321 °C

Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
39.8223	40	-0.2	0.31

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

- 0.0321 -

P





Certificate of Calibration

Certificate No. : 67-300569-1

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisetasuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Burette

Manufacturer : GLASSCO

Class : A

Capacity : 10 ml Graduation : 0.05 ml

ID No. : 2212-0344-1

Environment

: Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1008.0 mbar.

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. Cert.No. Due Date Traceability

241005 67-200210-4 02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd



Certificate of Calibration

Certificate No. : 67-300569-1

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 19.92 sec.

Nominal Volume (ml)	Measuring Volume (ml)
2	2.0044
5	5.0024
10	9.9915

Uncertainty of measurement with in ± 0.0039 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o-



Certificate of Calibration

Certificate No. : 67-300569-2

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Burette

Manufacturer : GLASSCO **Class :** A

Capacity : 25 ml **Graduation :** 0.1 ml

ID No. : 2212-0344-2

Environment : Ambient Temperature : $(20 \pm 3) ^\circ\text{C}$

Relative Humidity : $(50 \pm 10) \%$

Air Pressure : 1008.0 mbar.

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Arcerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.	Cert.No.	Due Date	Traceability
241005	67-200210-4	02 Dec 2024	National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd



Certificate of Calibration

Certificate No. : 67-300569-2

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at $20 ^\circ\text{C}$

UUC Condition As-Received : Good

Delivery Time : 46.13 sec.

Nominal Volume (ml)	Measuring Volume (ml)
5	5.0039
15	14.9824
25	24.9757

Uncertainty of measurement with in ± 0.0066 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o-o-





Certificate of Calibration

Certificate No. : 67-300569-3

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkr, Bangkok 10140 Thailand

Equipment : Measuring Pipette

Manufacturer : GLASSCO Class : A

Capacity : 10 ml Graduation : 0.1 ml

ID No. : MP10/01/19

Environment : Ambient Temperature : (20 ± 3) °CRelative Humidity : (50 ± 10) %

Air Pressure : 1000.8 mbar.

Date of Received : 20 September 2024

Date of Calibration : 23 September 2024

Date of Issue : 23 September 2024

Calibrated by : Arceat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. Cert. No. Due Date

241005 67-200210-4 02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Traceability

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300569-3

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 12.20 sec.

Nominal Volume (ml)	Measuring Volume (ml)
2	1.9998
5	4.9871
10	9.9742

Uncertainty of measurement with in $\pm$ 0.0039 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-300569-4

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Measuring Pipette

Manufacturer : GLASSCO

Class : A

Capacity : 25 ml

Graduation : 0.1 ml

ID No. : MP25/01/19

Environment

: Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1000.8 mbar.

Date of Received

: 20 September 2024

Date of Calibration

: 23 September 2024

Date of Issue

: 23 September 2024

Calibrated by

: Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert. No.

Due Date

Traceability

241005

67-200210-4

02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.

Certificate of Calibration

Certificate No. : 67-300569-4

Page : 2 of 2

Result of Calibration :

This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Delivery Time : 15.20 sec.

Nominal Volume (ml)	Measuring Volume (ml)
5	5.0302
15	15.0832
25	25.0398

Uncertainty of measurement with in ± 0.0067 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-oOo-





NSC-TISI-TIS 7025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 67-300571-1

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisetuesuknakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok-10140 Thailand

Equipment : Cylinder

Manufacturer : GLASSCO

Class : A

Capacity : 100 ml

Graduation : 1 ml

ID No. : CY100/01/24

Environment : Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1003.9 mbar.

Date of Received : 20 September 2024

Date of Calibration : 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Atcreat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. : 67-200210-1

Cert. No. : 67-200210-1

Due Date : 02 Dec 2024

Traceability : National Institute of Metrology (Thailand) (NIMT)

241002

Approved by :

(Signature)
(Wipa Tovadee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300571-1

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
50	50.45
100	100.52

Uncertainty of measurement with in ± 0.063 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

- o0o -

(Signature)





NSC-TIS-17025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 67-300571-2

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatsuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Cylinder

Manufacturer : GLASSCO

Class : A

Capacity : 250 ml

Graduation : 2 ml

ID No. : CY250/01/19

Environment

: Ambient Temperature : (20 ± 3) °C

: Relative Humidity : (50 ± 10) %

: Air Pressure : 1004.1 mbars

Date of Received : 20 September 2024

Date of Calibration : 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Arcerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert.No.

Due Date

Traceability

241002

67-200210-1

02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300571-2

Page : 2 of 2

Result of Calibration :

This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
150	151.02
250	251.16

Uncertainty of measurement with in ± 0.087 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-300571-3

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Cylinder

Manufacturer : GLASSCO **Class** : A

Capacity : 1000 ml **Graduation** : 10 ml

ID No. : CY1000/01/24

Environment : Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1001.7 mbar.

Date of Received : 20 September 2024

Date of Calibration : 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Arcerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. **Cert.No.** **Due Date** **Traceability**

241002 67-200210-1 02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300571-3

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
500	500.74
1000	1003.10

Uncertainty of measurement with in ± 0.17 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o-

(Signature)



Certificate of Calibration

Certificate No. : 67-300572-1 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.
188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Imhoff Cone
Manufacturer : VITLAB
Capacity : 1000 ml Graduation : 0.1, 50 ml
ID No. : CY1000/01/22

Environment : Ambient Temperature : (20 ± 3) °C
Relative Humidity : (50 ± 10) %
Air Pressure : 1001.5 mbar.

Date of Received : 20 September 2024
Date of Calibration : 23 September 2024
Date of Issue : 23 September 2024
Calibrated by : Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-01

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance
ID No. 241002 Cert. No. 67-200210-1 Due Date 02 Dec 2024 Traceability National Institute of Metrology (Thailand) (NIMT)

Approved by : 
(Wipa Triradee)
Supervisor

The Uncertainties are for a confidence probability of approximately 95%.
This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300572-1 Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
500	500.74
1000	1009.16

Uncertainty of measurement with in $\pm$ 0.17 ml
This result of calibration was found accurate as shown on date and place of calibration only.
This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

-o-o-





Certificate of Calibration

Certificate No. : 67-400547-1 Page : 1 of 2

Submitted by :

M Green Group Co., Ltd

188/46 Wisatsukhakkhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment : Temperature Indicator with Thermistor Probe

Temperature Indicator

Manufacturer : Eutech Model : pH 700

Range : N/A °C Resolution : 0.1 °C

Serial No. : 2884323 ID No. : N/A

Thermistor probe

Model : N/A Sheath Material : Stainless

Diameter : 3 mm. Length : 115 mm.

Serial No. : PH5TEMB01P 279 ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 26.7) °C

Relative Humidity : (40 to 45) %

Line Voltage : (220.0 to 223.0) VAC

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Permpon Chanpu

Calibration Method : This instrument was calibrated by In-house method comparison technique CAL-M4003 by compared with PRT in the liquid bath at the constant controlled temperature.

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

1. Platinum Resistance Thermometer (PRT)

ID No. Cert. No. Due Date Traceability

400002 TT-0095-24 01 Jul 2026

2. Standard Digital Thermometer

ID No. Cert. No. Due Date Traceability

400033 24E633 21 Feb 2026

Approved by :

(Permpon Chanpu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-400547-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

Immersion Depth (mm.)	Standard Reading (°C)	UUC Reading (°C)	Correction (°C)	Uncertainty (± °C)
130	25.004	24.9	0.1	0.19

Remark

UUC : Unit Under Calibration

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o





Certificate of Calibration

Certificate No. : 67-400548-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisutesukhakhon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Temperature controlled enclosure (Refrigerator)

Manufacturer : Biobase

Model : BXC-V250M (II)

Range : N/A °C

Resolution : 0.1 °C

Serial No. : YC025025190108

ID No. : N/A

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 27.4) °C

Relative Humidity : (39 to 47) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Permpon Charnpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No. Cert.No.

Traceability

400046 & 400042

Due Date

26 Jan 2025 National Institute of Metrology Thailand (NIMT)

Approved by :

(Permpon Charnpu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-400548-1


Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)

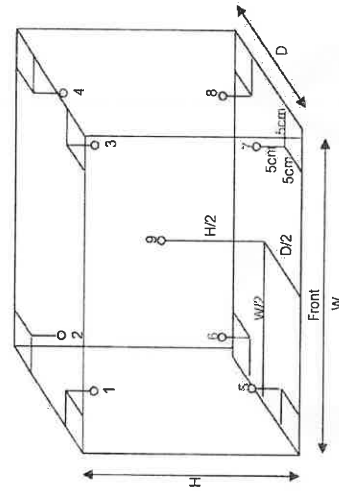

Inside of Chamber

W = 0.50 m

D = 0.40 m

H = 1.20 m

Capacity = 0.24 m³

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
4.0	2.0	2.0	4.70	4.42	5.04	4.99	4.52	4.22	4.74	4.67	3.89	0.45

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
4.0	2.0	2.00	1.23	0.13	1.40

Remark The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-400548-3

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisutesukhakdon 25, Pracha-Utd Rd., Thungkru Bangkok 10140 Thailand

Equipment :

Water Bath

Manufacturer : Memmert

Model : WNB29

Range : N/A °C

Resolution :0.1 °C

Serial No. : L619.0037

ID No. : N/A

Environment :

On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (26.3 to 27.4) °C

Relative Humidity : (39 to 47) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Pempon Chanpu

Calibration Method :

This instrument was calibrated by In-house method CAL-M4006 based on ASTM E715-80

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD probe

ID No. Cert. No.

Traceability

400046 & 400024 67-400198-2

Due Date National Institute of Metrology Thailand (NIMT)

30 Sep 2024

Approved by :

(Pempon Chanpu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration


Certificate No. : 67-400548-3

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

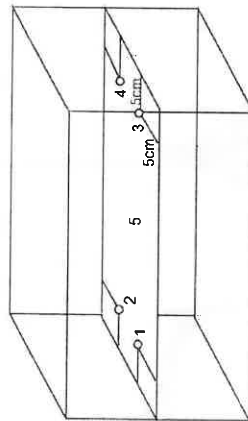

Front

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.					Uncertainty (°C)	Measured Uniformity (°C)	Measured Stability (°C)
			1	2	3	4	5			
85.0	85.0	85.0	84.55	84.44	84.49	84.46	84.62	0.20	0.25	0.06

Remark The uncertainty is not combine uniformity of the water bath

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

- o0o -

P





Certificate of Calibration

Certificate No. : 67-400548-4 Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Uttd Rd., Thungkru Bangkok 10140 Thailand

Equipment : Temperature controlled enclosure (Incubator)

Manufacturer : Biobase

Model : Biochemistry Incubator

Range : 0 °C to 65 °C

Resolution : 0.1 °C

Serial No. : KYP1502202003

ID No. : N/A

Environment : On site calibration was carried out at the Laboratory, M Green Group Co., Ltd.

Ambient Temperature : (31.0 to 32.0) °C

Relative Humidity : (50 to 55) %

Line Voltage : (226.0 to 230.0) V

Date of Received : 20 September 2024

Date of Calibration : 20 September 2024

Date of Issue : 21 September 2024

Calibrated by : Permpoon Chanpu

Calibration Method : CAL-M4004, TLAS G-20

The temperature scale used was based on ITS-90

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Digital Thermometer with RTD Probe

ID No. Cert. No.

Traceability

400029 & 400048

02 Feb 2025

National Institute of Metrology Thailand (NIMT)

Approved by :

(Permpoon Chanpu)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-400548-4


Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

Function : Temperature measurement

This instrument was setting air ventilation at position 0 (close)



Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Temperature (°C) @ Sensor No.									Uncertainty (± °C)
			1	2	3	4	5	6	7	8	9	
20.0	20.4	20.4	20.23	20.18	20.08	20.15	19.90	19.92	19.96	19.90	19.96	0.82

Test Point (°C)	Setting Temperature (°C)	Indicating Temperature (°C)	Measured Uniformity (°C)	Measured Stability (°C)	Overall Variation (°C)
20.0	20.4	20.4	0.38	0.43	0.96

Remark The uncertainty is not combine uniformity of the air chamber

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95%

-o0o-

P



Certificate of Calibration

Certificate No. : 67-300570-1

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Volumetric Flask

Manufacturer : GLASSCO

Class : A

Capacity : 100 ml

ID No. : VF100/01/19

Environment

: Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1003.9 mbar.

Date of Received

: 20 September 2024

Date of Calibration

: 24 September 2024

Date of Issue

: 24 September 2024

Calibrated by

: Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. Cert.No.

Due Date

Traceability

241005 67-200210-4

02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-300570-1

Page : 2 of 2

Result of Calibration :

This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
100	100.063

Uncertainty of measurement with in ± 0.018 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

- o o o -





Certificate of Calibration

Certificate No. : 67-300570-2

Page : 1 of 2

Submitted by : M Green Group Co., Ltd.

188/46 Wisatsukhakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment : Volumetric Flask

Manufacturer : GLASSCO **Class :** A

Capacity : 250 ml

ID No. : VF250/01/19

Environment : Ambient Temperature : (20 ± 3) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1003.8 mbar.

Date of Received : 20 September 2024

Date of Calibration : 24 September 2024

Date of Issue : 24 September 2024

Calibrated by : Arcerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No. : 241002

Cert. No. : 67-200210-1

Due Date : 02 Dec 2024

Traceability :

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Signature)
(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300570-2

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
250	250.04

Uncertainty of measurement with in ± 0.051 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor k = 2.00 , providing a level of confidence of approximately 95%

-o0o-

(Signature)



NSC-TISI-TIS17025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 67-300570-3

Page : 1 of 2

Submitted by

: M Green Group Co., Ltd.

188/46 Wisetusuknakhon 25, Pracha-Uthit Rd., Thungkru, Bangkok 10140 Thailand

Equipment

: Volumetric Flask

Manufacturer : GLASSCO

Class : A

Capacity : 1000 ml

ID No. : VF1000/01/19

Environment

: Ambient Temperature : (20 ± 3) °CRelative Humidity : (50 ± 10) %

Air Pressure : 1003.3 mbar.

Date of Received

: 20 September 2024

Date of Calibration

: 24 September 2024

Date of Issue

: 24 September 2024

Calibrated by

: Areerat Sombun

Calibration Method : In-house method CAL-M3001 based on ASTM E 542-22

Reference Standard Instruments : This certification is traceable to the International System of Units

Electronic Balance

ID No.

Cert. No.

Due Date

Traceability

241002

67-200210-1

02 Dec 2024

National Institute of Metrology (Thailand) (NIMT)

Approved by :

(Wipa Tovadee)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-300570-3

Page : 2 of 2

Result of Calibration : This result of true Volume is referred to standard temperature at 20 °C

UUC Condition As-Received : Good

Nominal Volume (ml)	Measuring Volume (ml)
1000	1000.25

Uncertainty of measurement with in $\pm$ 0.14 ml

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2.00$, providing a level of confidence of approximately 95%

- o0o -



NSC-TISI-TIS7/025
CALIBRATION 0030

Certificate of Calibration

Certificate No. : 67-210362-1

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisatesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Weight

Manufacturer : N/A

Material : Stainless Steel

Weight size : 1 g

ID No. : 63-210391-1

Assumed density of weight : 7950 kg/m³Assumed Air density : 1.2 kg/m³

Environment :

Ambient Temperature : (20 ± 2) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1005.7 mbar

Date of Received :

20 September 2024

Date of Calibration :

23 September 2024

Date of Issue :

23 September 2024

Calibrated by :

Wuttichai Swatphong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.

E221-E2210

Cert.No.

MM-0042-22

Due Date

21 Mar 2025

Traceability

National Institute of Metrology (Thailand), (NIMT)

Approved by :

(Satja Sangkhum)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co.,Ltd.



Certificate of Calibration

Certificate No. : 67-210362-1

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	1 g	none	1 g +0.003 mg	± 0.023 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-210362-2

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisetseuknakhon 25, Pracha-Uttd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Weight

Manufacturer : N/A

Material : Stainless Steel

Weight size : 100 g

ID No. : 63-210391-2

Assumed density of weight : 7950 kg / m³Assumed Air density : 1.2 kg / m³

Environment :

Ambient Temperature : (20 ± 2) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1005.7 mbar

Date of Received :

20 September 2024

Date of Calibration :

23 September 2024

Date of Issue :

23 September 2024

Calibrated by :

Wuttichai Swarphong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.

Cert. No.

Due Date

Traceability

E221-E2210

MM-0042-22

21 Mar 2025

National Institute of Metrology (Thailand), (NIMT)

Approved by

(Satja Sangkhum)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-210362-2

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	100 g	none	100 g +0.06 mg	± 0.11 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-





Certificate of Calibration

Certificate No. : 67-210362-3

Page : 1 of 2

Submitted by :

M Green Group Co., Ltd.

188/46 Wisutesuknakhon 25, Pracha-Utd Rd., Thungkru, Bangkok 10140 Thailand

Equipment :

Weight

Manufacturer : N/A

Material : Stainless Steel

Weight size : 200 g

ID No. : 63-210391-3

Assumed density of weight : 7950 kg / m³Assumed Air density : 1.2 kg / m³

Environment :

Ambient Temperature : (20 ± 2) °C

Relative Humidity : (50 ± 10) %

Air Pressure : 1005.7 mbar

Date of Received :

20 September 2024

Date of Calibration :

23 September 2024

Date of Issue :

23 September 2024

Calibrated by :

Wuttichai Swatphong

Calibration Method : In-house method CAL-M2101 based on OIML R 111-1 : 2004(E)

Reference Standard Instruments : This certification is traceable to the International System of Units

Standard Weights

ID No.

Cert. No.

Due Date

Traceability

E221-E2210

MM-0042-22

21 Mar 2025

National Institute of Metrology (Thailand), (NIMTT)

Approved by :

(Satja Sangkhum)

Supervisor

The Uncertainties are for a confidence probability of approximately 95%

This certificate may not be reproduced other than in full except with the prior written approval of the Calibratech Co., Ltd.



Certificate of Calibration

Certificate No. : 67-210362-3

Page : 2 of 2

Result of Calibration : Without Adjustment

UUC Condition As-Received : Good

No.	Nominal Value	Id.Mark	Conventional mass Value	Measuring Uncertainty
1	200 g	none	200 g +0.06 mg	± 0.17 mg

This result of calibration was found accurate as shown on date and place of calibration only.

This reported uncertainty of measurement was based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%

-o0o-



ภาคผนวก ฉ

กฎหมายที่เกี่ยวข้อง

หน้า ๑

ประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม

เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางชนิด

พ.ศ. ๒๕๖๗

โดยที่เป็นการสมควรปรับปรุงการกำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคาร ให้เหมาะสมตามความก้าวหน้าทางวิทยาศาสตร์ เทคโนโลยี และความเปลี่ยนแปลงทางเศรษฐกิจ สังคม ของประเทศ และให้สอดคล้องกับสภาพการณ์ปัจจุบัน

อาศัยอำนาจตามความในมาตรา ๕๕ แห่งพระราชบัญญัติส่งเสริมและรักษาคุณภาพสิ่งแวดล้อมแห่งชาติ พ.ศ. ๒๕๓๕ รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อมและสิ่งแวดล้อม โดยคำแนะนำของคณะกรรมการควบคุมมลพิษ และโดยความเห็นชอบของคณะกรรมการสิ่งแวดล้อมแห่งชาติ จึงออกประกาศไว้ ดังต่อไปนี้

ข้อ ๑ ให้ยกเลิกประกาศกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม เรื่อง กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารบางประเภทและบางชนิด ฉบับลงวันที่ ๗ พฤศจิกายน พ.ศ. ๒๕๔๔

ข้อ ๒ ในประกาศนี้

“อาคาร” หมายความว่า อาคารที่ก่อสร้างขึ้น ไม่ว่าจะมึลักษณะเป็นอาคารหลังเดียวหรือเป็นกลุ่มของอาคารซึ่งตั้งอยู่ภายในพื้นที่ซึ่งเป็นบริเวณเดียวกัน และไม่ว่าจะมีตอร์รณยาน้ำหอเดียวหรือมีหลายที่ที่เชื่อมติดต่อกันระหว่างอาคารหรือไม่ก็ตาม

“น้ำทิ้ง” หมายความว่า น้ำที่เกิดจากกิจกรรมของอาคารที่ระบายหรือจะระบายลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อม

ข้อ ๓ ให้แบ่งอาคาร ออกเป็น ๓ ชนิด คือ

ชนิดที่ ๑ อาคารอยู่อาศัย หมายถึง อาคารที่มีวัตถุประสงค์ให้เป็นที่พักอาศัยของบุคคล

ทั้งการอยู่อาศัยอย่างถาวรหรือชั่วคราว ได้แก่

- (๑) อาคารชุด ตามกฎหมายว่าด้วยอาคารชุด
- (๒) หอพัก ตามกฎหมายว่าด้วยหอพัก
- (๓) หอพัก ห้องเช่า ห้องแบ่งเช่า หรือกิจการอื่นในนองเดียวกันตามกฎหมายว่าด้วยการสาธารณสุข

- (๔) สถานรับเลี้ยงเด็ก ตามกฎหมายว่าด้วยคุ้มครองเด็ก
 - (๕) สถานดูแลผู้สูงอายุหรือผู้ภาวะพึ่งพิง ตามกฎหมายว่าด้วยสถานประกอบการเพื่อสุขภาพ
 - (๖) ที่พักอาศัยสำหรับลูกจ้างประเภทกิจการก่อสร้าง ตามกฎหมายว่าด้วยการคุ้มครองแรงงาน
- ชนิดที่ ๒ อาคารพาณิชย์ หมายถึง อาคารที่ใช้ประโยชน์ในการพาณิชย์กรรม หรือบริการธุรกิจอย่างเดียวหรือหลายอย่าง ได้แก่

- (๑) โรงแรม ตามกฎหมายว่าด้วยโรงแรม

- หน้า ๒
- (๒) ศูนย์การค้าหรือห้างสรรพสินค้า
 - (๓) ตลาด ตามกฎหมายว่าด้วยการสาธารณสุข
 - (๔) สถานบริการประเภทสถานอาบน้ำ นวดหรืออบตัว ตามกฎหมายว่าด้วยสถานบริการ
 - (๕) ภัตตาคารหรือร้านอาหาร
 - (๖) อาคารที่ทำการของทางราชการ รัฐวิสาหกิจ หรือองค์การระหว่างประเทศและของเอกชน
 - (๗) อาคารโรงเรียนเอกชน ตามกฎหมายว่าด้วยโรงเรียนเอกชน โรงเรียนของทางราชการ
- อาคารสถาบันอุดมศึกษาของเอกชน ตามกฎหมายว่าด้วยสถาบันอุดมศึกษาของเอกชนและสถาบันอุดมศึกษาของทางราชการ
- ชนิดที่ ๓ อาคารสถานพยาบาล หมายถึง สถานพยาบาล ตามกฎหมายว่าด้วยสถานพยาบาล
- ประเภทที่รับผู้ป่วยไว้ค้างคืน
- ข้อ ๔ ให้แบ่งขนาดของอาคาร ออกเป็น ๔ ประเภท ดังต่อไปนี้

ประเภทอาคาร	หน่วย	อาคารประเภท ก.	อาคารประเภท ข.	อาคารประเภท ค.	อาคารประเภท ง.
๑. อาคารอยู่อาศัย					
อาคารชุด	ห้องชุด	ตั้งแต่ ๕๐๐ ขึ้นไป	ตั้งแต่ ๑๐๐ แต่ไม่ถึง ๕๐๐	ไม่ถึง ๑๐๐	-
หอพัก	ห้อง	-	ตั้งแต่ ๕๐๐ ขึ้นไป	ตั้งแต่ ๕๐ แต่ไม่ถึง ๒๕๐	ไม่ถึง ๕๐
หอพัก ห้องเช่า ห้องแบ่งเช่า หรือกิจการอื่นในนองเดียวกัน ตามกฎหมายว่าด้วยการสาธารณสุข	ห้อง	-	ตั้งแต่ ๕๐๐ ขึ้นไป	ตั้งแต่ ๕๐ แต่ไม่ถึง ๒๕๐	ไม่ถึง ๕๐
สถานรับเลี้ยงเด็ก	-	-	-	-	ทุกขนาด
สถานดูแลผู้สูงอายุหรือผู้ภาวะพึ่งพิง	-	-	-	-	ทุกขนาด
ที่พักอาศัยสำหรับลูกจ้างประเภทกิจการก่อสร้าง	-	-	-	-	ทุกขนาด
๒. อาคารพาณิชย์					
โรงแรม	ห้อง	ตั้งแต่ ๒๐๐ ขึ้นไป	ตั้งแต่ ๖๐ แต่ไม่ถึง ๒๐๐	ไม่ถึง ๖๐	-
สถานบริการประเภทสถานอาบน้ำ นวดหรืออบตัว	ตารางเมตร	-	ตั้งแต่ ๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๑,๐๐๐ แต่ไม่ถึง ๕,๐๐๐	ไม่ถึง ๑,๐๐๐
โรงเรียนเอกชน โรงเรียนของทางราชการ สถาบันอุดมศึกษาของเอกชนหรือสถาบันอุดมศึกษาของทางราชการ		ตั้งแต่ ๒๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๕,๐๐๐ แต่ไม่ถึง ๒๕,๐๐๐	-	ไม่ถึง ๕,๐๐๐

ประเภทอาคาร	หน่วย	อาคาร ประเภท ก.	อาคาร ประเภท ข.	อาคาร ประเภท ค.	อาคาร ประเภท ง.
อาคารที่ทำการของทาง ราชการ รัฐวิสาหกิจ หรือ องค์การระหว่างประเทศและ ของเอกชน	ศูนย์การค้า หรือห้างสรรพสินค้า	ตั้งแต่ ๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๑๐,๐๐๐ แต่ไม่ถึง ๕๕,๐๐๐	ตั้งแต่ ๕,๐๐๐ แต่ไม่ถึง ๑๐,๐๐๐	ไม่ถึง ๕,๐๐๐
		ตั้งแต่ ๒๕,๐๐๐ ขึ้นไป	ตั้งแต่ ๕,๐๐๐ แต่ไม่ถึง ๒๕,๐๐๐	-	ไม่ถึง ๕,๐๐๐
ตลาด	ภัตตาคารหรือร้านอาหาร	ตั้งแต่ ๒,๕๐๐ ขึ้นไป	ตั้งแต่ ๑,๕๐๐ แต่ไม่ถึง ๒,๕๐๐	ตั้งแต่ ๑,๐๐๐ แต่ไม่ถึง ๑,๕๐๐	ไม่ถึง ๑,๐๐๐
		ตั้งแต่ ๒,๕๐๐ ขึ้นไป	ตั้งแต่ ๕๐๐ แต่ไม่ถึง ๒,๕๐๐	ตั้งแต่ ๒๕๐ แต่ไม่ถึง ๕๐๐	ไม่ถึง ๒๕๐
๓. อาคารสถานพยาบาล	เตียง	ตั้งแต่ ๓๐ ขึ้นไป	ตั้งแต่ ๑๐ แต่ไม่ถึง ๓๐	-	ไม่ถึง ๑๐

ข้อ ๕ กำหนดมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารไว้ ดังต่อไปนี้

พารามิเตอร์	ค่ามาตรฐาน			
	อาคาร ประเภท ก.	อาคาร ประเภท ข.	อาคาร ประเภท ค.	อาคาร ประเภท ง.
๑. ความเป็นกรดและต่าง (pH)	๕.๕ - ๙.๐	๕.๕ - ๙.๐	๕.๕ - ๙.๐	๕.๕ - ๙.๐
๒. บีโอดี (Biochemical Oxygen Demand)	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๓๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๔๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร
	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๓๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๔๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร
๓. ของแข็งแขวนลอยทั้งหมด (Total Suspended Solids)	ไม่เกิน ๓๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๔๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๕๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๖๐ มิลลิกรัมต่อลิตร
๔. ของแข็งละลายน้ำทั้งหมด (Total Dissolved Solids)	ไม่เกิน ๑,๐๐๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑,๐๐๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑,๓๐๐ มิลลิกรัมต่อลิตร	-

พารามิเตอร์	ค่ามาตรฐาน			
	อาคาร ประเภท ก.	อาคาร ประเภท ข.	อาคาร ประเภท ค.	อาคาร ประเภท ง.
	สำหรับอาคารอยู่อาศัยและอาคารพาณิชย์	สำหรับอาคารอยู่อาศัยและอาคารพาณิชย์	สำหรับอาคารอยู่อาศัยและอาคารพาณิชย์	อาคารประเภท ง.
	เพิ่มขึ้นจากปริมาณน้ำใช้ปกติไม่เกิน ๑,๐๐๐ สำหรับอาคารสถานพยาบาล	เพิ่มขึ้นจากปริมาณน้ำใช้ปกติไม่เกิน ๑,๐๐๐ สำหรับอาคารสถานพยาบาล	เพิ่มขึ้นจากปริมาณน้ำใช้ปกติไม่เกิน ๑,๐๐๐ สำหรับอาคารสถานพยาบาล	-
๕. ซัลไฟด์ (Sulfide)	ไม่เกิน ๑๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑๐ มิลลิกรัมต่อลิตร	-
๖. ทิตเคียน (Total Kjeldahl Nitrogen)	ไม่เกิน ๓๕ มิลลิกรัมต่อลิตร	ไม่เกิน ๓๕ มิลลิกรัมต่อลิตร	ไม่เกิน ๔๐ มิลลิกรัมต่อลิตร	-
๗. น้ำมันและไขมัน (Oil and Grease)	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๒๐ มิลลิกรัมต่อลิตร
๘. แคตไอออนไนต์ฟอสเฟต (Total Coliform Bacteria) (สำหรับอาคารสถานพยาบาล)	ไม่เกิน ๕,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิตร)	ไม่เกิน ๕,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิตร)	ไม่เกิน ๕,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิตร)	-
๙. แคตไอออนไนต์ฟอสเฟต (Fecal Coliform Bacteria) (สำหรับอาคารสถานพยาบาล)	ไม่เกิน ๑,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิตร)	ไม่เกิน ๑,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิตร)	ไม่เกิน ๑,๐๐๐ (เอ็มพีเอ็นต่อ ๑๐๐ มิลลิตร)	-
๑๐. คลอรีนอิสระ (Free Chlorine)	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	ไม่เกิน ๑.๐ มิลลิกรัมต่อลิตร	-

ข้อ ๖ การตรวจสอบมาตรฐานควบคุมการระบายน้ำทิ้งจากอาคารให้ใช้วิธีการ ดังต่อไปนี้

๖.๑ ความเป็นกรดและด่าง ให้ใช้เครื่องวัดความเป็นกรดและด่างของน้ำ (pH Meter) ที่มีความละเอียดไม่ต่ำกว่า ๐.๑ หน่วย

๖.๒ บียูดี ให้ใช้วิธีบียูดีอย่างทึบของหมู่มี ๒๐ องศาเซลเซียส เป็นเวลา ๕ วินาทีติดกัน และหาค่าออกซิเจนละลายด้วยวิธีแอไซด์มอดิฟิเคชัน (Azide Modification) หรือวิธีอินแฟรเรด (Membrane Electrode) หรือวิธีออปติคอลไฟเบอร์ (Optical Probe)

๖.๓ ของแข็งแขวนลอยทั้งหมด ให้ใช้วิธีการกรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter) และอบแห้งที่อุณหภูมิ ตั้งแต่ ๑๐๓ ถึง ๑๐๕ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

๖.๔ ของแข็งละลายน้ำทั้งหมด ให้ใช้วิธีระเหยด้วยอ่างที่กรองผ่านกระดาษกรองใยแก้ว (Glass Fiber Filter) และอบแห้งที่อุณหภูมิ ๑๘๐ องศาเซลเซียส เป็นเวลาอย่างน้อย ๑ ชั่วโมง

๖.๕ ซัลไฟต์ ให้ใช้วิธีไอโอดิเมทริก (Iodometric Method) หรือวิธีเมทิลีนบลู (Methylene Blue Method)

๖.๖ ทีเคเอ็น ให้ใช้วิธีเคิลดาห์ล (Kjeldahl)

๖.๗ น้มน้ำมันและไขมัน ให้ใช้วิธีสกัดด้วยตัวทำละลายแล้วแยกน้ำมันของน้ำมันและไขมัน

๖.๘ แบคทีเรียกลุ่มโคลิฟอร์มทั้งหมดและแบคทีเรียกลุ่มฟีคอลโคลิฟอร์ม ให้ใช้วิธีมัลติเทิล ทิวบ์ เฟอ์เมนต์เพนชั่น เทคนิค (Multiple Tube Fermentation Technique)

๖.๙ คลอรีนอิสระ ให้ใช้วิธีไทเทรต (Titrimetric method) หรือวิธีไทเบนส์ (Colorimetric method) หรือวิธีไอโอดิเมทริก อิเล็กโทรด (Iodometric Electrode Technique)

ข้อ ๗ การคิดคำนวณขนาดของอาคารตามข้อ ๔ ให้เป็นไปตามวิธีการที่คณะกรรมการควบคุมมลพิษกำหนด โดยประกาศในราชกิจจานุเบกษา

ข้อ ๘ การตรวจสอบค่ามาตรฐานน้ำทิ้งตามข้อ ๖ ต้องเป็นไปตามคู่มือวิเคราะห์น้ำและน้ำเสียของสมาคมวิศวกรรมสิ่งแวดล้อมแห่งประเทศไทย หรือ Standard Methods for the Examination of Water and Wastewater ซึ่ง American Public Health Association, American Water Works Association และ Water Environment Federation ของประเทศสหรัฐอเมริกากำหนดฉบับล่าสุด หรือตามที่คณะกรรมการควบคุมมลพิษประกาศในราชกิจจานุเบกษา

ข้อ ๙ การเก็บตัวอย่างน้ำทิ้งเพื่อการตรวจสอบมาตรฐานควบคุมการระบายน้ำทิ้งตามข้อ ๕ ให้เป็น ดังต่อไปนี้

๙.๑ ให้เก็บในจุดระบายทิ้งลงสู่แหล่งน้ำสาธารณะหรือออกสู่สิ่งแวดล้อมหรือจุดอื่นที่สามารถใช้เป็นตัวแทนของน้ำทิ้งที่ระบายออกจากรถ ในกรณีที่มีการระบายทิ้งหลายจุดให้เก็บทุกจุด

๙.๒ วิธีการเก็บตัวอย่างน้ำทิ้ง ณ จุดเก็บตัวอย่างตามข้อ ๙.๑ ให้เก็บแบบจ้วง (Grab Sampling)

ข้อ ๑๐ ประกาศนี้ให้ใช้บังคับตั้งแต่วันถัดจากวันประกาศในราชกิจจานุเบกษาเป็นต้นไป

ประกาศ ณ วันที่ ๒๘ มิถุนายน พ.ศ. ๒๕๖๗

พลตำรวจเอก พัชรวาท วงษ์สุวรรณ

รัฐมนตรีว่าการกระทรวงทรัพยากรธรรมชาติและสิ่งแวดล้อม