

## ภาคผนวก ง.

เอกสารผลการสอบเทียบเครื่องมือตรวจวัด

## CERTIFICATE OF CALIBRATION FOR

NOMENCLATURE : BALANCE  
MANUFACTURER : METTLER TOLEDO  
MODEL / TYPE : MS204TS/00  
SERIAL NO. : B935191252[LA-002]  
CLID. NO. : 362200356  
JOB CONTROL NO. : 240307024790  
CALIBRATION SERVICE : ☐ IN-LABORATORY ☒ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 07 March 2024

DATE OF ISSUED : 08 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Chonvit Thongnat  
Calibration Engineer



Approved By : Mongkol Yotsoontorn  
Authorized Signatory  
08 April 2024

This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the  
International System of Units (SI)

Certificate No. Q24024790

F3-011-05/12-23

page 1 of 3



@clccalibration

## REPORT OF CALIBRATION FOR

NOMENCLATURE : BALANCE  
MANUFACTURER : METTLER TOLEDO  
MODEL / TYPE : MS204TS/00  
SERIAL NO. : B935191252[LA-002]  
LOCATION SITE : LABORATORY - BALANCE ROOM  
DATE OF CALIBRATION : 04 April 2024

### ENVIRONMENT CONDITIONS :

Temperature : 24 °C to 25 °C

Relative Humidity : 50 % to 51 %

### PROCEDURE USED :

This instrument was calibrated under procedure No. **WI-305-46** based on **EURAMET cg-18 Version 4.0 (11/2015)**.

The calibration was performed by Comparison with Weight Set which maintained by the Calibration Laboratory Co., Ltd.

### REFERENCE STANDARD USED :

1. Weight Set, Phoenix Class E2 S/N. WBS-SET-E2-01.
2. Weight, Sartorius Class E2 S/N. 44329129, 43529037, 44329167, 43529293.

### TRACEABILITY :

1. The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand).

Certificate No. MM-0123-22, Due Date 22 August 2024.

2. The measurements are traceable to International System of Units (SI), through Sartorius Lab Instruments GmbH & Co. KG.

Certificate No. M141607, M141608, M141609, M141611. Due Date 15 September 2025.

### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor complies with the table which for a normal distribution corresponds to a coverage probability of approximately 95%. It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q24024790

F3-011-05/12-23

page 2 of 3



@clccalibration



**CLC**  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY CO., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230

Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



NSC-TISI-TIS 17025  
CALIBRATION 0059  
CLC

**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

## CALIBRATION DATA



### 1. Error of indications

Nominal Test Value ( g )	Conventional mass ( g )	Display Value ( g )	Error of Balance ( g )	Uncertainty $\pm$ ( mg )	Coverage factor <i>k</i>
Unload	0.0000	0.0000	0.0000	0.07	2,00
0.1000	0.1000	0.0999	-0.0001	0.11	2,00
0.5000	0.5000	0.5000	0.0000	0.11	2,00
1.0000	1.0000	1.0000	0.0000	0.11	2,00
2.0000	2.0000	2.0000	0.0000	0.11	2,00
5.0000	5.0000	4.9999	-0.0001	0.11	2,00
10.0000	10.0000	9.9999	-0.0001	0.11	2,00

### 2. Repeatability of indications

Nominal Test Value ( g )	Standard Deviation of Reading ( g )
200.0000	0.00005

### 3. Effect of eccentric application of a load on the indication

<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <input type="checkbox"/>  </div> <div style="text-align: center;"> <input checked="" type="checkbox"/>  </div> </div>						
Nominal Test Value ( g )	Display Value ( g )					Maximum Difference of Center Value ( g )
	Position 1	Position 2	Position 3	Position 4	Position 5	
100.0000	100.0000	100.0001	100.0001	99.9999	100.0001	0.0001

Note. The Scope of Accredited TISI Certificate No. 23-LB0092 Issue 02 Page 116 of 138

**This report is valid for the above stated instrument/s only.**

### End of Certificate ###

Certificate No. Q24024790

F3-011-05/12-23

page 3 of 3



@clccalibration



CLC  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230  
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : BALANCE  
MANUFACTURER : SHIMADZU  
MODEL / TYPE : AP225WD  
SERIAL NO. : D316300692[LA-001]  
CLID. NO. : 362100172  
JOB CONTROL NO. : 240307024789  
CALIBRATION SERVICE : ☐ IN-LABORATORY ☒ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 07 March 2024

DATE OF ISSUED : 05 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Chonvit Thongnat  
Calibration Engineer

Approved By :

Mongkol Yotsoontorn  
Authorized Signatory  
05 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to  
the International System of Units ( SI )

Certificate No. Q24024789

F3-011-05/12-23

page 1 of 3



@clccalibration

## REPORT OF CALIBRATION

### FOR

NOMENCLATURE : BALANCE  
MANUFACTURER : SHIMADZU  
MODEL / TYPE : AP225WD  
SERIAL NO. : D316300692[LA-001]  
LOCATION SITE : LABORATORY-BALANCE ROOM  
DATE OF CALIBRATION : 04 April 2024

#### ENVIRONMENT CONDITIONS :

Temperature : 23 °C to 24 °C

Relative Humidity : 49 % to 50 %

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **WI-305-46** based on **EURAMET/cg-18/Version 4.0 (11/2015)**.

The calibration was performed by Comparison with Weight Set which maintained by the Calibration Laboratory Co., Ltd.

#### REFERENCE STANDARD USED :

1. Weight Set, Phoenix Class E2 S/N. WBS-SET-E2-01.
2. Weight, Sartorius Class E2 S/N. 44329129, 43529037, 44329167, 43529293.

#### TRACEABILITY :

1. The measurements are traceable to International System of Units (SI), through National Institute of Metrology (Thailand).

Certificate No. MM-0123-22, Due Date 22 August 2024.

2. The measurements are traceable to International System of Units (SI) , through Sartorius Lab Instruments GmbH & Co. KG.

Certificate No. M141607, M141608, M141609, M141611. Due Date 15 September 2025.

#### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor complies with the table which for a normal distribution corresponds to a coverage probability of approximately 95%. It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. **Q24024789**

**F3-011-05/12-23**

page 2 of 3



@clc calibration





## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : DO METER  
MANUFACTURER : YSI  
MODEL / TYPE : 5000-230V/5010  
SERIAL NO. : 16D101626/19D100367[DOM-01]  
CLID. NO. : 272100329  
JOB CONTROL NO. : 240408038371  
CALIBRATION SERVICE : ☒ IN-LABORATORY ☐ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 08 April 2024

DATE OF ISSUED : 10 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Sukgasem Seehanart  
Calibration Engineer



Approved By : Mongkol Yotsoontorn  
Authorized Signatory  
10 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units ( SI )

Certificate No. Q24038371

F3-011-05/12-23

page 1 of 3



@clccalibration



## REPORT OF CALIBRATION

### FOR

**NOMENCLATURE** : **DO METER**  
**MANUFACTURER** : **YSI**  
**MODEL / TYPE** : **5000-230V/5010**  
**SERIAL NO.** : **16D101626/19D100367[DOM-01]**  
**DATE OF CALIBRATION** : **09 April 2024**

---

#### ENVIRONMENT CONDITIONS :

**Temperature :**  $(25 \pm 2.5) ^\circ\text{C}$

**Relative Humidity :**  $(50 \pm 15) \% \text{RH}$

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **CLC-CPCH-06**. The calibration was performed by direct measurement with Certified Reference Material (CRM).

#### REFERENCE STANDARD USED :

Dissolved Oxygen, Sigma-Alorich Product ID QC3077-500ML .

#### TRACEABILITY :

The measurements are traceable to International System of Units (SI) , through Merck Co., Ltd.  
Lot LRAD3840 , Due Date October 2024.

#### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2,00$  which for a normal distribution corresponds to a coverage probability of approximately 95 %.  
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

**Certificate No. Q24038371**

**F3-011-05/12-23**

page 2 of 3



@clccalibration

**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties

of Do Meter.

## CALIBRATION DATA

### **CORRECTION OF DO METER @ 20°C**

Nominal Value ( mg/L )	DUC Reading ( mg/L )	Correction ( mg/L )	Uncertainty ( mg/L )
7.78	7.80	-0.02	± 0.38

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 012 Page 5 of 67

**This report is valid for the above stated instrument/s only.**

**### End of Certificate ###**

Certificate No. Q24038371

F3-011-05/12-23

page 3 of 3



@clccalibration

## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : HOT AIR OVEN  
MANUFACTURER : MEMMERT  
MODEL / TYPE : UF110  
SERIAL NO. : B422.0026[LA-0012]  
CLID. NO. : 332202464  
JOB CONTROL NO. : 240307024791  
CALIBRATION SERVICE : ☐ IN-LABORATORY ☒ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 07 March 2024

DATE OF ISSUED : 06 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Wenick Inchaisri  
Calibration Engineer



Approved By :

Mongkol Yotsoontorn  
Authorized Signatory

06 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the  
International System of Units (SI)

Certificate No. Q24024791

F3-011-05/12-23

page 1 of 4



@clccalibration

## REPORT OF CALIBRATION

### FOR

**NOMENCLATURE** : **HOT AIR OVEN**  
**MANUFACTURER** : **MEMMERT**  
**MODEL / TYPE** : **UF110**  
**SERIAL NO.** : **B422.0026[LA-0012]**  
**LOCATION SITE** : **LABORATORY-HOT ZONE**  
**DATE OF CALIBRATION** : **04 April 2024**

#### ENVIRONMENT CONDITIONS :

Temperature : 24 °C to 25 °C

Relative Humidity : 50% to 52 %

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **CLC-CPH-07** based on **TLAS G-20** as calibration guidelines.

The calibration was performed by using Hydra Data Logger which maintained by the Calibration Laboratory Co., Ltd.

#### REFERENCE STANDARD USED :

Hydra Data Logger, Fluke Model 2620 S/N. 5592550.

#### TRACEABILITY :

The measurements are traceable to International System of Units (SI) , through Calibration Laboratory Co., Ltd.

Certificate No. Q23065868, Due Date 22 June 2024.

#### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor complies with the table which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q24024791

F3-011-05/12-23

page 2 of 4



@clccalibration

**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties of the measuring hot air oven.

## CALIBRATION DATA

### 1. HOT AIR OVEN PERFORMANCE

DUC		Measured Uniformity	Measured Stability	Measured Overall
Setting ( °C )	Indicating ( °C )	( °C )	( °C )	Variation ( °C )
104.0	104.0	0.81	0.07	1.20
180.0	180.0	1.35	0.19	2.17






## CALIBRATION DATA

### 2. TEMPERATURE DISTRIBUTION

DUC		Measured Temperature ( °C )@Probe No.9 is Ref.									Uncertainty $\pm ( ^\circ \text{C} )$	Coverage factor $k$
Setting ( °C )	Indicating ( °C )	1	2	3	4	5	6	7	8	9		
104.0	104.0	103.11	104.12	103.56	103.79	103.72	103.88	103.57	104.18	103.88	0.45	2,00
180.0	180.0	178.33	180.32	178.77	179.54	179.26	179.74	179.19	180.15	179.58	0.55	2,00

Technical Note : W = 56 cm, D = 40 cm, H = 48 cm.

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 012 Page 58 of 67

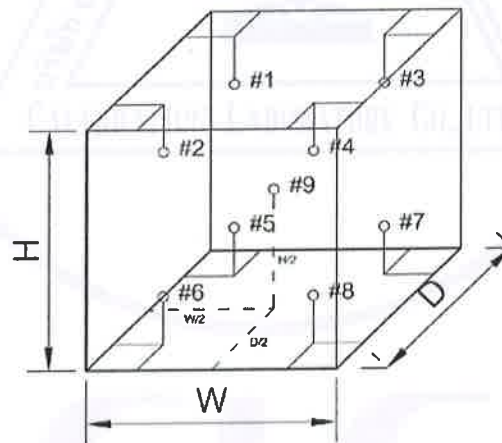

This report is valid for the above stated instrument/s only.

### End of Certificate ###

Certificate No. Q24024791

F3-011-05/12-23

page 4 of 4



@clccalibration



CLC  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230

Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



NSC-TISI-TIS 17025  
CALIBRATION 0059  
CLC

## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : INCUBATOR  
MANUFACTURER : ACCUPLUS  
MODEL / TYPE : SMART i250  
SERIAL NO. : 2059-0718-0010[LA-002]  
CLID. NO. : 332100155  
JOB CONTROL NO. : 240307024792  
CALIBRATION SERVICE : ☐ IN-LABORATORY ☒ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 07 March 2024

DATE OF ISSUED : 06 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Wenick Inchaisri

Calibration Engineer

Approved By :

Mongkol Yotsoontorn

Authorized Signatory

06 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q24024792

F3-011-05/12-23

page 1 of 4



@clccalibration

## REPORT OF CALIBRATION FOR

**NOMENCLATURE** : **INCUBATOR**  
**MANUFACTURER** : **ACCUPLUS**  
**MODEL / TYPE** : **SMART i250**  
**SERIAL NO.** : **2059-0718-0010[LA-002]**  
**LOCATION SITE** : **LABORATORY**  
**DATE OF CALIBRATION** : **04 April 2024**

### ENVIRONMENT CONDITIONS :

**Temperature : 24 °C to 25 °C**

**Relative Humidity : 50 % to 52 %**

### PROCEDURE USED :

This instrument was calibrated under procedure No. **WI-305-165** based on **TLAS G-20-1/02-08** as calibration guidelines.

The calibration was performed by using Hydra Data Logger which maintained by the Calibration Laboratory Co., Ltd.

### REFERENCE STANDARD USED :

Hydra Data Logger, Fluke Model 2620 S/N. 5592550.

### TRACEABILITY :

The measurements are traceable to International System of Units (SI) , through Calibration Laboratory Co., Ltd.

Certificate No. Q23065868, Due Date 22 June 2024.

### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor complies with the table which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. **Q24024792**

**F3-011-05/12-23**

page 2 of 4



@clccalibration

**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties of the measuring incubator.

## CALIBRATION DATA

### 1. INCUBATOR PERFORMANCE

DUC		Measured Uniformity	Measured Stability	Measured Overall
Setting ( °C )	Indicating ( °C )	( °C )	( °C )	Variation ( °C )
20.0	20.0	0.52	0.46	1.06





**CLC**  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co.,LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230

Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com




## CALIBRATION DATA

### 2. TEMPERATURE DISTRIBUTION

DUC		Measured Temperature ( °C )@Probe No.9 is Ref.									Uncertainty $\pm$ ( °C )	Coverage factor <i>k</i>
Setting ( °C )	Indicating ( °C )	1	2	3	4	5	6	7	8	9		
20.0	20.0	20.58	20.70	20.70	20.46	20.54	20.53	20.53	20.36	20.39	0.68	2,00

Technical Note : W = 50 cm, D = 48 cm, H = 110 cm.

The Scope of Accredited TISI Certificate No. 23-LB0092 Issue 02 Page 129 of 138

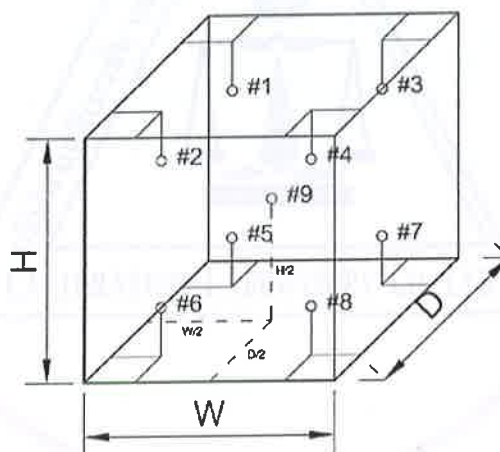

**This report is valid for the above stated instrument/s only.**

**### End of Certificate ###**

Certificate No. Q24024792

F3-011-05/12-23

page 4 of 4



@clccalibration



## CERTIFICATE OF CALIBRATION FOR

NOMENCLATURE : pH METER  
MANUFACTURER : APERA  
MODEL / TYPE : PH700/201T-F  
SERIAL NO. : PH700X1019061009/N/A [PH-02]  
CLID. NO. : 272401000  
JOB CONTROL NO. : 240521051980  
CALIBRATION SERVICE : ☒ IN-LABORATORY ☐ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 21 May 2024

DATE OF ISSUED : 23 May 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Sukgasem Seehanart

Wenick Inchaisri

Calibration Engineer



Approved By :

Mongkol Yotsoontorn

Authorized Signatory

23 May 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units ( SI )

Certificate No. Q24051980

F3-011-05/12-23

page 1 of 4



@clccalibration

## REPORT OF CALIBRATION

### FOR

NOMENCLATURE : pH METER  
MANUFACTURER : APERA  
MODEL / TYPE : PH700/201T-F  
SERIAL NO. : PH700X1019061009/N/A [PH-02]  
DATE OF CALIBRATION : 22 May 2024

---

#### ENVIRONMENT CONDITIONS :

Temperature :  $(25 \pm 2.5) ^\circ\text{C}$

Relative Humidity :  $(50 \pm 15) \% \text{ RH}$

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **WI-305-128, 238**. The calibration was performed by direct measurement with Certified Reference Material (CRM) and comparison with Calibration Bath, Precision Thermometer and IPRT which maintained by the Calibration Laboratory Co., Ltd.

#### REFERENCE STANDARD USED :

1. pH Standard Solution, NIMT TRM CODE TRM-S-2003, TRM CODE TRM-S-2007.
2. pH Standard Solution, Control Company Catalog Number 06664260,11754256, Lot Number CC787362.
3. Calibration Bath, Kambic Model OB-22/2 ULT S/N. 17115653.
4. Precision Thermometer, ASL Model F200-A-8 S/N. 014433/03.
5. IPRT, ASL Model T100-250-1D S/N. L0193A-1-1.



## TRACEABILITY :

1. The measurements are traceable to International System of Units (SI) , through National Institute of Metrology (Thailand).

Lot Number. 040822 , 120124. Due Date 04 March 2025.

2. The measurements are traceable to International System of Units (SI) , through Control Company.

Certificate No. 4281-14495731 , Due Date 27 September 2025.

3. The measurements are traceable to International System of Units (SI) , through Calibration Laboratory Co., Ltd.

Certificate No. Q23136342, Due Date 20 December 2024.

4. The measurements are traceable to International System of Units (SI) , through Thailand Institute of Scientific and Technological Research (TISTR). Certificate No. PSL-T 0203/67, Due Date 07 December 2024.

5. The measurements are traceable to International System of Units (SI) , through National Institute of Metrology (Thailand).

Certificate No. TT-0136-23, Due Date 12 December 2024.

## UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor complies with the table which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"



**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties of pH meter.

## CALIBRATION DATA

### 1. pH METER RESULT @ 25 °C

Standard pH Buffer Solution ( pH )	pH Meter Reading ( pH )	pH Meter Reading ( mV )	Correction ( pH )	Uncertainty of Measurement ( ± pH )	k Factor
4.003	4.00	180	+0.003	0.014	2,00
7.005	7.00	1	+0.005	0.014	2,00
10.015	10.01	-168	+0.005	0.100	2,00

Technical Note. Setting function CAL 3 point ( 4,7,10 ).

Note. The Scope of Accredited TISI Certificate No. 23-LB0092 Issue 02 Page 91 of 138

### \*2. TEMPERATURE RESULT [ pH PROBE ]

Immersion depth (mm)	Actual Temperature ( °C )	DUC Reading ( °C )	Correction ( °C )	Uncertainty ± ( °C )
100	25.00	25.0	0.00	0.07

Note. Probe Ø 12 mm

\* means Calibrations marked " Not TISI Accredited " in this Certificate have been included for completeness.

The reported uncertainty is based on a standard uncertainty multiplied by coverage factor of  $k = 2,00$ .

**This report is valid for the above stated instrument/s only.**

**### End of Certificate ###**

Certificate No. Q24051980

F3-011-05/12-23

page 4 of 4





CLC  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230

Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : REFRIGERATOR  
MANUFACTURER : MEDICOOL  
MODEL / TYPE : BB-117  
SERIAL NO. : BB117-190725001[LA-003]  
CLID. NO. : 332100156  
JOB CONTROL NO. : 240307024793  
CALIBRATION SERVICE : ☐ IN-LABORATORY ☒ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 07 March 2024

DATE OF ISSUED : 06 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Wenick Inchaisri

Calibration Engineer

Approved By :

Mongkol Yotsoontorn

Authorized Signatory

06 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q24024793

F3-011-05/12-23

page 1 of 4



@clccalibration





CLC  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11,14, 55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230

Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



## REPORT OF CALIBRATION

### FOR

NOMENCLATURE : REFRIGERATOR  
MANUFACTURER : MEDICOOL  
MODEL / TYPE : BB-117  
SERIAL NO. : BB117-190725001[LA-003]  
LOCATION SITE : LABORATORY  
DATE OF CALIBRATION : 04 April 2024

#### ENVIRONMENT CONDITIONS :

Temperature : 24 °C to 25 °C

Relative Humidity : 50 % to 52 %

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **WI-305-165** based on **TLAS G-20-1/02-08** as calibration guidelines.

The calibration was performed by using Hydra Data Logger which maintained by the Calibration Laboratory Co., Ltd.

#### REFERENCE STANDARD USED :

Hydra Data Logger, Fluke Model 2620 S/N. 5592550.

#### TRACEABILITY :

The measurements are traceable to International System of Units (SI), through Calibration Laboratory Co., Ltd.

Certificate No. Q23065868, Due Date 22 June 2024.

#### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor complies with the table which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q24024793

F3-011-05/12-23

page 2 of 4



@clccalibration



**CLC**  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11,14, 55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230  
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



NSC-TISI-TIS 17025  
CALIBRATION 0059  
CLC

**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties of the measuring refrigerator.

## CALIBRATION DATA

### 1. REFRIGERATOR PERFORMANCE

DUC		Measured Uniformity	Measured Stability	Measured Overall
Setting ( °C )	Indicating ( °C )	( °C )	( °C )	Variation ( °C )
4.0	4.0	0.82	1.14	2.49

Certificate No. Q24024793

F3-011-05/12-23

page 3 of 4



@clccalibration



**CLC**  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11, 14, 55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230  
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail: sale@cal-laboratory.com




## CALIBRATION DATA

### 2. TEMPERATURE DISTRIBUTION

DUC		Measured Temperature ( °C )@Probe No.9 is Ref.									Uncertainty $\pm$ ( °C )	Coverage factor <i>k</i>
Setting ( °C )	Indicating ( °C )	1	2	3	4	5	6	7	8	9		
4.0	4.0	3.22	3.93	3.21	3.93	3.52	3.29	3.02	3.18	3.31	1.40	2,00

Technical Note : W = 50 cm, D = 50 cm, H = 120 cm.

The Scope of Accredited TISI Certificate No. 23-LB0092 Issue 02 Page 129 of 138

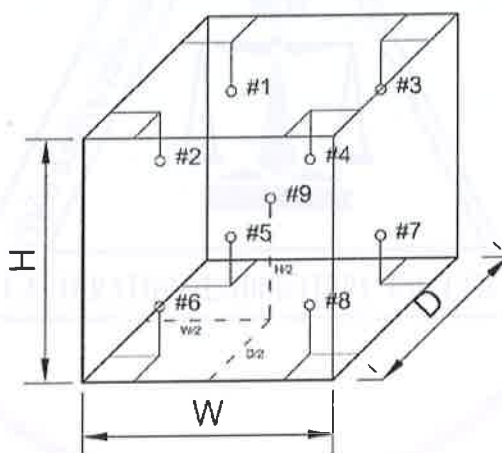

This report is valid for the above stated instrument/s only.

### End of Certificate ###

Certificate No. Q24024793

F3-011-05/12-23

page 4 of 4



@clccalibration



ID LINE : IEC17025



## Certificate of Calibration

Certificate Number : SPR24050208-1 Page : 1 of 3


Customer : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 Baan Klang Krung Biz Town, Soi Srinagarindra 46/1 (Pramote),  
Nongbon Sub-district, Prawet District, Bangkok 10250

Equipment Name	: Soil Hydrometer	
Manufacturer	: Precision	
Model	: ASTM 152H	
Serial Number	: 061	
ID. Number	: N/A	
Environmental Conditions		
Ambient Temperature	: 20 °C ± 1 °C	Received Date : 14 May 2024
Relative Humidity	: 50 % ± 15 %	Calibration Date : 16 May 2024
Location of Calibration	: In-Lab	Recommend Due Date : N/A
Calibration Procedure	: SP-CPM-04-14	Date of Issue : 17 May 2024

### Method of Calibration

This certifies that the above instrument was calibrated in compliance with the calibration system requirement of ISO/IEC 17025:2017 in accordance with reference procedure. Standards used to perform this calibration are certified by to NIST or equivalent, National metrology institute, Natural physical constants, consensus standards. The result reported herein apply only to the calibration of the item described above as received. Our decision rule is to contact the customer if the item pass and fail calibration when the results include the uncertainties and the customer must determine if the results meets their needs. The calibration certificate shall not be reproduced except in full, without written approval of SP Metrology System (Thailand).

Calibrated by : Mr.Kijja Visitsilp  
Calibration Officer

Approved by :   
( Mr.Prayoon Topart )  
Authorized Signatory



ID LINE : IEC17025



# Calibration Report

Certificate Number : SPR24050208-1

Page : 2 of 3

## Reference Standards

Equipment Name	Model	Serial No.	Certificate No.	Due. Date
Digimatic Micrometer	293-821-30	45121126	SPR24020353-4	14 Mar 2025
Electronic Balance	N/A	14246789	SPR23100036-7	15 Oct 2024
Barometer	MHB-382SD	52188	SPR24020353-10	16 Mar 2025
Standard Weight Ring	N/A	N/A	SPR24010142-26	11 Jan 2025
Digital Thermometer With PRT	GT11/3850-40-392	08000098/100288	SPR23070077-4	20 Jul 2024

## Traceability

This certification is traceable to the International System of Unit maintained at :  
SP Metrology - SP Metrology system (Thailand) Co.Ltd.





ID LINE : IEC17025



# Result of Calibration

Certificate No. : SPR24050208-1

Page : 3 of 3

Range : -5 to 60 g/l

Resolution : 1 g/l

Accuracy ( $\pm$ ) : 1 g/l

Hydrometer Measurement @ 20 °C

Unit : g/l

Standard Value	UUC Reading	Error	Uncertainty ( $\pm$ )
-0.049	0	0.049	0.23
30.093	30	-0.093	0.23
60.032	60	-0.032	0.24

## Note:

The result of calibration was found accurate as show on date and place of calibration only.  
This Certificate is not certified for any commercial transaction.

## Measurement Uncertainty

The reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor  $k = 2$ , providing a level of confidence approximately 95%.

- End of Certificate -



## Certificate of Calibration

Certificate Number : SPR24050208-2

Page : 1 of 3

Customer : ENVIRONMENTAL MEASUREMENTS CO., LTD.

5/45 Baan Klang Krung Biz Town, Soi Srinagarindra 46/1 (Pramote),  
Nongbon Sub-district, Prawet District, Bangkok 10250

Equipment Name : Soil Hydrometer

Manufacturer : Precision

Model : ASTM 152H-62

Serial Number : 2201967

ID. Number : N/A

### Environmental Conditions

Ambient Temperature :  $20^{\circ}\text{C} \pm 1^{\circ}\text{C}$

Relative Humidity :  $50\% \pm 15\%$

Location of Calibration : In-Lab

Calibration Procedure : SP-CPM-04-14

Received Date : 14 May 2024

Calibration Date : 16 May 2024

Recommend Due Date : N/A

Date of Issue : 17 May 2024

### Method of Calibration

This certifies that the above instrument was calibrated in compliance with the calibration system requirement of ISO/IEC 17025:2017 in accordance with reference procedure. Standards used to perform this calibration are certified by to NIST or equivalent, National metrology institute, Natural physical constants, consensus standards. The result reported herein apply only to the calibration of the item described above as received. Our decision rule is to contact the customer if the item pass and fail calibration when the results include the uncertainties and the customer must determine if the results meets their needs.

The calibration certificate shall not be reproduced except in full, without written approval of SP Metrology System (Thailand).

Calibrated by : Mr.Kijja Visitsilp

Calibration Officer

Approved by :

  
( Mr. Prayoon Topart )

Authorized Signatory



## Calibration Report

Certificate Number : SPR24050208-2

Page : 2 of 3

### Reference Standards

Equipment Name	Model	Serial No.	Certificate No.	Due. Date
Digimatic Micrometer	293-821-30	45121126	SPR24020353-4	14 Mar 2025
Electronic Balance	N/A	14246789	SPR23100036-7	15 Oct 2024
Barometer	MHB-382SD	52188	SPR24020353-10	16 Mar 2025
Standard Weight Ring	N/A	N/A	SPR24010142-26	11 Jan 2025
Digital Thermometer With PRT	GT11/3850-40-392	08000098/100288	SPR23070077-4	20 Jul 2024

### Traceability

This certification is traceable to the International System of Unit maintained at :  
SP Metrology - SP Metrology system (Thailand) Co.Ltd.



## Result of Calibration

Certificate No. : SPR24050208-2

Page : 3 of 3

Range : -5 to 60 g/l

Resolution : 1 g/l

Accuracy ( $\pm$ ) : 1 g/l

Hydrometer Measurement @ 20 °C

Unit : g/l

Standard Value	UUC Reading	Error	Uncertainty ( $\pm$ )
-0.048	0	0.048	0.23
30.089	30	-0.089	0.23
60.041	60	-0.041	0.24

### Note:

The result of calibration was found accurate as show on date and place of calibration only.  
This Certificate is not certified for any commercial transaction.

### Measurement Uncertainty

The reported uncertainty of measurement is the expanded uncertainty obtained by multiplying the standard uncertainty with the coverage factor  $k = 2$ , providing a level of confidence approximately 95%.

- End of Certificate -



## CERTIFICATE OF CALIBRATION FOR

**NOMENCLATURE** : **DIGITAL THERMOMETER WITH PROBE**  
**MANUFACTURER** : **LUTRON**  
**MODEL / TYPE** : **MTM-380SD**  
**SERIAL NO.** : **1.570147/N/A[LA-0013/LA-0013/A]**  
**CLID. NO.** : **232204019**  
**JOB CONTROL NO.** : **240408038373**  
**CALIBRATION SERVICE** : ☒ **IN-LABORATORY** ☐ **ON-SITE**

**CUSTOMER** : **ENVIRONMENTAL MEASUREMENTS CO., LTD.**  
**5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),**  
**NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250**

**DATE OF RECEIVED** : **08 April 2024**

**DATE OF ISSUED** : **10 April 2024**

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

**Calibrated By :** **Pimsiri Hemtanon**  
**Calibration Engineer**



**Approved By :** **Mongkol Yotsoontorn**  
**Authorized Signatory**  
**10 April 2024**



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q24038373

F3-011-05/12-23

page 1 of 3



@clccalibration

## REPORT OF CALIBRATION FOR

**NOMENCLATURE** : **DIGITAL THERMOMETER WITH PROBE**  
**MANUFACTURER** : **LUTRON**  
**MODEL / TYPE** : **MTM-380SD**  
**SERIAL NO.** : **I.570147/N/A[LA-0013/LA-0013/A]**  
**DATE OF CALIBRATION** : **09 April 2024**

### ENVIRONMENT CONDITIONS :

Temperature :  $(23 \pm 2) ^\circ\text{C}$

Relative Humidity :  $(55 \pm 10) \% \text{ RH}$

### PROCEDURE USED :

This instrument was calibrated under procedure No. **CLC-CPTH-06** based on **ASTM E 220-86** as calibration guidelines.

The calibration was performed by using Calibration Bath, Precision Thermometer and IPRT which maintained by the Calibration Laboratory Co., Ltd.

### REFERENCE STANDARD USED :

1. Calibration Bath, Kambic Model OB-22/2 ULT, OB-22/2 S/N. 17115653, 17115654.
2. Precision Thermometer, ASL Model F200-A-8 S/N. 014433/03.
3. IPRT, ASL Model T100-250-1D, T100-450-1D S/N. L0193A-1-1, L1123A-1-5.

### TRACEABILITY :

1. The measurements are traceable to International System of Units (SI) , through Calibration Laboratory Co., Ltd. Certificate No. Q23136342, Q23126517. Due Date 20 December 2024, 20 November 2024.
2. The measurements are traceable to International System of Units (SI) , through Thailand Institute of Scientific and Technological Research (TISTR). Certificate No. PSL-T 0203/67, Due Date 07 December 2024.
3. The measurements are traceable to International System of Units (SI) , through National Institute of Metrology (Thailand). Certificate No. TT-0136-23, TT-0132-23. Due Date 12 December 2024, 22 November 2024.

### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2,00$  which for a normal distribution corresponds to a coverage probability of approximately 95 %. It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. **Q24038373**

**F3-011-05/12-23**

page 2 of 3



@clccalibration



**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The DUC Reading were recorded and the means value were reported of five times measurement in the table below.

## CALIBRATION DATA

**CORRECTION OF TEMPERATURE : T1 [ THERMOCOUPLE TYPE K ]**

Immersion depth (mm)	Actual Temperature ( °C )	DUC Reading ( °C )	Correction ( °C )	Uncertainty $\pm$ ( °C )
200	4.00	4.2	-0.20	0.52
	20.01	20.3	-0.29	
	95.04	95.6	-0.56	
	104.02	104.9	-0.88	
	180.03	181.4	-1.37	

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 012 Page 56 of 67

**This report is valid for the above stated instrument/s only.**

**### End of Certificate ###**

Certificate No. Q24038373

F3-011-05/12-23

page 3 of 3



## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : DIGITAL THERMOHYGRO METER  
MANUFACTURER : DIGICON  
MODEL / TYPE : TH-02A  
SERIAL NO. : 1919E0284991[DTH-01]  
CLID. NO. : 232100200  
JOB CONTROL NO. : 240408038369  
CALIBRATION SERVICE : ☒ IN-LABORATORY ☐ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 08 April 2024

DATE OF ISSUED : 17 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Tanawan Seenam-Ngoen  
Calibration Engineer



Approved By : Mongkol Yotsoontorn  
Authorized Signatory

17 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the  
International System of Units (SI)

Certificate No. Q24038369

F3-011-05/12-23

page 1 of 3



@clccalibration

## REPORT OF CALIBRATION

### FOR

**NOMENCLATURE** : **DIGITAL THERMOHYGRO METER**  
**MANUFACTURER** : **DIGICON**  
**MODEL / TYPE** : **TH-02A**  
**SERIAL NO.** : **1919E0284991[DTH-01]**  
**DATE OF CALIBRATION** : **10 April 2024**

---

#### ENVIRONMENT CONDITIONS :

**Temperature :**  $(23 \pm 2) ^\circ\text{C}$

**Relative Humidity :**  $(55 \pm 10) \% \text{RH}$

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **CLC-CPTH-11**. The calibration was performed by using Chilled Mirror Hygrometer which maintained by the Calibration Laboratory Co., Ltd.

#### REFERENCE STANDARD USED :

Chilled Mirror Hygrometer, Edgetech Model Dew Master S/N. 44602.

Temperature & Humidity Chamber, PGC Model 9141-5116 S/N. 1304261.

#### TRACEABILITY :

The measurements are traceable to International System of Units (SI) , through Thunder Scientific Corporation.

Certificate No. 21594, Due Date 06 July 2024.

#### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2,00$  which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

**Certificate No. Q24038369**

**F3-011-05/12-23**

page 2 of 3



@clccalibration

**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties of the measuring digital thermohygro meter.

## CALIBRATION DATA

### 1. CORRECTION OF TEMPERATURE

Test point ( ° C )	Actual Temperature ( ° C )	DUC Reading ( ° C )	Correction ( ° C )	Uncertainty ± ( ° C )
20.0	20.00	19.6	+0.40	0.27
25.0	25.00	24.6	+0.40	
30.0	30.00	29.5	+0.50	

### 2. CORRECTION OF HUMIDITY

STD Temperature ( ° C )	STD Reading ( %RH )	DUC Reading ( %RH )	Correction ( %RH )	Uncertainty ± ( %RH )
25	40.0	32	+8.0	0.8
25	60.0	52	+8.0	0.9

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 012 Page 59 of 67

**This report is valid for the above stated instrument/s only.**

**### End of Certificate ###**

Certificate No. Q24038369

F3-011-05/12-23

page 3 of 3



@clccalibration

## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : DIGITAL THERMOHYGRO METER  
MANUFACTURER : DIGICON  
MODEL / TYPE : TH-02A  
SERIAL NO. : 1919E0284980[DTH-02]  
CLID. NO. : 232100201  
JOB CONTROL NO. : 240408038370  
CALIBRATION SERVICE : ☒ IN-LABORATORY ☐ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 08 April 2024

DATE OF ISSUED : 17 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By : Tanawan Seenam-Ngoen  
Calibration Engineer



Approved By : Mongkol Yotsoontorn  
Authorized Signatory

17 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the  
International System of Units (SI)

Certificate No. Q24038370

F3-011-05/12-23

page 1 of 3



@clccalibration

## REPORT OF CALIBRATION

### FOR

**NOMENCLATURE** : **DIGITAL THERMOHYGRO METER**  
**MANUFACTURER** : **DIGICON**  
**MODEL / TYPE** : **TH-02A**  
**SERIAL NO.** : **1919E0284980[DTH-02]**  
**DATE OF CALIBRATION** : **10 April 2024**

---

#### ENVIRONMENT CONDITIONS :

**Temperature :**  $(23 \pm 2) ^\circ\text{C}$

**Relative Humidity :**  $(55 \pm 10) \% \text{RH}$

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **CLC-CPTH-11**. The calibration was performed by using Chilled Mirror Hygrometer which maintained by the Calibration Laboratory Co., Ltd.

#### REFERENCE STANDARD USED :

Chilled Mirror Hygrometer, Edgetech Model Dew Master S/N. 44602.

Temperature & Humidity Chamber, PGC Model 9141-5116 S/N. 1304261.

#### TRACEABILITY :

The measurements are traceable to International System of Units (SI) , through Thunder Scientific Corporation.

Certificate No. 21594, Due Date 06 July 2024.

#### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2,00$  which for a normal distribution corresponds to a coverage probability of approximately 95 %.  
It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

**Certificate No. Q24038370**

**F3-011-05/12-23**

page 2 of 3



@clccalibration



## CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION

## MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment

The table in the following gives the calibration results and associated measurement uncertainties of the measuring digital thermohygro meter.

### CALIBRATION DATA

#### 1. CORRECTION OF TEMPERATURE

Test point ( ° C )	Actual Temperature ( ° C )	DUC Reading ( ° C )	Correction ( ° C )	Uncertainty ± ( ° C )
20.0	20.00	19.7	+0.30	0.27
25.0	25.00	24.7	+0.30	
30.0	30.00	29.6	+0.40	

#### 2. CORRECTION OF HUMIDITY

STD Temperature ( ° C )	STD Reading ( %RH )	DUC Reading ( %RH )	Correction ( %RH )	Uncertainty ± ( %RH )
25	40.0	33	+7.0	0.8
25	60.0	53	+7.0	0.9

Note. The Scope of Accredited ANAB Certificate No. ACDM-2814 Version 012 Page 59 of 67

**This report is valid for the above stated instrument/s only.**

**### End of Certificate ###**

Certificate No. Q24038370

F3-011-05/12-23

page 3 of 3



@clccalibration

## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : WATER BATH  
MANUFACTURER : M-LAB  
MODEL / TYPE : WBN 15  
SERIAL NO. : 0335[LA-007]  
CLID. NO. : 332300657  
JOB CONTROL NO. : 240307024795  
CALIBRATION SERVICE : ☐ IN-LABORATORY ☒ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 07 March 2024

DATE OF ISSUED : 06 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Wenick Inchaisri

Calibration Engineer



Approved By :

Mongkol Yotsoontorn

Authorized Signatory

06 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units (SI)

Certificate No. Q24024795

F3-011-05/12-23

page 1 of 4



@clccalibration

## REPORT OF CALIBRATION

### FOR

NOMENCLATURE	:	WATER BATH
MANUFACTURER	:	M-LAB
MODEL / TYPE	:	WBN 15
SERIAL NO.	:	0335[LA-007]
LOCATION SITE	:	LABORATORY-HOT ZONE
DATE OF CALIBRATION	:	04 April 2024

---

#### ENVIRONMENT CONDITIONS :

Temperature : 24 °C to 25 °C

Relative Humidity : 50% to 52%

#### PROCEDURE USED :

This instrument was calibrated under procedure No. **WI-305-135** based on **ASTM E 715-80:2016** as calibration guidelines.

The calibration was performed by using Hydra Series II which maintained by the Calibration Laboratory Co., Ltd.

#### REFERENCE STANDARD USED :

Hydra Series II, Fluke Model 2635A S/N. 7107303.

#### TRACEABILITY :

The measurements are traceable to International System of Units (SI) , through Calibration Laboratory Co., Ltd.

Certificate No. Q24026699, Due Date 13 September 2024.

#### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2,00$  which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. **Q24024795**

F3-011-05/12-23

page 2 of 4



**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties of the measuring water bath.

## CALIBRATION DATA

### 1. WATER BATH PERFORMANCE

Test Point ( °C )	DUC Reading ( °C )	Uniformity ( °C )	Stability ( °C )
85.0	85.0	0.48	0.17





CLC  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY CO., LTD.

2/10-11, 14, 55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230

Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail: sale@cal-laboratory.com



NSC-TISI-TIS 17025  
CALIBRATION 0059  
CLC


## CALIBRATION DATA

### 2. TEMPERATURE DISTRIBUTION

Test Point ( ° C )	DUC Reading ( ° C )	STD Reading ( ° C )					Uncertainty ± ( ° C )
		Probe No. 1	Probe No. 2	Probe No. 3	Probe No. 4	Probe No. 5	
85.0	85.0	84.37	84.87	84.67	84.86	84.71	0.60

Technical Note : W = 35 cm, D = 30 cm, H = 15 cm.

The Scope of Accredited TISI Certificate No. 23-LB0092 Issue 02 Page 128 of 138

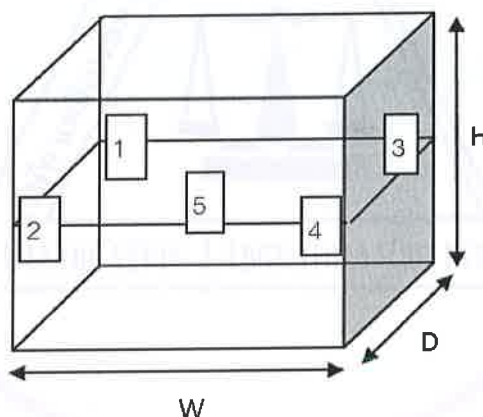

This report is valid for the above stated instrument/s only.

### End of Certificate ###

Certificate No. Q24024795

F3-011-05/12-23

page 4 of 4



@clccalibration

## CERTIFICATE OF CALIBRATION

### FOR

NOMENCLATURE : WATER BATH  
MANUFACTURER : MEMMERT  
MODEL / TYPE : WNB14  
SERIAL NO. : L418.0758[LA-004]  
CLID. NO. : 332100157  
JOB CONTROL NO. : 240307024794  
CALIBRATION SERVICE : ☐ IN-LABORATORY ☒ ON-SITE

CUSTOMER : ENVIRONMENTAL MEASUREMENTS CO., LTD.  
5/45 BAAN KLANG KRUNG BIZ TOWN, SOI SRINAGARINDRA 46/1 (PRAMOTE),  
NONG BON SUB-DISTRICT, PRAWET DISTRICT, BANGKOK 10250

DATE OF RECEIVED : 07 March 2024

DATE OF ISSUED : 06 April 2024

The report of calibration shall not be reproduced except in full without approval of the Calibration Laboratory Co., Ltd.

Calibrated By :

Wenick Inchaisri

Calibration Engineer



Approved By :

Mongkol Yotsoontorn

Authorized Signatory

06 April 2024



This Calibration Certificate documents the traceability to national standards, which realize the units of measurement according to the International System of Units ( SI )

Certificate No. Q24024794

F3-011-05/12-23

page 1 of 4



@clccalibration



## REPORT OF CALIBRATION FOR

NOMENCLATURE	:	WATER BATH
MANUFACTURER	:	MEMMERT
MODEL / TYPE	:	WNB14
SERIAL NO.	:	L418.0758[LA-004]
LOCATION SITE	:	LABORATORY-HOT ZONE
DATE OF CALIBRATION	:	04 April 2024

### ENVIRONMENT CONDITIONS :

Temperature : 24 °C to 25 °C

Relative Humidity : 50% to 52%

### PROCEDURE USED :

This instrument was calibrated under procedure No. **WI-305-135** based on **ASTM E 715-80:2016** as calibration guidelines.

The calibration was performed by using Hydra Series II which maintained by the Calibration Laboratory Co., Ltd.

### REFERENCE STANDARD USED :

Hydra Series II, Fluke Model 2635A S/N. 7107303.

### TRACEABILITY :

The measurements are traceable to International System of Units (SI) , through Calibration Laboratory Co., Ltd.

Certificate No. Q24026699, Due Date 13 September 2024.

### UNCERTAINTY :

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2,00$  which for a normal distribution corresponds to a coverage probability of approximately 95 %.

It has been evaluated according to the "Evaluation of the Uncertainty of Measurement in Calibration (EA-4/02 M:2022)"

Certificate No. Q24024794

F3-011-05/12-23

page 2 of 4



@clccalibration



**CLC**  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11,14,55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230

Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



NSC-TISI-TIS 17025  
CALIBRATION 0059  
CLC

**CONDITION OF CALIBRATION ITEM : RECEIVED IN GOOD OPERATIONAL CONDITION**

**MEASUREMENT RESULTS : ( X ) without adjustment ( ) adjustment**

The table in the following gives the calibration results and associated measurement uncertainties of the measuring water bath.

## CALIBRATION DATA

### 1. WATER BATH PERFORMANCE

Test Point ( °C )	DUC Reading ( °C )	Uniformity ( °C )	Stability ( °C )
95.0	95.0	0.50	0.21

Certificate No. Q24024794

F3-011-05/12-23

page 3 of 4



@clccalibration



CLC  
Accredited  
ISO/IEC 17025

# CALIBRATION LABORATORY Co., LTD.

2/10-11,14, 55 Soi Prasert Manukit 29 Yaek 4, Prasert Manukit Rd., Ladphrao, Bangkok 10230  
Tel. 02-578-0353-4 Fax: 02-578-2672 www.cal-laboratory.com E-mail:sale@cal-laboratory.com



NSC-TISI-TIS 17025  
CALIBRATION 0059  
CLC


## CALIBRATION DATA

### 2. TEMPERATURE DISTRIBUTION

Test Point ( ° C )	DUC Reading ( ° C )	STD Reading ( ° C )					Uncertainty ± ( ° C )
		Probe No. 1	Probe No. 2	Probe No. 3	Probe No. 4	Probe No. 5	
95.0	95.0	96.62	96.74	96.93	96.68	96.66	0.65

Technical Note : W = 35 cm, D = 29 cm, H = 14 cm.

The Scope of Accredited TISI Certificate No. 23-LB0092 Issue 02 Page 128 of 138

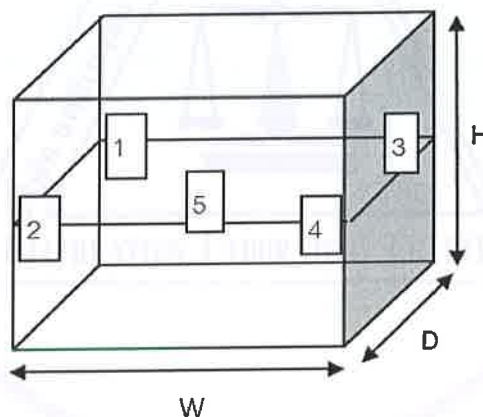

This report is valid for the above stated instrument/s only.

### End of Certificate ###

Certificate No. Q24024794

F3-011-05/12-23

page 4 of 4



@clccalibration